


Events

inline way

```
<button onclick = "Kaam()" > Click </button>
```

event handling property

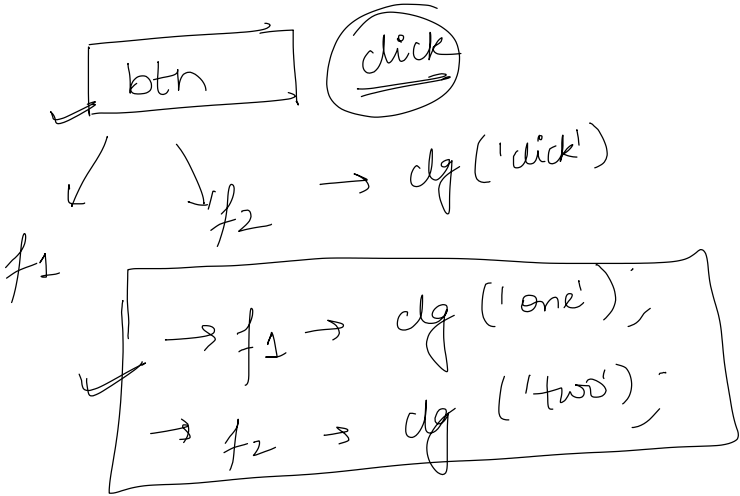

addEventListener(
 event
 trigger

eg:


```
body  
btn.addEventListener('click', function() {  
    dg('Hi');  
    body.style.backgroundColor = "pink";  
});
```

Imp
Best ?






Yes / INPUT EVENTS


```
<input type = "text" >
```

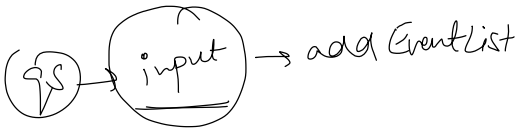


whenever an event is run/executed along with the function/event, an object is also attached with it which we can have access of.

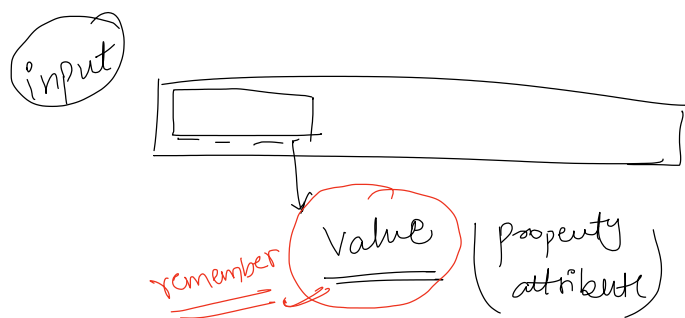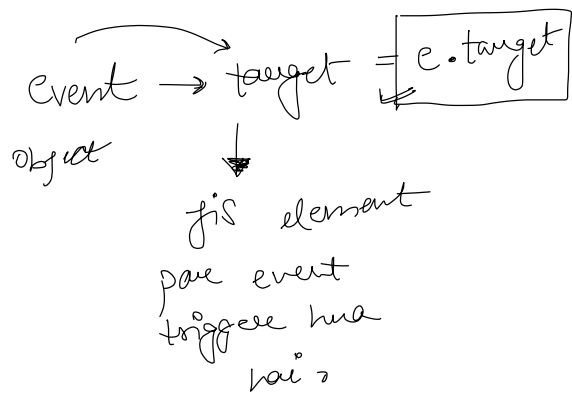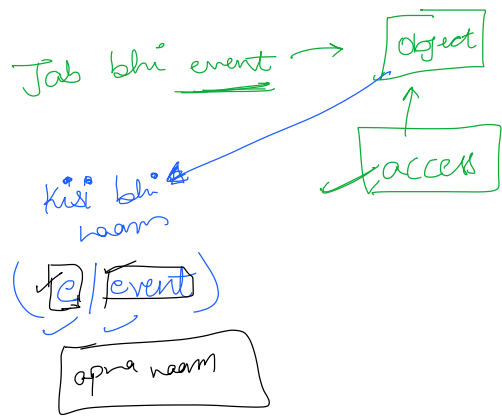

Question :

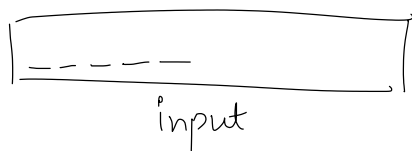

<H1> ----- <H2>

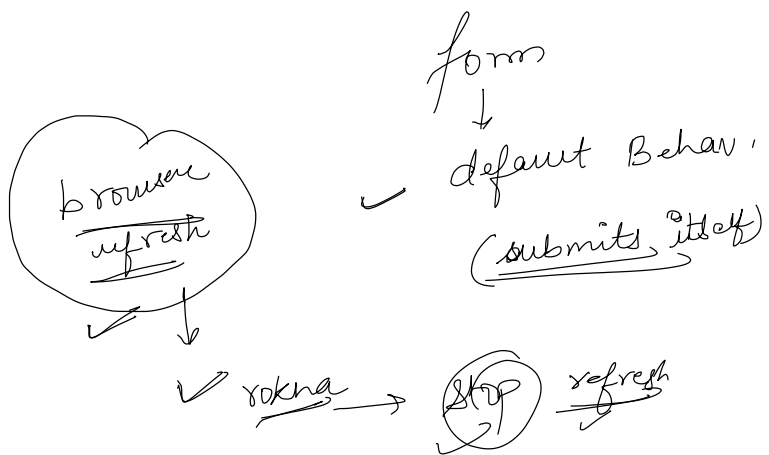

#

accessing elements of form

form → elements

property inside form



① ② ✓