

✓ Mohr hasir
wasi ✓] ✓

React → Library
→ SEO ↓ → faster → SPA
→ Component Based
→ Reusability

JSX → JS → Browser
Babel

JSX → JS → JS → Browser
JSX → JS
Bundlers → X-webpack ✓ (slower)
vite
parcel ✓

create-react-app
↑
npx cra fold_name
cd fold_name
npm start

vite
npm create vite@latest
cd folder
npm i
npm run dev

Components → FUNCTIONAL
↓
call
functions

webpacks → JS ✓
→ JSX ✓

vite → .js X
→ .jsx ✓


→ Hello.jsx

Not
Comput.

Capitol

Hello.jsx
1. rename

(convert)

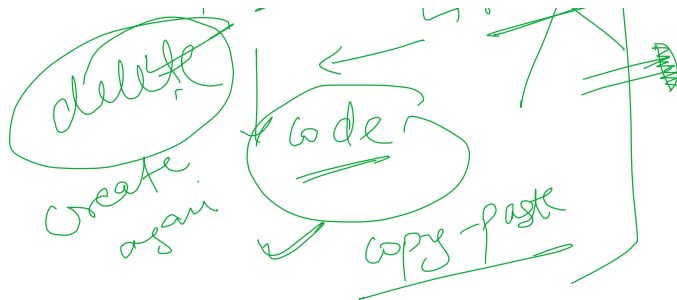

2-3 ✓

#

Conditional Rendering



if-else

funcⁿ (10, 20)

Events

✓ (2)

(attributes arguments)



(yes)

< Student 0 / >