
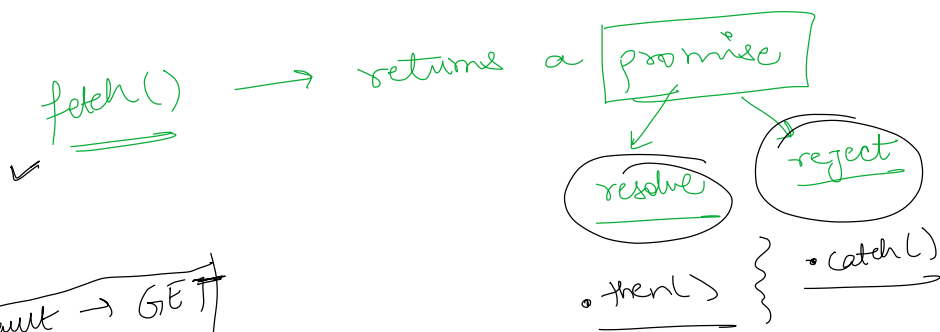
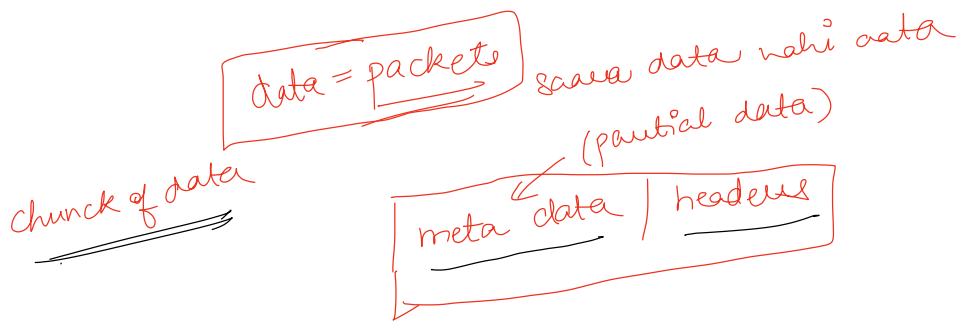
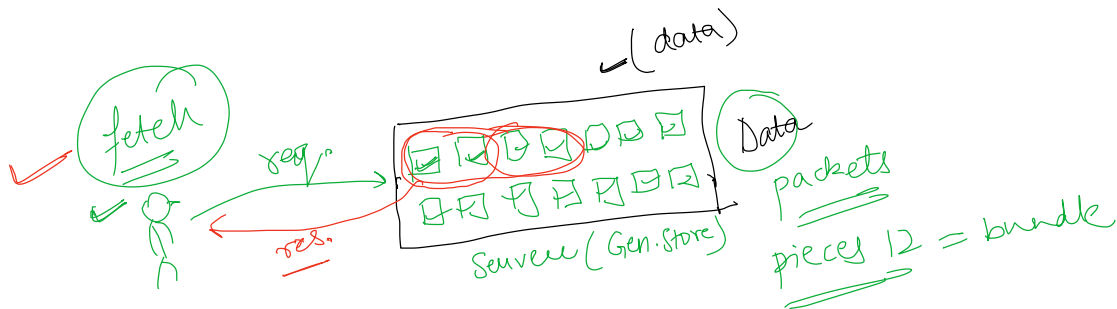



ways - part 2

BTS  
XMLHttpRequest  
Xhr

##  
#  
Axios

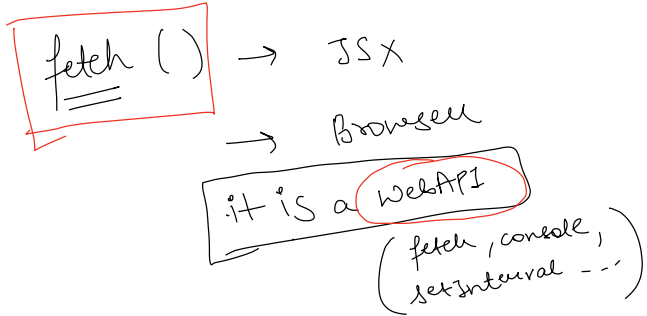

method by default → GET

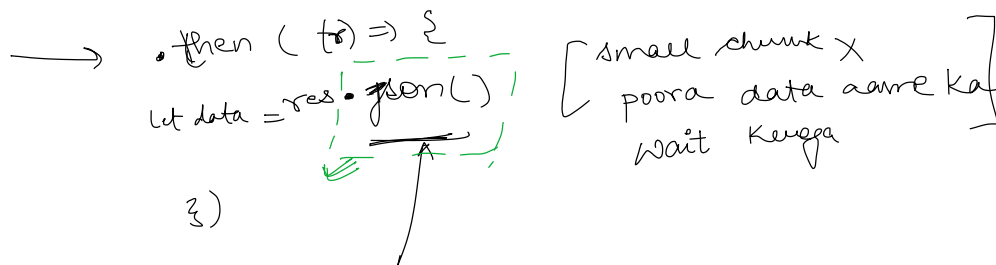


[small chunk x  
poora data aane ka  
wait karna]

this also returns  
a promise

## Axios (3rd party → library)

→ Axios also returns a promise

- then()
- catch()

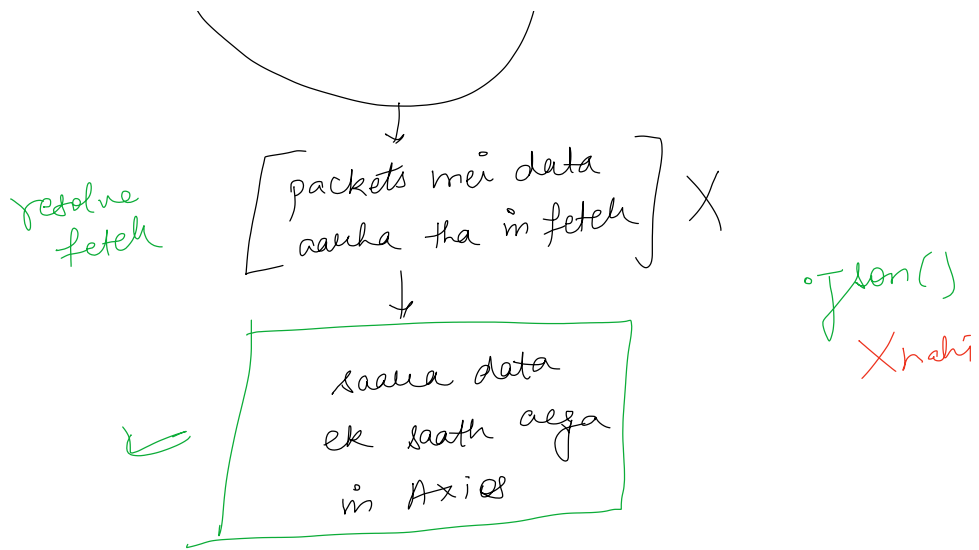

By default X

XMLHttpRequest < fetch < Axios  
\* Best


axios.get()  
axios.post()

----- X ----- X ----- X ----- X -----


Api → ----- { } → data

Search

Batman

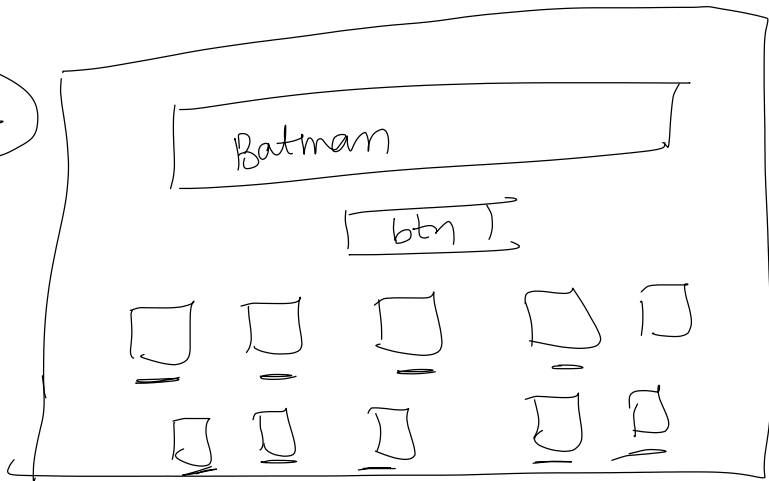

Input




https:// --- | q = Superman  
q = batman  
q = girls  
q = boys

----- X ----- X ----- X -----


## # Javascript Modules

app.js → 10000 line code → we can make multiple JS file

(100)



50~

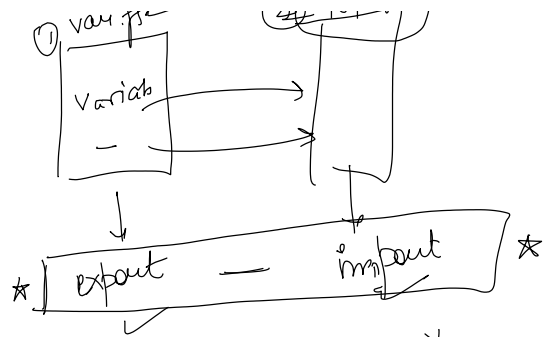

Base - 2 X  
despite of having  
diff. files

