Day-31(carosal project ,dom , selectors 5 , innerText, textcontent , innerhtml , setattribute , getttribute , style , csstext , setinterval , clearinterval)

Friday, 27 October 2023 7:50 PM

Disclaimer ⇒ Project (By heart)

DOM (Ratne X) → ×

→ interview X

→ Very basic ✓

Implementation (Create)

* Everything inside JS is an object *

DOM → document // object // Model | Modelling

document → HTML

object → JS

Model → change | manipulate

⇒ html change with the help of JS

aap html ko sirf JS use change karpaao.

html → JS

- h1
- h2
- p
- div
- section

Kisko? manipulate

Principal ← X

10 → 3F

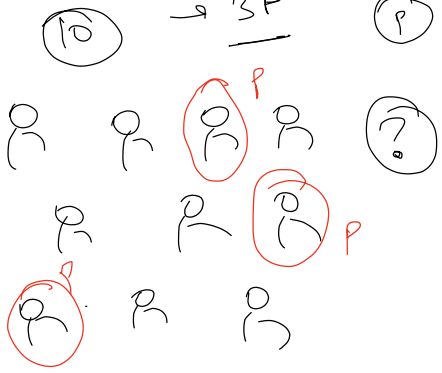

heading

- push()
- pop()

⇒ Selection of your Element :

1 or many ?

⇒ Many (5)

- # getElementById → Single element
- # getElementsByTagName → Array (html collection)
- # getElementByClassName
- # querySelector

querySelectorAll

(dhyaan) # properties on HTML

- innerText → Brainful
- textContent → Brainless

manipulating attributes ?

- → getAttribute()
- → setAttribute()

setTimeout() → WebApi → delay

setInterval() → repeat karne after a particular interval of time.

setTimeout(function(){
clg("Hi from sam")
}, 4000)

4s → Board → 1 baar sun loge

setInterval(function(){
clg("Hi anaa");
}, 2000)

Infinite

2s baad khudko repeat karega.

Not good

Let Id = setInterval(..)

stop(Id) stops the

clear Interval

interval

1 2 3 4 5 6 ×

9:58

4 mins

Q → create a carousal

→ 4-5 images (unsplash)

→ after every 3s image changes

→ 5th image ~~ke~~ baad 1st show karo

→ after 30s sab band karo

html

img tag

% → remainder

⇓

1%.5 = 1

2%.5 = 2

3%.5 = 3

4%.5 = 4

5%.5 = 0

6%.5 = 1

7%.5 = 2