
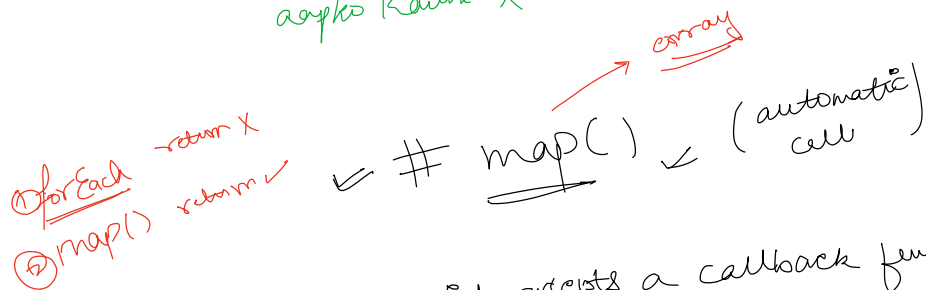


Hof }  
callback }

methods  
↓  
automatically

① it accepts a callback func ✓

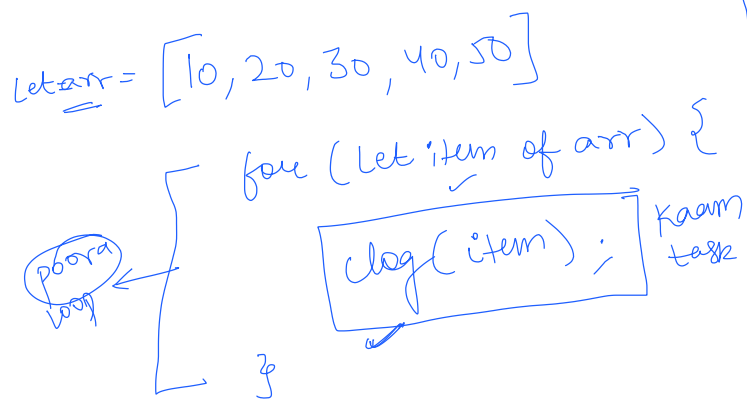


- React

~~filter()~~

- ① it accepts a callback (cb) ✓
- ② it returns a new array. ✓
- ③ it only sends the trueful value to the new Array. ✓


[x]

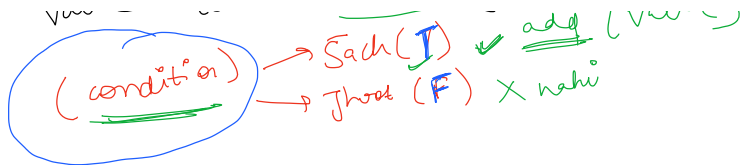

# sort

III, II , (2)  
Lexicographically


homework  
Comparator  
5-7 mins  
youtube

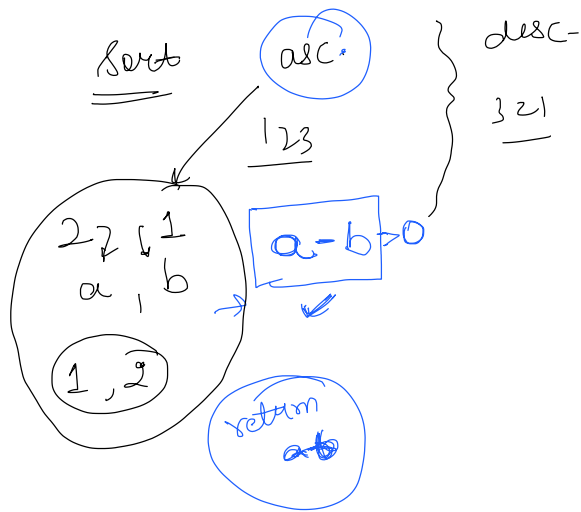

Comparator  
incr. → a-b } Reason  
desc → b-a }

Restaurant

Menu = ['paneer Biri', 'pizza', 'chicken 2ggaza', 'dal',  
'palak paneer', 'chicken B.', 'mix veg',  
'egg bhuri', 'soda', 'noodles'] ;

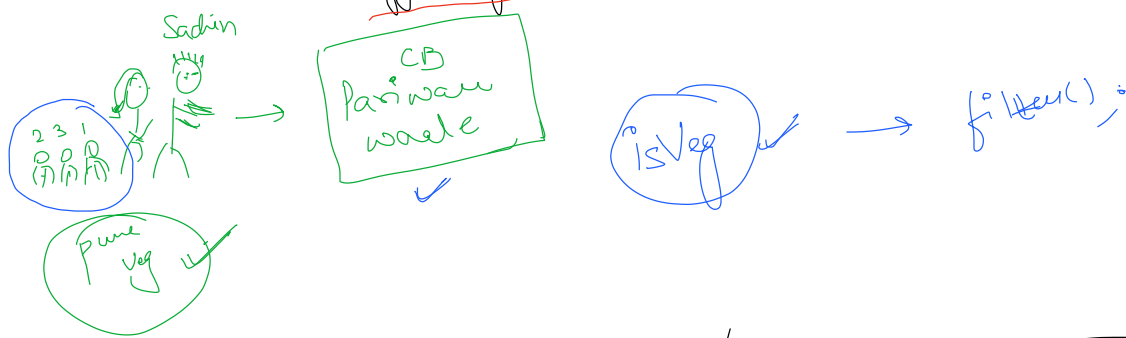

# closures

A function bundled together with  
reference to its surrounding  
state or lexical environment  
that is called closure.

Jodd → closure

