

[2CEIT503 COMPUTER NETWORKS]

Practical: 7

AIM- Implementation of .tcl script in Ns2 .

- a) Write a tcl script to add two nodes and one link (example.tcl).**
- b) Modify example.tcl such that node n0 sends data to node n1.**

Submitted By: 21012021003_AMIT GOSWAMI



**Ganpat
University**

॥ विद्यया समाजोत्कर्षः ॥

**U.V. Patel
College of
Engineering**

Department of Computer


Engineering/Information Technology

Practical: 7

a) Write a tcl script to add two nodes and one link.

Example1a.tcl

```
set ns [ new Simulator ]
set nf [ open out.nam w ]
$ns namtrace-all $nf
proc finish {} {
    global ns nf
    $ns flush-trace
    close $nf
    exec nam out.nam &
    exit 0
}
set n0 [$ns node]
set n1 [$ns node]
$ns duplex-link $n0 $n1 1Mb 10ms DropTail
$ns at 5.0 "finish"
$ns run
```

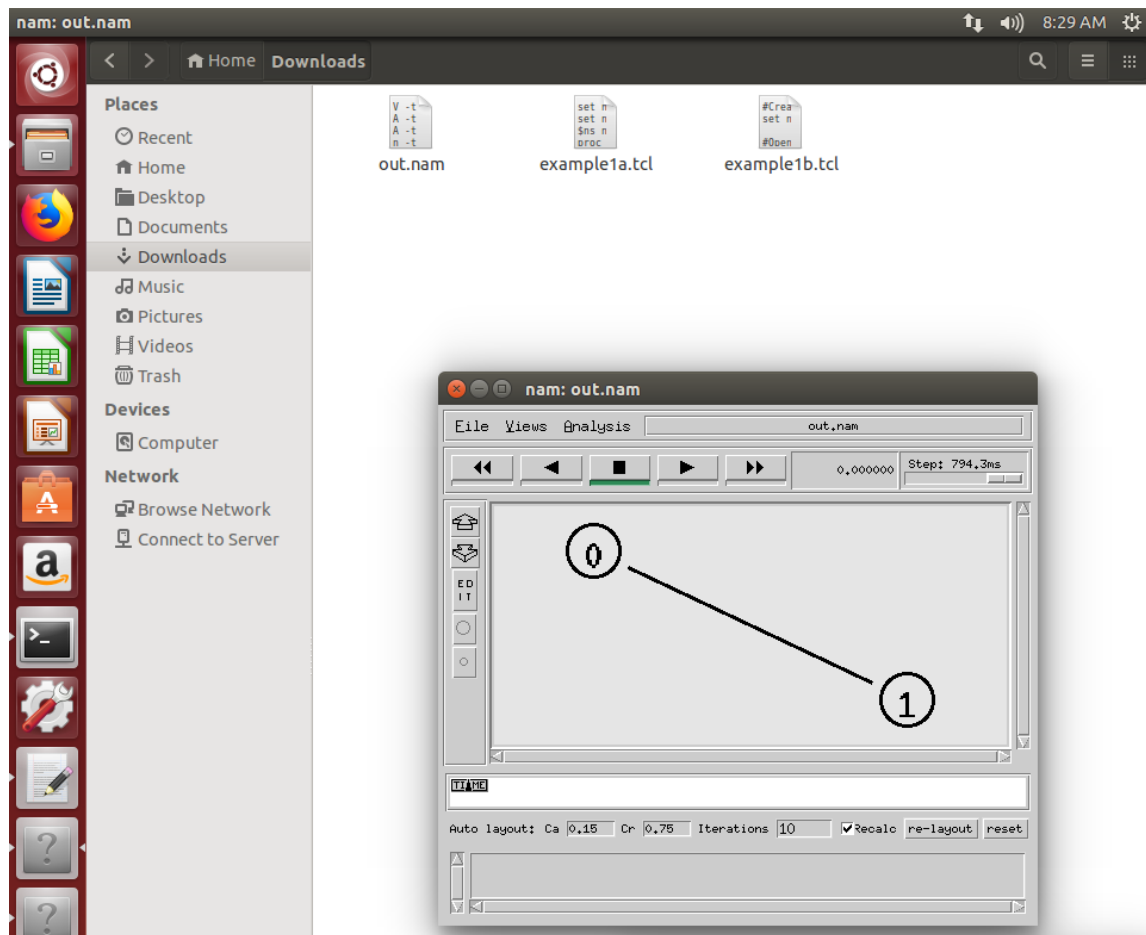

b) Example1b.tcl

```
#Create a simulator object
set ns [new Simulator]

#Open the nam trace file
set nf [open out.nam w]
$ns namtrace-all $nf

#Define a 'finish' procedure
proc finish {} {
    global ns nf
    $ns flush-trace
    #Close the trace file
    close $nf
    #Execute nam on the trace file
    exec nam out.nam &
    exit 0
}

#Create two nodes
set n0 [$ns node]
set n1 [$ns node]

#Create a duplex link between the nodes
$ns duplex-link $n0 $n1 1Mb 10ms DropTail

#Create a UDP agent and attach it to node n0
set udp0 [new Agent/UDP]
$ns attach-agent $n0 $udp0

# Create a CBR traffic source and attach it to udp0
set cbr0 [new Application/Traffic/CBR]
$cbr0 set packetSize_ 500
$cbr0 set interval_ 0.005
$cbr0 attach-agent $udp0

#Create a Null agent (a traffic sink) and attach it to node n1
set null0 [new Agent/Null]
$ns attach-agent $n1 $null0

#Connect the traffic source with the traffic sink
$ns connect $udp0 $null0

#Schedule events for the CBR agent
$ns at 0.5 "$cbr0 start"
$ns at 4.5 "$cbr0 stop"
#Call the finish procedure after 5 seconds of simulation time
$ns at 5.0 "finish"
```

Practical: 7

#Run the simulation

\$ns run

