

Introduction to layouts

INTERACTIVE DATA VISUALIZATION WITH BOKEH



Bryan Van de Ven
Core Developer of Bokeh

Arranging multiple plots

- Arrange plots (and controls) visually on a page.
 - rows, columns
 - grid arrangements
 - tabbed layouts




Rows of plots

```
from bokeh.layouts import row
```

```
layout = row(p1, p2, p3)
```

```
output_file('row.html')
```

```
show(layout)
```

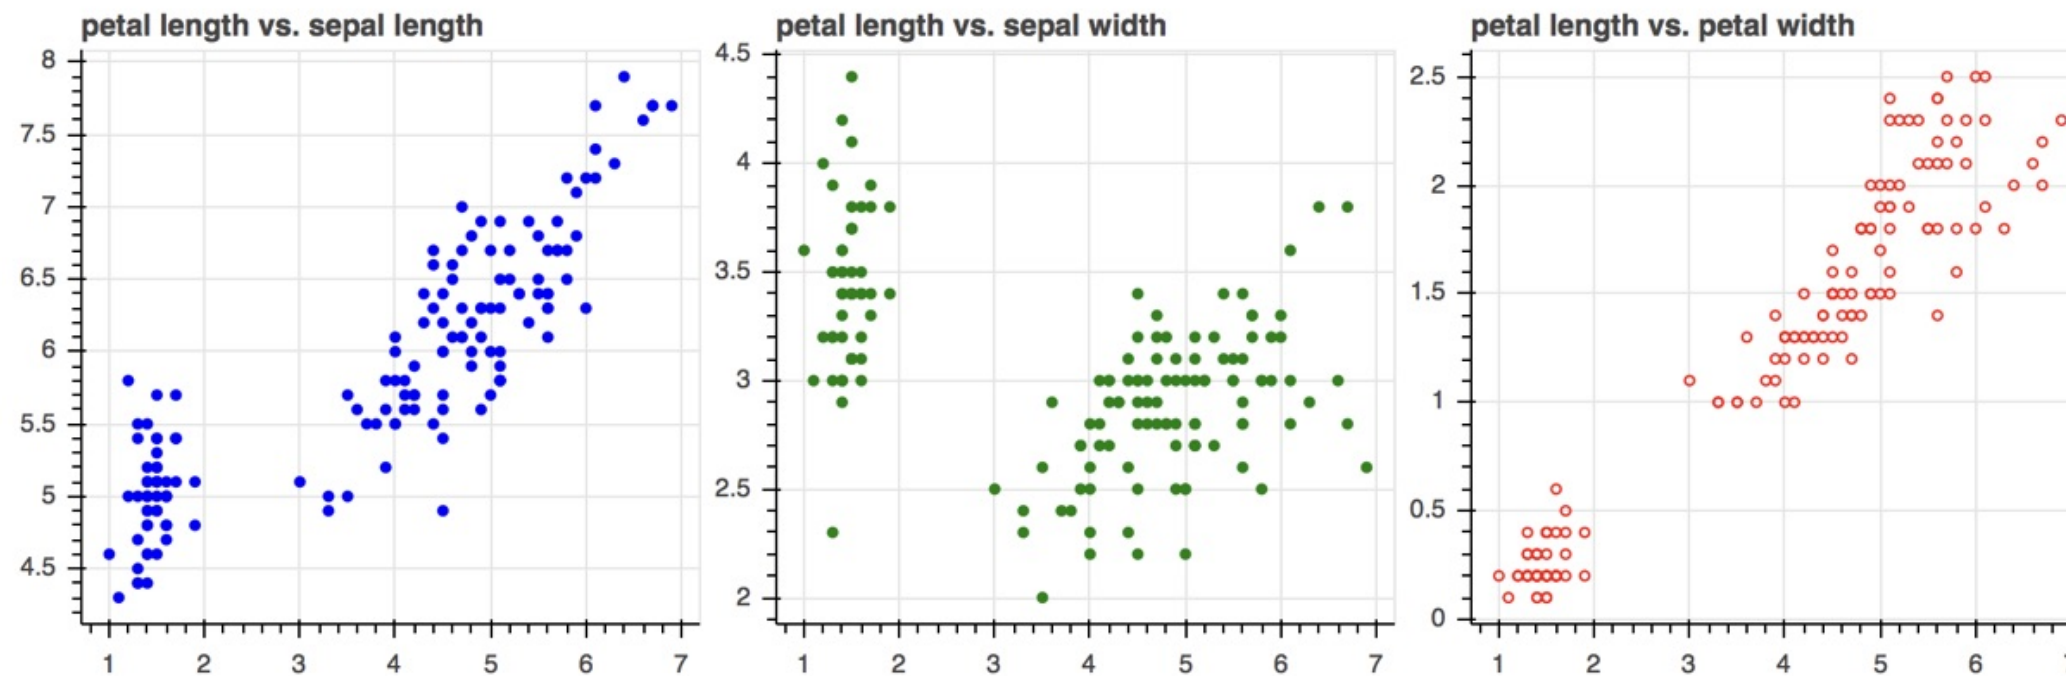


Columns of plots

```
from bokeh.layouts import import column
```

```
layout = column(p1, p2, p3)
```

```
output_file('column.html')
```

```
show(layout)
```

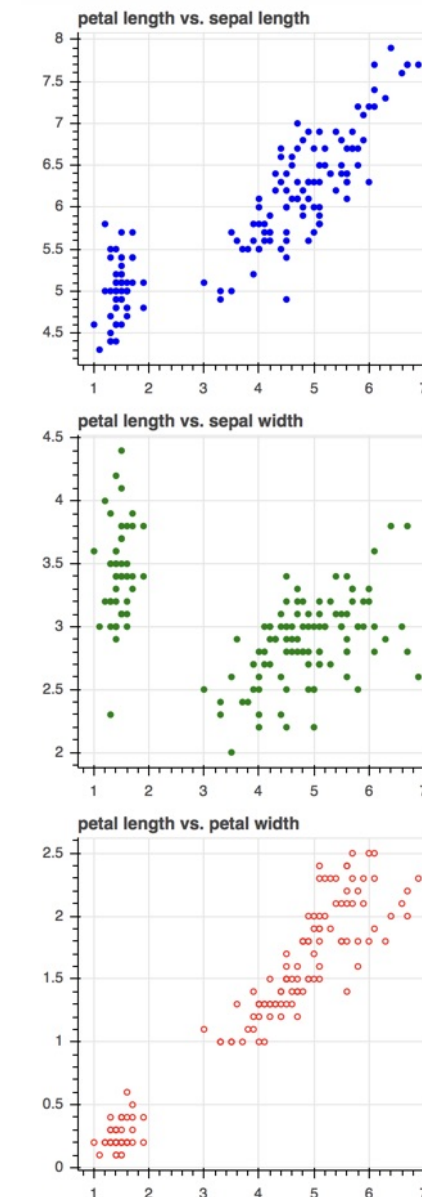


Nested layouts

Rows and columns can be nested for more sophisticated layouts

```
from bokeh.layouts import column, row

layout = row(column(p1, p2), p3)

output_file('nested.html')
show(layout)
```

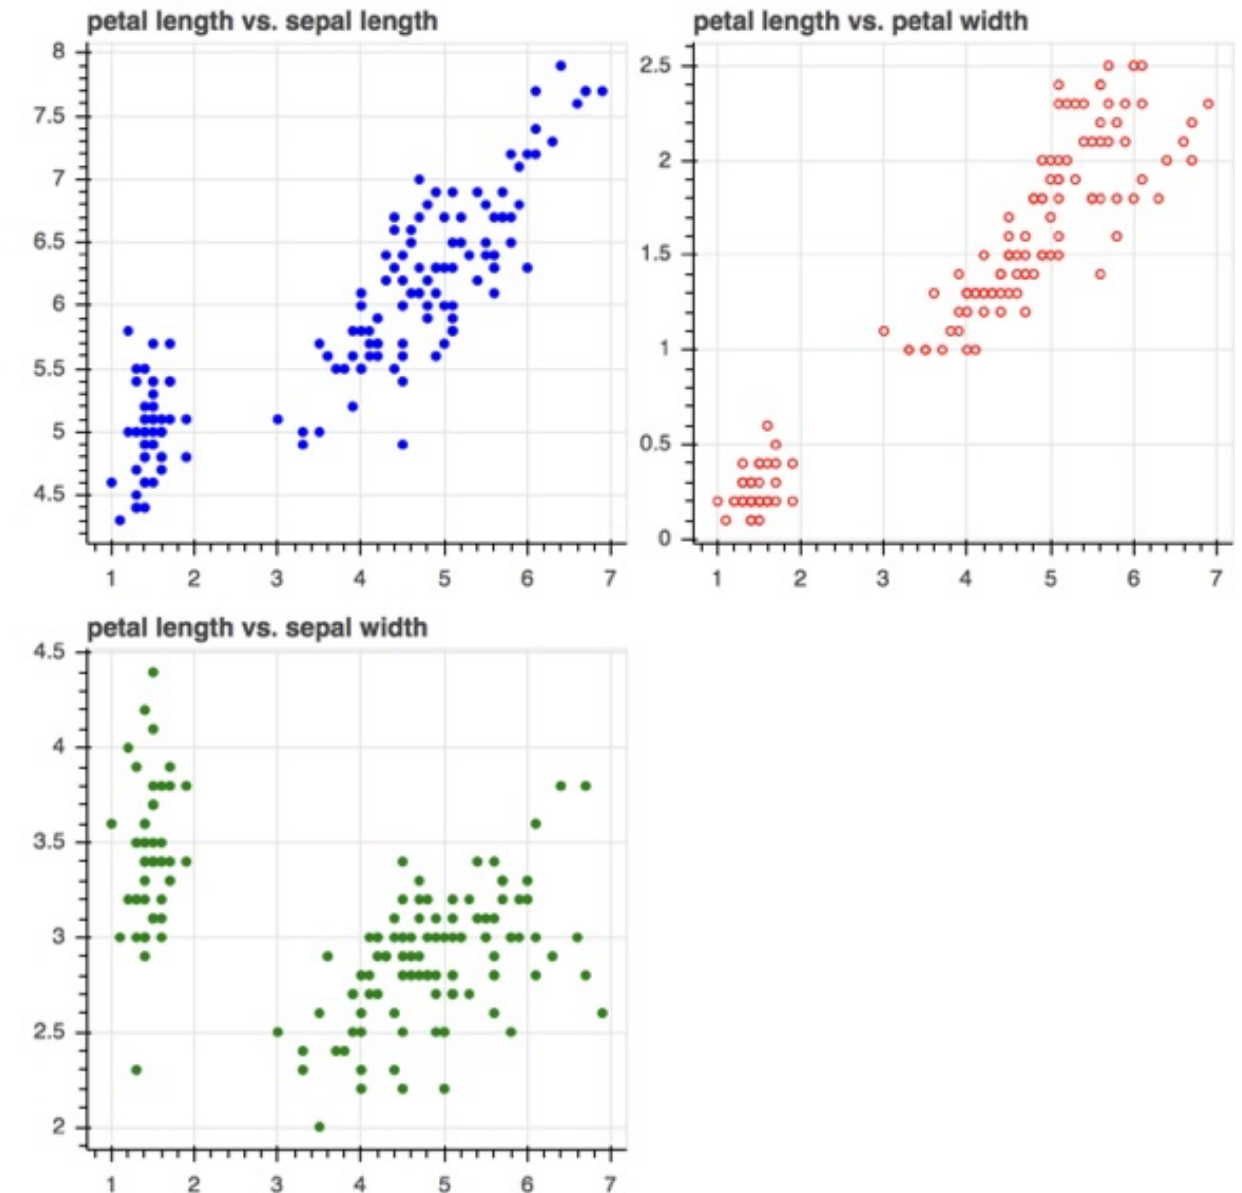

Let's practice!

INTERACTIVE DATA VISUALIZATION WITH BOKEH

Advanced layouts

INTERACTIVE DATA VISUALIZATION WITH BOKEH



Bryan Van de Ven
Core Developer of Bokeh

Gridplots




```
from bokeh.layouts import gridplot
```

```
layout = gridplot([[None, p1], [p2, p3]],  
                  toolbar_location=None)
```

```
output_file('nested.html')
```

```
show(layout)
```

- Give a "list of rows" for layout
- Can use `None` as a placeholder
- Accepts `toolbar_location`

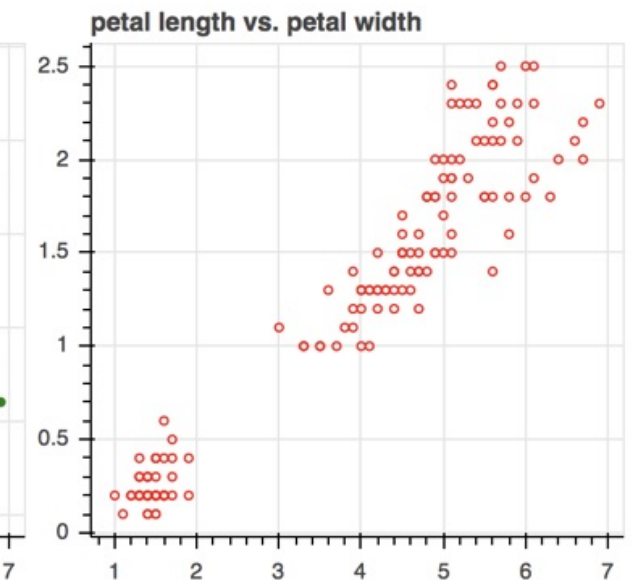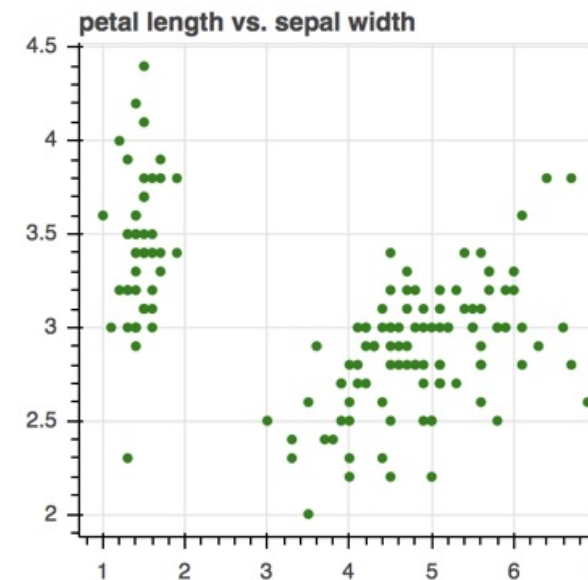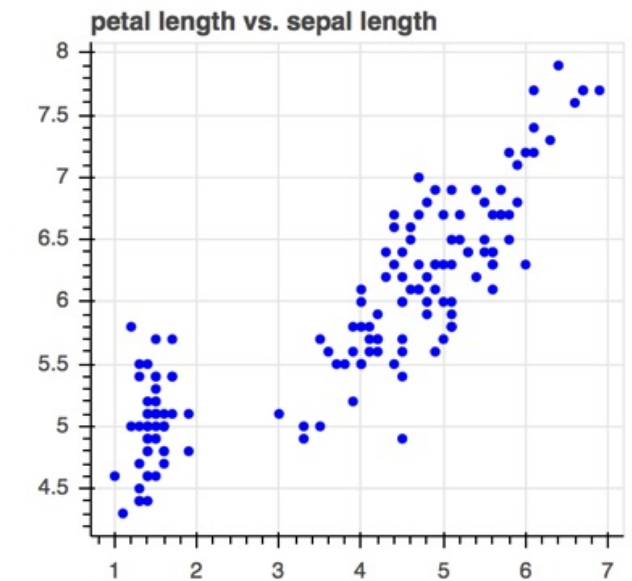

Tabbed layouts

```
from bokeh.models.widgets import Panel, Tabs


# Create a Panel with a title for each tab
first = Panel(child=row(p1, p2), title='first')
second = Panel(child=row(p3), title='second')

tabs = Tabs(tabs=[first, second])

output_file('tabbed.html')

show(tabs)
```

Tabbed layouts

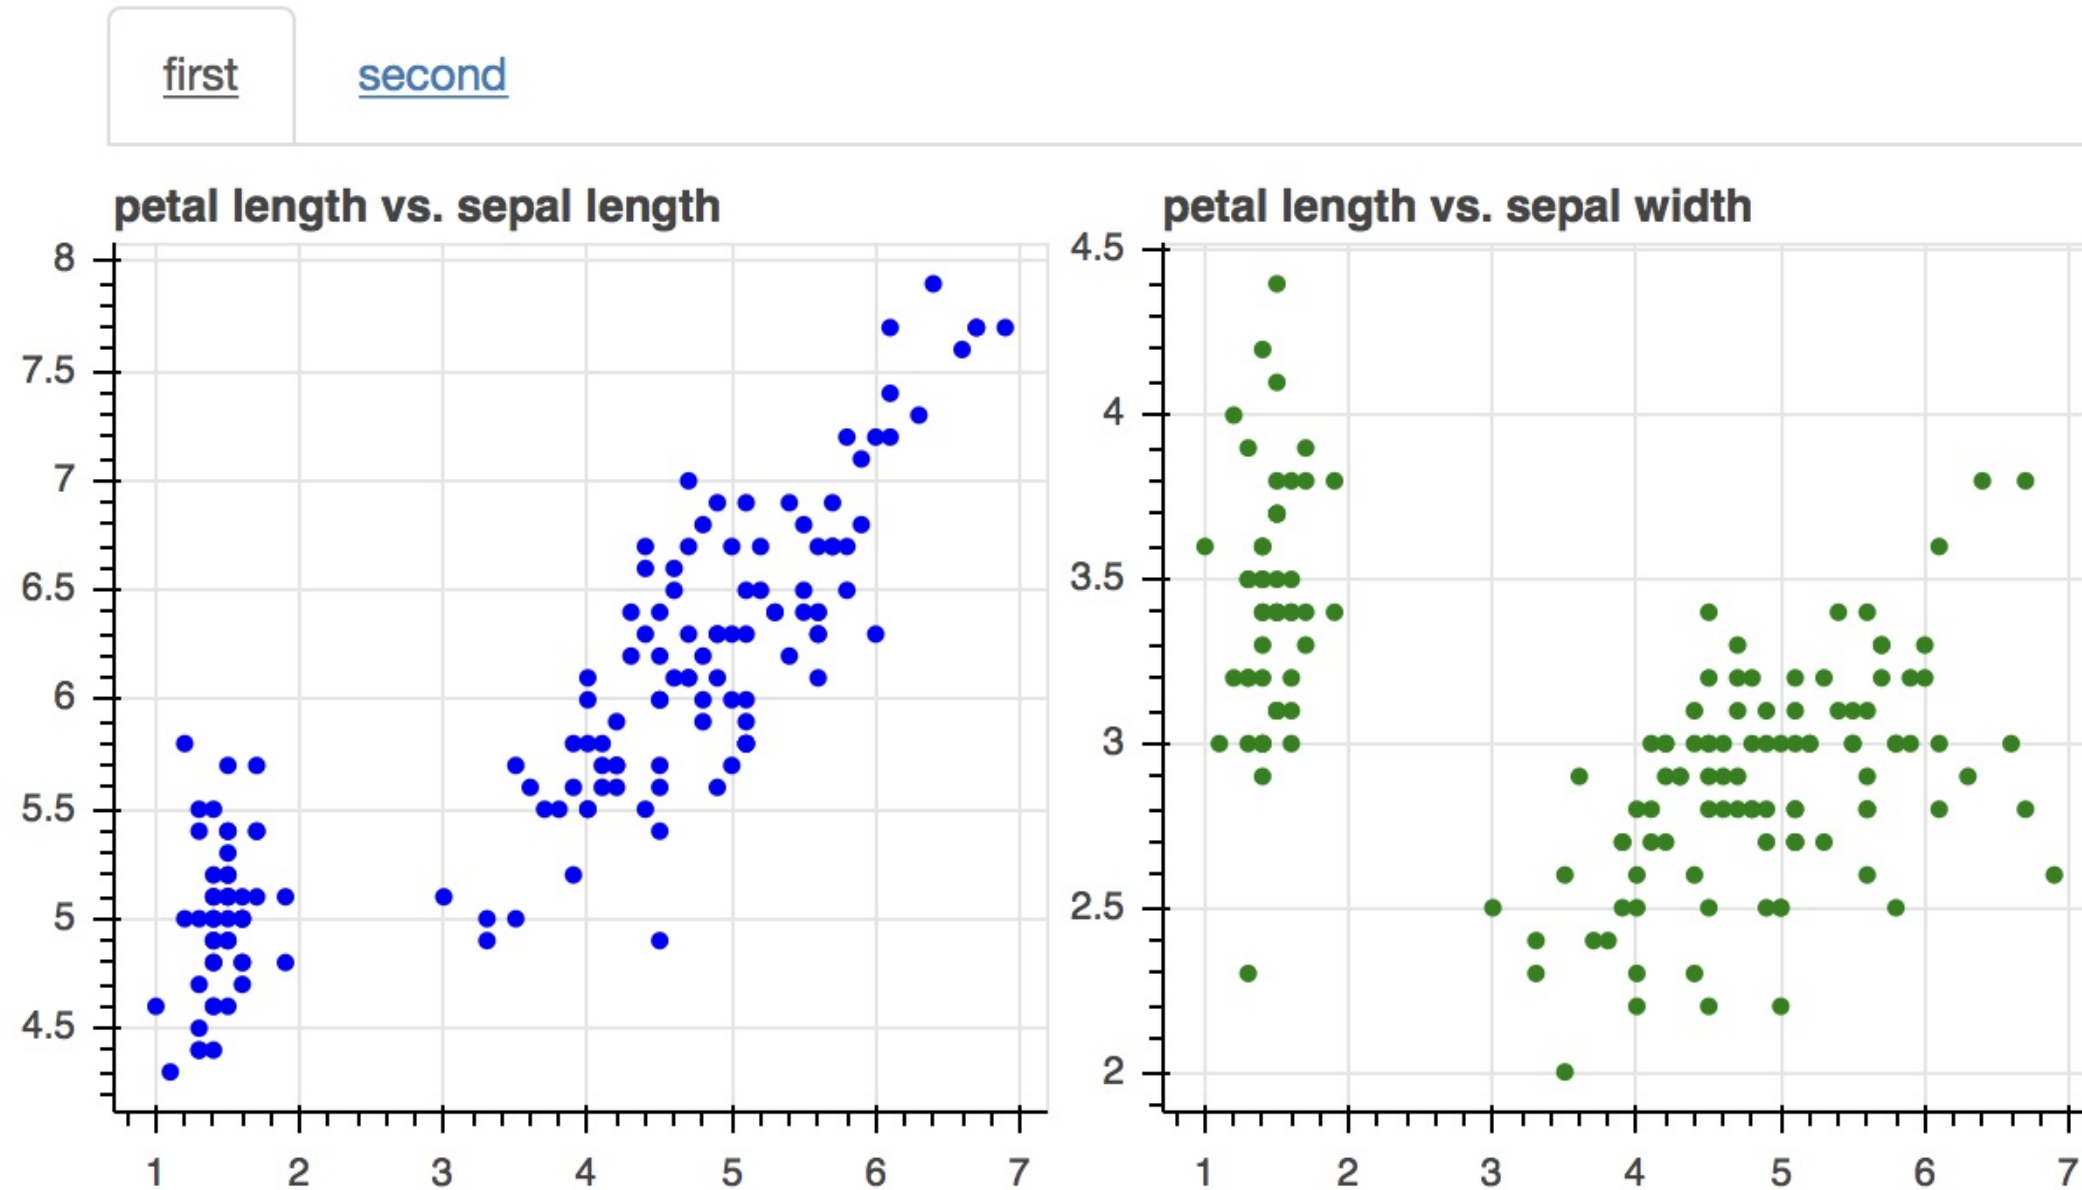

Let's practice!

INTERACTIVE DATA VISUALIZATION WITH BOKEH

Linking plots together

INTERACTIVE DATA VISUALIZATION WITH BOKEH




Bryan Van de Ven
Core Developer of Bokeh

Linking axes

```
p3.x_range = p2.x_range = p1.x_range
```

```
p3.y_range = p2.y_range = p1.y_range
```

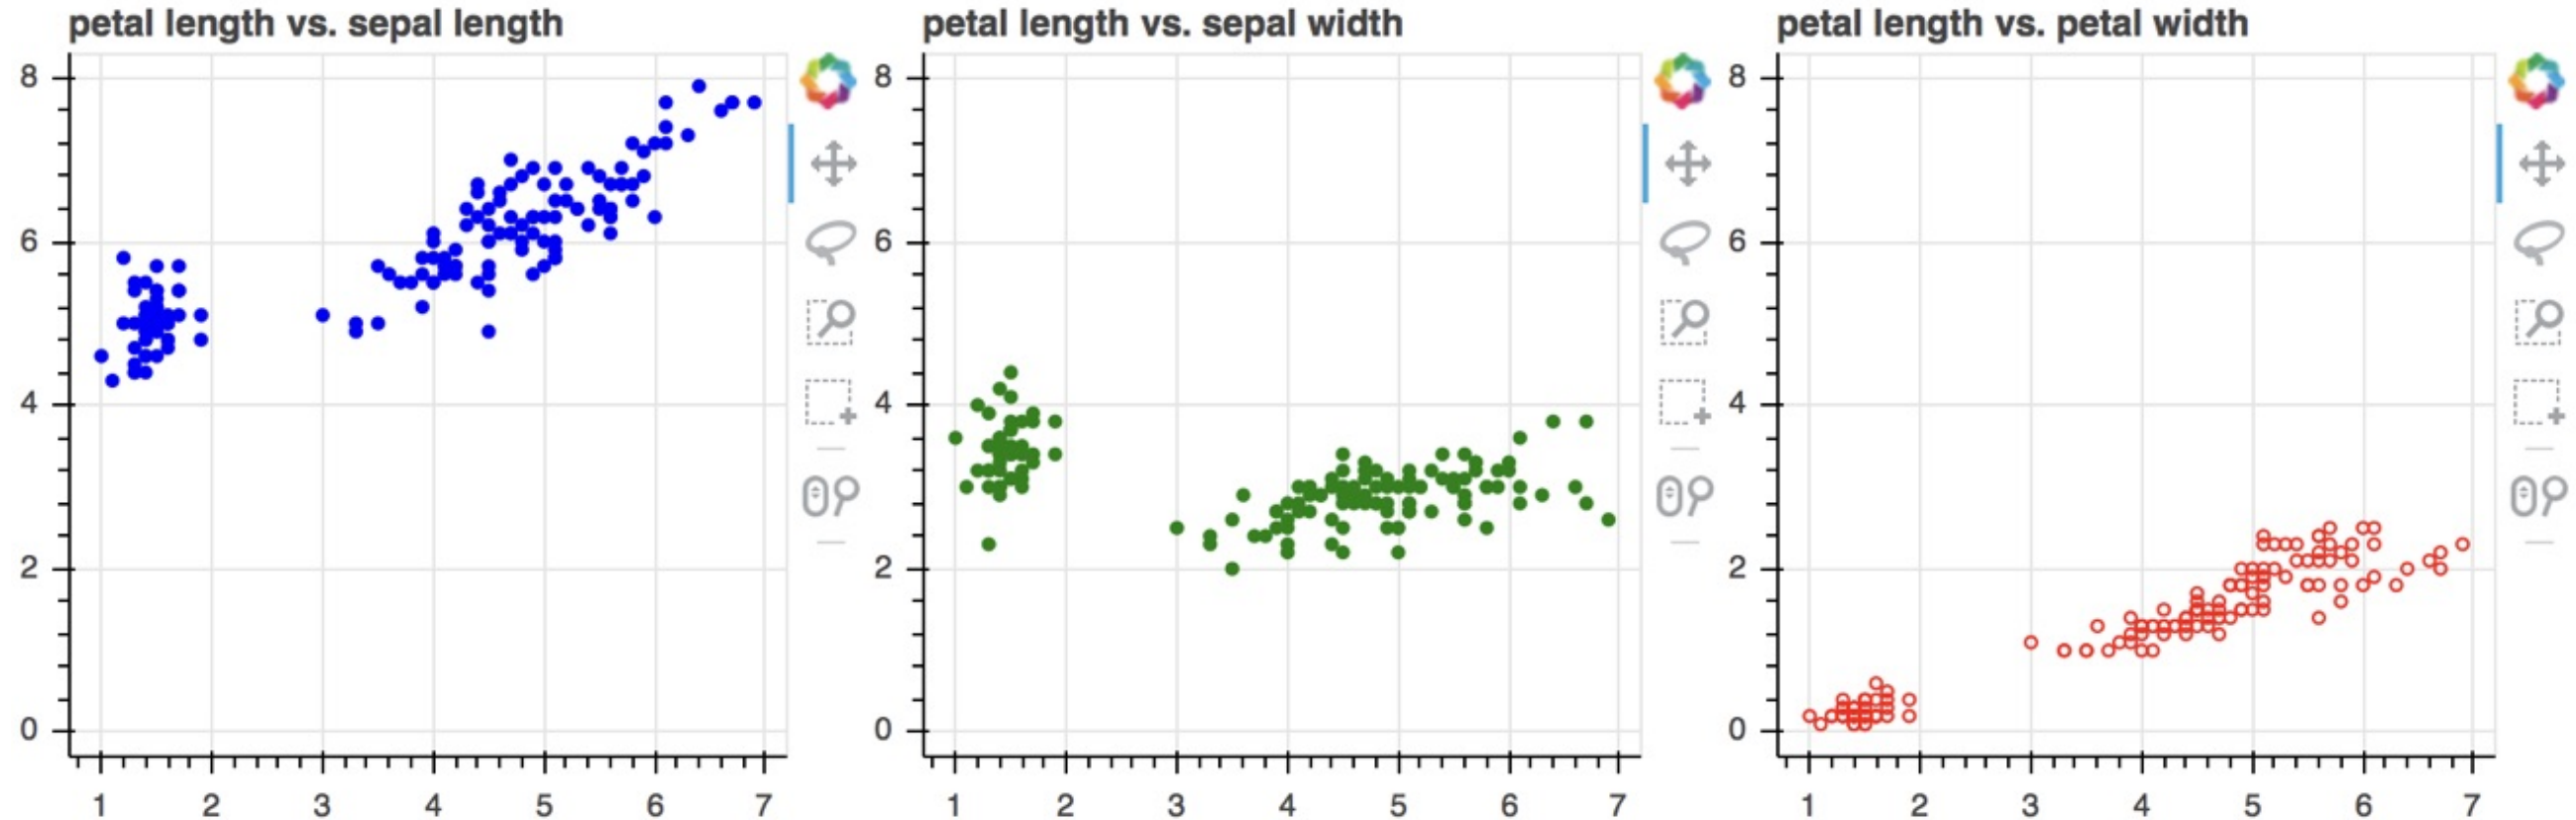


Linking selections

```
p1 = figure(title='petal length vs. sepal length')
p1.circle('petal_length', 'sepal_length',
          color='blue', source=source)

p2 = figure(title='petal length vs. sepal width')
p2.circle('petal_length', 'sepal_width',
          color='green', source=source)

p3 = figure(title='petal length vs. petal width')
p3.circle('petal_length', 'petal_width',
          line_color='red', fill_color=None,
          source=source)
```

Linking selections

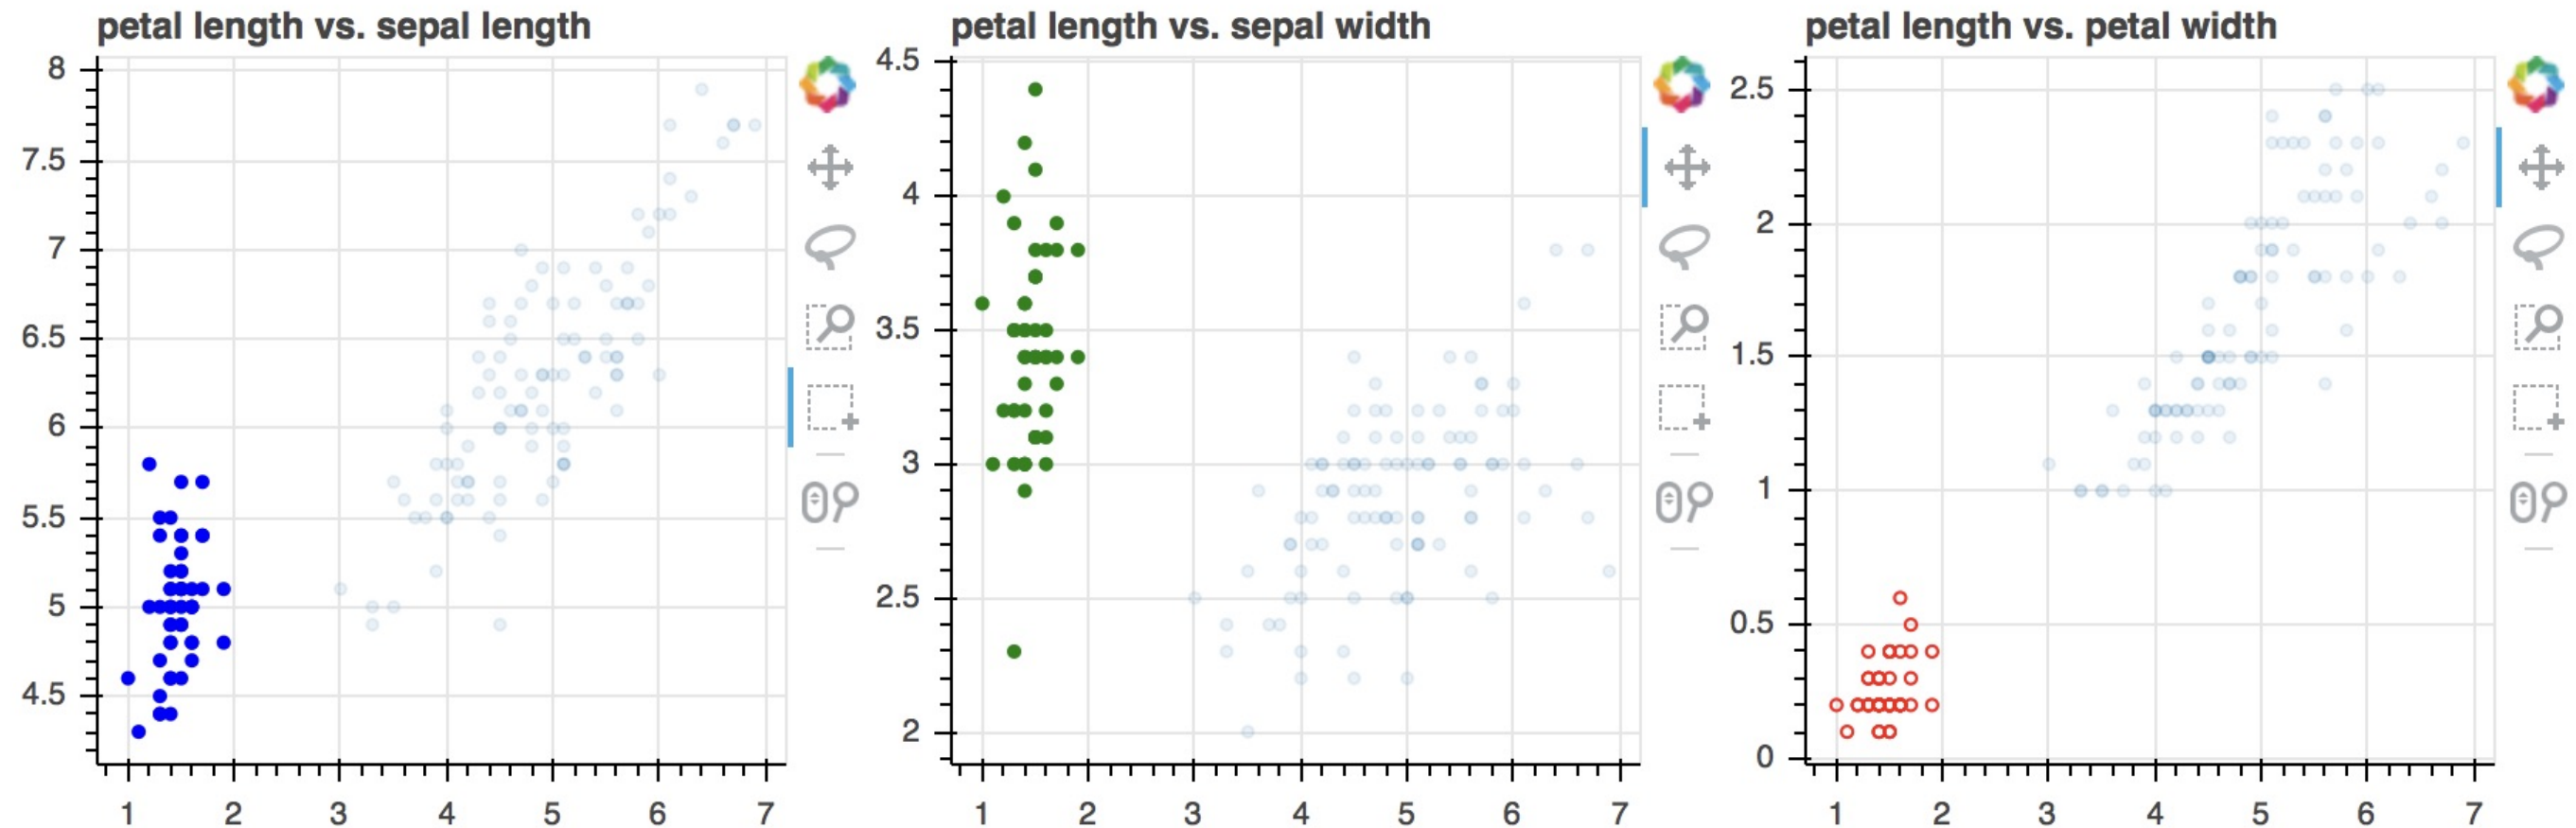

Let's practice!

INTERACTIVE DATA VISUALIZATION WITH BOKEH

Annotations and guides

INTERACTIVE DATA VISUALIZATION WITH BOKEH



Bryan Van de Ven
Core Developer of Bokeh


What are they?

- Help relate scale information to the viewer
 - Axes, Grids (default on most plots)
- Explain the visual encodings that are used
 - Legends
- Drill down into the details not visible in the plot
 - Hover Tooltips

Legends

```
plot.circle('petal_length', 'sepal_length',  
            size=10, source=source,  
            color={'field': 'species',  
                  'transform': mapper},  
            legend='species')
```

```
plot.legend.location = 'top_left'
```

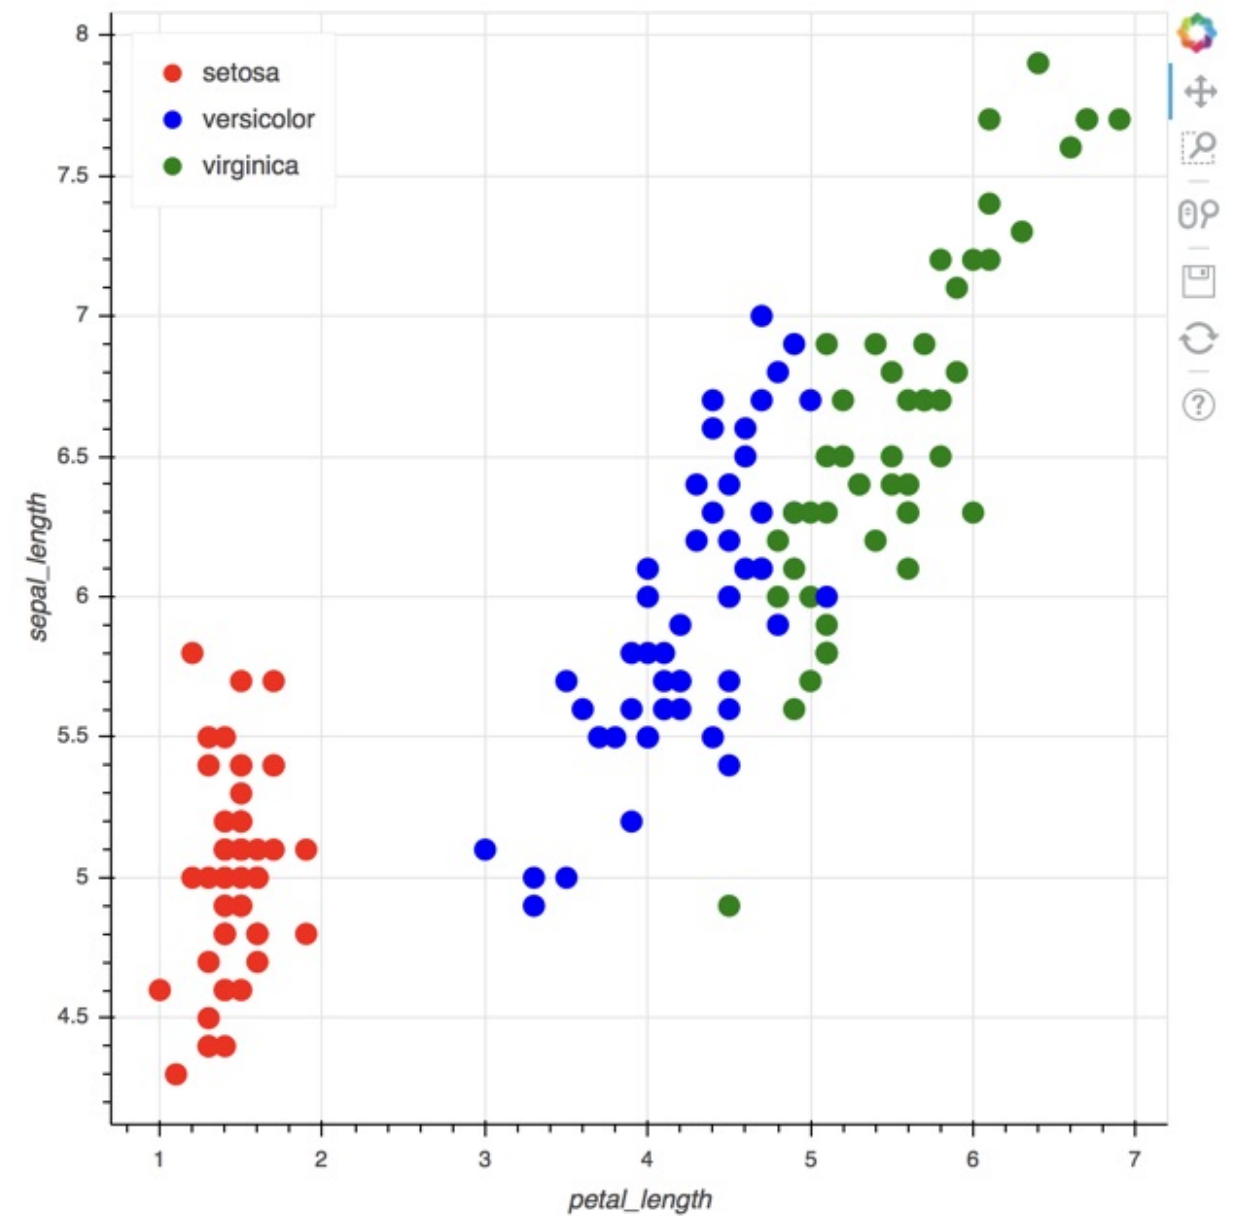


Hover Tooltips

```
from bokeh.models import HoverTool

hover = HoverTool(tooltips=[
    ('species name', '@species'),
    ('petal length', '@petal_length'),
    ('sepal length', '@sepal_length'),
])

plot = figure(tools=[hover, 'pan',
                    'wheel_zoom'])
```

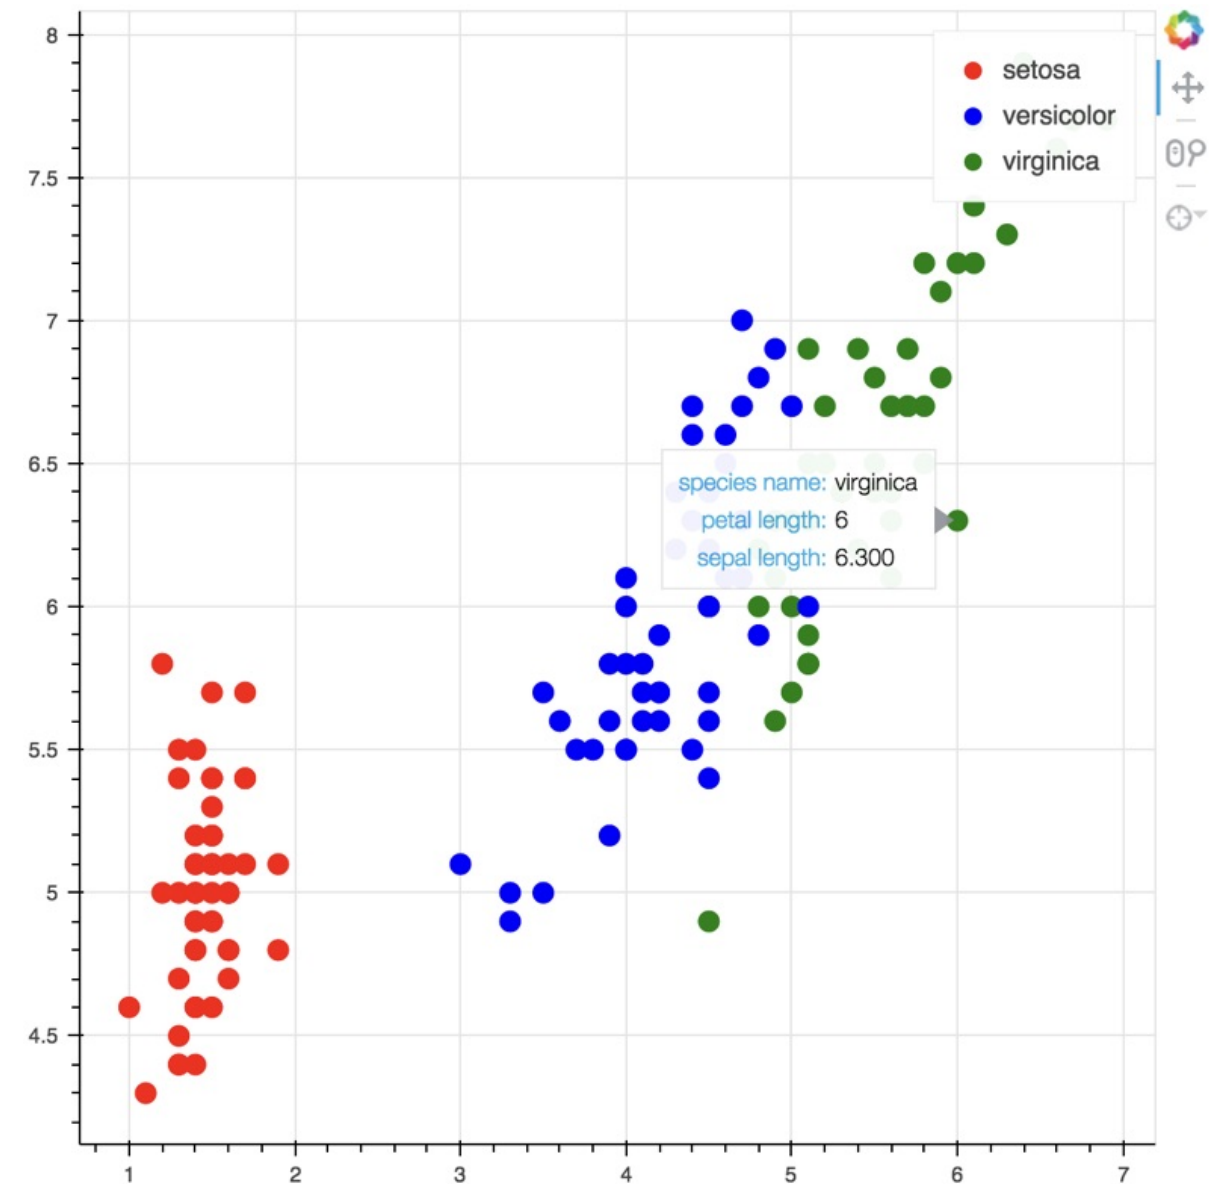

Let's practice!

INTERACTIVE DATA VISUALIZATION WITH BOKEH