Different runtime conditions must remain separate

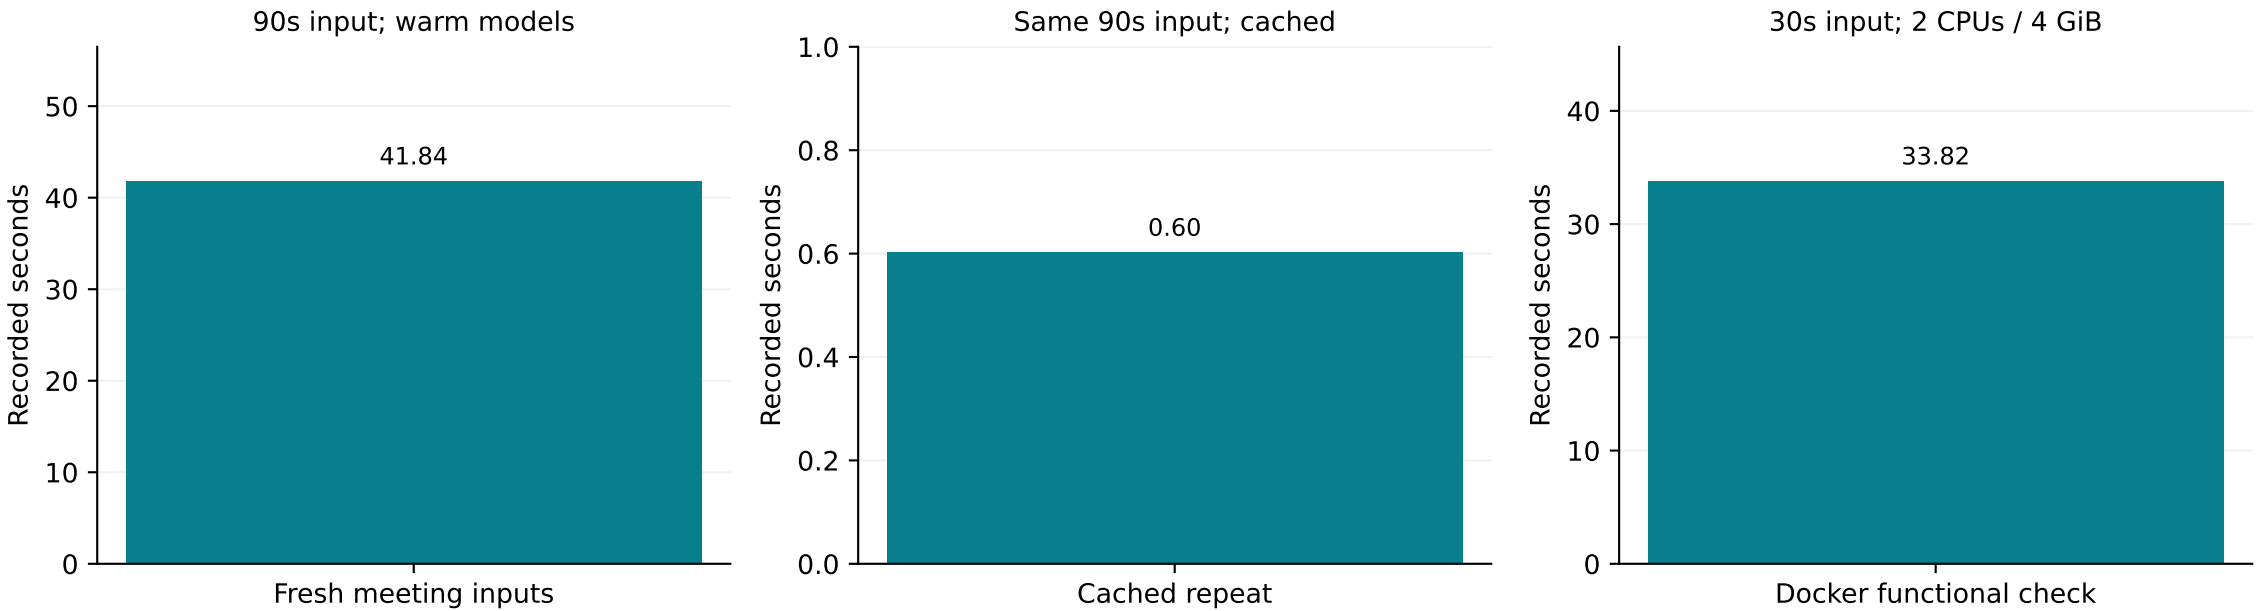

Independent panels use different scales and input/cache/resource conditions. These are functional timing records, not a matched comparison of models or cloud hosts. Cached repeat is not fresh inference speed.