RaceTracker — VK4WIP UI validation pack

Every new screen, every event (click or entry), with what the plan says and what the built app showed.
Branch feature/vk4wip-ui · generated 21 Oct 2026, 2:09 pm · 152 events · 15 screens

How to validate

Each event block has: **Plan** (section of IMPLEMENTATION_SPEC.md), **Event** (exactly what was clicked or entered), **Plan says** (wording quoted from the plan — not the developer's own description), **App showed** (evidence read from the running app for that event: the element's text, accessible name, state such as pressed / disabled / invalid, and the computed colour or border where the plan specifies one), **Status line** (any live status or alert text on screen) and a screenshot taken straight after the event. Events whose Plan column says **Fixes A1 … D3** check an item from the validation-fixes brief (docs/design-handoff/VALIDATION_FIXES.md) and quote it. The full plan is reproduced in the appendix.

Suggested prompt for Claude.ai — attach this PDF and say:
"This PDF documents a built UI against the plan in its appendix (IMPLEMENTATION_SPEC.md) and the validation-fixes brief. For every event, compare 'App showed' and the screenshot with 'Plan says' and the referenced plan section. List every mismatch, missing behaviour, styling difference from §3 (colours, buttons, runner states) and accessibility concern, with the event ID and the plan section. Also list plan items (§4, §7, §8) that no event exercises."

Notes for the reviewer. The race is generated for the run (started two hours before the screenshots), so times differ from the plan's 07:47 examples. Base screens were seeded with earlier calls (an hour and half an hour before) including deliberate data problems, so the overdue alert and every data check have something to show. Known, deliberate differences from the plan are listed in DECISIONS.md (e.g. no Start checkpoint, the setup wizard has 5–6 steps, the race list stays on Home). All events were completed by the automation.


Screens

- Home — HOME-01 … HOME-04 (4)
- Settings — SET-01 … SET-09 (9)
- Share race config — SHARE-01 … SHARE-04 (4)
- Race setup — SETUP-01 … SETUP-05 (5)
- Checkpoint — Mark off — CP-01 … CP-17 (17)
- Checkpoint — Callout sheet — CO-01 … CO-09 (9)
- Checkpoint — Read-out — RO-01 … RO-11 (11)
- Checkpoint — Overview — OV-01 … OV-12 (12)
- Sunlight — SUN-01 … SUN-04 (4)
- Base — Receive — RX-01 … RX-25 (25)
- Base — DNF / DNS — ST-01 … ST-18 (18)
- Base — Overview — BO-01 … BO-05 (5)
- Base — Reports & data checks — RP-01 … RP-21 (21)
- Base — Ask reminder — AS-01 … AS-04 (4)
- Base — phone and accessibility — PH-01 … A11Y-01 (4)

Home


HOME-01 390×844

Plan	§4.1
Event	**Open the app at /**
Plan says	*Navy header: badge, "RaceTracker", "Ipswich & District Radio Club · VK4WIP", "Offline ready" status. Current race card (name, date, checkpoint count, start time). Three role cards (≥76px): Checkpoint, Base station, Race setup — icon tile, title, one-line description, chevron. Primary button at bottom: Scan race QR code (existing import flow). Footer lockup: "Ipswich & District Radio Club · VK4WIP".*
App showed	• Header: "RaceTracker Ipswich & District Radio Club · VK4WIP CURRENT RACE Offline ready Mt Glorious Mountain Trails Wed 21 Oct · 3 checkpoints + finish · start 12:07" • Checkpoint role card: "Checkpoint Mark runners as they pass your station" • Role card heights: Checkpoint 94px, Base station 94px, Race setup 94px
Result	☐ Matches plan ☐ Issue: _____

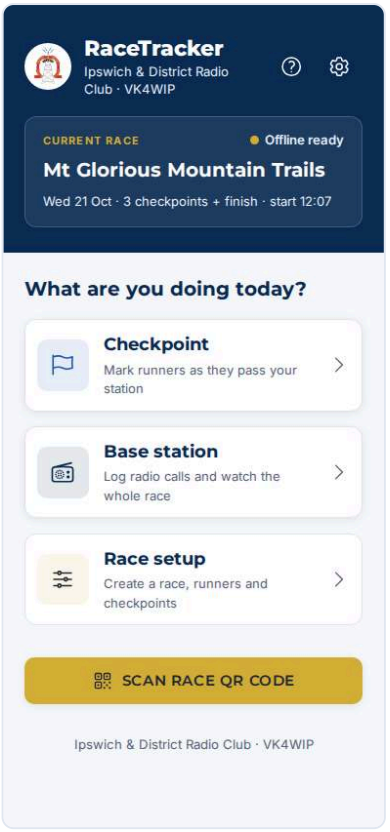


HOME-02 390×844

Plan	§4.1
Event	**Click "Scan race QR code"**
Plan says	*Opens the existing import flow (QR scanner).*
App showed	• Dialog: "Import / Export Race Configuration Export Configuration Import Configuration Import Race Configuration Upload a JSON file, paste the race configuration data bel…" · name "Import / Export" · role=dialog
Result	☐ Matches plan ☐ Issue: _____

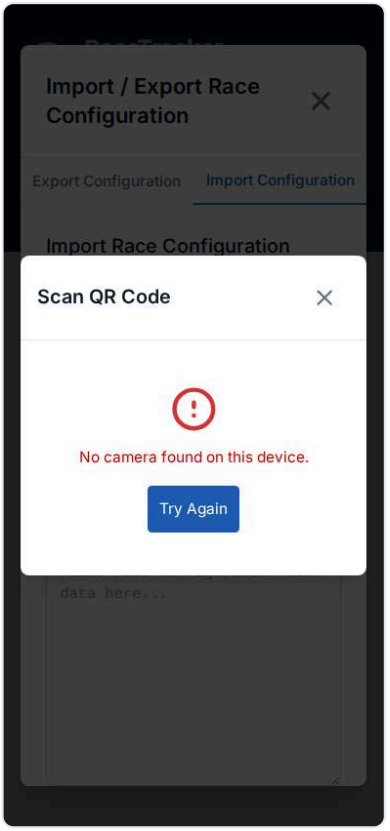


HOME-03 390×844

Plan	§4.1
Event	**Close the scanner, then click the "Checkpoint" role card**
Plan says	*Role cards keep the existing navigation (choose race, then checkpoint). Navigation protection unchanged.*
App showed	• URL: / • Dialog heading: "Select Race for Checkpoint Operations"
Result	☐ Matches plan ☐ Issue: _____

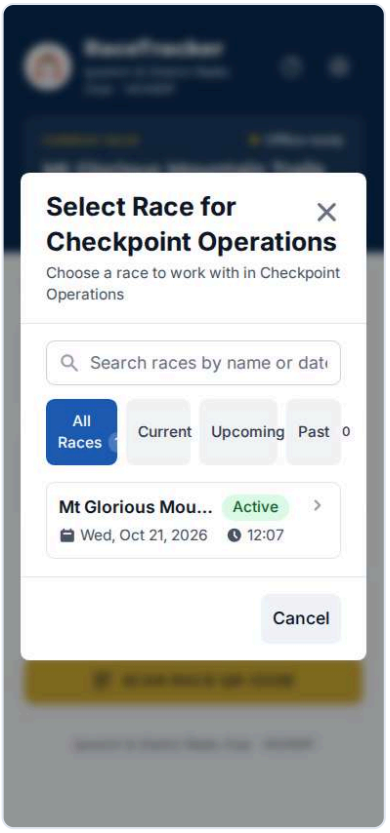

HOME-04 390×844

Plan	Fixes C6
Event	**Open Race setup and scroll to the footer**
Plan says	*Footer text "Ipswich & District Radio Club · VK4WIP" (not "VK4WIP Radio Club").*
App showed	• Footer: "© 2026 Ipswich & District Radio Club · VK4WIP. All rights reserved."
Result	☐ Matches plan ☐ Issue: _____

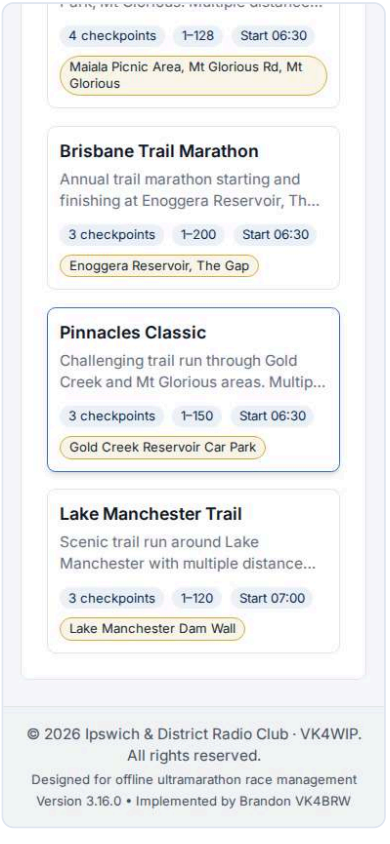

Settings

SET-01 390×844

Plan §4.4


Event **Home → click the Settings (cog) button**

Plan says *Sections: Display (Theme segmented: Light / Dark / Sunlight; text-size slider), Status colours (rows with swatch, name, description; "Reset to club colours"), Race data (Share or import race config).*

App showed
- Section headings: DISPLAY · STATUS COLOURS · RACE DATA · MORE OPTIONS · DANGER ZONE · Clear database
- Theme: Light: "Light" · aria-pressed=true

Status line Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database

Result ☐ Matches plan ☐ Issue: _____

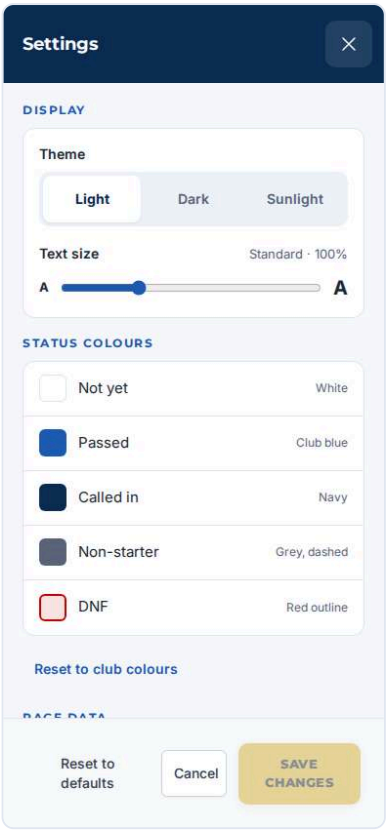

SET-02 390×844

Plan §4.4


Event **Click Theme → "Sunlight"**

Plan says *Sunlight = new high-contrast theme option (pure white bg, ink text, thicker borders).*

App showed
- Theme: Sunlight: "Sunlight" · aria-pressed=true
- Theme classes on <html>: touch-optimized sunlight-mode
- Body background: rgb(255, 255, 255)


Status line Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database

Result ☐ Matches plan ☐ Issue: _____

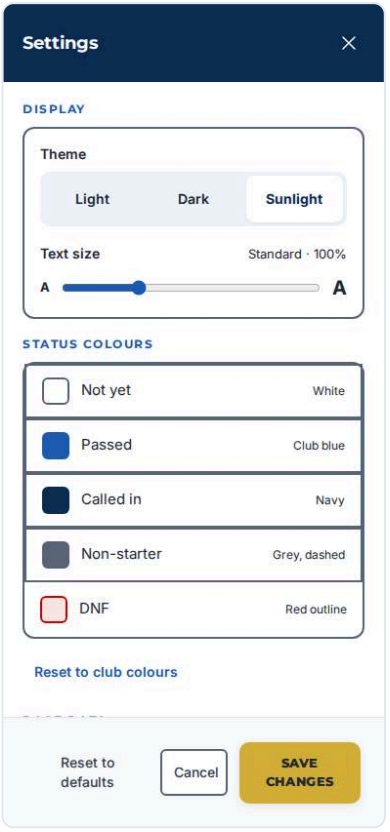


SET-03 390×844

Plan	§4.4 / G6 / Fixes C3
Event	**Click Theme → "Dark"**
Plan says	*Dark mode: muted labels, the "Reset to club colours" link and "Standard · 100%" at least 4.5:1; Called-in swatch has a light outline.*
App showed	• Theme classes on <html>: touch-optimized dark • Section heading: "DISPLAY" · colour rgb(111, 150, 208) • "Reset to club colours": "Reset to club colours" · colour rgb(111, 150, 208) • Text size label: "Standard · 100%" · colour rgb(185, 203, 230) • axe colour-contrast: no violations
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

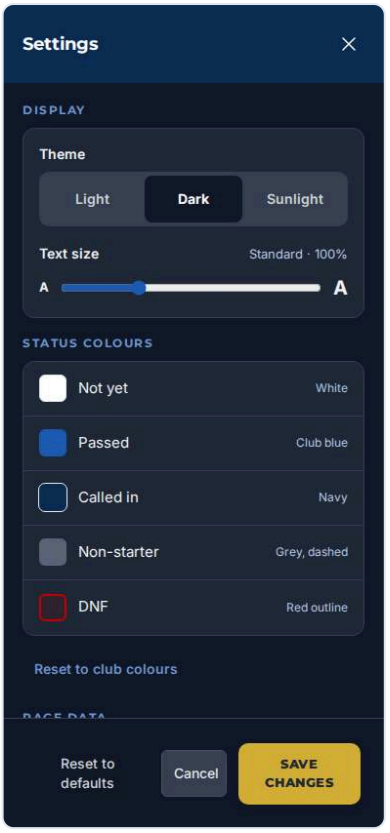


SET-04 390×844

Plan	§3.2 / §4.4
Event	**Click "Light", then drag Text size to 130%**
Plan says	*Keep the existing --font-scale setting; all sizes scale with it.*
App showed	• --font-scale: 1.3 • Text size label: "Extra large · 130%"
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

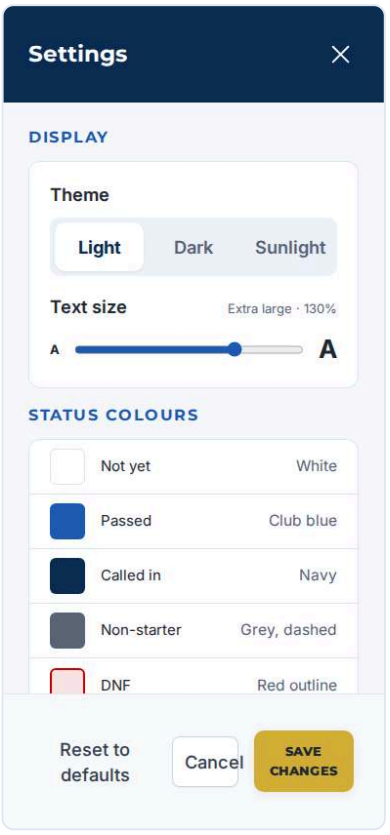


SET-05 390×844

Plan	§4.4 / G7
Event	**Change the "Passed" colour to #2a9d8f with its swatch**
Plan says	*Users may still recolour in Settings.*
App showed	• --color-status-passed: 42 157 143
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

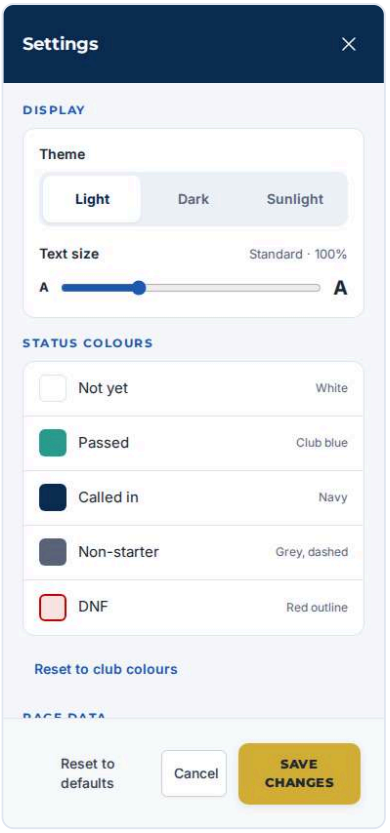


SET-06 390×844

Plan	§4.4
Event	**Click "Reset to club colours"**
Plan says	*Status colours … "Reset to club colours".*
App showed	• --color-status-passed (club blue = 30 92 179): 30 92 179
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

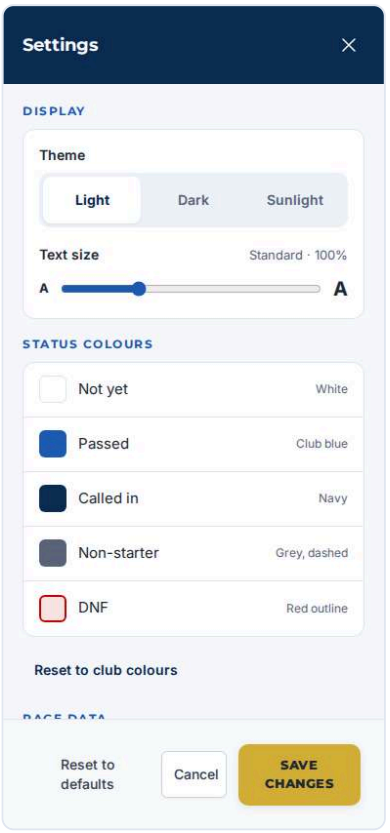


SET-07 390×844

Plan	Fixes C2
Event	**Look at the accessibility toggles**
Plan says	*Settings toggles: club blue when on, border colour when off.*
App showed	• Toggle colours (on/off): false: rgb(224, 230, 240), false: rgb(224, 230, 240), true: rgb(30, 92, 179), false: rgb(224, 230, 240)
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

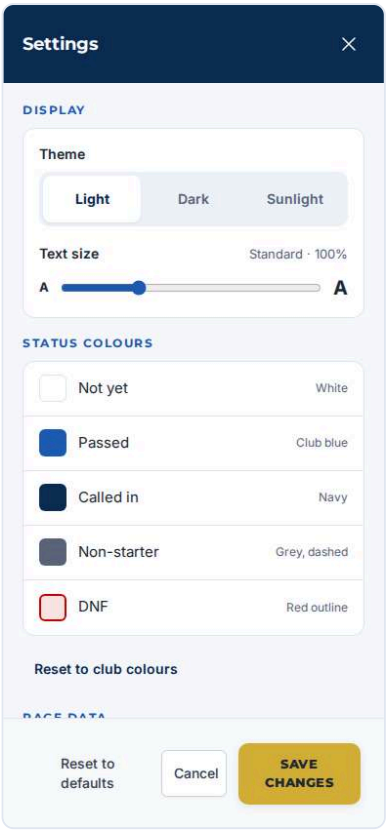


SET-08 390×844

Plan	Fixes D3
Event	**Click "Dark", then "Cancel"**
Plan says	*Settings Cancel undoes the live theme preview.*
App showed	• Theme classes on <html>: touch-optimized
Result	☐ Matches plan ☐ Issue: _____

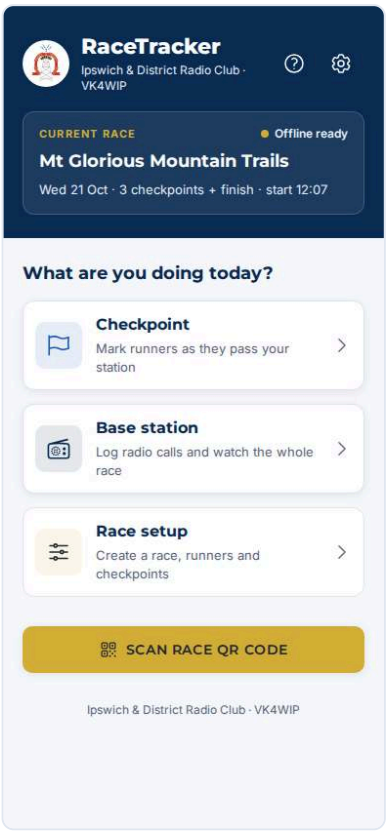

SET-09 390×844


Plan	Fixes D3
Event	**Settings → "Dark" → "Save Changes", then reload the page**
Plan says	*Settings persist after reload.*
App showed	• Theme classes on <html>: dark touch-optimized
Result	☐ Matches plan ☐ Issue: _____

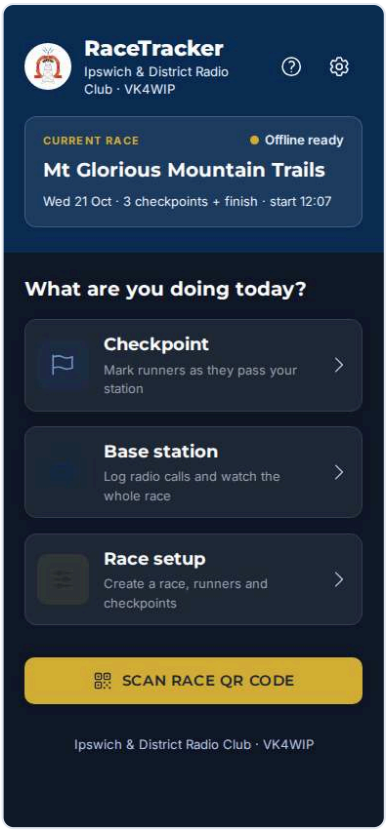

Share race config


SHARE-01 390×844

Plan	§4.3 / Fixes C1
Event	**Settings → "Light" → Save; Settings → Race data → "Share or import race config"**
Plan says	*Existing QR export: large QR in a white card with shadow, runner/checkpoint count; Download / Email / Copy tiles; primary "Show full screen" (QRDisplayFullscreen). Note "Works without internet — device to device". Locked buttons: dashed border, muted text.*
App showed	• QR card note: "This race is too large for one QR code (8,843 characters). Use Download, Email or Copy below to send the file instead." • Show full screen: "SHOW FULL SCREEN" · disabled · background rgb(255, 255, 255) · border 2px dashed rgb(224, 230, 240) · colour rgb(90, 101, 121)
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

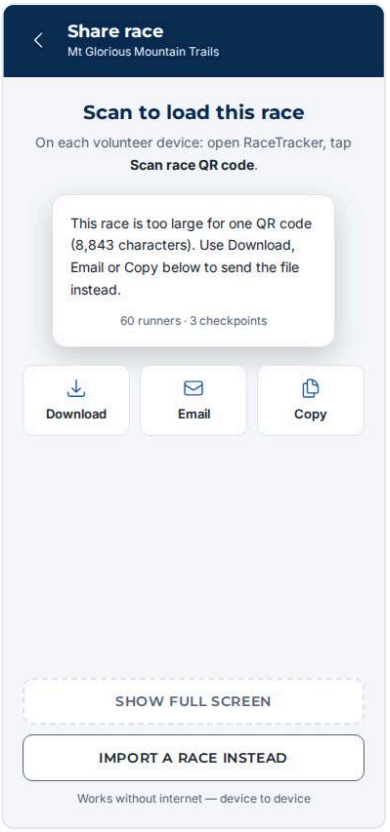


SHARE-02 390×844

Plan	§4.3
Event	**Click the "Copy" tile**
Plan says	*Download / Email / Copy tiles.*
App showed	• Copy tile: "Copied" • Clipboard starts: {"version":"3.0.0","exportDate":"2026-10-21T14:07:23.378Z","
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

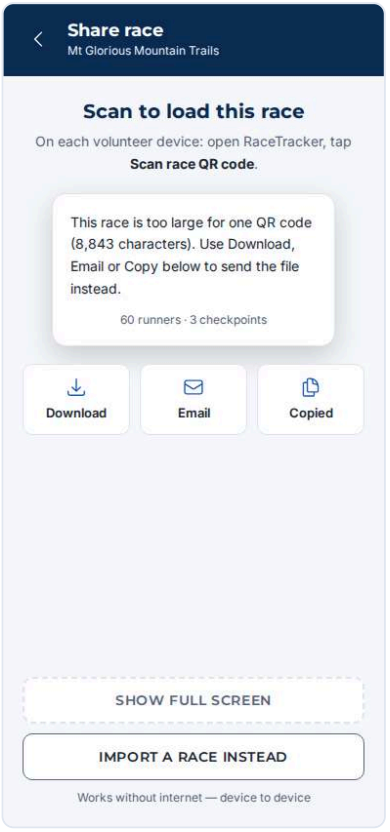


SHARE-03 390×844

Plan	Fixes A7
Event	**Click the "Email" tile (no Web Share on this browser)**
Plan says	*Download the .json file and open mailto: with a short body (instructions only, ≤ 1,800 characters) telling the reader to attach it. The share payload contains no results.*
App showed	• Downloaded: race-setup-Mt-Glorious-Mountain-Trails.json — data: races, runners, checkpoints • mailto: 443 characters — mailto:?subject=Race setup: Mt Glorious Mountain Trails&body=Race setup for Mt Glorious Mountain Trails is attached as race-setup-Mt-Gloriou…
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

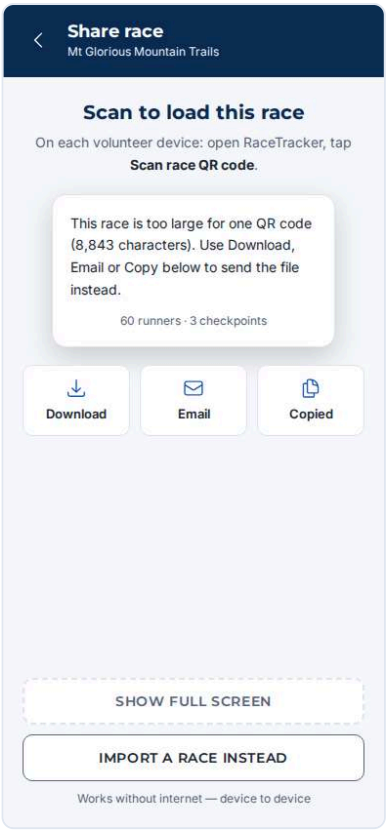

SHARE-04 390×844

Plan	Fixes A7
Event	**"Import a race instead" → Import tab → choose a race file the mail app labelled application/octet-stream**
Plan says	*File import accepts by content, not file.type (.json, application/json, application/octet-stream, text/plain, '').*
App showed	• Import message: "File loaded successfully. Click "Import Configuration" to proceed."
Status line	Clear database Permanently deletes all races, runners and settings on this device. This cannot be undone. Clear database
Result	☐ Matches plan ☐ Issue: _____

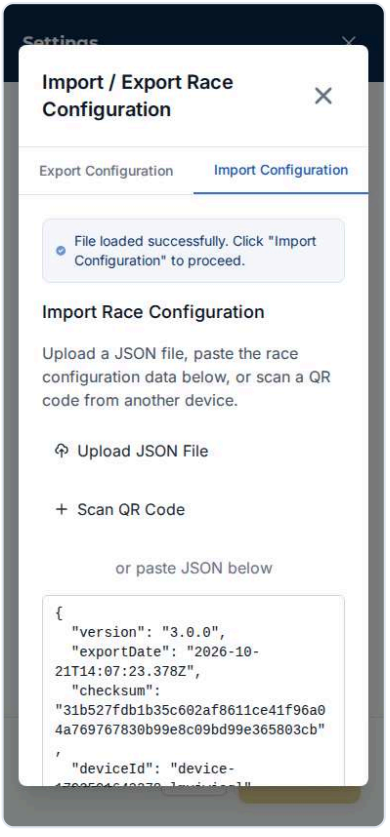

Race setup

SETUP-01 390×844


Plan §4.2 / Fixes C7

Event **Open /race-maintenance/setup**

Plan says *Navy header with step and a gold progress bar. Restyle only; keep the wizard. Mt Glorious template per the WICEN brief: start 06:30, checkpoints / distances / operators from spec §10 (bib range unchanged).*

App showed
- Mt Glorious template card: "Mt Glorious Mountain Trail Mountain trail race finishing at Maiala Park, Mt Glorious. Multiple distance options with challenging terrain. 4 checkpoints 1–128 St..."
- Template tag: "4 checkpoints" · background rgb(238, 243, 250) · colour rgb(11, 45, 83)

Result ☐ Matches plan ☐ Issue: _____

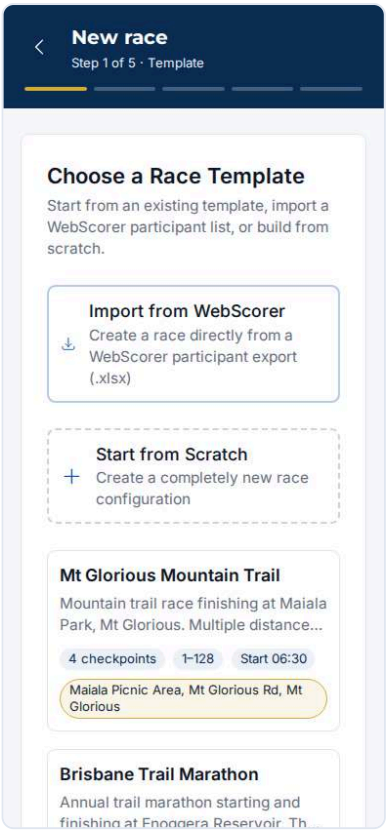

SETUP-02 390×844


Plan Fixes C7

Event **Click the Mt Glorious template**

Plan says *Start 06:30 (spec §10).*


App showed
- Start time: "06:30" · aria-invalid=false
- Checkpoints: "4" · aria-invalid=false

Result ☐ Matches plan ☐ Issue: _____

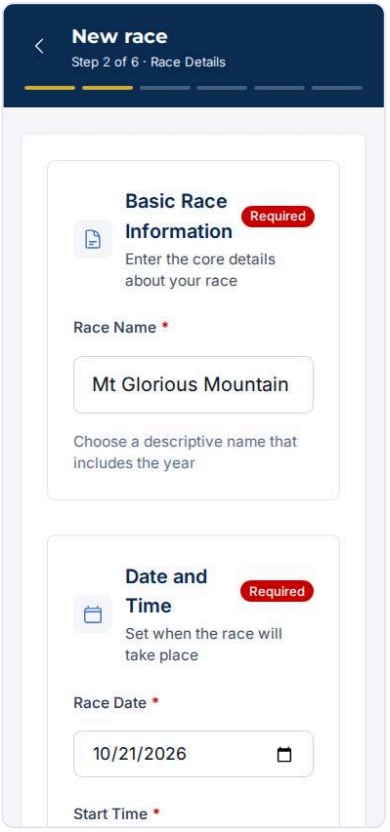

SETUP-03 390×844


Plan	§4.2
Event	**Back to templates; "Start from Scratch", enter name / date / start time, click Next**
Plan says	*Keep the wizard (Back secondary, Next primary).*
App showed	• Step heading: "Add Runner Range"
Status line	0 runners will be created
Result	☐ Matches plan ☐ Issue: _____

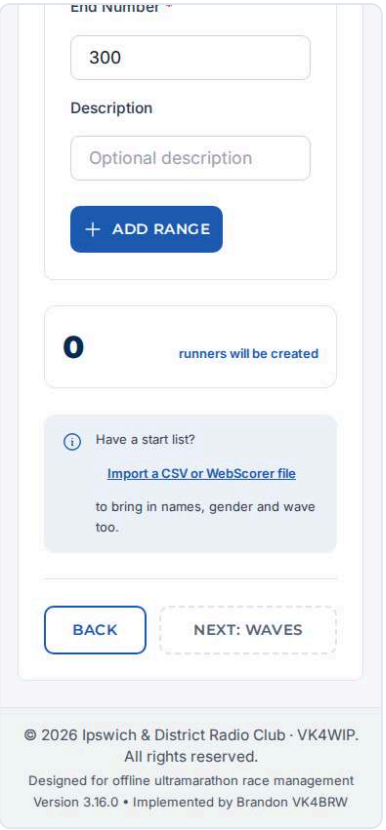

© 2026 Ipswich & District Radio Club · VK4WIP. All rights reserved.
Designed for offline ultramarathon race management
Version 3.16.0 • Implemented by Brandon VK4BRW


SETUP-04 390×844

Plan	§4.2 / G1 / Fixes C5
Event	**Enter From 100, To 349 and click "Add Range"**
Plan says	*Runner ranges input, live count ("250 runners will be created") and first/last preview chips. Configured range row must not overflow at 390px (badge and delete inside the card; delete has aria-label).*
App showed	• Live count: "250 runners will be created" • Delete: name "Remove range 100-349" • Page width: 390px (viewport 390px)
Status line	250 runners will be created 100 101 102 103 104 … 345 346 347 348 349
Result	☐ Matches plan ☐ Issue: _____

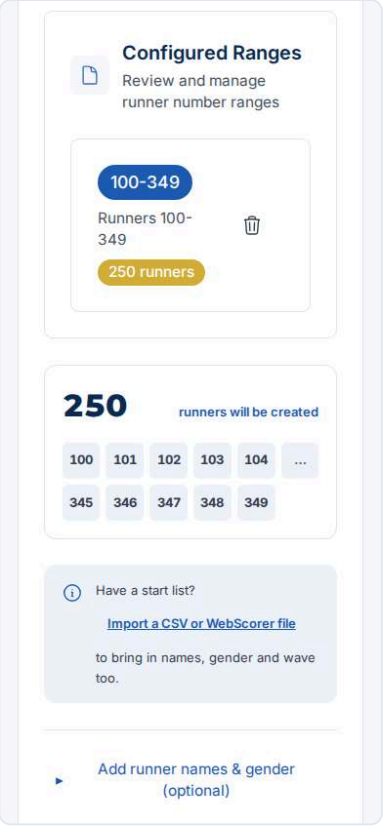

SETUP-05 390×844

Plan	§4.2 / Fixes C5
Event	**Scroll to the bottom of the runners step**
Plan says	*Back/Next buttons: short labels ("Back", "Next: Waves") on one line.*
App showed	• Back / Next: "Back" 50px high, "Next: Waves" 50px high • CSV / WebScorer link: "Import a CSV or WebScorer file"
Status line	250 runners will be created 100 101 102 103 104 … 345 346 347 348 349
Result	☐ Matches plan ☐ Issue: _____

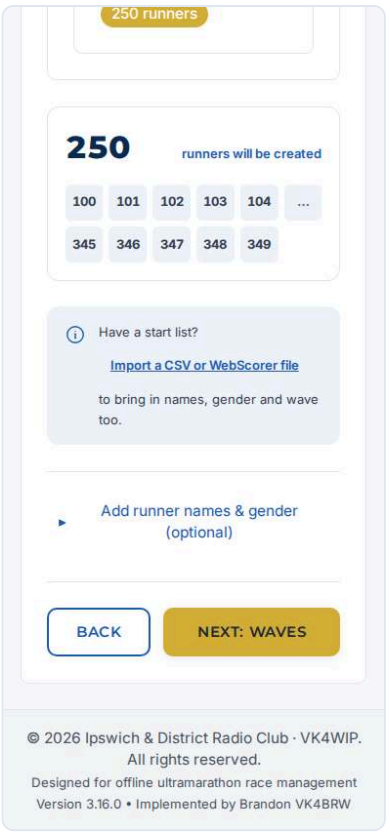


© 2026 Ipswich & District Radio Club · VK4WIP.
All rights reserved.
Designed for offline ultramarathon race management
Version 3.16.0 • Implemented by Brandon VK4BRW

Checkpoint — Mark off

CP-01 390×844

Plan	§4.5 Layout / Fixes B1 B2 C1
Event	**Open /checkpoint/3**
Plan says	*AppBar (checkpoint number, location + operator callsign — two lines rather than an ellipsis) with 3 StatTiles → quick-entry input + gold Mark (locked until a number is typed) → status line → group chips → tile grid. Share batch is a labelled icon in the app bar with a count.*
App showed	• Subtitle: "England Creek Rd & Joyners Ridge Rd · VK4PMC" • Subtitle cut off?: no • Share batch: name "Share batch, 0 runners" · title=Share batch • Mark (empty entry): "MARK" · disabled · border 2px dashed rgb(224, 230, 240) · colour rgb(90, 101, 121)
Status line	Tap a number as the runner passes. Tap again to fix its time.
Result	☐ Matches plan ☐ Issue: _____

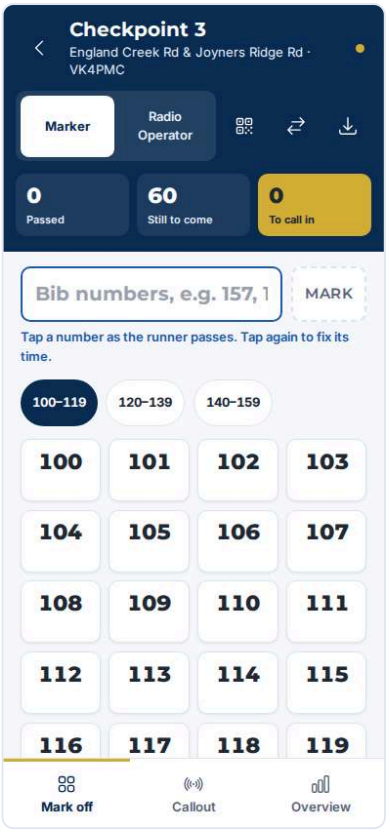

CP-02 390×844

Plan	§4.5 Behaviour 1
Event	**Tap tile 101 (not passed)**
Plan says	*Tap a not-passed tile → mark passed at now.*
App showed	• Tile 101: "101 14:07" · name "Runner 101, 14:07" · background rgb(30, 92, 179) • Status line: "101 marked at 14:07" · aria-live=polite
Status line	101 marked at 14:07
Result	☐ Matches plan ☐ Issue: _____



CP-03 390×844

Plan	§4.5 Behaviour 6
Event	**Type "103, 104 105" in quick entry and press Enter**
Plan says	*Quick entry accepts multiple numbers, marks each at now, message "3 runners marked at 07:47".*
App showed	• Status line: "3 runners marked at 14:07" · aria-live=polite • Share batch: "4" · name "Share batch, 4 runners" · title=Share batch
Status line	3 runners marked at 14:07 · 3 runners marked UNDO
Result	☐ Matches plan ☐ Issue: _____




CP-04 390×844

Plan	G1 / §4.5 Behaviour 6
Event	**Type "110-115 999 101" and press Enter**
Plan says	*Individual numbers only. Unknown / already-marked numbers are not marked.*
App showed	• Status line: "No new runners — 999 not at this checkpoint · 101 already marked · type each number on its own" · aria-live=polite
Status line	No new runners — 999 not at this checkpoint · 101 already marked · type each number on its own · 3 runners marked UNDO
Result	☐ Matches plan ☐ Issue: _____



CP-05 390×844

Plan	§4.5 Behaviour 6
Event	**Type "125" and press Enter**
Plan says	*Jumps the grid to the group of the first number.*
App showed	• Status line: "125 marked at 14:07" · aria-live=polite • Group chip 120–139: "120–139" · aria-pressed=true
Status line	125 marked at 14:07 · 125 marked UNDO
Result	☐ Matches plan ☐ Issue: _____

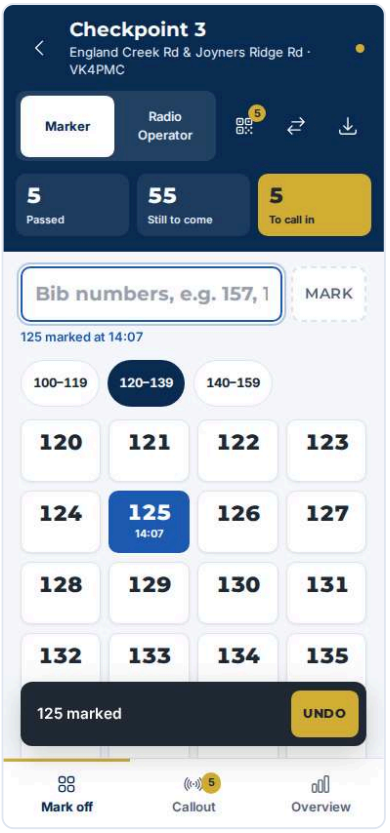


CP-06 390×844

Plan	§4.5
Event	**Tap group chip "100–119"**
Plan says	*Group chips (20 per group).*
App showed	• Group chip 100–119: "100–119" · aria-pressed=true · background rgb(11, 45, 83)
Status line	125 marked at 14:07 · 125 marked UNDO
Result	☐ Matches plan ☐ Issue: _____




CP-07 390×844

Plan	§4.5 Behaviour 2–3
Event	**Tap tile 101 again (passed)**
Plan says	*Edit sheet: bib, "Passed · not called in yet", "Marked at HH:MM", TimeStepper, Save HH:MM (or "Keep time"), Unmark runner, Cancel.*
App showed	• Sheet: "101 Passed · not called in yet Marked at 14:07 TIME PASSED −5 −1 14:07 +1 +5 Use − / + to correct the time KEEP TIME Cancel Unmark runner" · role=dialog • Primary: "KEEP TIME"
Status line	125 marked at 14:07 · 125 marked UNDO · 14:07
Result	☐ Matches plan ☐ Issue: _____

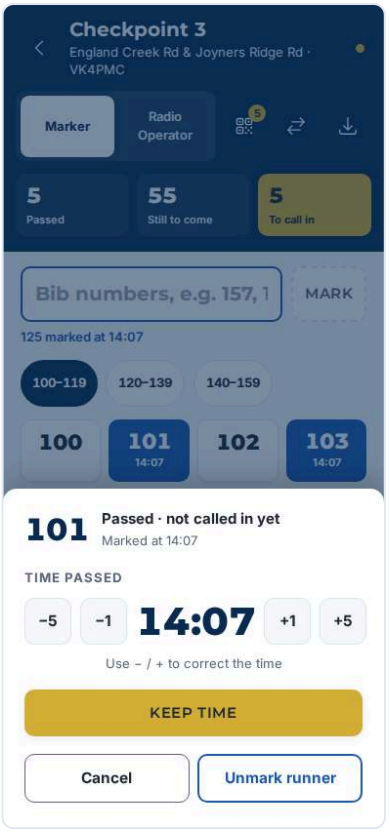


CP-08 390×844

Plan	§3.5 TimeStepper
Event	**In the sheet tap "−5"**
Plan says	*Primary changes to "Save HH:MM"; "Was HH:MM" note.*
App showed	• Primary: "SAVE 14:02" • Note: "Was 14:07"
Status line	125 marked at 14:07 · 125 marked UNDO · 14:02
Result	☐ Matches plan ☐ Issue: _____

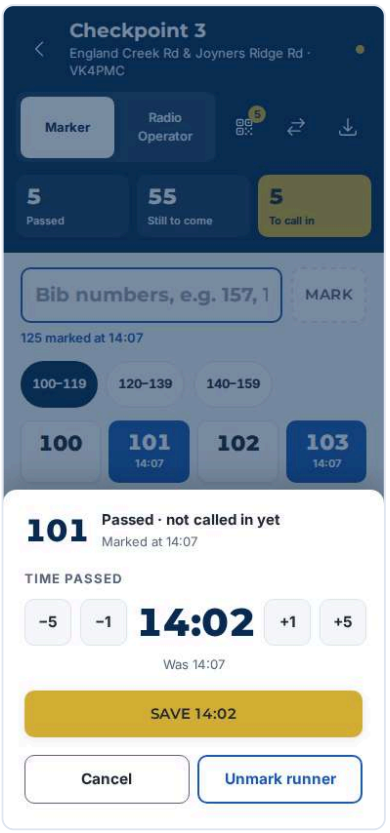

CP-09 390×844

Plan	§3.5 TimeStepper / Fixes B4
Event	**Tap "+5" three times**
Plan says	*Clamp to now. Back at the original minute the button reads "Keep time" and the "Was" note is hidden.*
App showed	• Primary: "KEEP TIME" • "Was" note: hidden
Status line	125 marked at 14:07 · 125 marked UNDO · 14:07
Result	☐ Matches plan ☐ Issue: _____

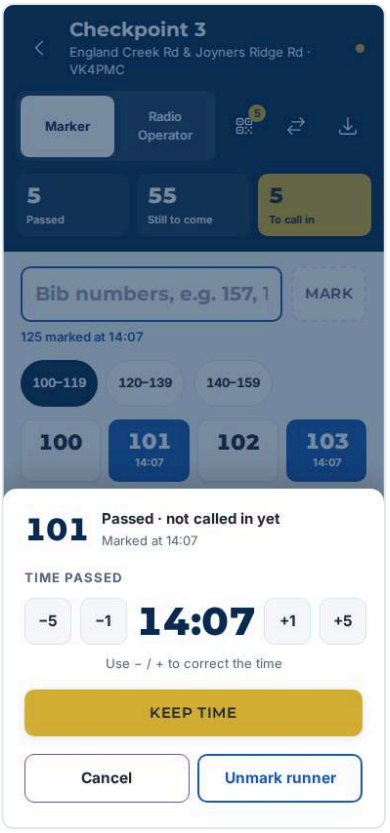

CP-10 390×844

Plan	§4.5 Behaviour 3
Event	**Tap "−5" twice, then "Save HH:MM"**
Plan says	*Save changes the time; status line confirms.*
App showed	• Status line: "101 time changed to 13:57" · aria-live=polite • Tile 101: "101 13:57" · name "Runner 101, 13:57"
Status line	101 time changed to 13:57 · 101 time changed UNDO
Result	☐ Matches plan ☐ Issue: _____



CP-11 390×844

Plan	§4.5 Behaviour 4
Event	**Tap tile 103 → "Unmark runner"**
Plan says	*Tile becomes "unmarked earlier" (dashed blue, was HH:MM); UndoBar "103 unmarked · Undo".*
App showed	• Tile 103: "103 was 14:07" · name "Runner 103, was 14:07" · border 2px dashed rgb(30, 92, 179) • Undo bar: "103 unmarked UNDO" · role=status
Status line	103 unmarked UNDO
Result	☐ Matches plan ☐ Issue: _____



CP-12 390×844

Plan	§4.5 Behaviour 4 / G5
Event	**Tap "Undo" on the undo bar**
Plan says	*Undo restores the original record exactly.*
App showed	• Tile 103: "103 14:07" · name "Runner 103, 14:07"
Status line	103 restored at 14:07
Result	☐ Matches plan ☐ Issue: _____




CP-13 390×844

Plan	§4.5 Behaviour 4 / Fixes D3
Event	**Tap tile 104 → "Unmark runner", wait 6.5 s**
Plan says	*Tile becomes "unmarked earlier"; Undo auto-dismisses after ~6 s.*
App showed	• Tile 104: "104 was 14:07" · name "Runner 104, was 14:07" · border 2px dashed rgb(30, 92, 179) • Undo bar after 6.5 s: gone
Result	☐ Matches plan ☐ Issue: _____



CP-14 390×844

Plan	§4.5 Behaviour 5
Event	**Tap tile 104 (unmarked earlier)**
Plan says	*Restore mode: "Unmarked earlier · It had been marked at 07:37", primary Mark at 07:37, secondary Use now (HH:MM).*
App showed	• Sheet: "104 Unmarked earlier It had been marked at 14:07 TIME PASSED −5 −1 14:07 +1 +5 Restore the original time, or adjust it MARK AT 14:07 Cancel Use now (14:07)" · role=dialog
Status line	14:07
Result	☐ Matches plan ☐ Issue: _____

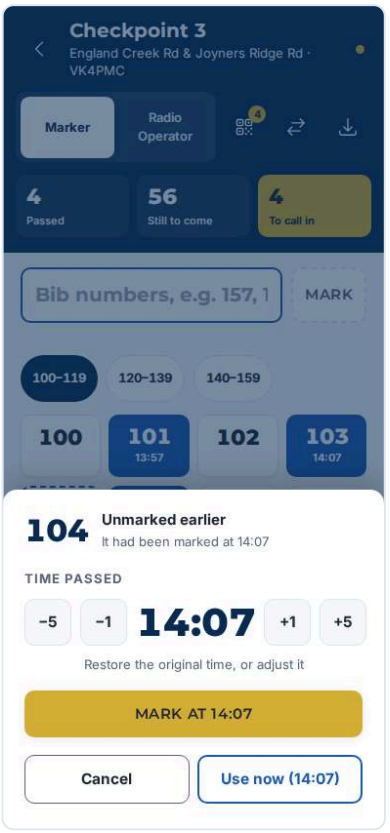


CP-15 390×844

Plan	§4.5 Behaviour 5
Event	**Tap "Mark at HH:MM"**
Plan says	*Restores the original time.*
App showed	• Status line: "104 marked at 14:07" · aria-live=polite • Tile 104: "104 14:07" · name "Runner 104, 14:07"
Status line	104 marked at 14:07 · 104 marked UNDO
Result	☐ Matches plan ☐ Issue: _____



CP-16 390×844

Plan	§4.5 Behaviour 7 / Fixes B3
Event	**In Overview mark 119 DNS, back to Mark off, scroll the grid to the bottom, tap tile 119**
Plan says	*DNS/DNF tiles are not editable here. The quick-entry bar and status line stay in view while the grid scrolls.*
App showed	• Status line: "119 is DNS — change it in Overview" · aria-live=polite • Status line in view: yes
Status line	119 is DNS — change it in Overview
Result	☐ Matches plan ☐ Issue: _____

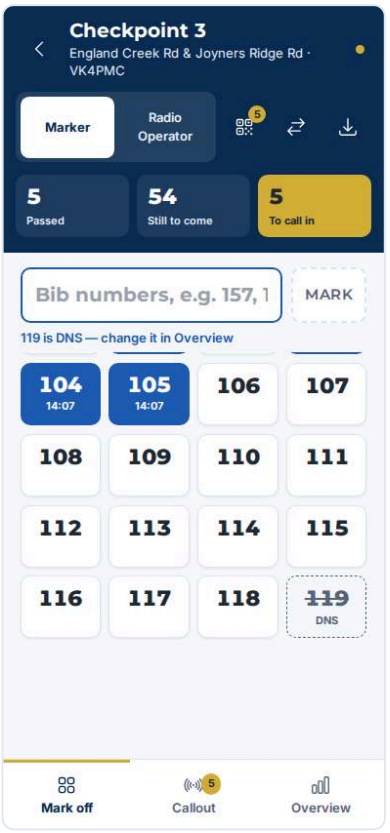

CP-17 390×844

Plan	Accessibility (Fixes D3)
Event	**Tap tile 101, press Tab 12 times, then Escape**
Plan says	*Sheets trap focus and close on Escape.*
App showed	• Focus inside the sheet after 12 Tabs: yes • Sheet after Escape: closed
Status line	119 is DNS — change it in Overview
Result	☐ Matches plan ☐ Issue: _____



Checkpoint — Callout sheet

CO-01 390×844

Plan §4.6 / Fixes B1

Event **Mark 107 108 109, then tap the "Callout" tab**

Plan says *Title "CP3 · Callout", subtitle "VK4PMC → VK4WIP · 147.225". Call-due banner when ≥ 5 waiting or oldest ≥ 5 min. Next call card with one white card per pending block. Read out + Base copied — mark sent.*

App showed
- Title: "CP3 · Callout"
- Subtitle: "VK4PMC → VK4WIP · 147.225"
- Call due: "Call due — 8 waiting, oldest 10 min" · role=status
- Pending block: "Common time 13:55 · 1 101"

Status line Call due — 8 waiting, oldest 10 min

Result ☐ Matches plan ☐ Issue: _____



CO-02 390×844

Plan §4.6


Event **Tap "Base copied — mark sent"**

Plan says *Marks every pending runner called in; called-in blocks collapse to one compact row.*

App showed
- Callout badge: gone (nothing left to call in)
- Sent row: "Sent 14:07"


Status line 8 marked as copied by base · 8 marked sent UNDO

Result ☐ Matches plan ☐ Issue: _____

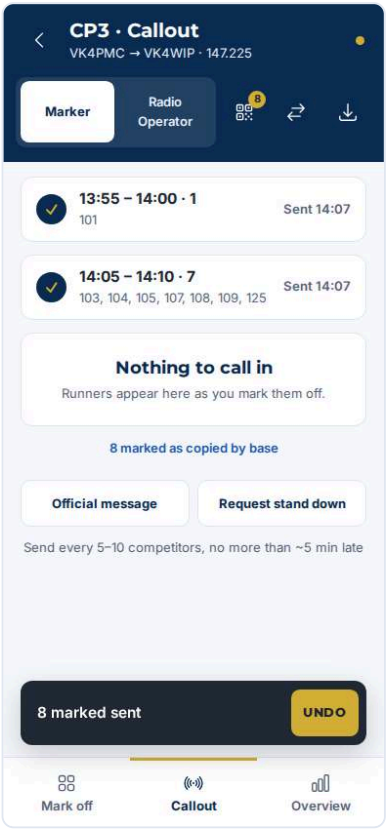


CO-03 390×844

Plan	Fixes A3
Event	**Mark off → tap 101 (called in) → move it one minute inside its 5-minute block**
Plan says	*Same block → no correction. Sheet note "Same common time (HH:MM) — base doesn't need a correction."*
App showed	• Note: "Same common time (13:55) — base doesn't need a correction." • Correction warning: not shown
Status line	Tap a number as the runner passes. Tap again to fix its time. · 13:56
Result	☐ Matches plan ☐ Issue: _____

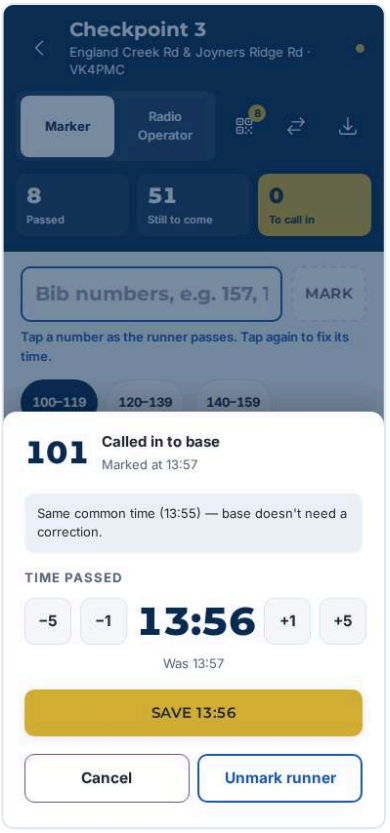


CO-04 390×844

Plan	Fixes A3
Event	**Tap "Save HH:MM"**
Plan says	*Keep calledIn, no correction, no ✎. Status line "101 time changed — same common time, nothing to send".*
App showed	• Status line: "101 time changed — same common time, nothing to send" · aria-live=polite • Tile 101: "101 ✓ 13:56" · name "Runner 101, ✓ 13:56" • Callout badge: none
Status line	101 time changed — same common time, nothing to send · 101 time changed UNDO
Result	☐ Matches plan ☐ Issue: _____

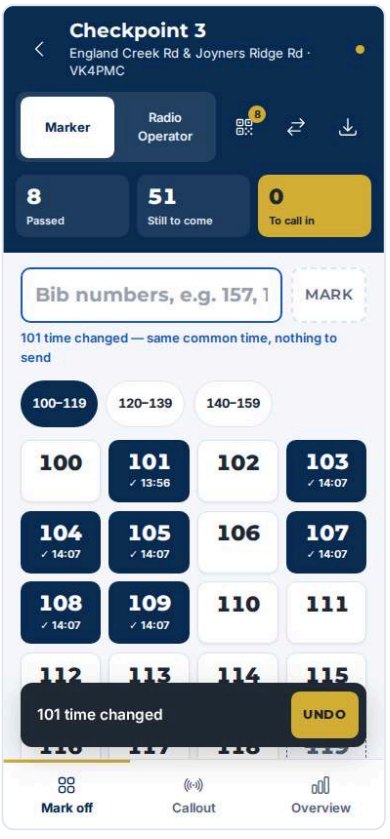


CO-05 390×844

Plan	§4.5 Behaviour 3
Event	**Tap 101 again → "−5"**
Plan says	*Block changes → warning box "Base already has 07:31. A changed time goes back on the callout sheet as a correction."*
App showed	• Warning: "Base already has 13:56. A changed time goes back on the callout sheet as a correction." · background rgba(212, 175, 55, 0.1) · border 1px solid rgb(212, 175, 55)
Status line	101 time changed — same common time, nothing to send · 101 time changed UNDO · 13:51
Result	☐ Matches plan ☐ Issue: _____

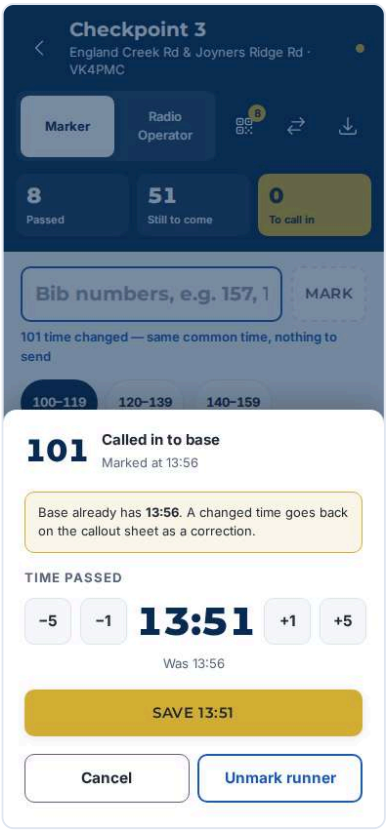

CO-06 390×844

Plan	§4.5 Behaviour 3 / §4.6
Event	**Tap "Save HH:MM", then the "Callout" tab**
Plan says	*Saving sets correction = true; tile shows ✎; corrections appear in the pending list tagged "Correction".*
App showed	• Pending block: "Common time 13:50 · 1 101 Correction"
Status line	Call due — 1 waiting, oldest 16 min
Result	☐ Matches plan ☐ Issue: _____

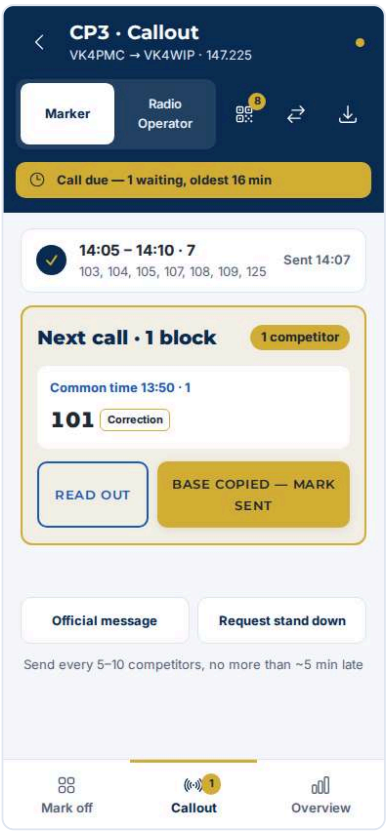


CO-07 390×844

Plan	§4.6 / Fixes E2
Event	**Tap "Official message"; type a message, the originator, tick "Signed by originator"**
Plan says	*Official message: Date (prefilled, en-AU), Originator (name/role, required), "Signed by originator" checkbox; local log. WICEN: sender, recipient, message number, date/time, originator's signature.*
App showed	• Heading: "Official message 1" • Date: "21/10/2026" • Originator: "Sue Smith, CP3 marshal" • Signed: true • Log message: "LOG MESSAGE"
Status line	Call due — 1 waiting, oldest 16 min
Result	☐ Matches plan ☐ Issue: _____




CO-08 390×844

Plan	§4.6 / Fixes E2
Event	**Tap "Log message"**
Plan says	*Kept in a local log.*
App showed	• Status line: "Message 1 logged at 14:07" · aria-live=polite
Status line	Call due — 1 waiting, oldest 16 min · Message 1 logged at 14:07
Result	☐ Matches plan ☐ Issue: _____

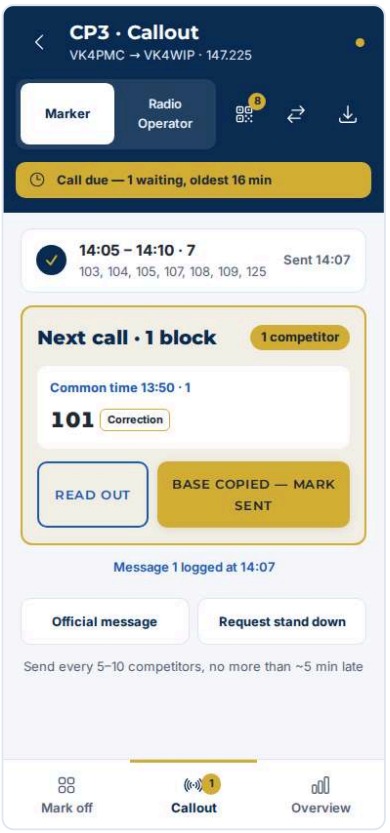

CO-09 390×844


Plan	§4.6 / Fixes E2
Event	**Tap "Request stand down"**
Plan says	*Request stand down (plain button; notes modal / log entry). Read-only "Checkpoint log" list. No radio phrases on screen.*
App showed	• Heading: "Request stand down" • Checkpoint log: "Message 1 · 14:07 · to VK4WIP 21/10/2026 · Sue Smith, CP3 marshal · signed Request extra water at CP3"
Status line	Call due — 1 waiting, oldest 16 min · Message 1 logged at 14:07
Result	☐ Matches plan ☐ Issue: _____

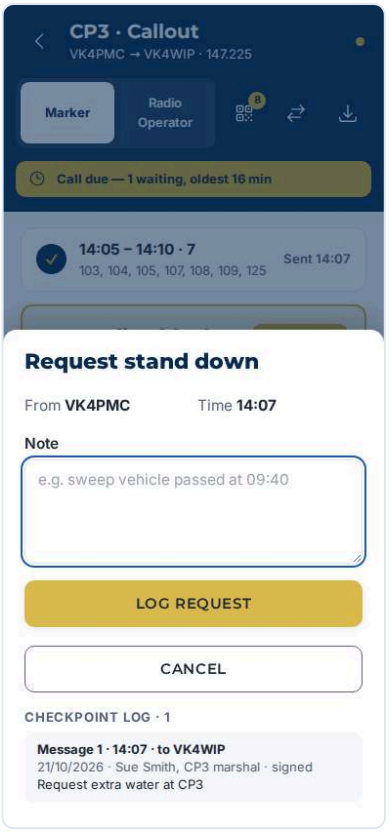

Checkpoint — Read-out


RO-01 390×844

Plan	§4.7 / Fixes C1
Event	**Cancel; send the pending correction; mark 12 runners (130–141); tap "Read out"**
Plan says	*Numbers split into overs of up to 5, each bib its own row. Lead "Common time 07:45". Base copied — next locked (dashed) until every number is ticked ("Tick each number as you read · 0 of 5").*
App showed	• Lead: "Common time 14:05" • Rows: 5 • Next: "TICK EACH NUMBER AS YOU READ · 0 OF 5" · disabled · border 2px dashed rgb(224, 230, 240) · colour rgb(90, 101, 121)
Status line	Common time 14:05 130 Read next 131 132 133 134
Result	☐ Matches plan ☐ Issue: _____

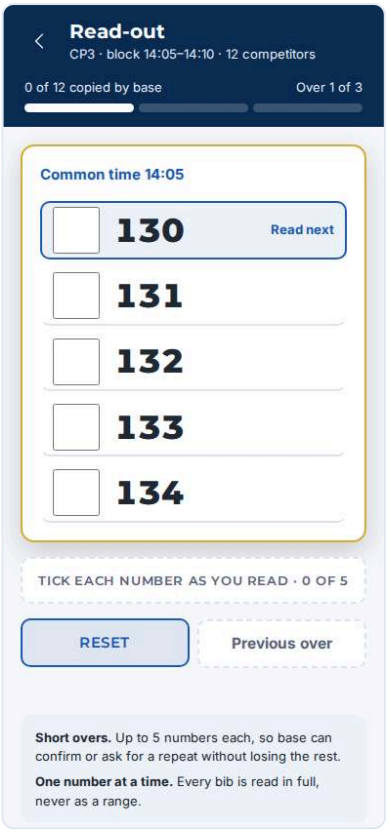


RO-02 390×844

Plan	§4.7
Event	**Tick the first two numbers**
Plan says	*Ticked rows muted, struck through; "Tick each number as you read · 2 of 5".*
App showed	• Next: "TICK EACH NUMBER AS YOU READ · 2 OF 5" · disabled
Status line	Common time 14:05 130 131 132 Read next 133 134
Result	☐ Matches plan ☐ Issue: _____

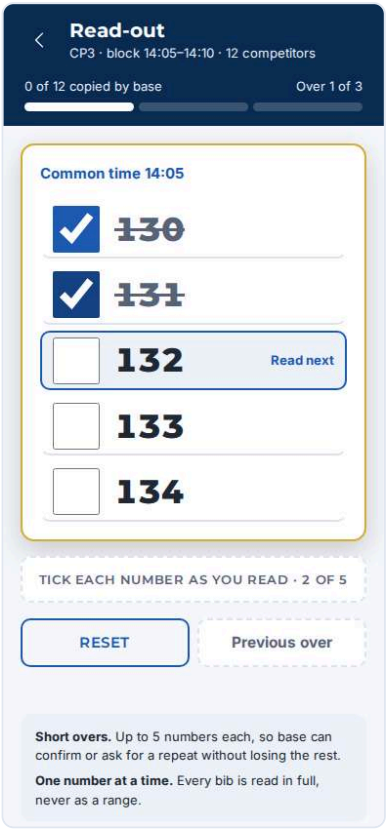

RO-03 390×844

Plan	§4.7
Event	**Tap "Reset"**
Plan says	*Reset clears ticks on the current over.*
App showed	• Ticked: 0
Status line	Common time 14:05 130 Read next 131 132 133 134 · Ticks cleared for this over
Result	☐ Matches plan ☐ Issue: _____

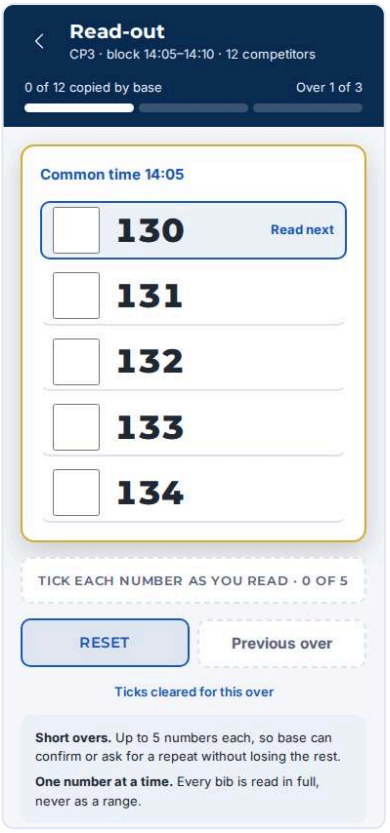


RO-04 390×844

Plan	§4.7
Event	**Tick all numbers in the over**
Plan says	*Base copied — next unlocks.*
App showed	• Next: "BASE COPIED — NEXT" · background rgb(212, 175, 55)
Status line	Common time 14:05 130 131 132 133 134
Result	☐ Matches plan ☐ Issue: _____




RO-05 390×844

Plan	§4.7
Event	**Tap "Base copied — next"**
Plan says	*Next over: lead "Continuing 07:45"; progress advances.*
App showed	• Lead: "Continuing 14:05" • Progress: "5 of 12 copied by base"
Status line	Continuing 14:05 135 Read next 136 137 138 139
Result	☐ Matches plan ☐ Issue: _____

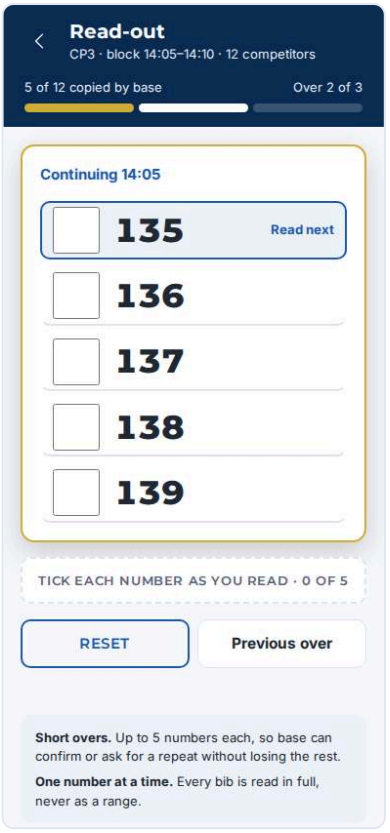

RO-06 390×844

Plan	§4.7
Event	**Tick one number, tap back, then tap "Read out" again**
Plan says	*Read-out progress persists.*
App showed	• Lead: "Continuing 14:05" • Ticked: 1
Status line	Continuing 14:05 135 136 Read next 137 138 139 · Resumed at over 2
Result	☐ Matches plan ☐ Issue: _____

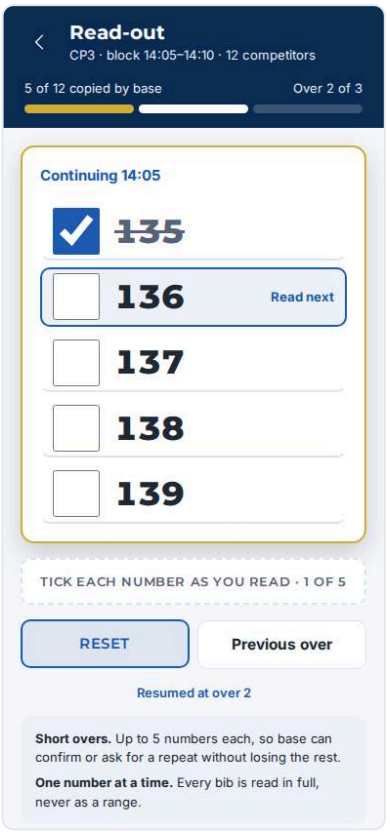


RO-07 390×844

Plan	§4.7
Event	**Tap "Previous over"**
Plan says	*Previous over steps back.*
App showed	• Lead: "Common time 14:05"
Status line	Common time 14:05 130 131 132 133 134
Result	☐ Matches plan ☐ Issue: _____




RO-08 390×844

Plan	§4.7
Event	**Complete every over to the end**
Plan says	*Done state "All N copied", which marks the block called in.*
App showed	• Done: "All 12 copied"
Result	☐ Matches plan ☐ Issue: _____

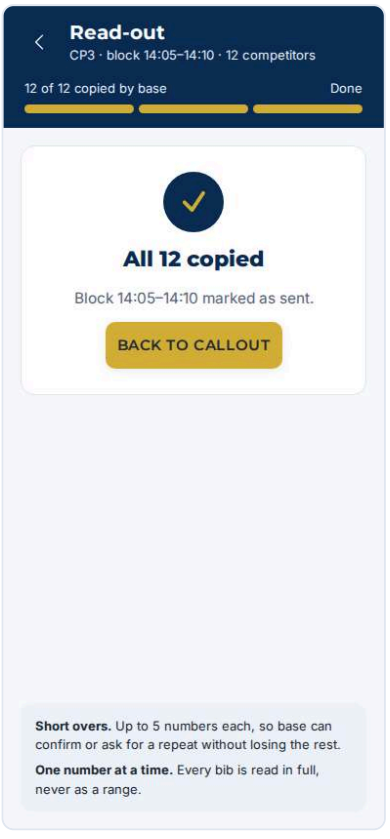


RO-09 390×844

Plan	Fixes D3 / §4.7
Event	**Race with overs of 3; four runners in one block and two in the next; Callout → "Read out"**
Plan says	*Read-out across two blocks; overSize 3.*
App showed	• Lead: "Common time 13:45" • Numbers in this over: 3
Status line	Common time 13:45 140 Read next 141 142
Result	☐ Matches plan ☐ Issue: _____

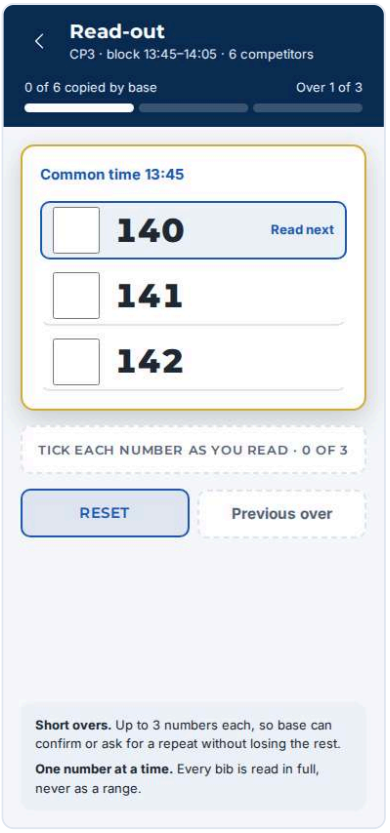


RO-10 390×844

Plan	Fixes D3 / §4.7
Event	**Tick all, "Base copied — next"**
Plan says	*The rest of the first block continues ("Continuing").*
App showed	• Lead: "Continuing 13:45" • Numbers in this over: 1
Status line	Continuing 13:45 143 Read next
Result	☐ Matches plan ☐ Issue: _____

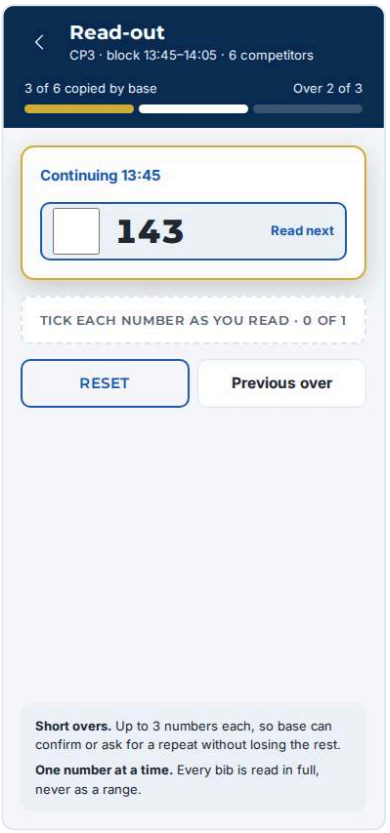

RO-11 390×844

Plan	Fixes D3 / §4.7
Event	**Tick all, "Base copied — next"**
Plan says	*The second block starts "Common time".*
App showed	• Lead: "Common time 14:00" • Numbers in this over: 2
Status line	Common time 14:00 150 Read next 151
Result	☐ Matches plan ☐ Issue: _____

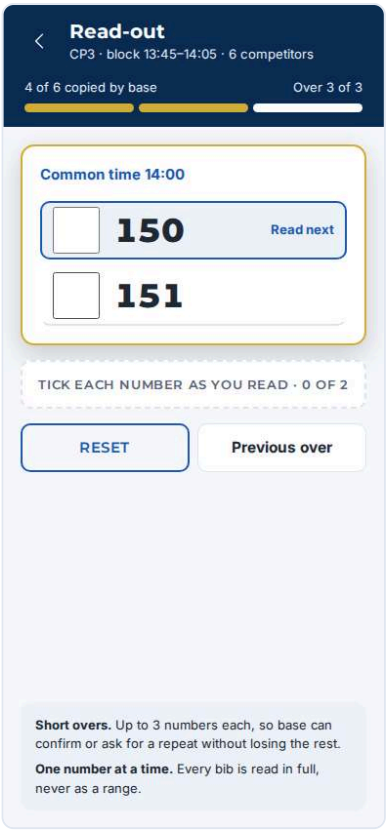

Checkpoint — Overview

OV-01 390×844

Plan §4.8 / Fixes B1 B5


Event **Back to callout, tap the "Overview" tab**

Plan says *Title "CP3 · Overview"; hint in the list header. Stacked bar: DNS muted dashed, DNF red; aria-label "20 called in, 0 passed not called in, 39 to come, 1 DNS, 0 DNF".*

App showed

- Title: "CP3 · Overview"
- Bar: name "20 called in, 0 passed not called in, 39 to come, 1 DNS, 0 DNF" · role=img
- DNS segment: background rgba(0, 0, 0, 0) · border 1px dashed rgba(233, 242, 255, 0.7)
- List header: "Tap a runner to fix it"

Result ☐ Matches plan ☐ Issue: _____

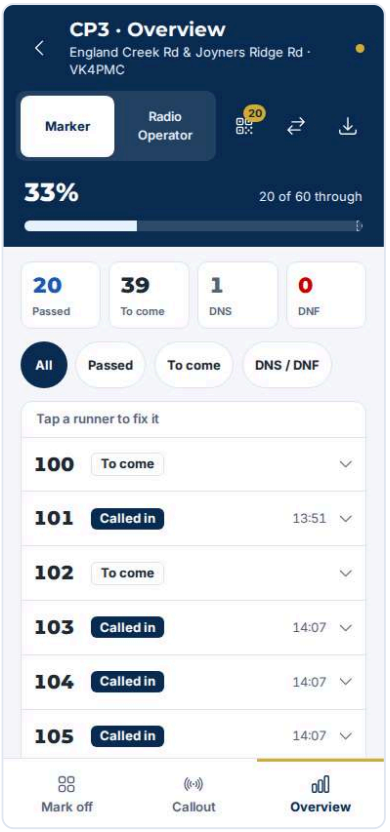

OV-02 390×844

Plan §4.8


Event **Tap filter "Passed"**

Plan says *Filter pills: All · Passed · To come · DNS / DNF.*

App showed


- Filter Passed: "Passed" · aria-pressed=true

Result ☐ Matches plan ☐ Issue: _____

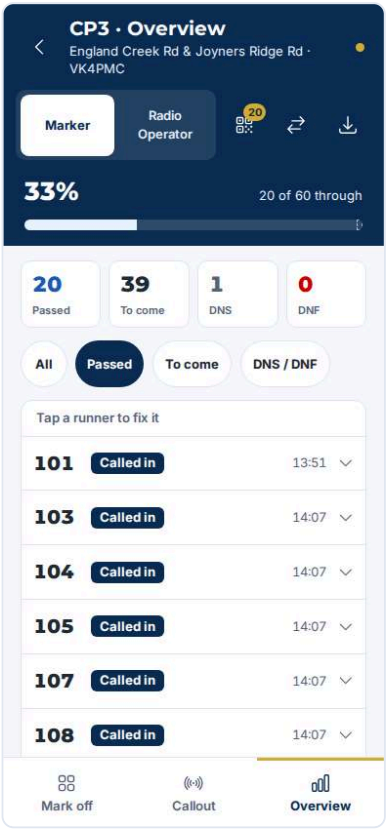


OV-03 390×844

Plan	§4.8 table (Called in)
Event	**Tap row 107 (called in)**
Plan says	*Called in: TimeStepper, Undo call-in, Reset — not passed, Mark DNF (+ note "Base already has HH:MM. Changing the time sends a correction.")*
App showed	• Row 107: "107 Called in 14:07" · aria-expanded=true • Actions: −5 · −1 · +1 · +5 · Undo call-in · Reset — not passed · Mark DNF
Status line	14:07
Result	☐ Matches plan ☐ Issue: _____

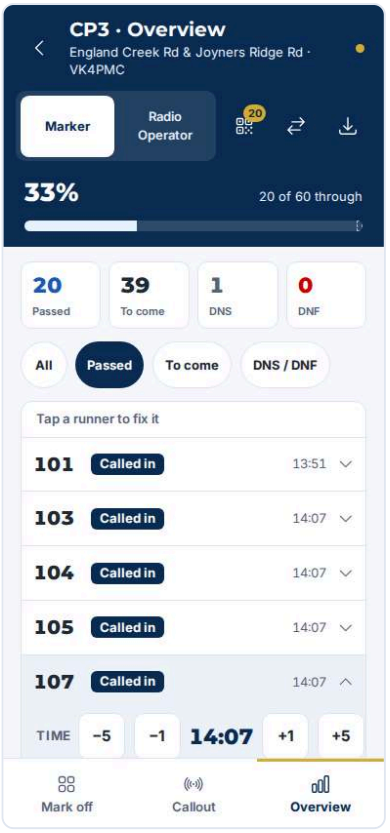


OV-04 390×844

Plan	§4.8
Event	**Tap "Undo call-in"**
Plan says	*Every action shows UndoBar; totals and the Callout badge update.*
App showed	• Undo bar: "107 back on callout sheet UNDO" · role=status • Callout badge: "1" · name "1 to call in"
Status line	14:07 · 107 back on callout sheet UNDO
Result	☐ Matches plan ☐ Issue: _____

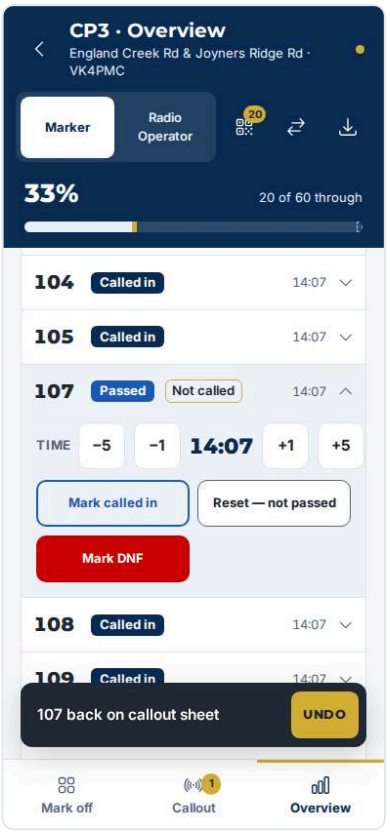


OV-05 390×844

Plan	§4.8 table (Passed)
Event	**Row 107 now Passed: tap "Mark called in"**
Plan says	*Passed: TimeStepper, Mark called in, Reset — not passed, Mark DNF.*
App showed	• Row 107: "107 Called in 14:07" · aria-expanded=true
Status line	14:07 · 107 marked called in UNDO
Result	☐ Matches plan ☐ Issue: _____

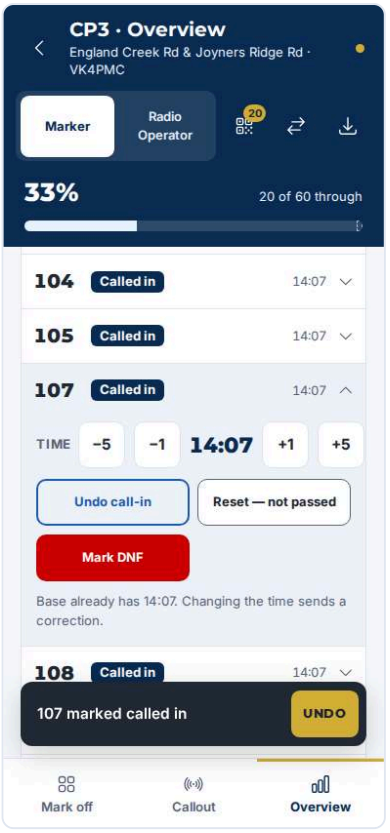


OV-06 390×844

Plan	Fixes B6
Event	**On row 107 tap "−5", then "+5"**
Plan says	*The stepper changes a local value; nothing saved, no correction. A gold "Save HH:MM" appears only while it differs.*
App showed	• Save button: not shown • Row 107: "107 Called in 14:07" · aria-expanded=true
Status line	14:07 · 107 marked called in UNDO
Result	☐ Matches plan ☐ Issue: _____

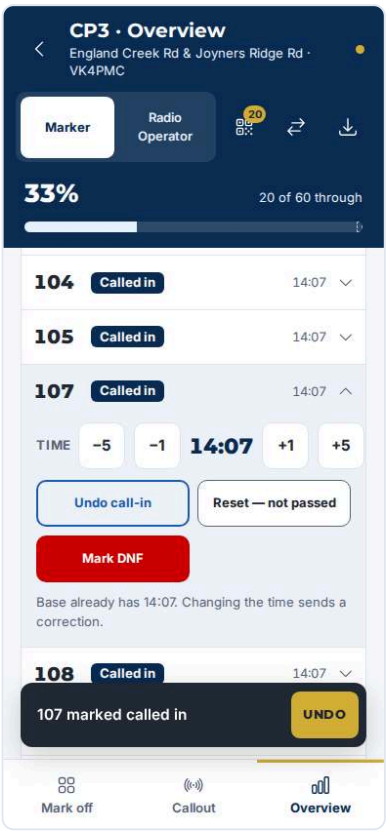


OV-07 390×844

Plan	Fixes B6 / §4.8
Event	**Tap "−5", then "Save HH:MM"**
Plan says	*Save applies the A3 rule once (new block → correction); Undo restores exactly.*
App showed	• Row 107: "107 Passed Correction 14:02" · aria-expanded=true • Undo bar: "107 time 14:07 → 14:02 UNDO" · role=status
Status line	14:02 · 107 time 14:07 → 14:02 UNDO
Result	☐ Matches plan ☐ Issue: _____

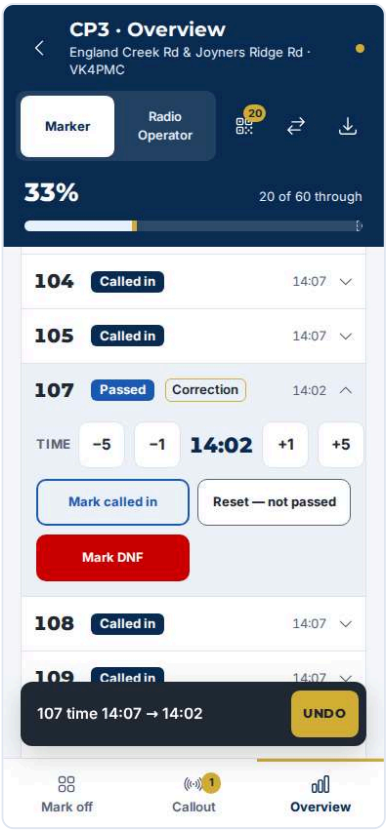


OV-08 390×844

Plan	§4.8
Event	**Tap "Reset — not passed", then "Undo"**
Plan says	*Every action shows UndoBar.*
App showed	• Row 107: "107 Passed Correction 14:02" · aria-expanded=true
Status line	14:02
Result	☐ Matches plan ☐ Issue: _____

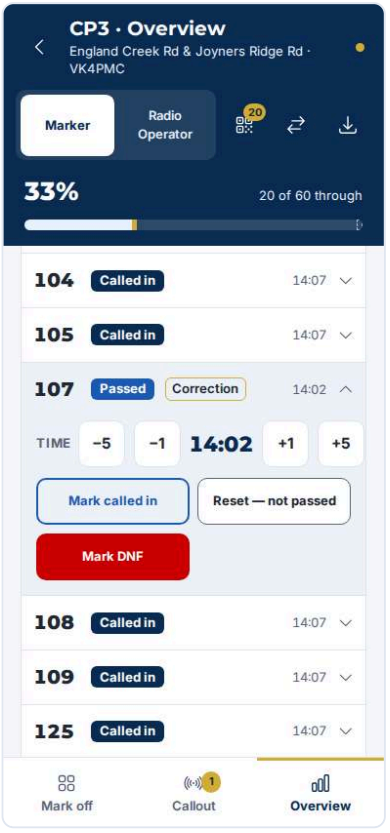


OV-09 390×844

Plan	§4.8 table (To come)
Event	**Filter "To come", tap row 102**
Plan says	*To come: Passed now (HH:MM) (gold), Mark DNS, Mark DNF.*
App showed	• Passed now: "Passed now (14:08)" · background rgb(212, 175, 55)
Result	☐ Matches plan ☐ Issue: _____

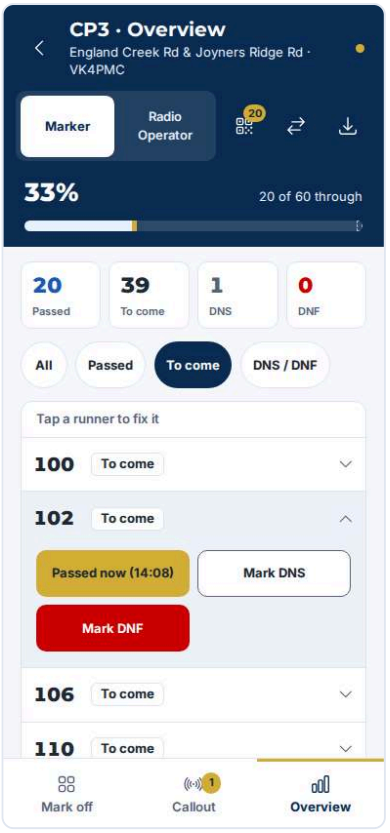


OV-10 390×844

Plan	§4.8
Event	**Tap "Mark DNF"**
Plan says	*DNF shown with red style; counts update.*
App showed	• Stat tiles: 20 Passed 38 To come 1 DNS 1 DNF • Row 102 in "To come": gone (now DNF)
Status line	102 marked DNF UNDO
Result	☐ Matches plan ☐ Issue: _____

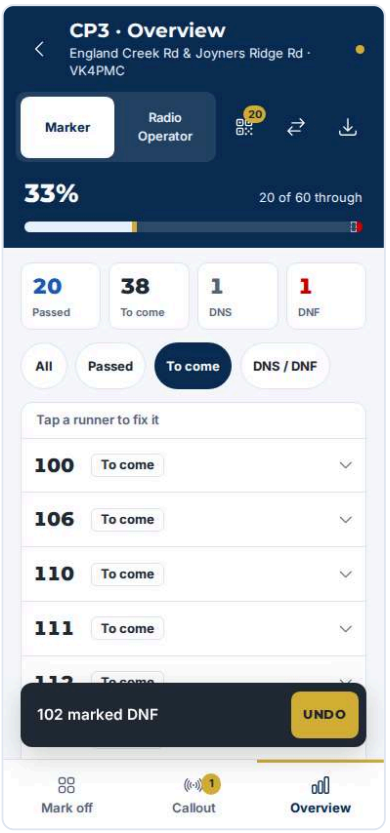


OV-11 390×844

Plan	§4.8 table (DNS / DNF)
Event	**Filter "DNS / DNF", tap row 102**
Plan says	*DNS / DNF: Clear DNS/DNF, Passed now (+ note that base is flagged).*
App showed	• Row 102: "102 DNF" · aria-expanded=true · colour rgb(34, 42, 53)
Status line	102 marked DNF UNDO
Result	☐ Matches plan ☐ Issue: _____

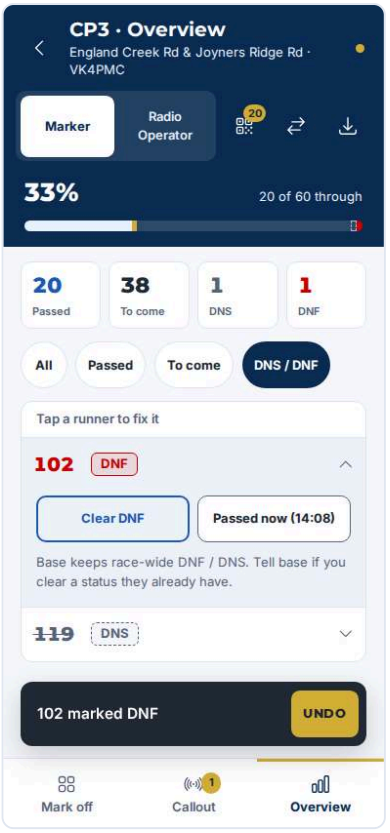

OV-12 390×844

Plan	§4.8
Event	**Tap "Clear DNF"**
Plan says	*Clear DNS/DNF; UndoBar.*
App showed	• Undo bar: "102 DNF cleared UNDO" · role=status
Status line	102 DNF cleared UNDO
Result	☐ Matches plan ☐ Issue: _____

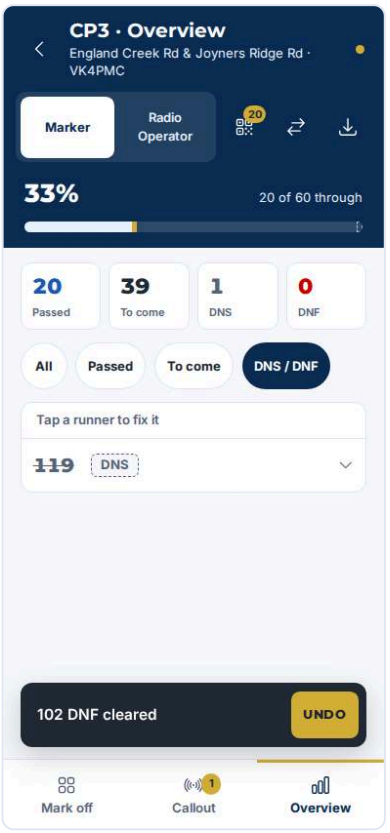

Sunlight


SUN-01 390×844

Plan	Fixes C4 / §4.4
Event	**Settings → Sunlight → Save; open CP3 Mark off and mark 100 101 102**
Plan says	*Sunlight: white page, ink text, 2px borders.*
App showed	• Body background: rgb(255, 255, 255) • Main background: rgba(0, 0, 0, 0) • Tile 110: "110" · name "Runner 110, to come" · border 2px solid rgb(90, 101, 121)
Status line	3 runners marked at 14:08 · 3 runners marked UNDO
Result	☐ Matches plan ☐ Issue: _____




SUN-02 390×844

Plan	Fixes C4
Event	**Tap "Callout"**
Plan says	*Sunlight on Callout.*
App showed	• Body background: rgb(255, 255, 255) • Main background: rgba(0, 0, 0, 0)
Result	☐ Matches plan ☐ Issue: _____

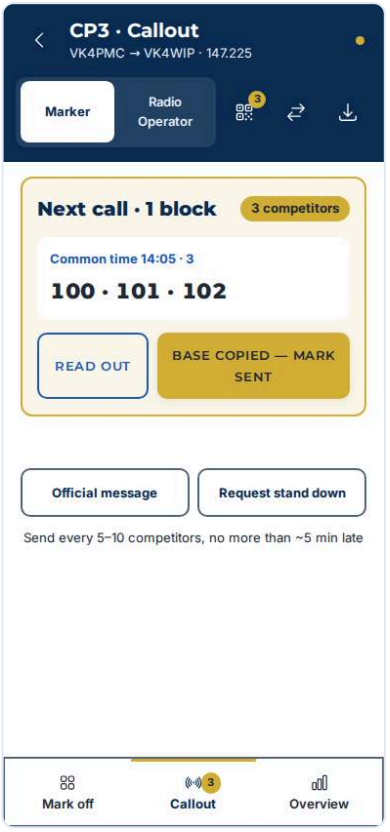


SUN-03 390×844

Plan	Fixes C4
Event	**Tap "Read out"**
Plan says	*Sunlight on Read-out.*
App showed	• Body background: rgb(255, 255, 255) • Main background: rgba(0, 0, 0, 0)
Status line	Common time 14:05 100 Read next 101 102
Result	☐ Matches plan ☐ Issue: _____

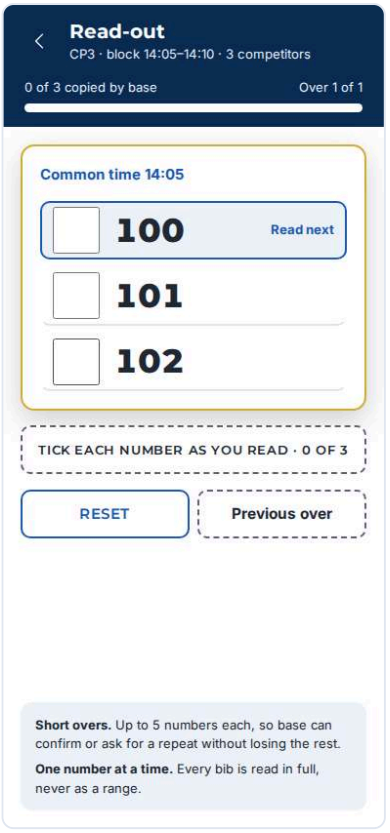

SUN-04 390×844


Plan	Fixes C4
Event	**Base station → Receive → "CP1"**
Plan says	*Sunlight on Receive.*
App showed	• Body background: rgb(255, 255, 255) • Main background: rgba(0, 0, 0, 0) • Block button: "13:05" · aria-pressed=false · border 2px solid rgb(90, 101, 121)
Result	☐ Matches plan ☐ Issue: _____

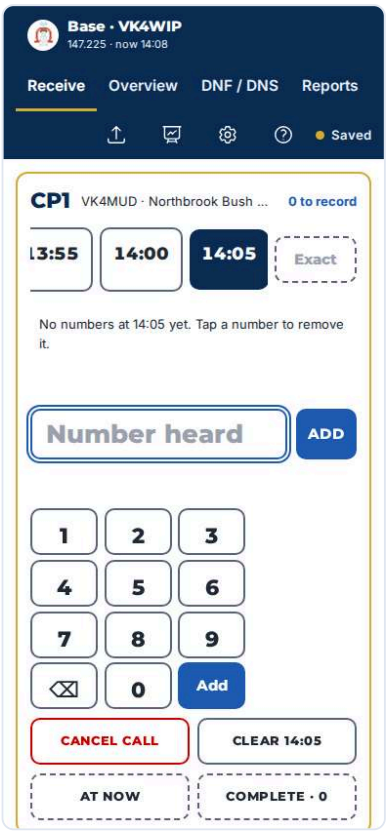

Base — Receive


RX-01 1112×834

Plan	§4.9 / §3.5 BaseTabs
Event	**Open /base-station/operations (tablet 1112×834)**
Plan says	*Idle "Who's calling?": grid of compact buttons (≥64px) for CP1–CP3, Finish: short name, status pill, "VK4PMC · up to 07:15". Checkpoint board rows: "Up to 07:15 · 30 min behind · call 11m ago", count, pill.*
App showed	• CP1 button: "CP1 Due VK4MUD · up to 13:15" · name "CP1, Due" • Board CP1: "CP1 Up to 13:15 · 50 min behind · call 57m ago 20 Due" • Page scroll: 0px
Result	☐ Matches plan ☐ Issue: _____

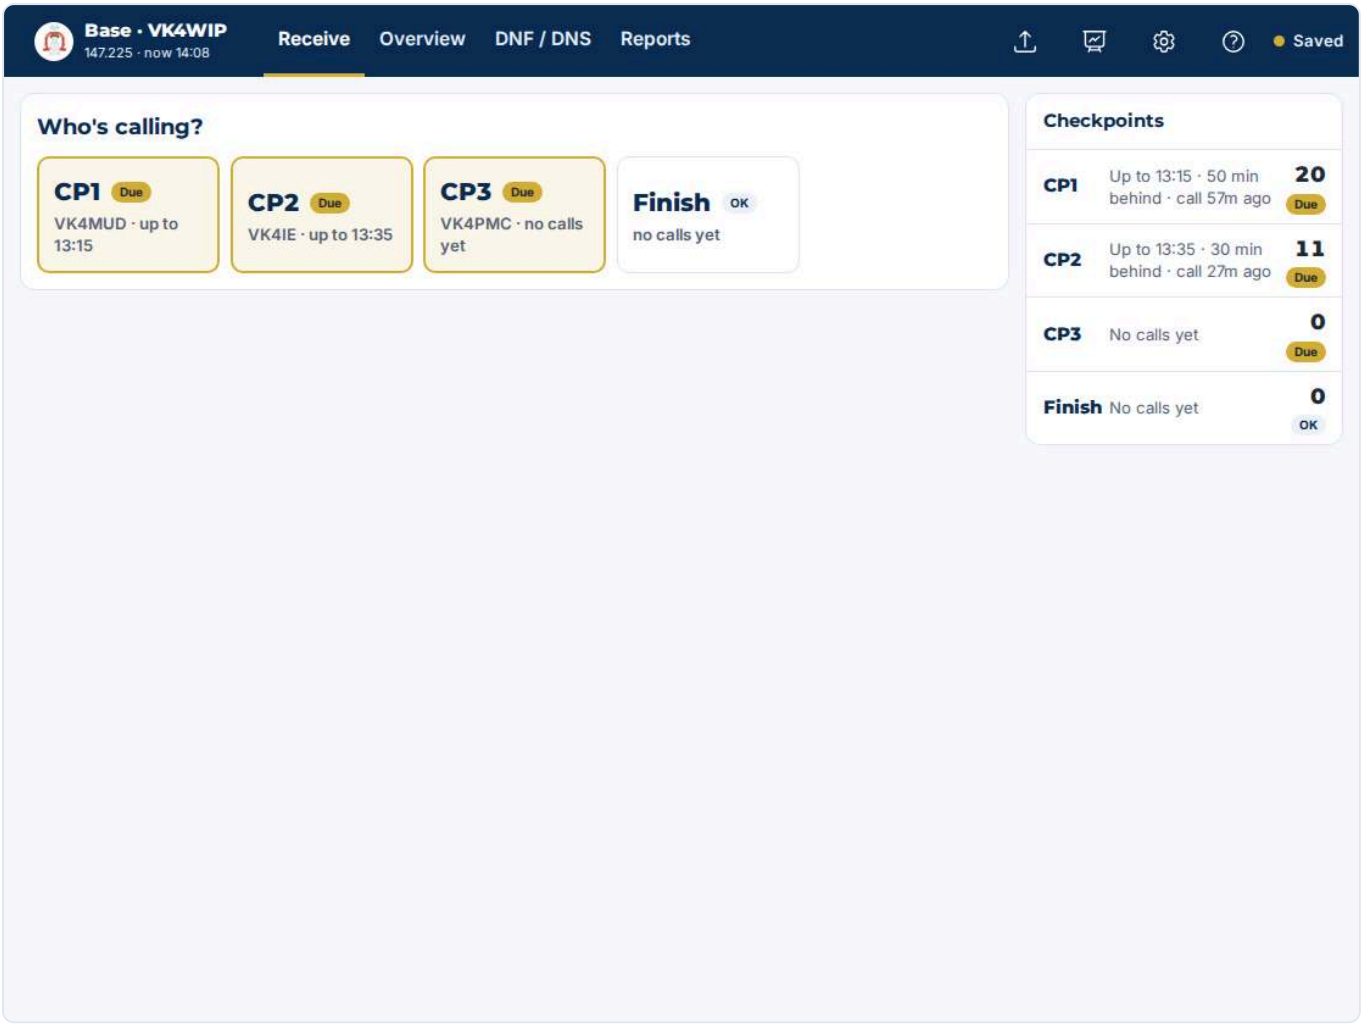


RX-02 1112×834

Plan	§4.9 / Fixes B7 C1
Event	**Tap "CP1"**
Plan says	*Default selection = next unreceived block. "Exact" pinned outside the scrolling block row. Complete locked (dashed) with nothing taken.*
App showed	• Selected block: "13:20 next" · aria-pressed=true • Exact: data-active=false · border 1px dashed rgb(90, 101, 121) • Exact in view with the row scrolled to the start: yes • Complete: "COMPLETE · 0" · disabled · border 2px dashed rgb(224, 230, 240) · colour rgb(90, 101, 121)
Result	☐ Matches plan ☐ Issue: _____

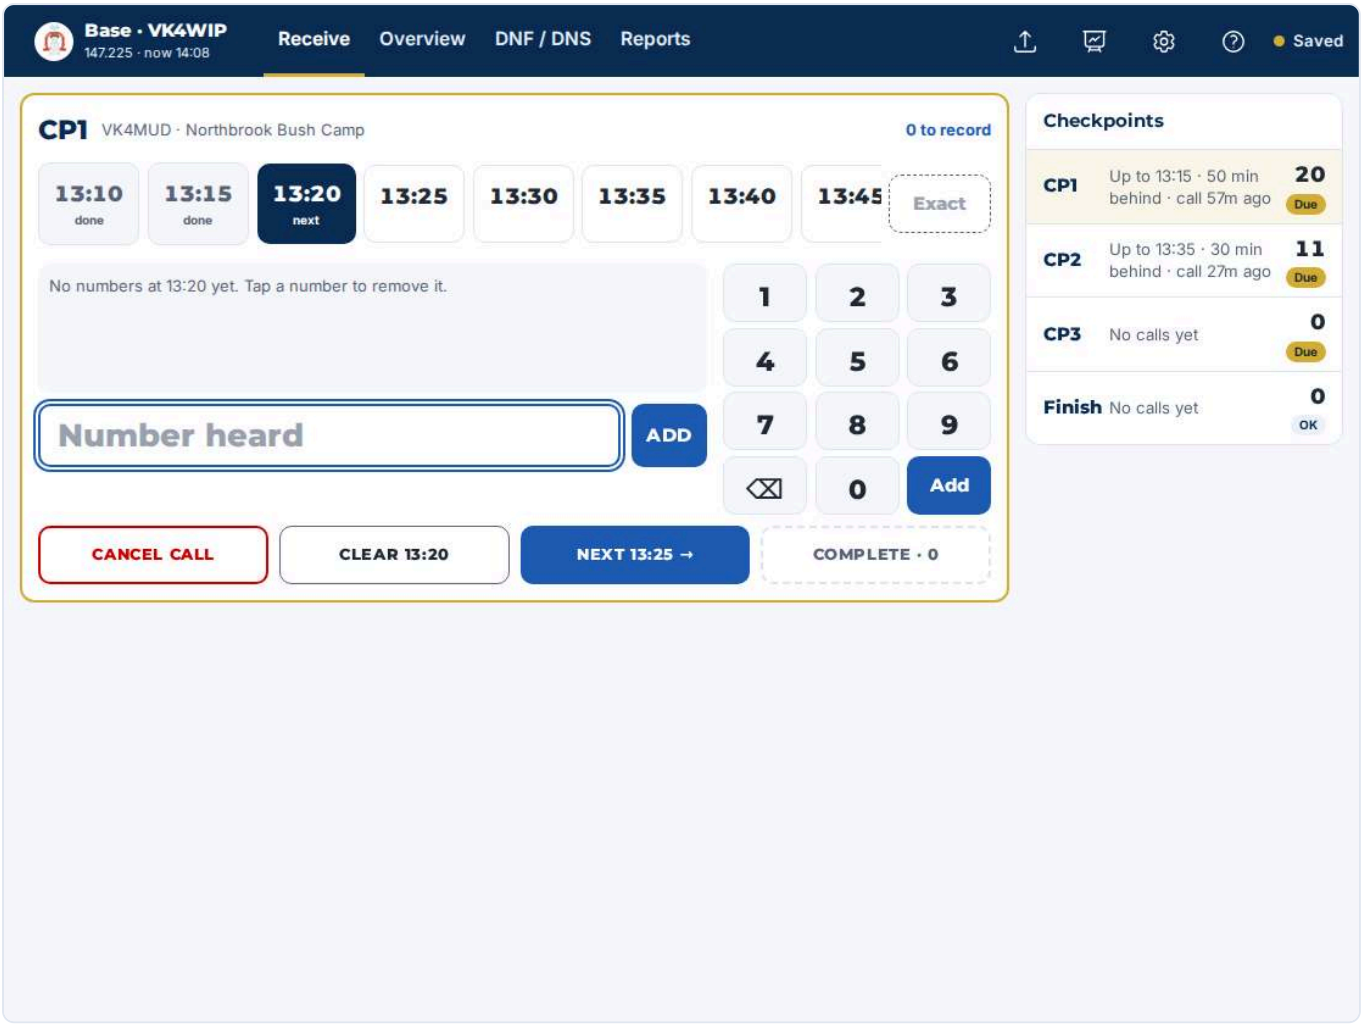


RX-03 1112×834

Plan	§4.9 / §3.5 NumberPad
Event	**Type 120 + Enter; then press keypad 1, 2, 1 and "Add"**
Plan says	*Enter adds. Each number becomes a BibChip validated live.*
App showed	• Chip 120: "120" · name "Remove 120" · background rgb(30, 92, 179) • Chip 121: "121" · name "Remove 121" • Status line: "121 added at 13:20" · aria-live=polite
Status line	121 added at 13:20
Result	☐ Matches plan ☐ Issue: _____

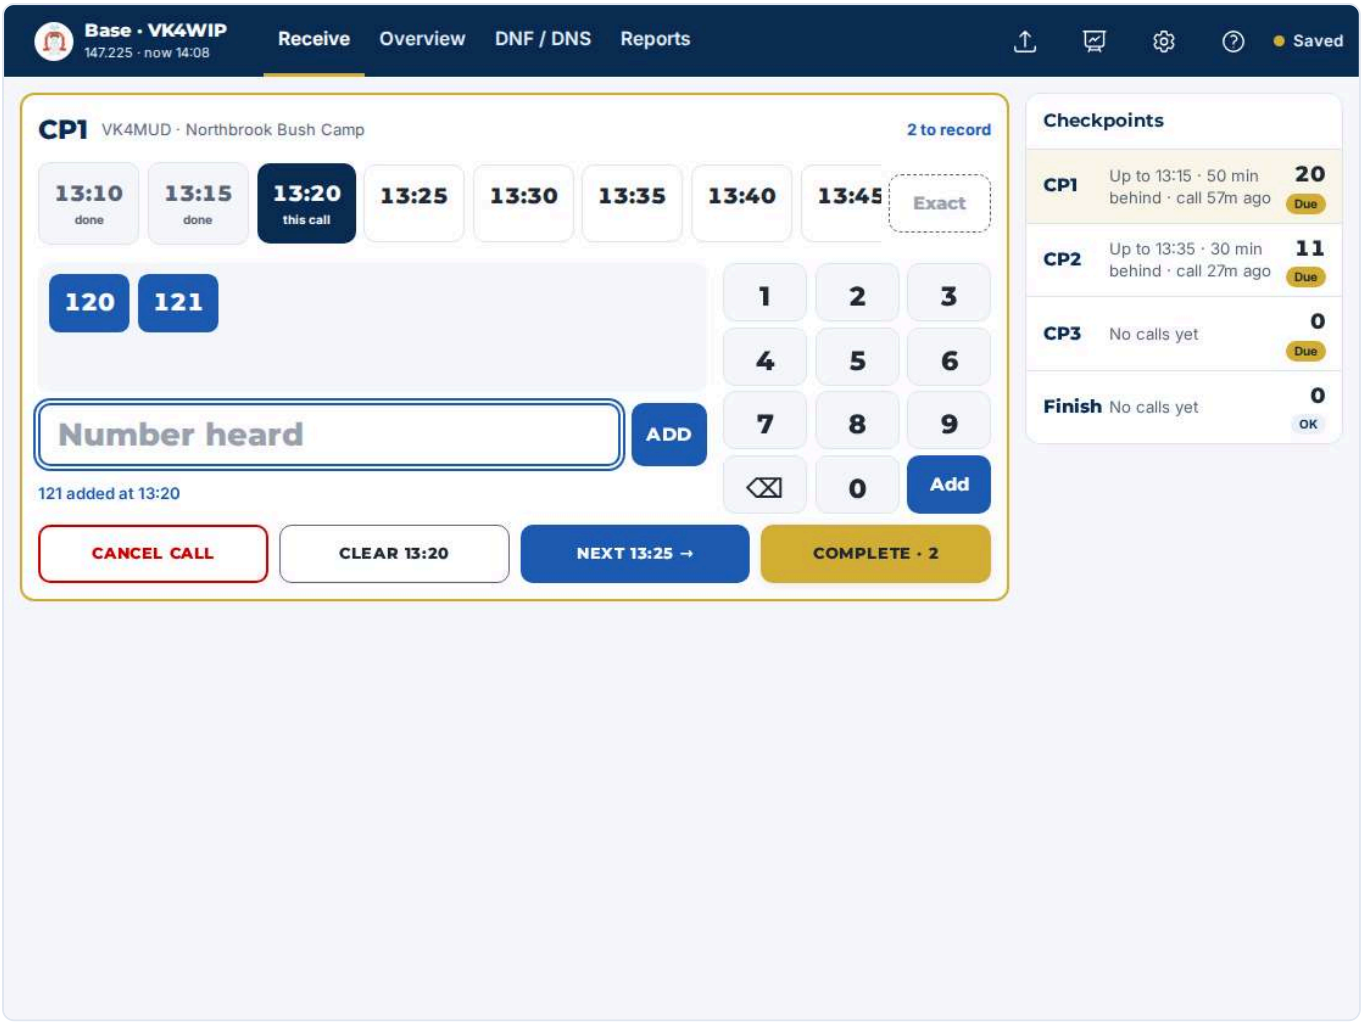


RX-04 1112×834

Plan	§4.9 validation table
Event	**Add 999, 121 again, 100, 150**
Plan says	*Not in race → rejected (red) "Not in race"; same bib earlier in this call → "Said twice"; already logged → "Had 07:40"; otherwise ok (blue).*
App showed	• Chip 999: "999 Not in race" · name "Remove 999, Not in race" · border 2px solid rgb(204, 0, 0) · text-decoration line-through • Chips: Remove 120 | Remove 121 | Remove 999, Not in race | Remove 121, Said twice | Remove 100, Had 13:05 | Remove 150 • Complete: "COMPLETE · 3"
Status line	150 added at 13:20
Result	☐ Matches plan ☐ Issue: _____

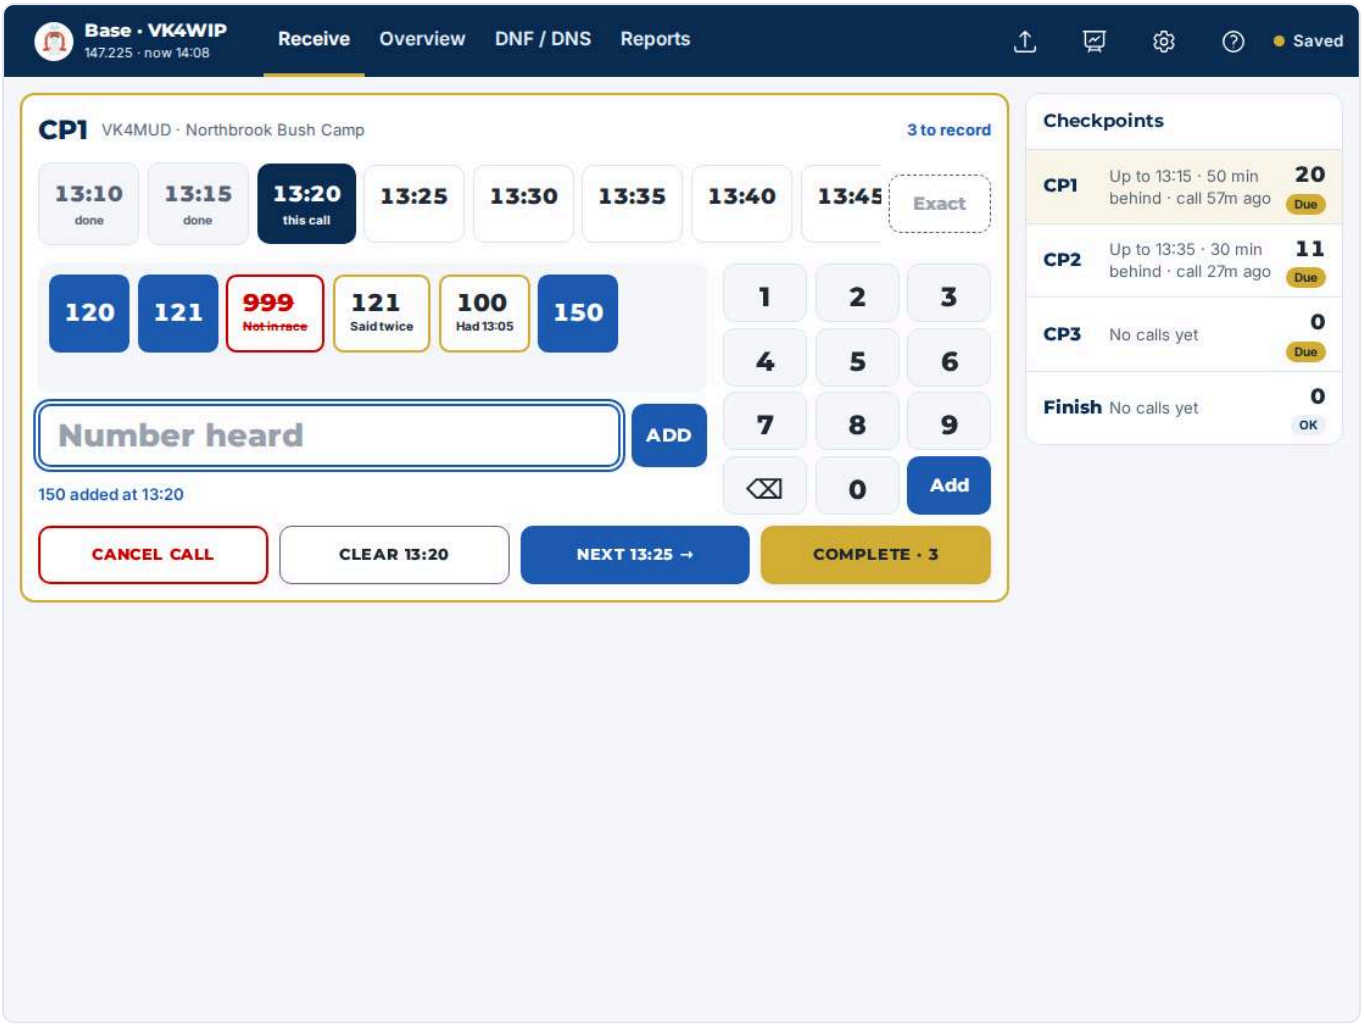


RX-05 1112×834

Plan	§4.9
Event	**Tap chip 999 (remove), then "Undo"**
Plan says	*Tap a chip to remove (Undo).*
App showed	• Status line: "Restored" · aria-live=polite • Chip 999: "999 Not in race" · name "Remove 999, Not in race"
Status line	Restored
Result	☐ Matches plan ☐ Issue: _____

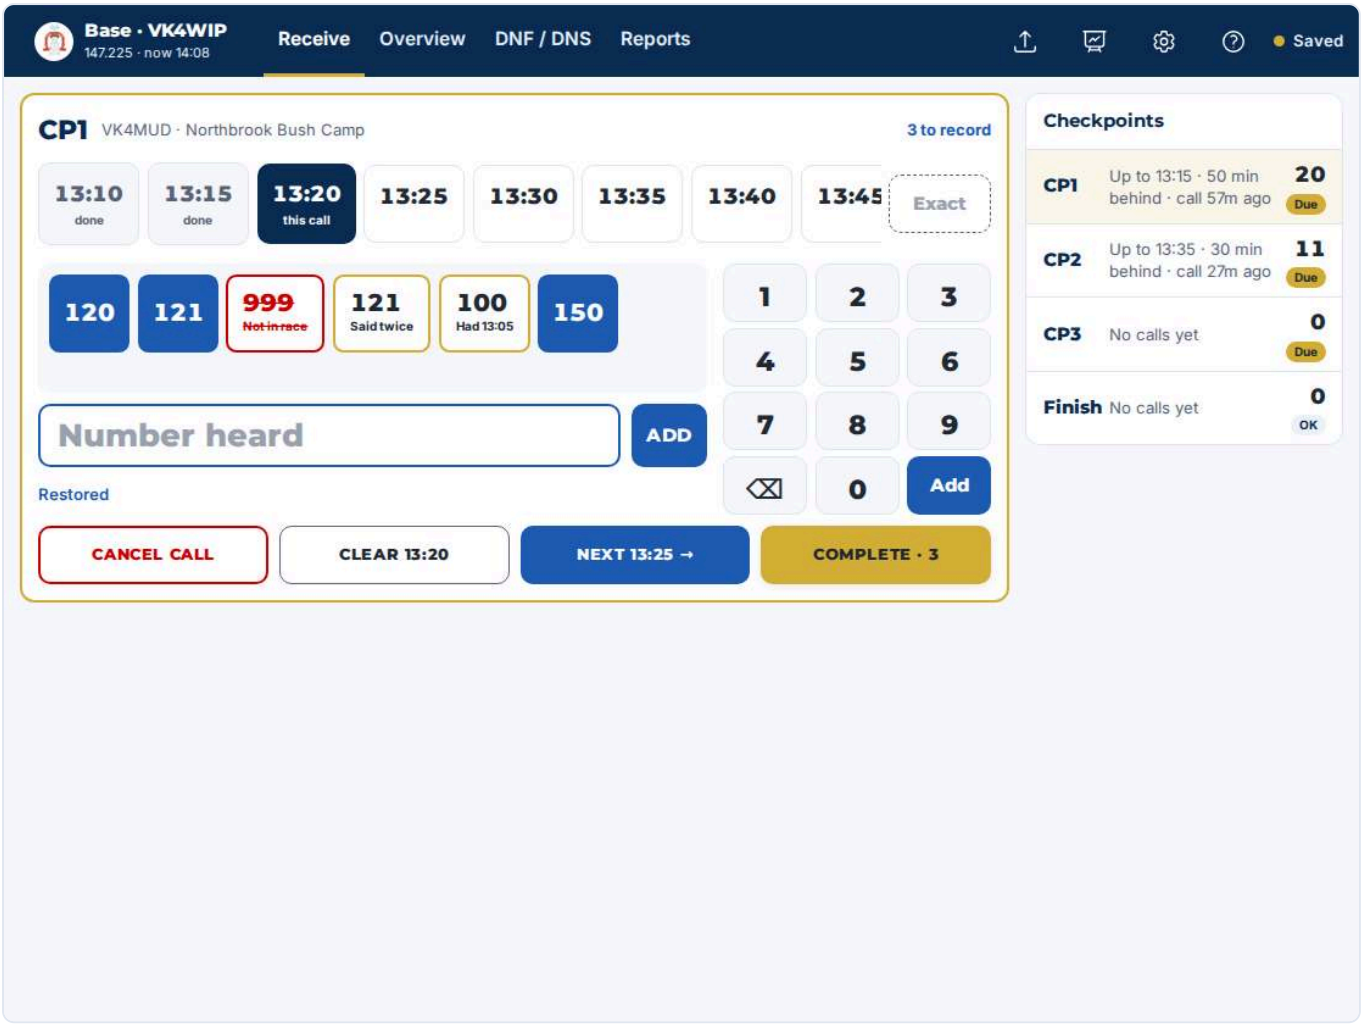


RX-06 1112×834

Plan	§4.9
Event	**Tap "Next HH:MM →"**
Plan says	*Next → move to the next 5-minute block, clear the box.*
App showed	• Selected block: "13:25" · aria-pressed=true • Status line: "Now taking 13:25" · aria-live=polite
Status line	Now taking 13:25
Result	☐ Matches plan ☐ Issue: _____

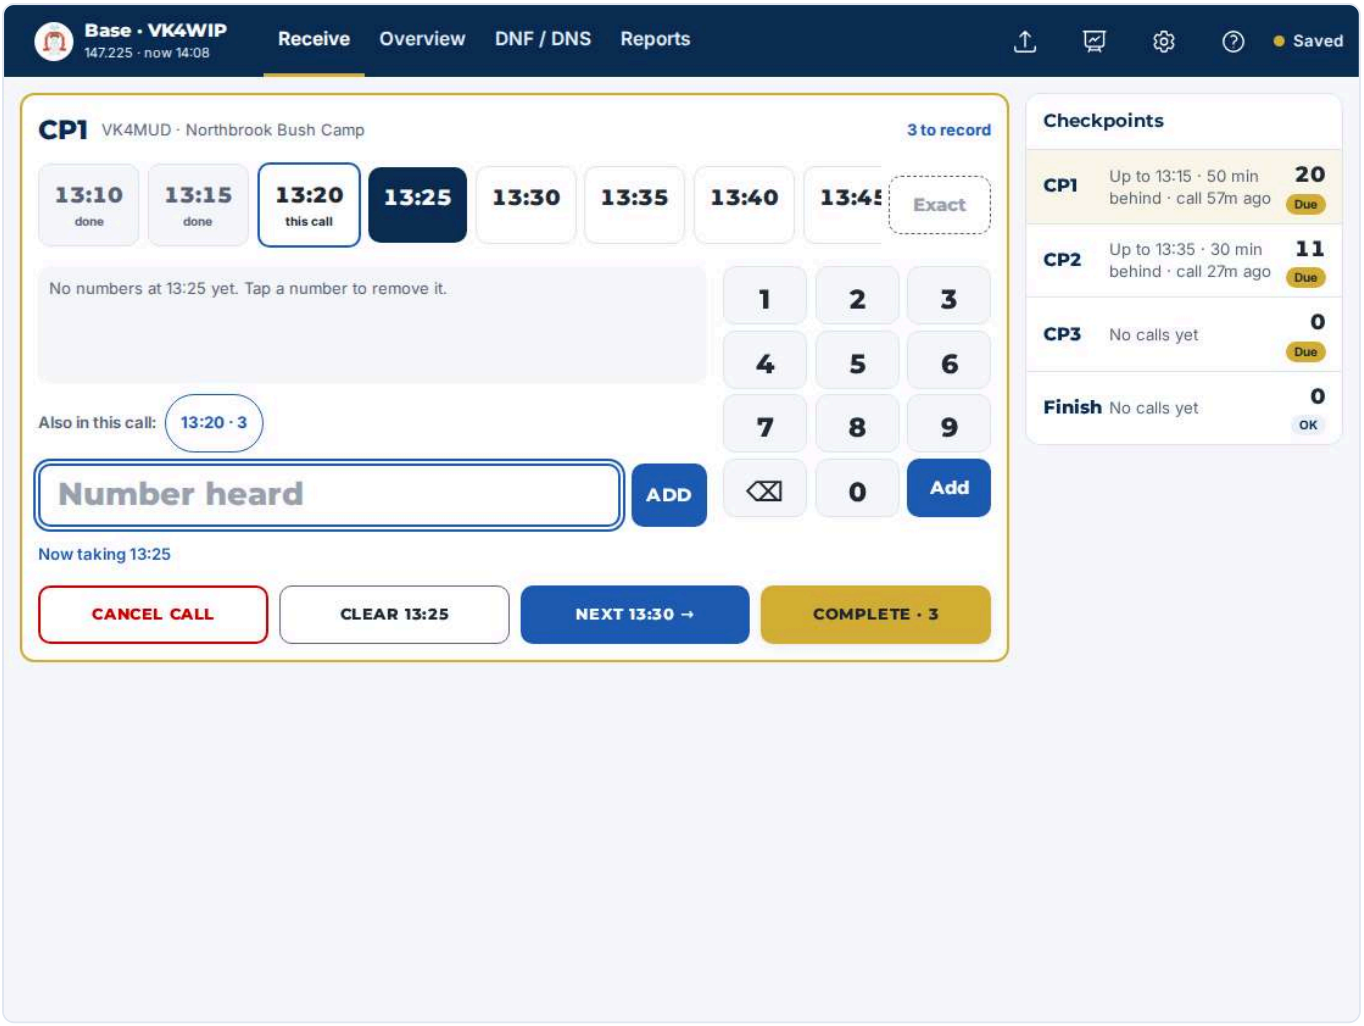


RX-07 1112×834

Plan	§4.9 / Fixes B8
Event	**Add 122, 123**
Plan says	*Other blocks in the call show as pills; the count is only the numbers that will be recorded (ok + info).*
App showed	• Also in this call: "13:20 · 3" · name "Show the numbers at 13:20, 3 to record"
Status line	123 added at 13:25
Result	☐ Matches plan ☐ Issue: _____

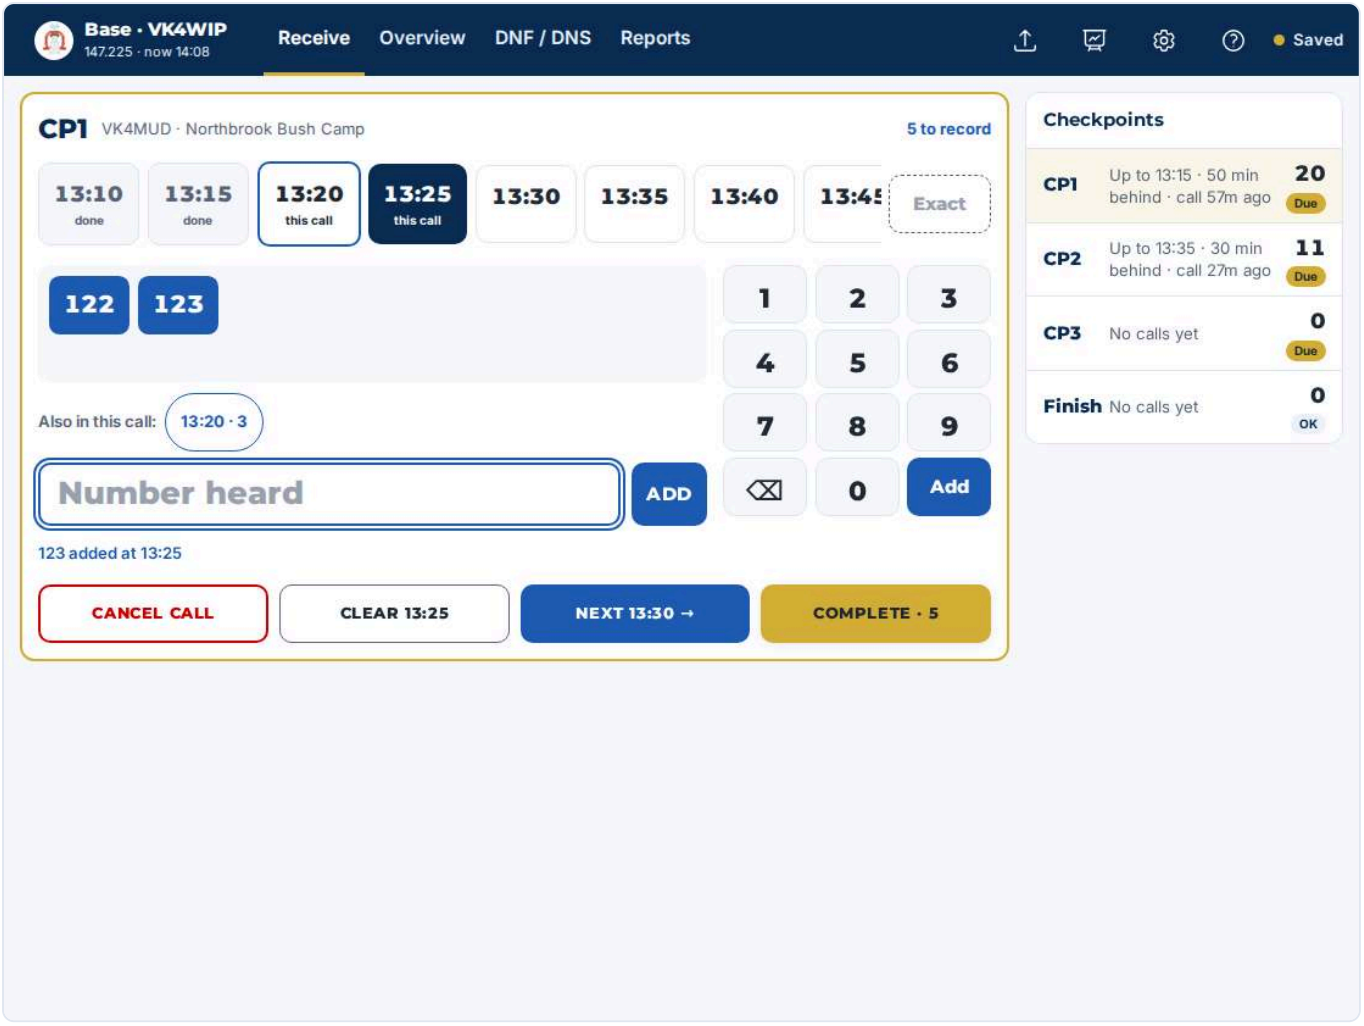


RX-08 1112×834

Plan	§4.9
Event	**Tap the "Also in this call" pill**
Plan says	*Tap to switch back.*
App showed	• Selected block: "13:20 this call" · aria-pressed=true
Status line	Now taking 13:20
Result	☐ Matches plan ☐ Issue: _____

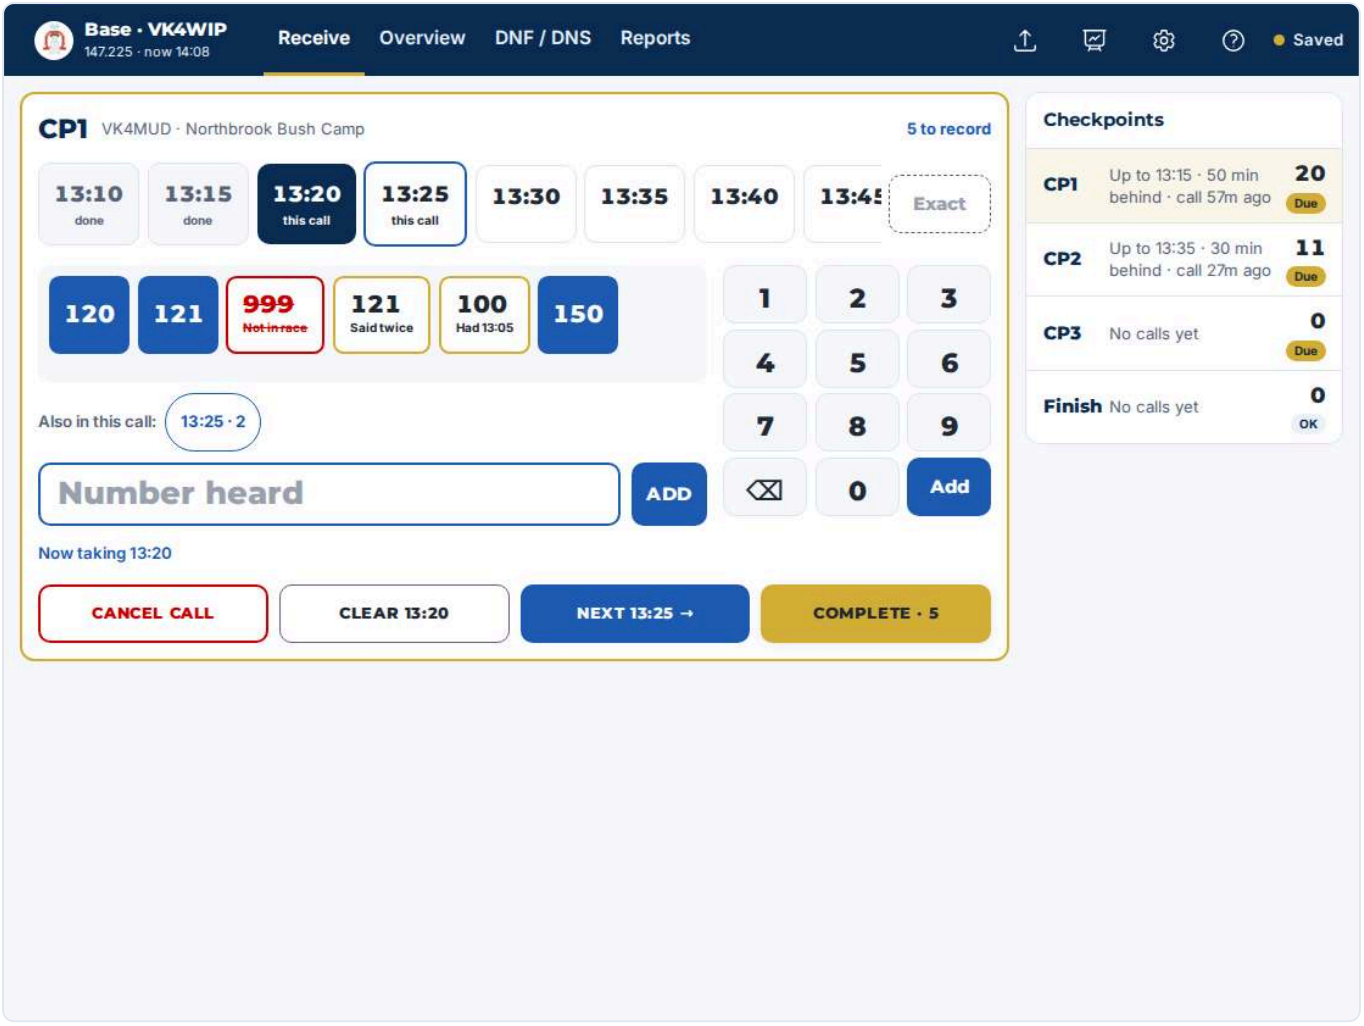


RX-09 1112×834

Plan	§4.9 / Fixes B7
Event	**Type an exact time as HHMM (1346) and add 124**
Plan says	*"Exact" accepts HH:MM or HHMM between race start and now; shown as HH:MM and selected.*
App showed	• Exact: "13:46" · data-active=true · background rgb(11, 45, 83) • Status line: "124 added at 13:46" · aria-live=polite
Status line	124 added at 13:46
Result	☐ Matches plan ☐ Issue: _____

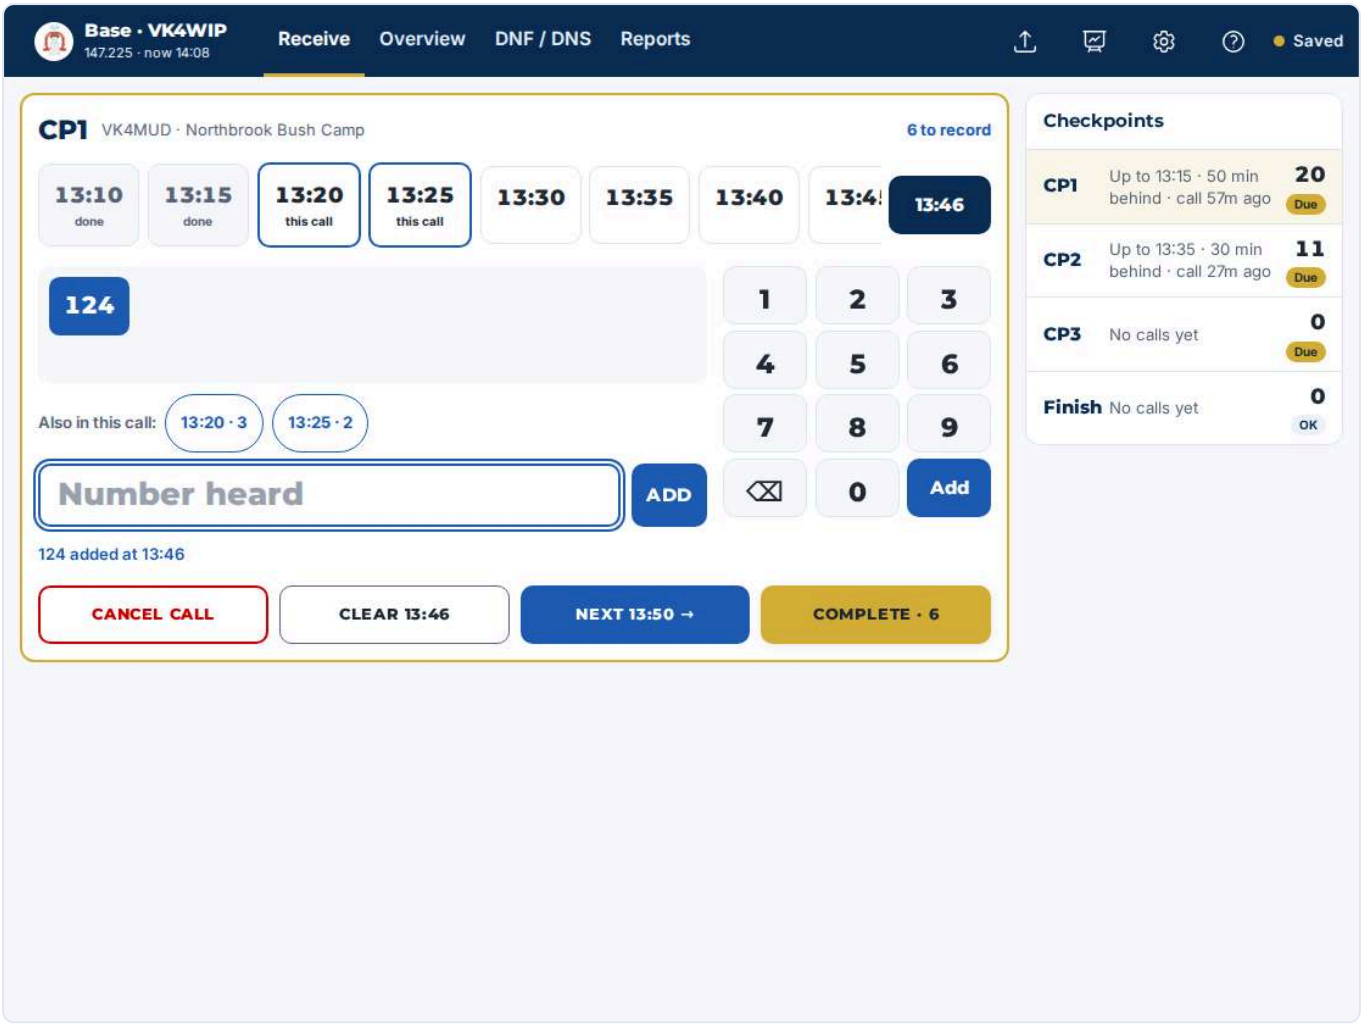


RX-10 1112×834

Plan	§4.9 / Fixes B7
Event	**Pick the "next" block, then type 2359 in Exact**
Plan says	*Invalid value → red border, error in the status line, field cleared, previous block stays selected; Exact not selected.*
App showed	• Exact: aria-invalid=true · data-active=false · border 2px solid rgb(204, 0, 0) • Selected block: "13:20 this call" · aria-pressed=true • Status line: "Time must be between 12:08 and now" · aria-live=polite
Status line	Time must be between 12:08 and now
Result	☐ Matches plan ☐ Issue: _____

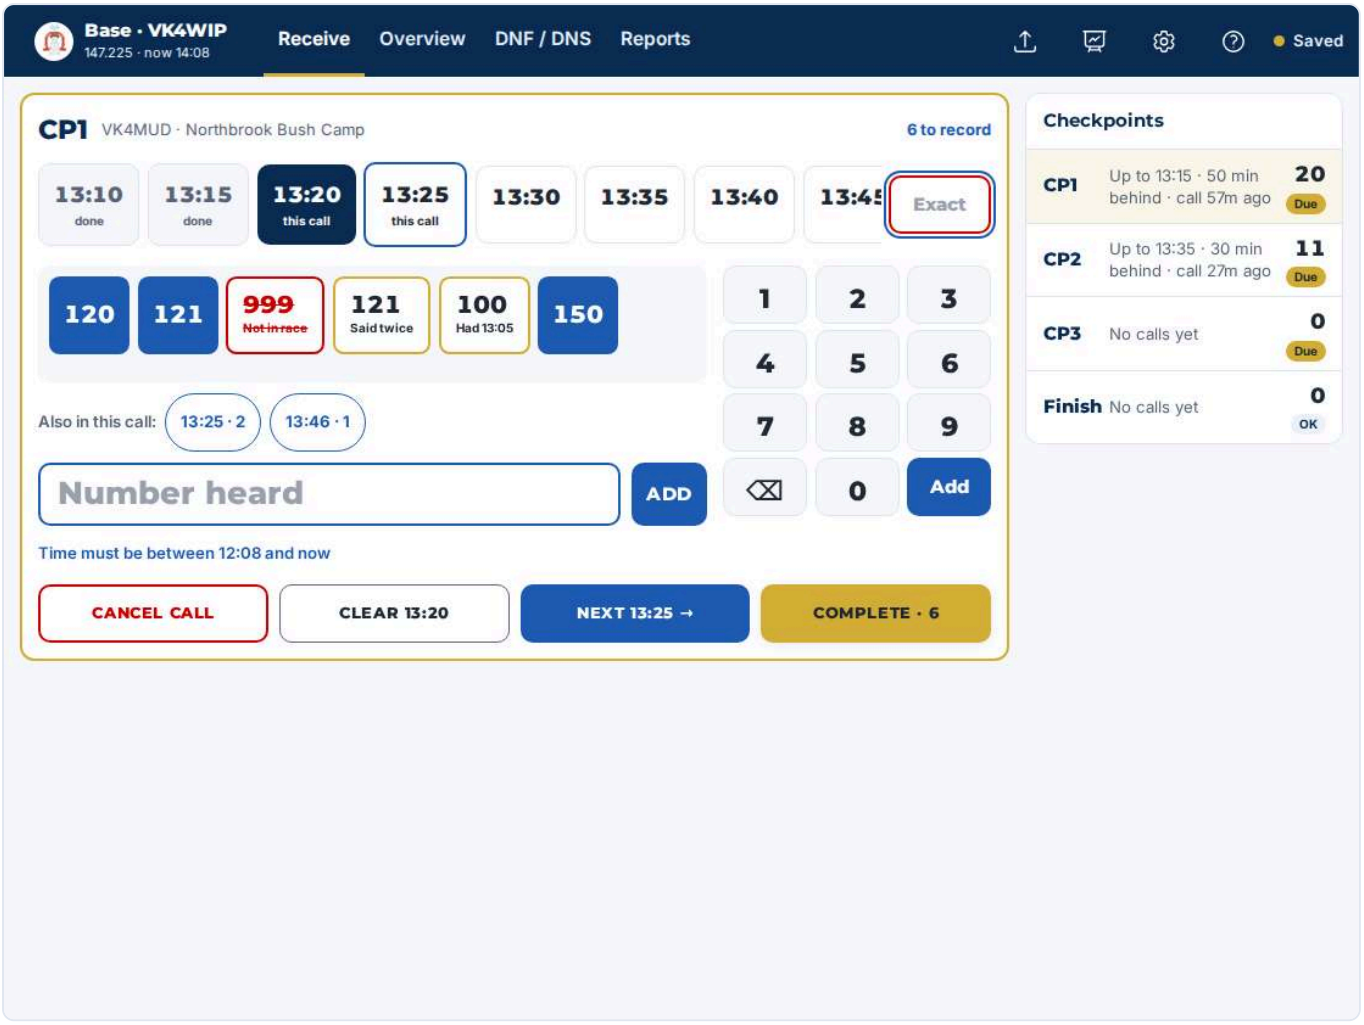


RX-11 1112×834

Plan	Fixes D3
Event	**Type an exact time with a colon (13:50)**
Plan says	*Exact time typed as HH:MM.*
App showed	• Exact: "13:50" · data-active=true
Status line	Now taking 13:50
Result	☐ Matches plan ☐ Issue: _____

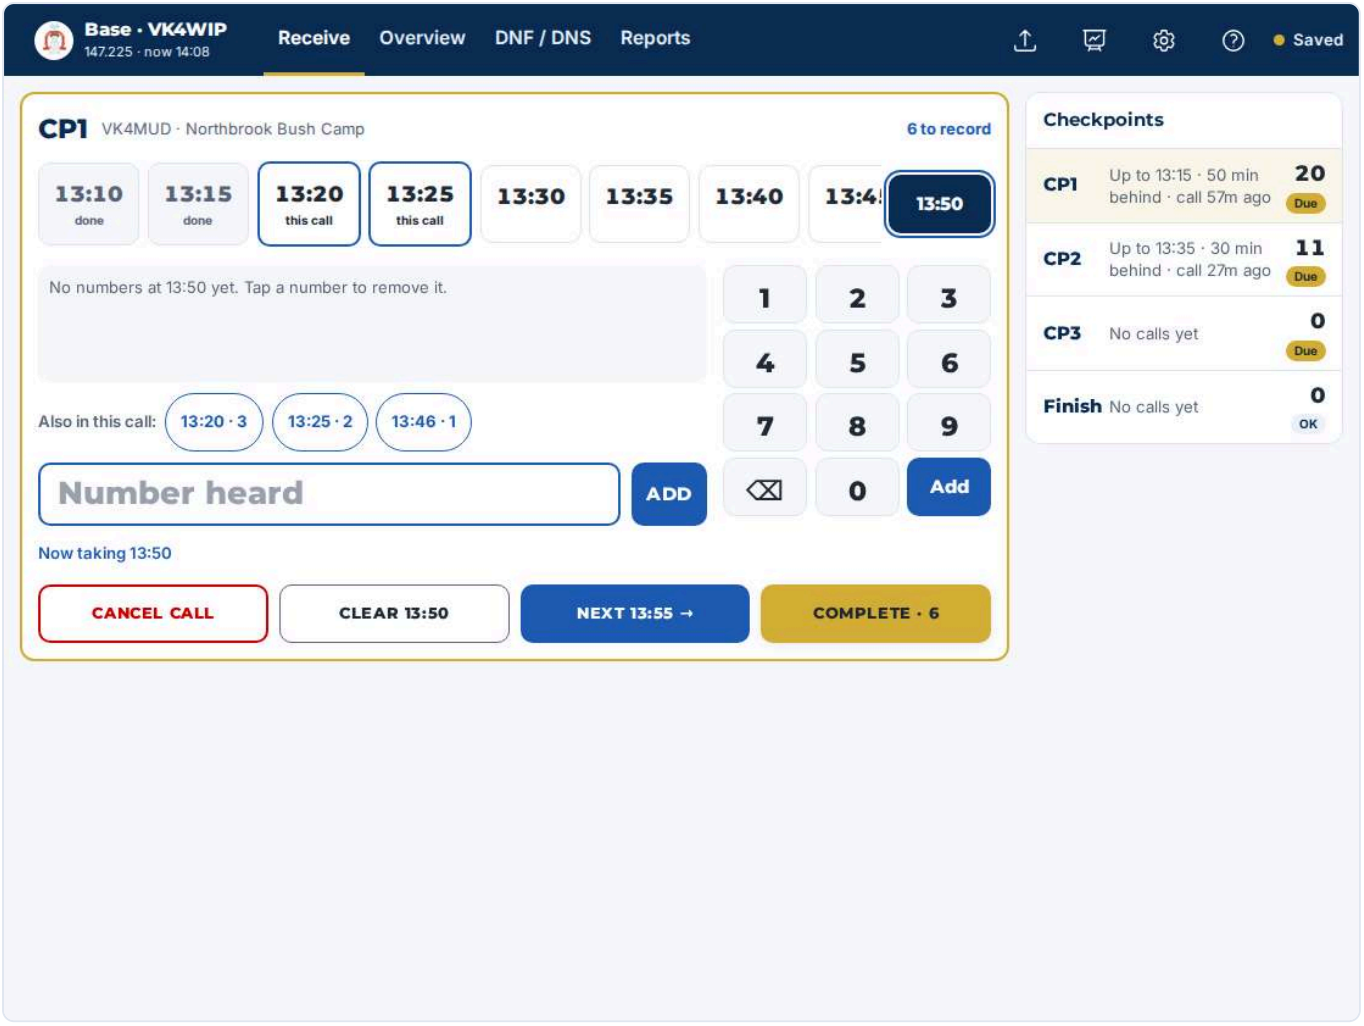


RX-12 1112×834

Plan	§4.9
Event	**Pick the "next" block again, tap "Clear HH:MM"**
Plan says	*Clears all numbers in the current block (Undo).*
App showed	• Status line: "Cleared 6 from 13:20" · aria-live=polite • Chips in block: 0
Status line	Cleared 6 from 13:20
Result	☐ Matches plan ☐ Issue: _____

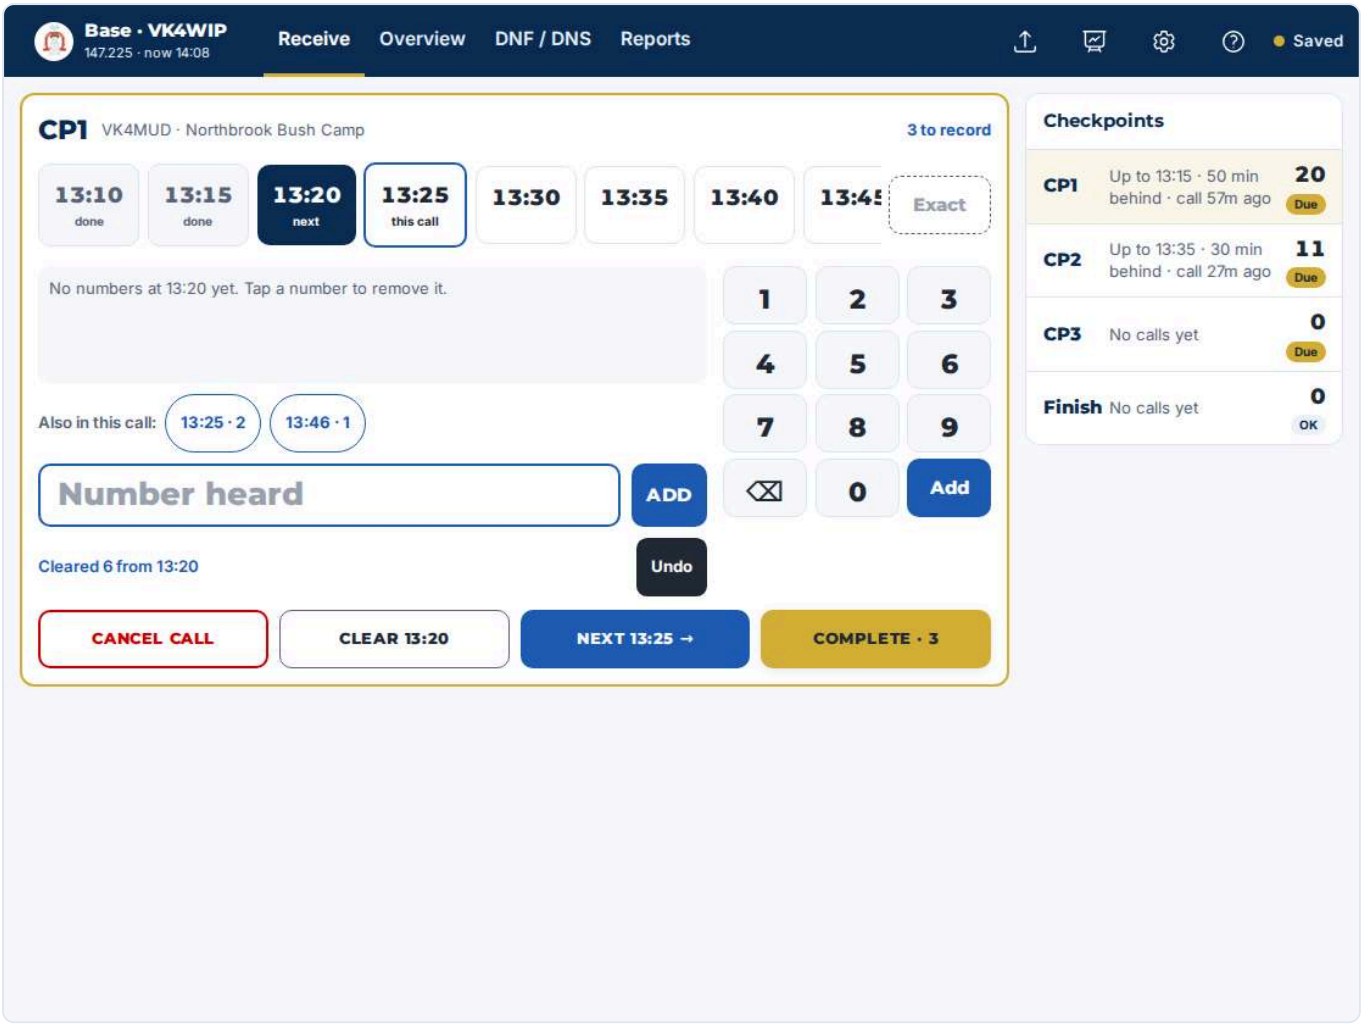


RX-13 1112×834

Plan	§4.9 / G5
Event	**Tap "Undo"**
Plan says	*Undo restores the cleared numbers.*
App showed	• Chips in block: 6
Status line	Restored
Result	☐ Matches plan ☐ Issue: _____

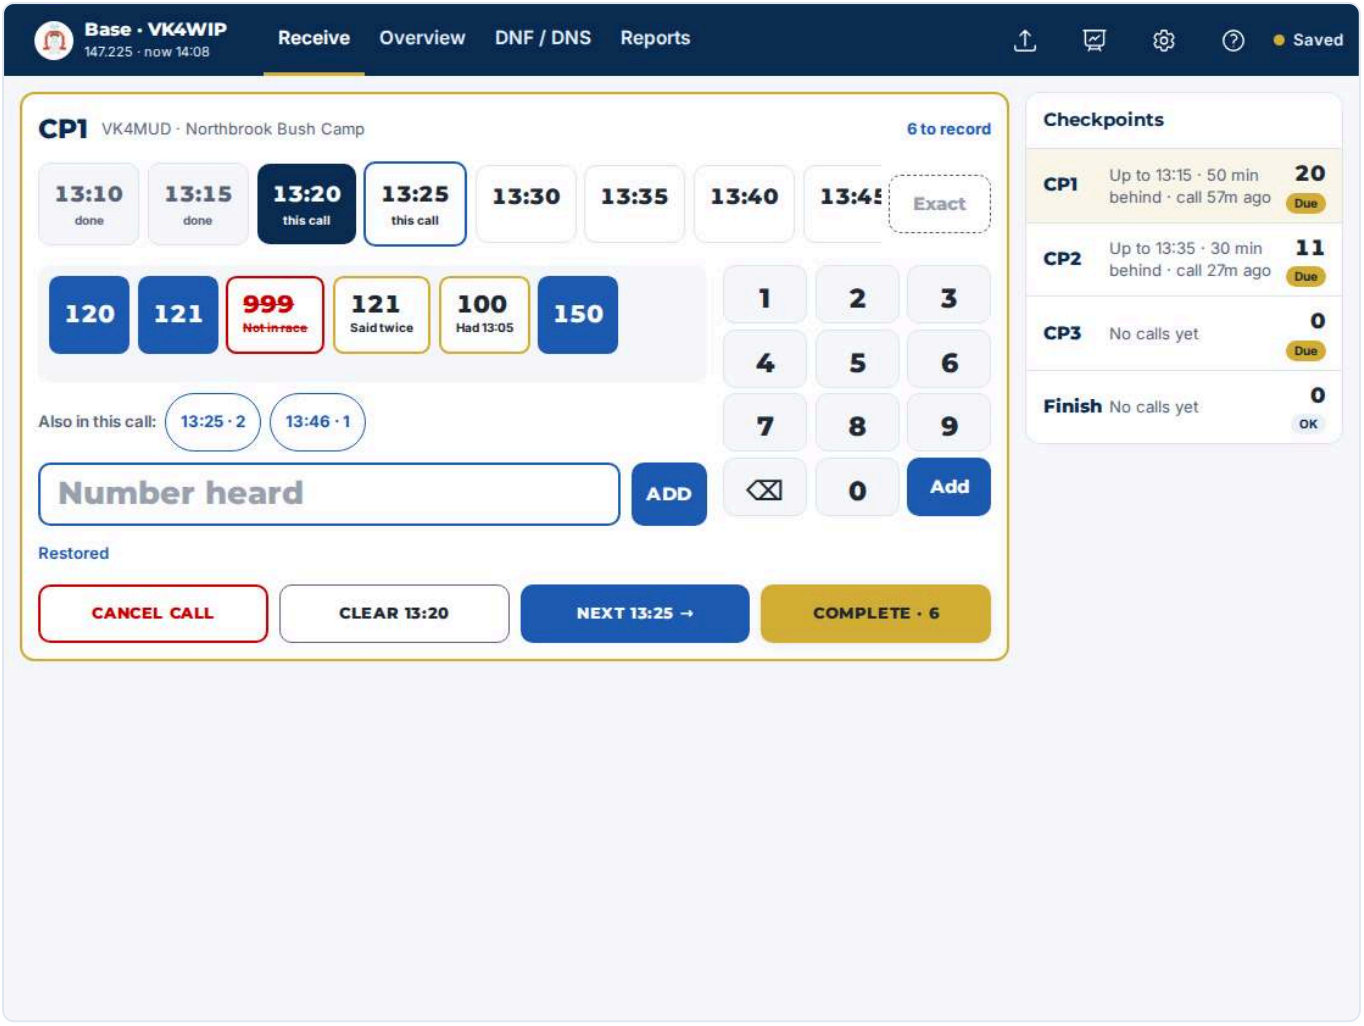


RX-14 1112×834

Plan	Fixes D3
Event	**Switch to the Overview tab and back to Receive**
Plan says	*The draft survives a tab switch.*
App showed	• Selected block: "13:20 this call" · aria-pressed=true • Chips in block: 6
Result	☐ Matches plan ☐ Issue: _____

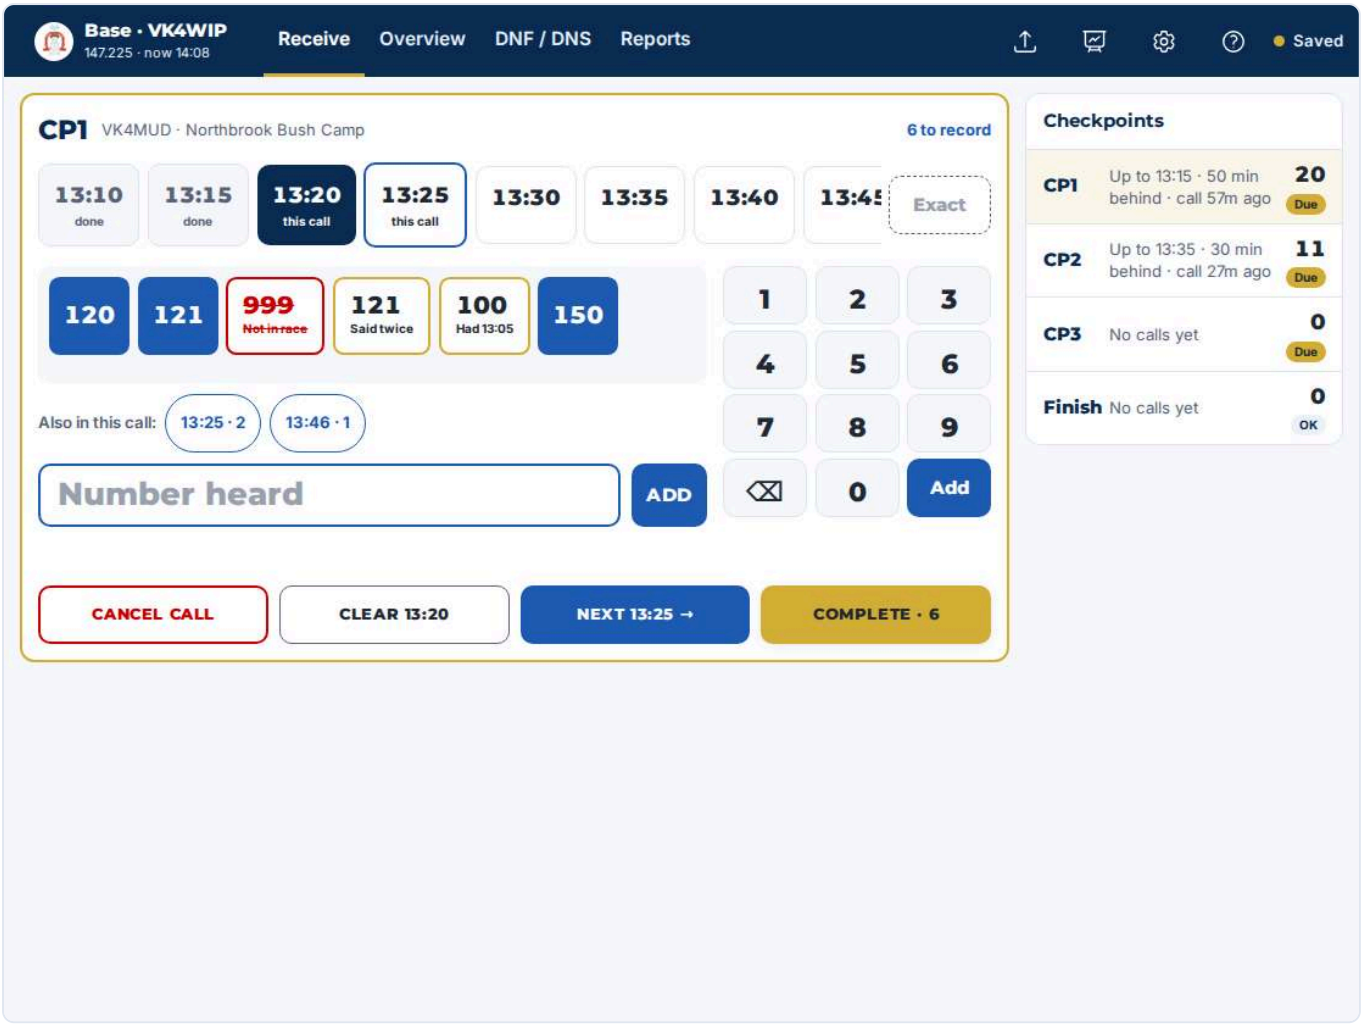


RX-15 1112×834

Plan	§4.9 / Fixes A2
Event	**Tap "Complete · N"**
Plan says	*Done card "N recorded at CP1 · M skipped (flagged)". The board's "up to" is the latest block received; an exact time never moves it.*
App showed	• Done card: "6 recorded at CP1 · 3 skipped (flagged) Blocks 13:20, 13:25, 13:46 UNDO NEXT CALL" · role=status • Board CP1: "CP1 Up to 13:25 · 40 min behind · call 0m ago 26 OK"
Status line	6 recorded at CP1 · 3 skipped (flagged) Blocks 13:20, 13:25, 13:46 UNDO NEXT CALL
Result	☐ Matches plan ☐ Issue: _____

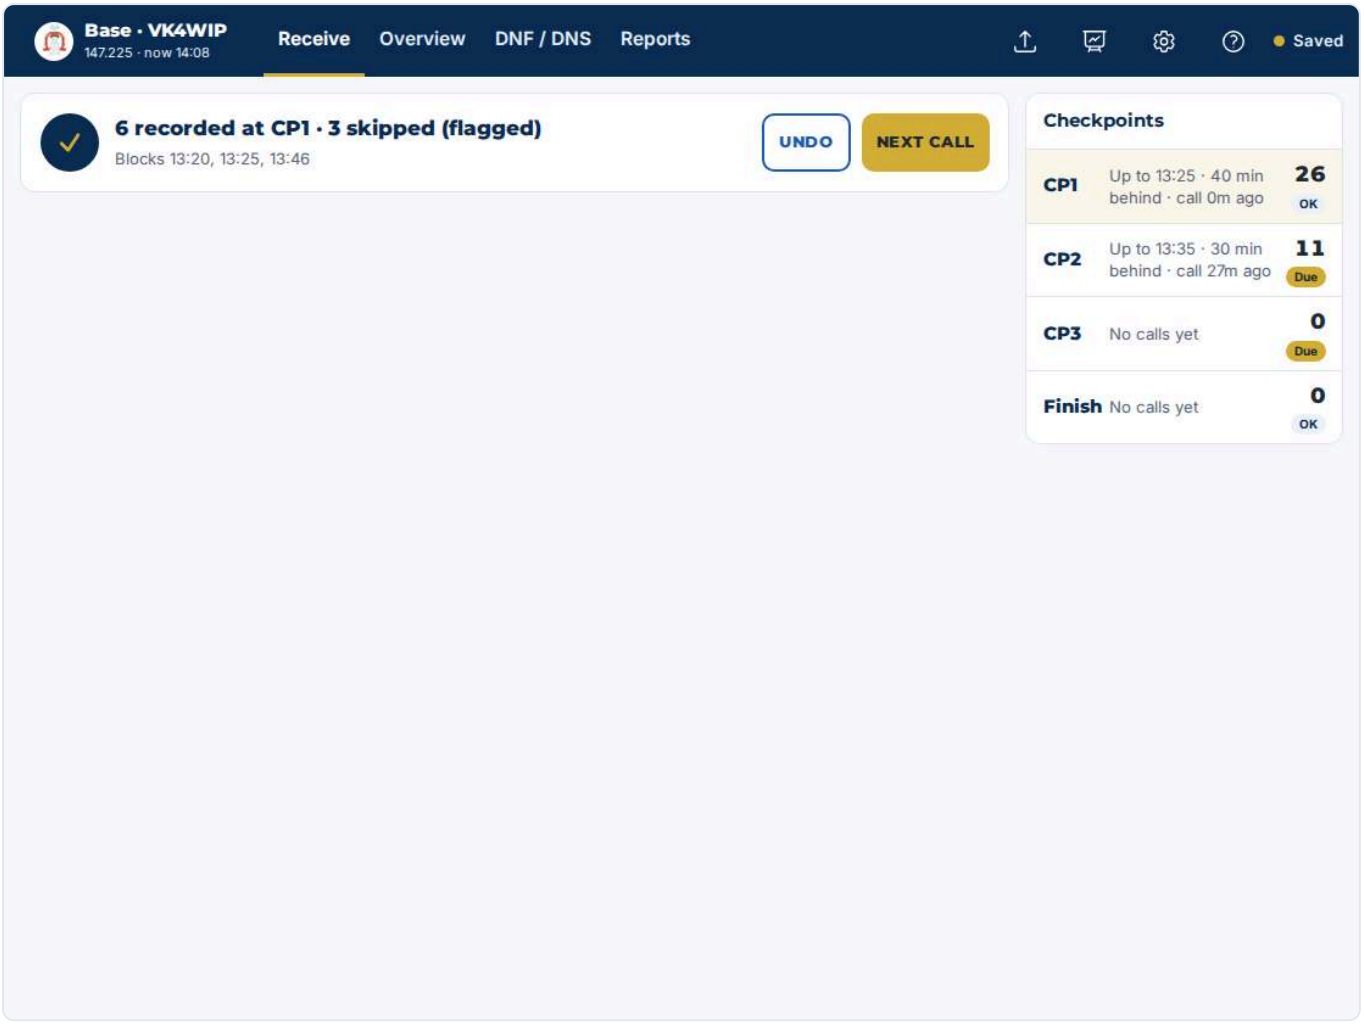


RX-16 1112×834

Plan	§4.9
Event	**Tap "Undo" on the done card**
Plan says	*Undo reopens the call, reverts writes.*
App showed	• Status line: "Call reopened" · aria-live=polite • Board CP1: "CP1 Up to 13:15 · 50 min behind · call 57m ago 20 Due"
Status line	Call reopened
Result	☐ Matches plan ☐ Issue: _____

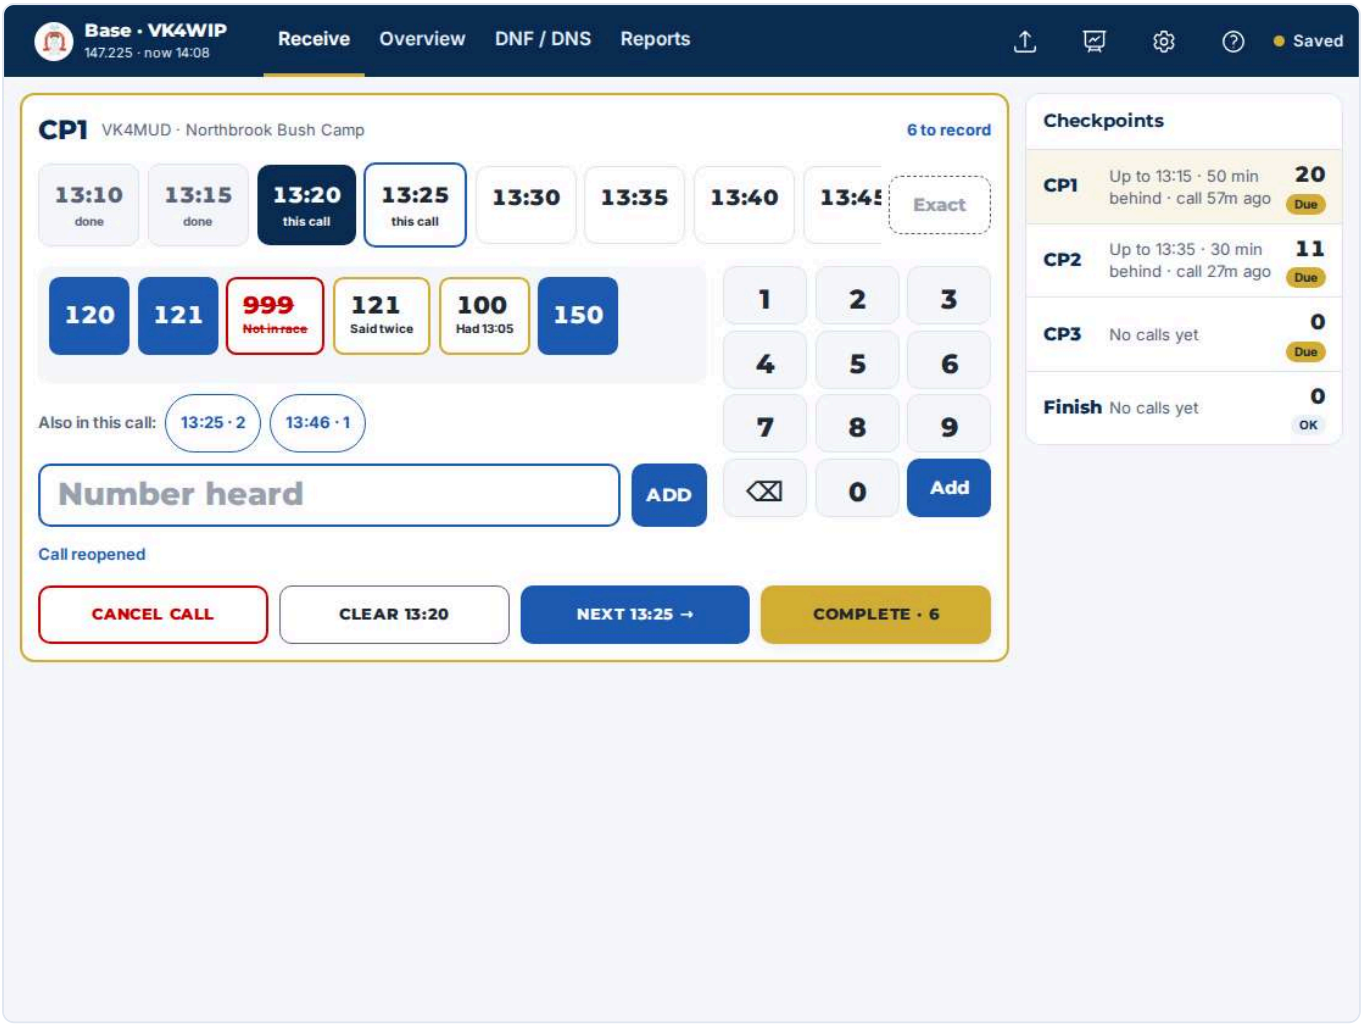


RX-17 1112×834

Plan	§4.9
Event	**Tap "Complete", then "Next call"**
Plan says	*Next call returns to "Who's calling?"; board updated.*
App showed	• CP1 button: "CP1 OK VK4MUD · up to 13:25" · name "CP1, OK" • Board CP1: "CP1 Up to 13:25 · 40 min behind · call 0m ago 26 OK"
Result	☐ Matches plan ☐ Issue: _____

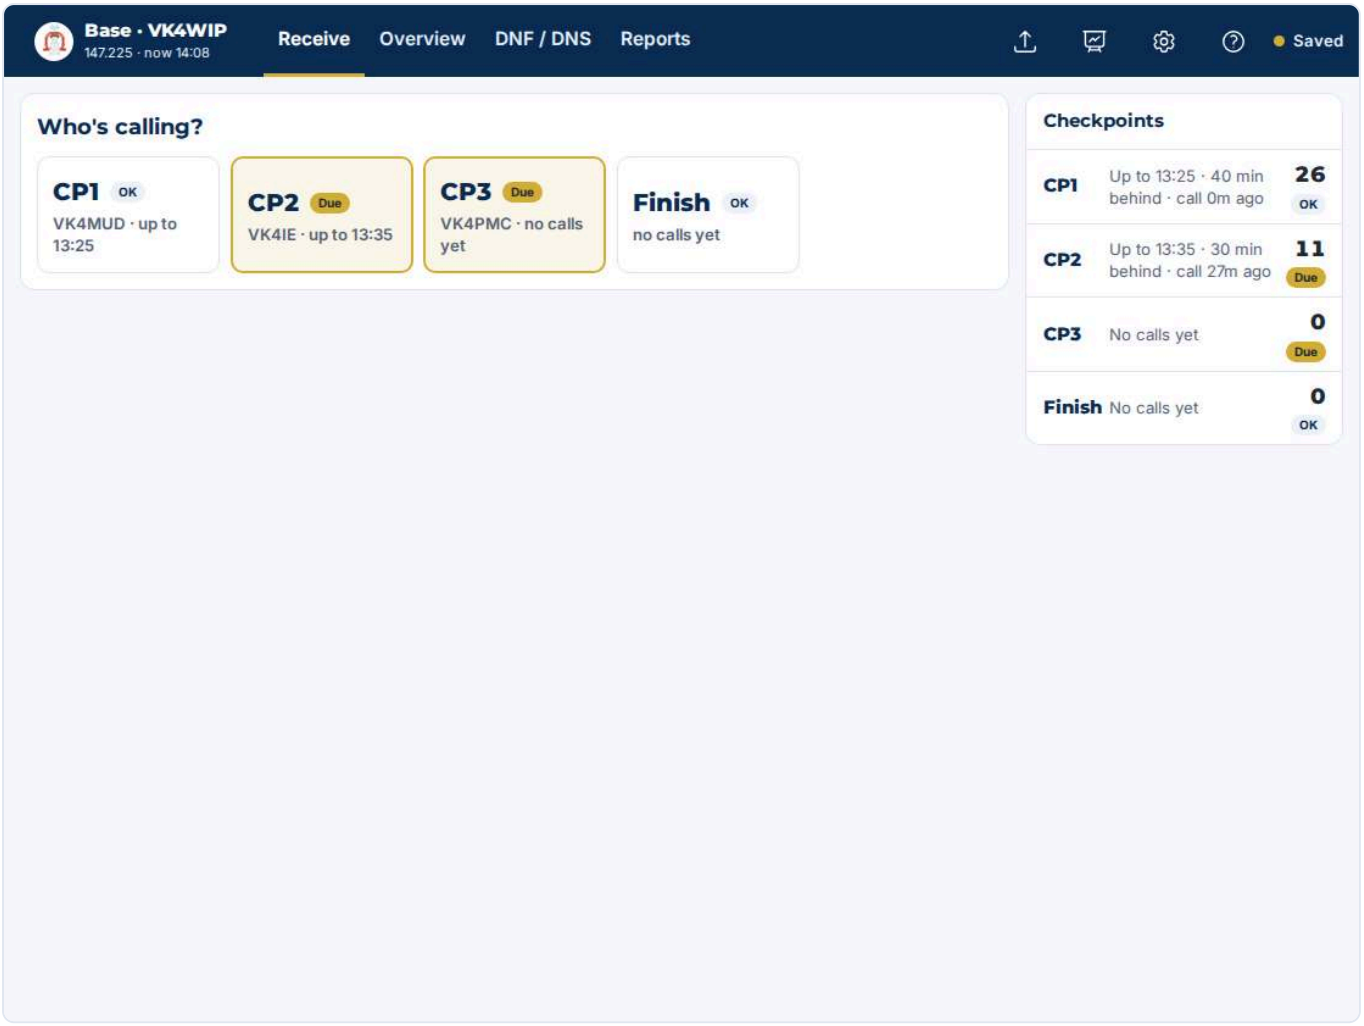


RX-18 1112×834

Plan	Fixes D3 / §4.9 validation table
Event	**Tap "CP3", add 115 (reported at CP1, never at CP2)**
Plan says	*Not seen at the previous checkpoint → info (blue, recorded) "Not seen CP2".*
App showed	• Chip 115: "115 Not seen CP2" · name "Remove 115, Not seen CP2" · background rgb(30, 92, 179) · border 2px solid rgb(11, 45, 83) • Complete: "COMPLETE · 1"
Status line	115 added at 14:05
Result	☐ Matches plan ☐ Issue: _____

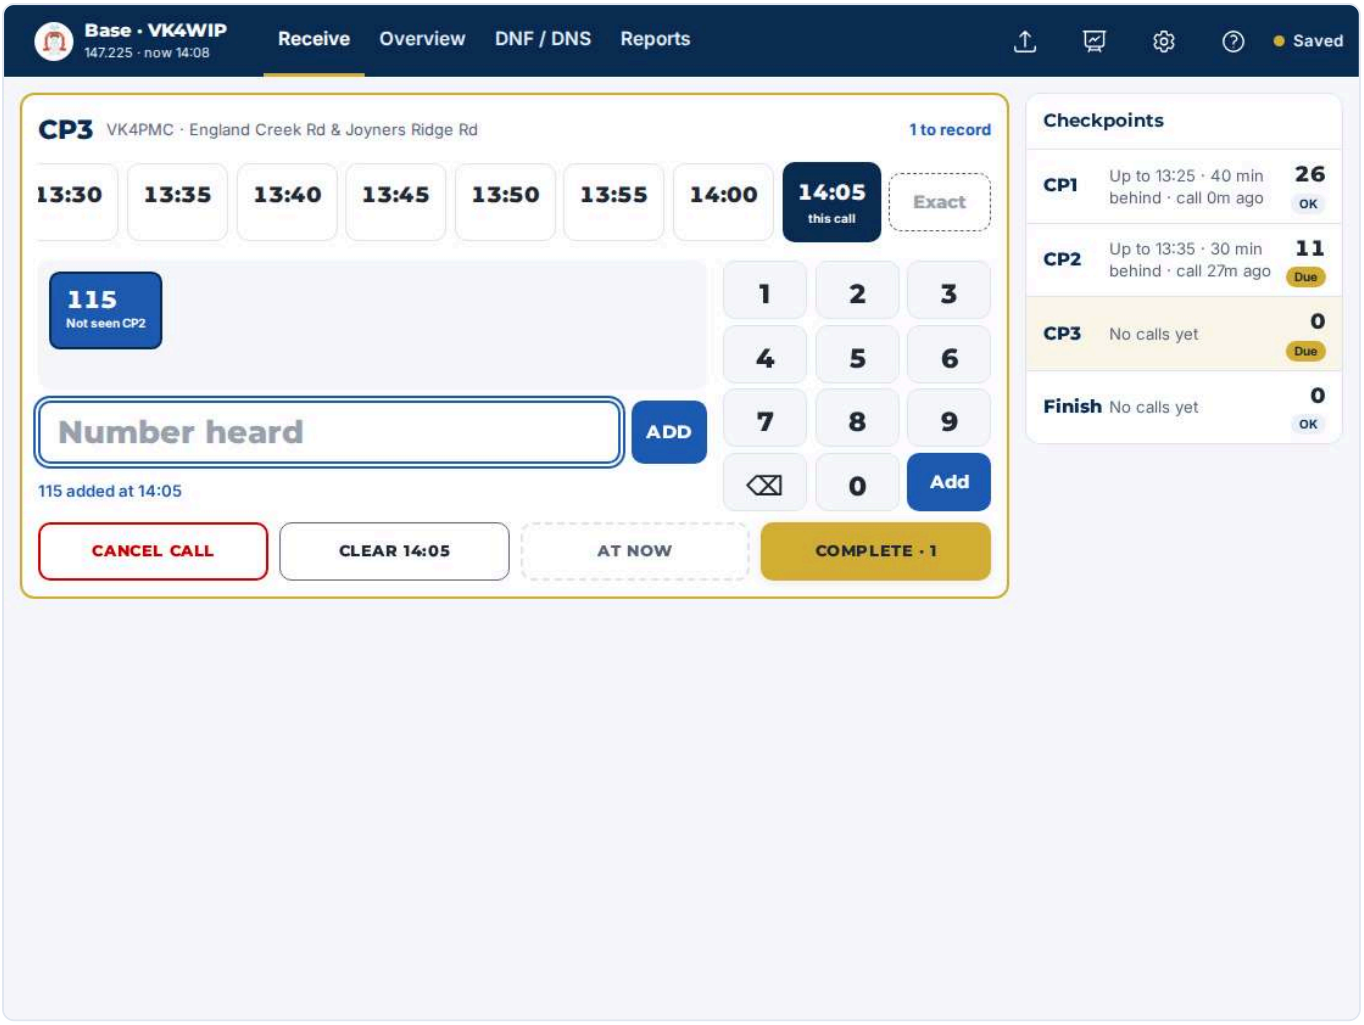


RX-19 1112×834

Plan	§4.9 / G5
Event	**Add 101 102, tap "Cancel call" once**
Plan says	*First tap turns solid red "Tap again to cancel" and says how many will be dropped.*
App showed	• Cancel: "TAP AGAIN TO CANCEL" · background rgb(204, 0, 0) • Status line: "Cancel drops all 3 numbers in this call" · aria-live=polite
Status line	Cancel drops all 3 numbers in this call
Result	☐ Matches plan ☐ Issue: _____

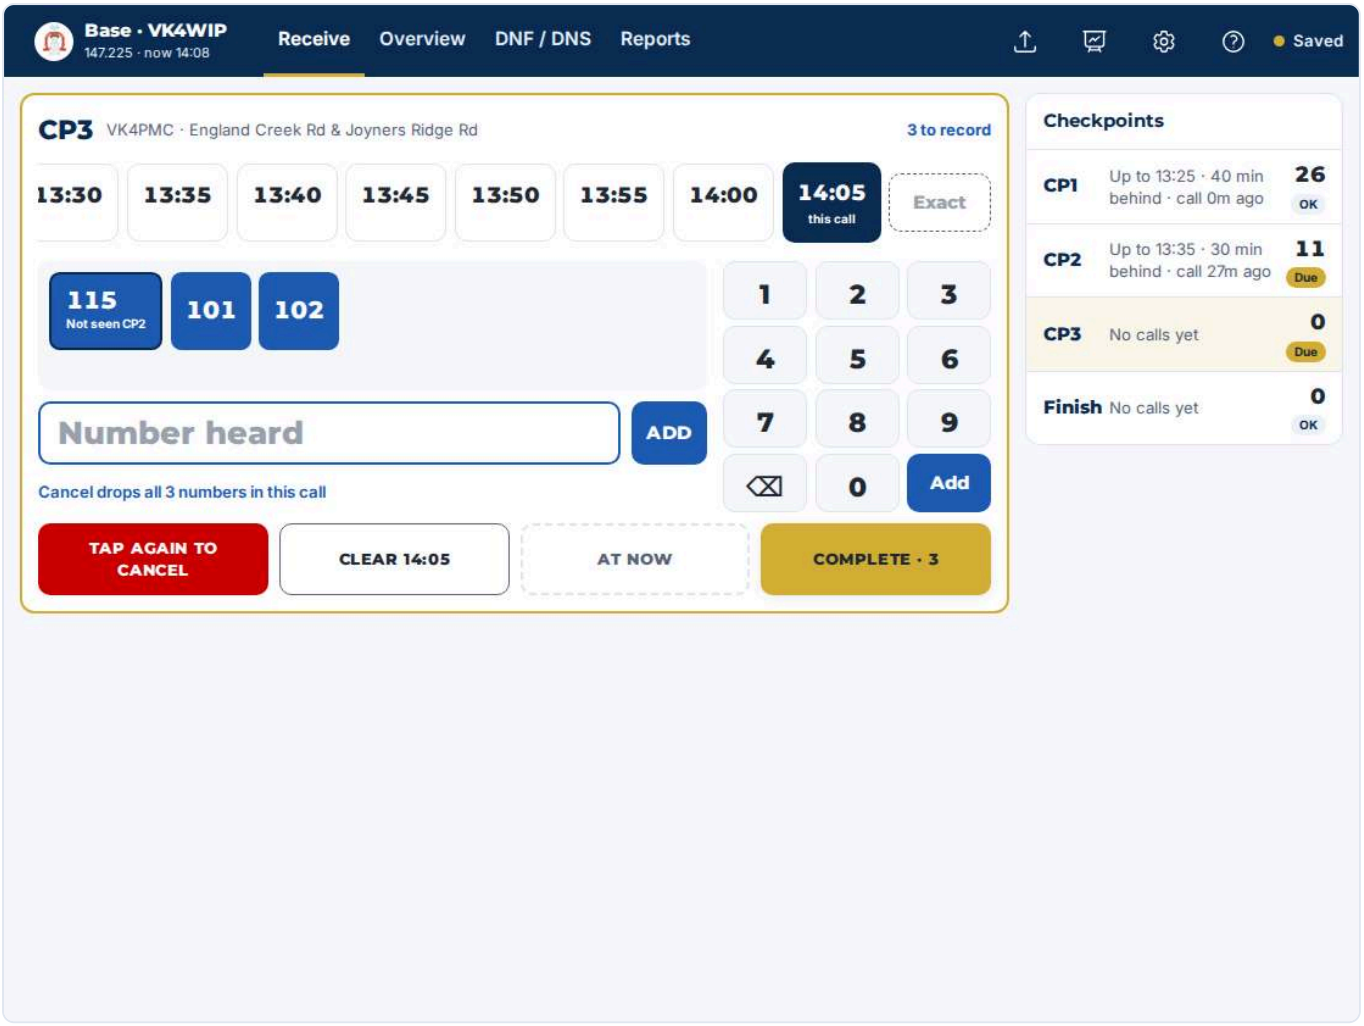


RX-20 1112×834

Plan	§4.9
Event	**Tap "Tap again to cancel"**
Plan says	*Second tap drops the call.*
App showed	• Heading: "Who's calling?"
Result	☐ Matches plan ☐ Issue: _____

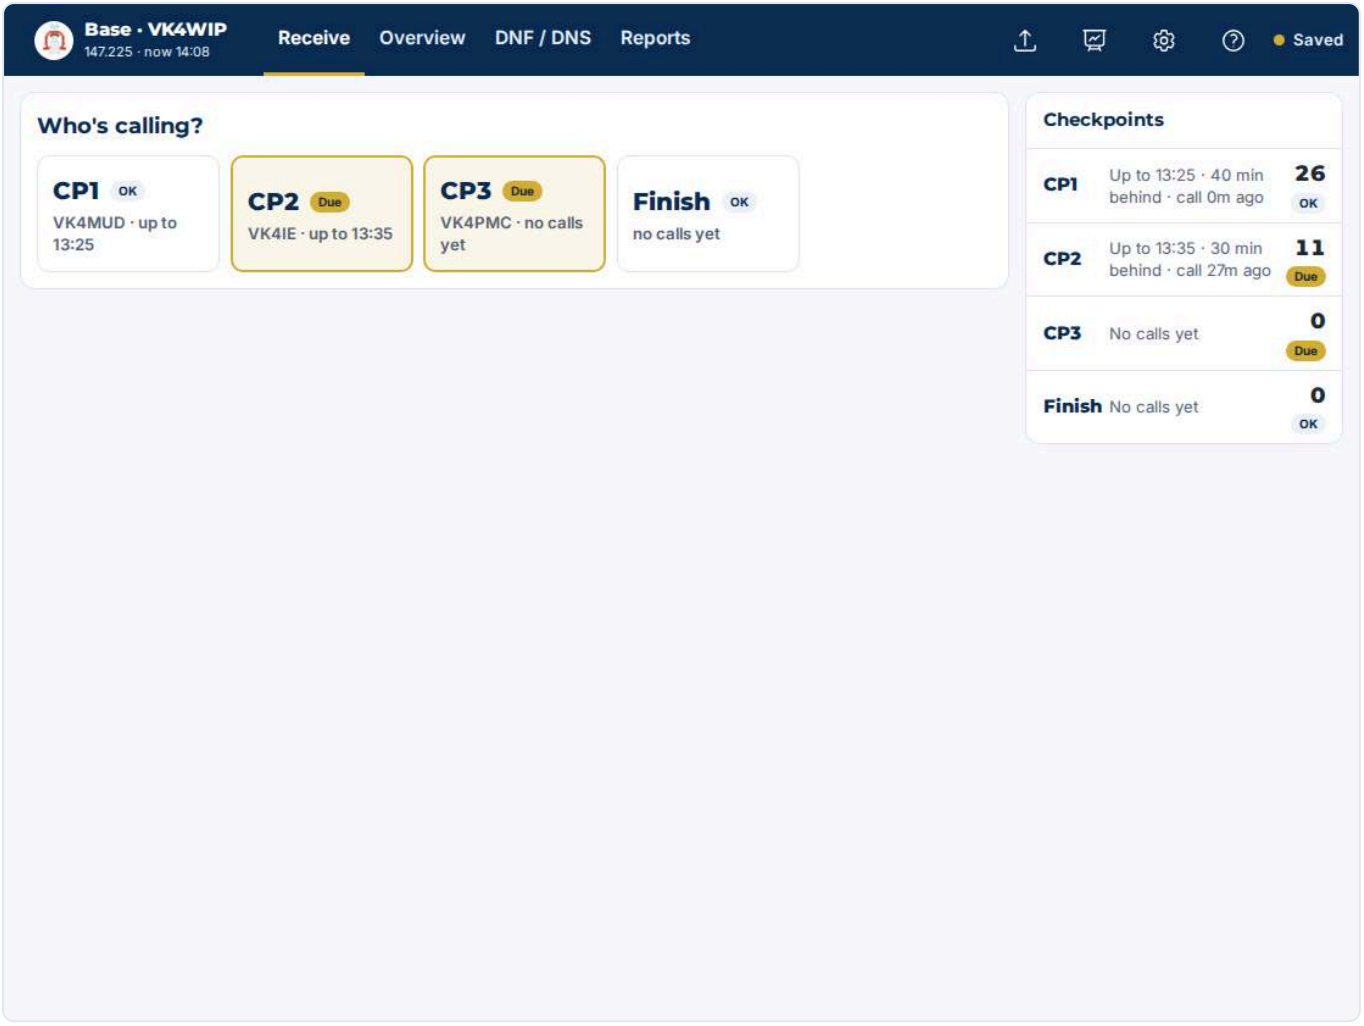


RX-21 1112×834

Plan	Fixes B9
Event	**Tap "CP2", add 998 and 997 (not in the race)**
Plan says	*Complete stays enabled (rejected numbers must be logged) but reads "Log call · 0" in the plain style.*
App showed	• Button: "LOG CALL · 0" · background rgb(255, 255, 255) · border 1px solid rgb(90, 101, 121)
Status line	997 added at 13:40
Result	☐ Matches plan ☐ Issue: _____

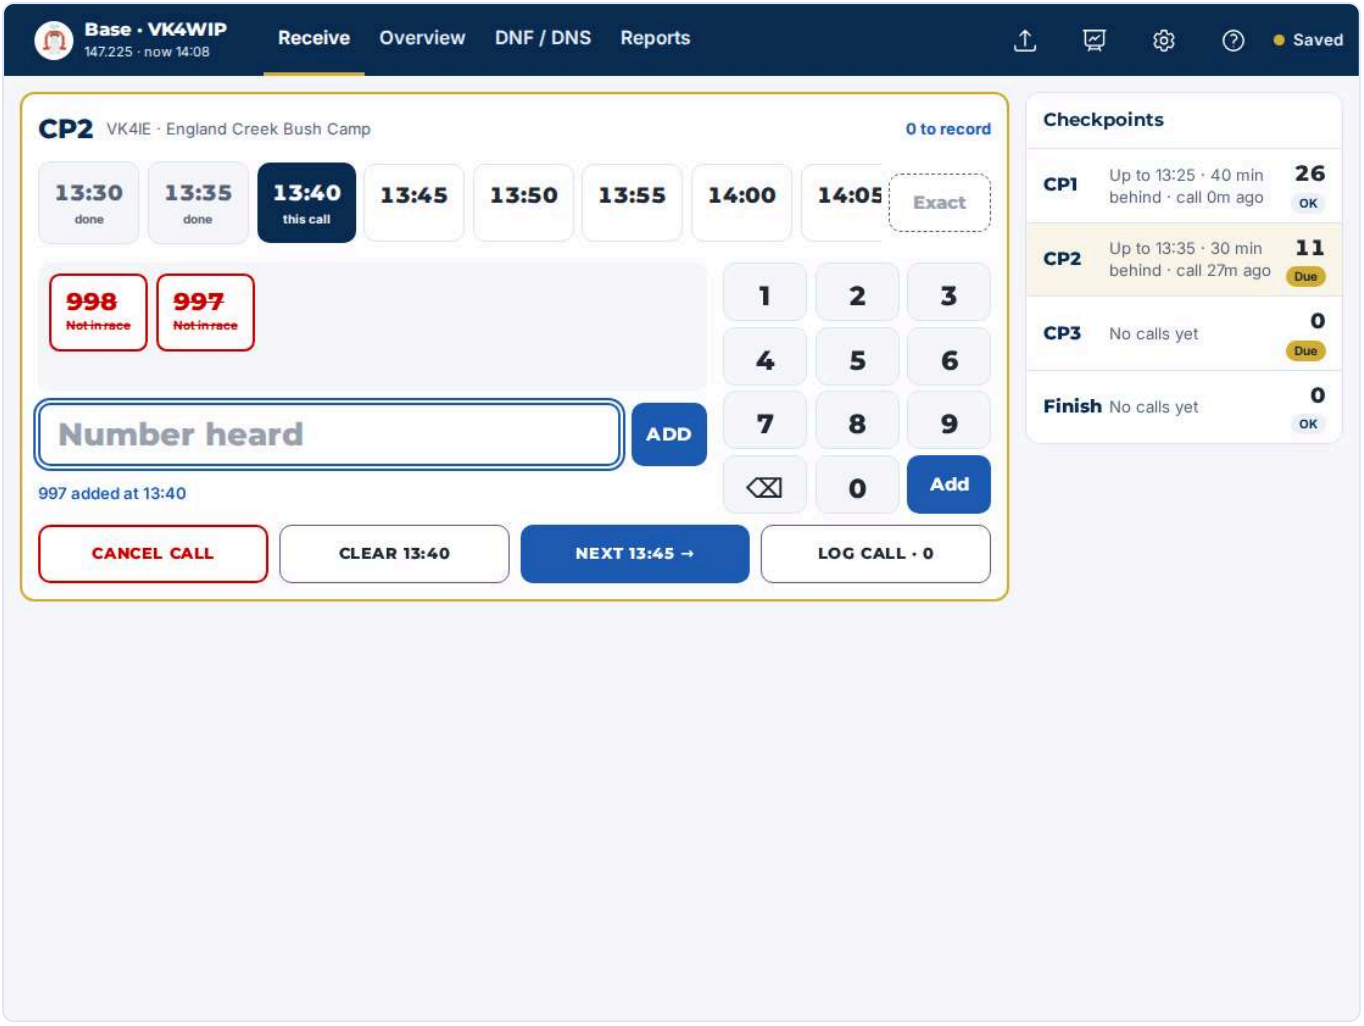


RX-22 1112×834

Plan	Fixes B9
Event	**Tap "Log call · 0"**
Plan says	*Done card "0 recorded · 2 skipped (flagged)".*
App showed	• Done card: "0 recorded at CP2 · 2 skipped (flagged) Common time 13:40 UNDO NEXT CALL" · role=status
Status line	0 recorded at CP2 · 2 skipped (flagged) Common time 13:40 UNDO NEXT CALL
Result	☐ Matches plan ☐ Issue: _____

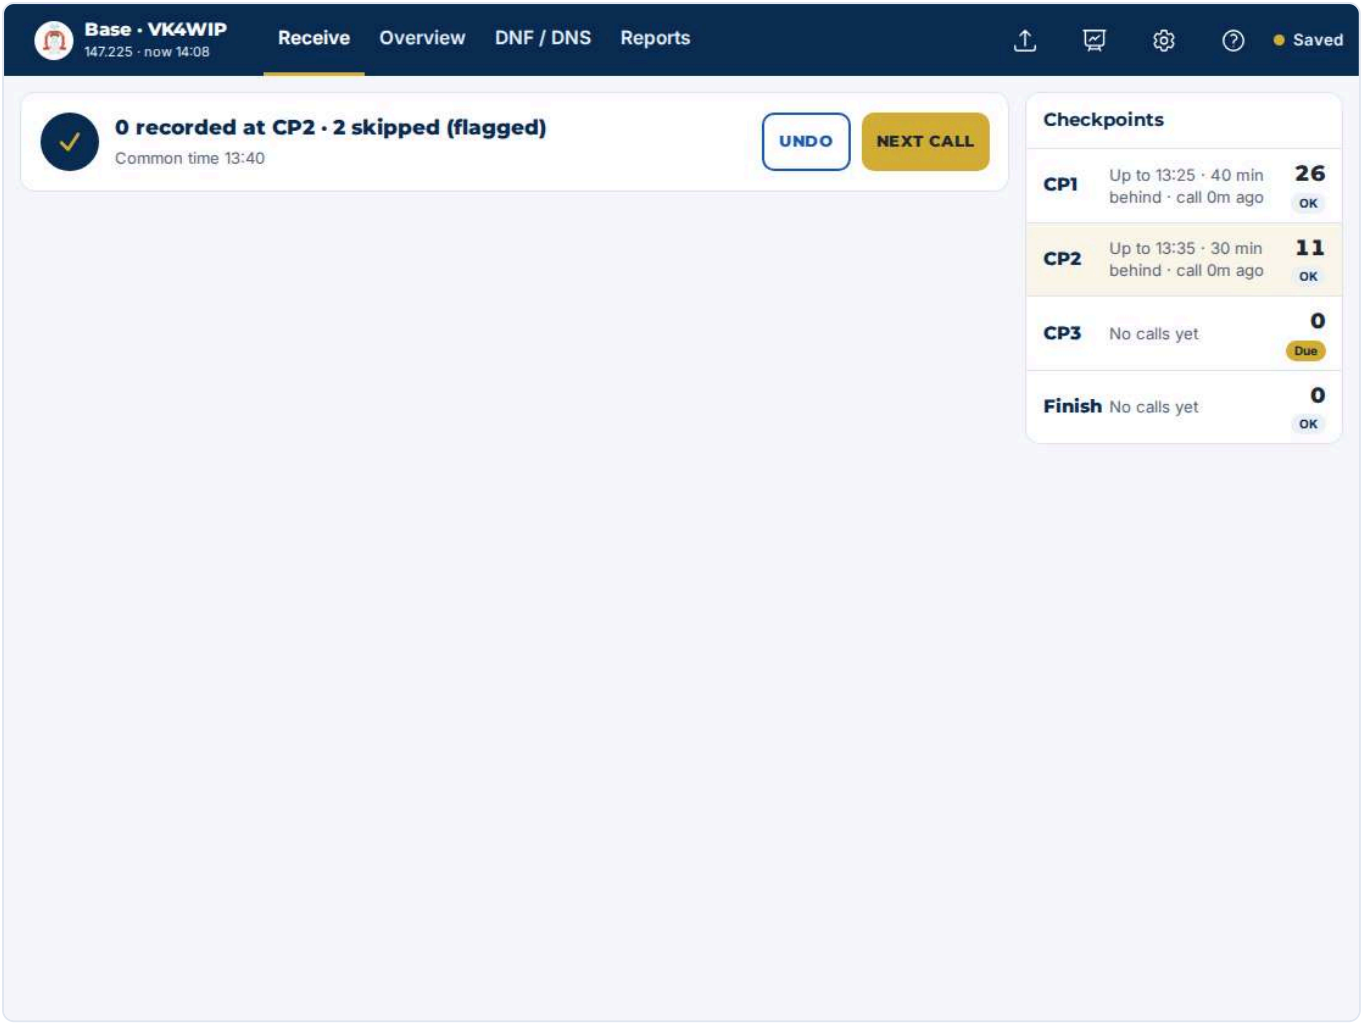


RX-23 1112×834

Plan	Fixes D3 / §4.9
Event	**"Next call"; "Finish"; add every bib 100–159; Complete; Next call**
Plan says	*Board pill Closed when every runner still in the race has been reported there.*
App showed	• Finish button: "Finish Closed up to 14:05" · name "Finish, Closed" • Board Finish: "Finish Closed 59 Closed"
Result	☐ Matches plan ☐ Issue: _____

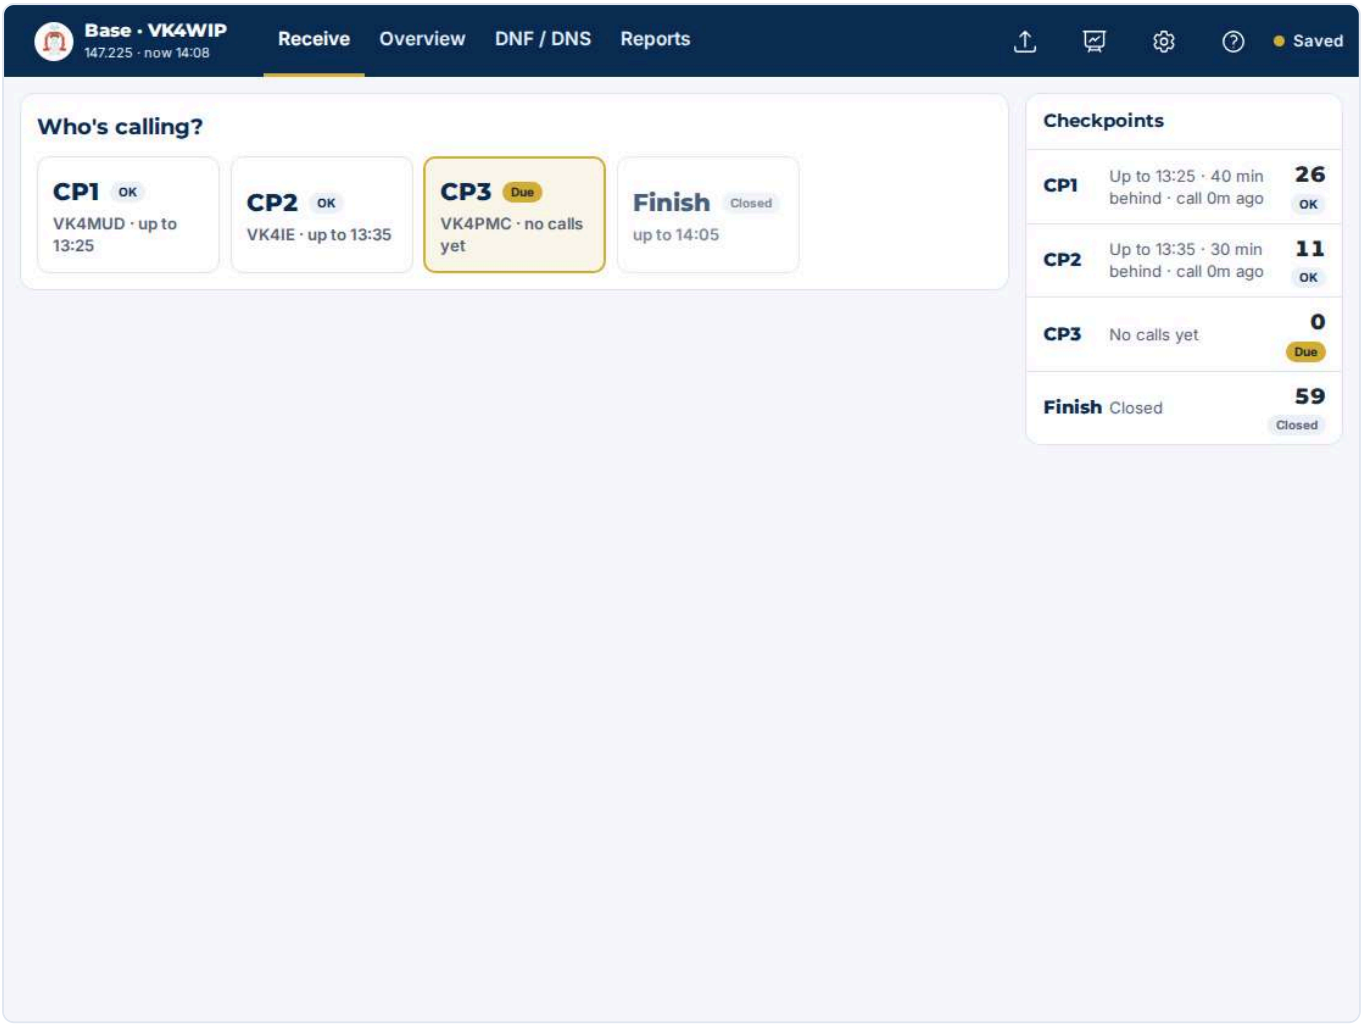


RX-24 390×844

Plan	§4.9 Layout
Event	**Phone 390×844: tap "CP2", add 110 111**
Plan says	*Phone: stacks, receive panel first.*
App showed	• Page width: 390px (viewport 390px)
Status line	111 added at 13:40
Result	☐ Matches plan ☐ Issue: _____

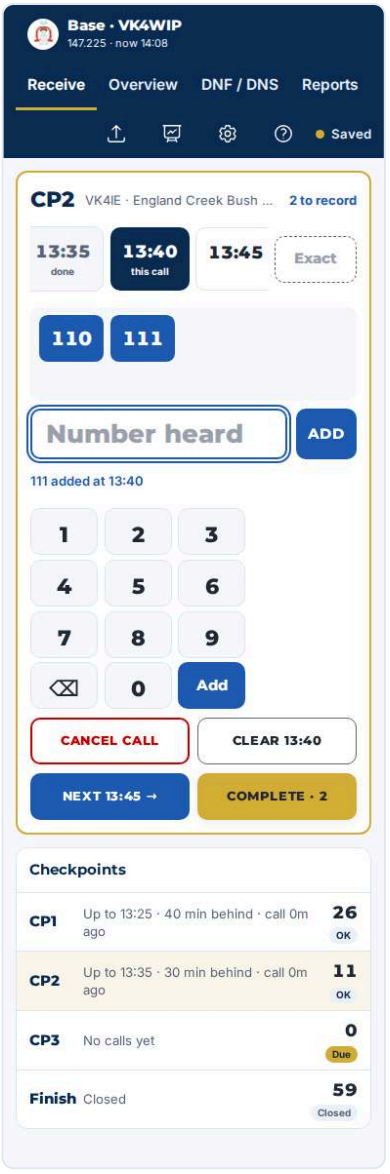

RX-25 390×844


Plan	§4.9
Event	**Phone: Cancel call (two taps)**
Plan says	*Back to idle.*
App showed	• Heading: "Who's calling?"
Result	☐ Matches plan ☐ Issue: _____

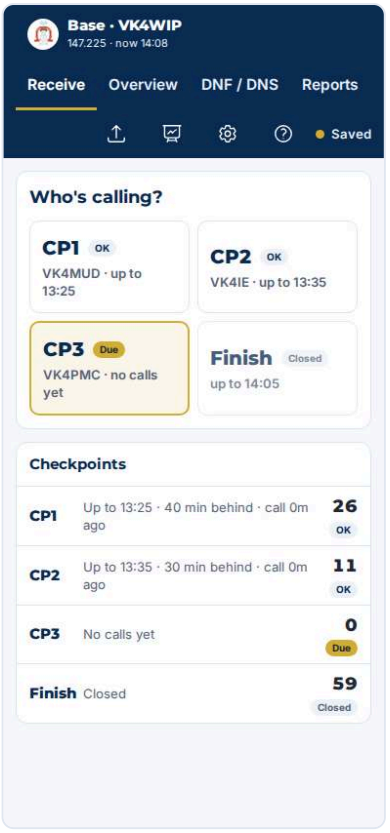

Base — DNF / DNS


ST-01 1112×834

Plan	§4.11 / Fixes C1
Event	**Open base, tap the "DNF / DNS" tab**
Plan says	*Bulk add: DNF/DNS toggle (DNF active = red), Where pills, Reason pills, Time (−5/+5). "Add numbers to mark" locked. Out of the race panel with totals and rows.*
App showed	• DNF toggle: "DNF" · aria-pressed=true · background rgb(204, 0, 0) • Mark button: "ADD NUMBERS TO MARK" · disabled · border 2px dashed rgb(224, 230, 240) · colour rgb(90, 101, 121) • Totals: "0 DNS · 1 DNF"
Status line	14:08
Result	☐ Matches plan ☐ Issue: _____

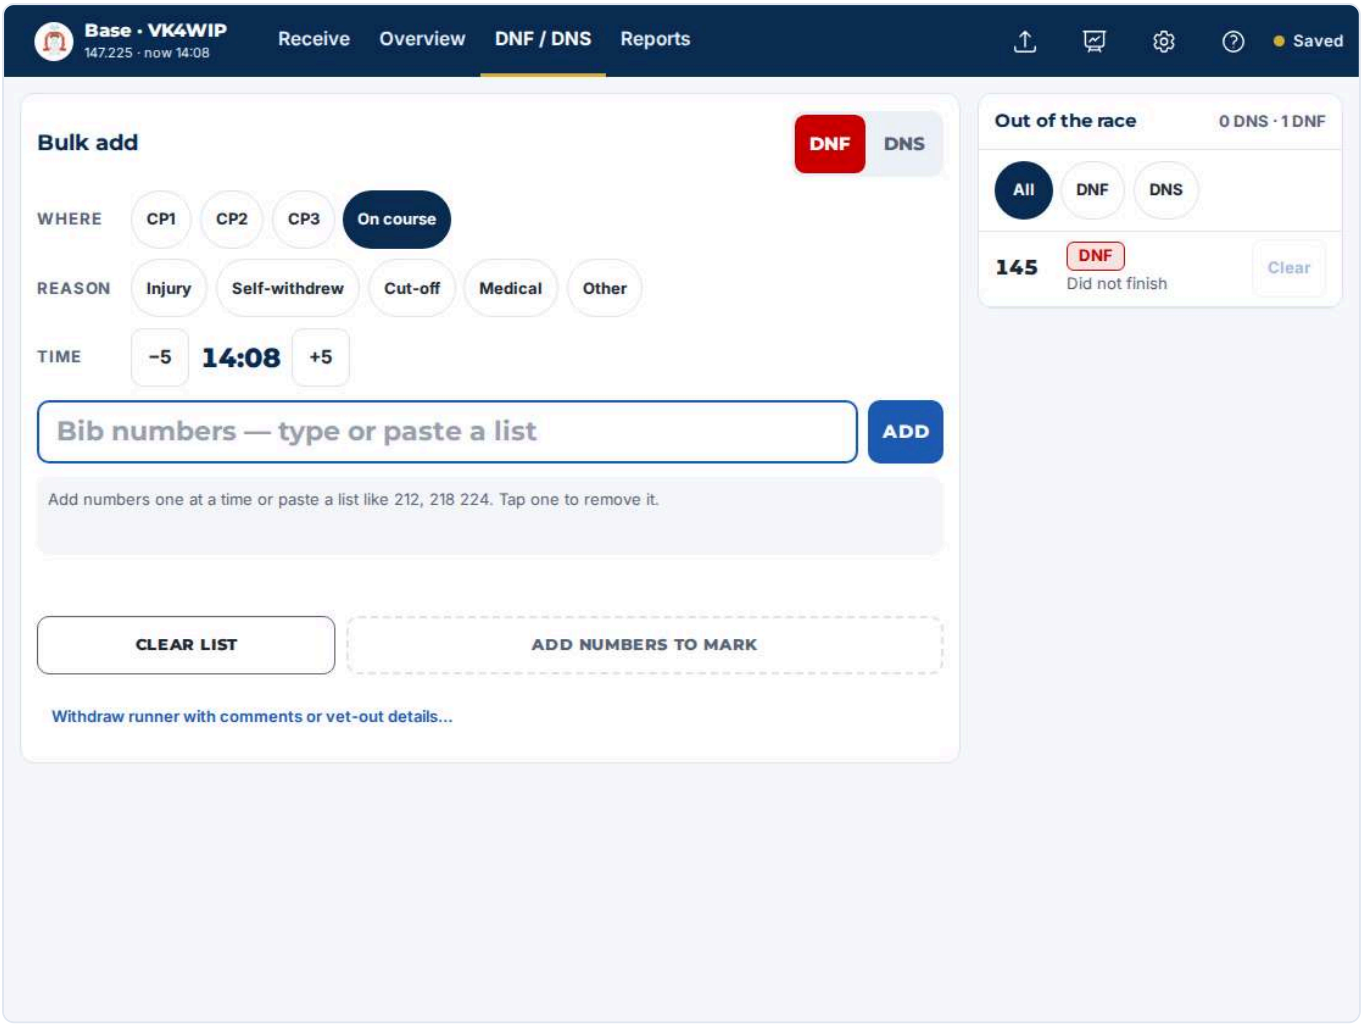


ST-02 1112×834

Plan	§4.11
Event	**Tap Where "CP1", Reason "Injury", tap "Injury" again, tap "Medical"**
Plan says	*Reason pills — optional, tap again to unset.*
App showed	• Injury: "Injury" · aria-pressed=false • Medical: "Medical" · aria-pressed=true
Status line	14:08
Result	☐ Matches plan ☐ Issue: _____

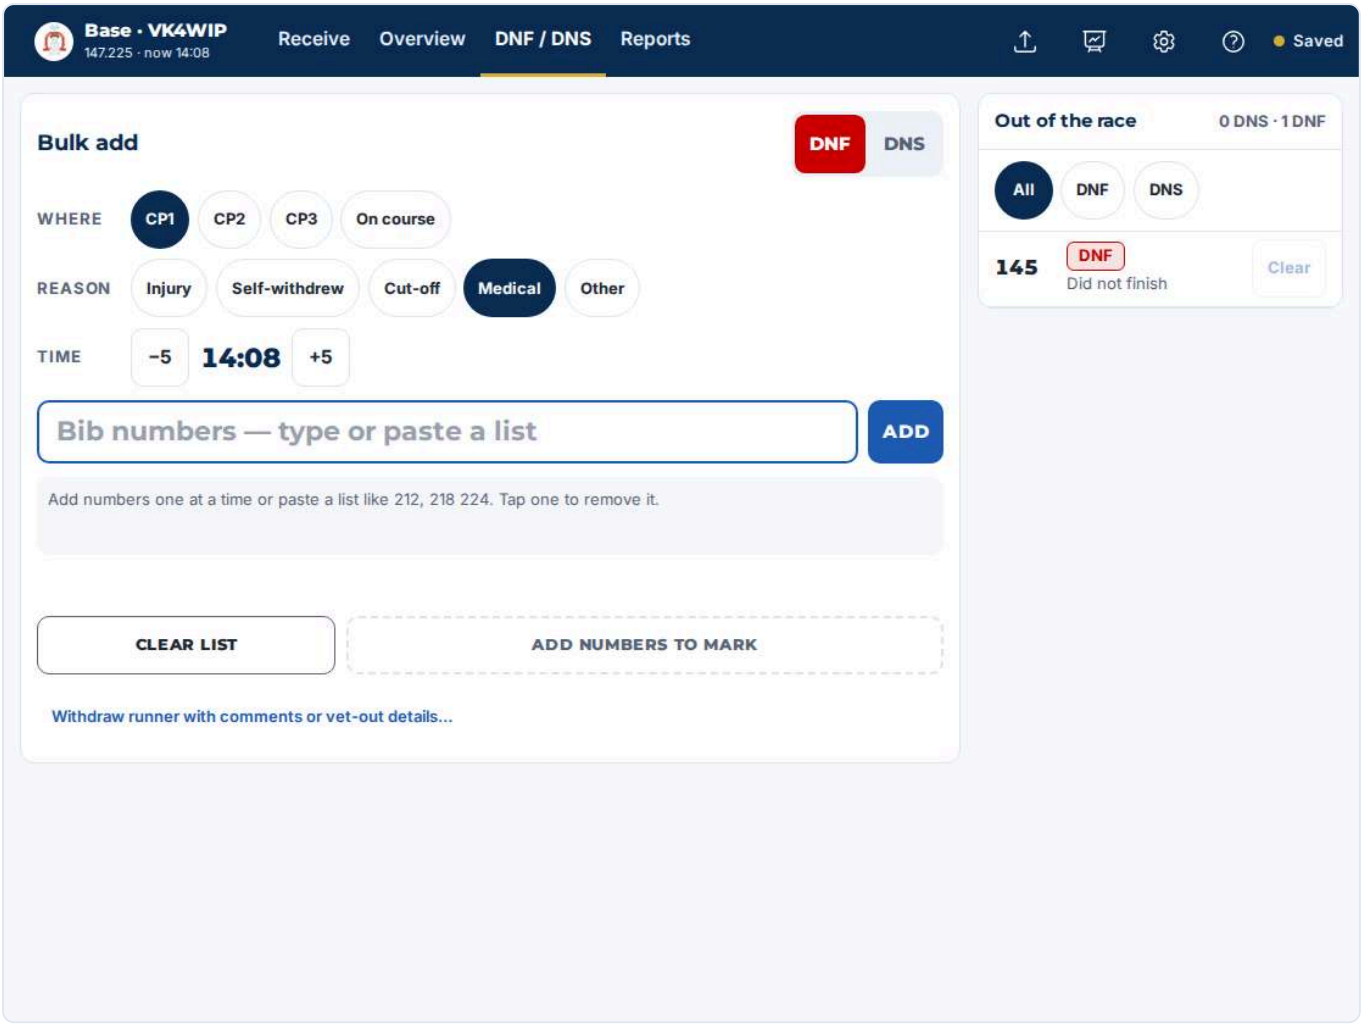


ST-03 1112×834

Plan	§4.11
Event	**Tap Time "−5" nine times (45 minutes back)**
Plan says	*Time (−5/+5, clamped).*
App showed	• Time: "13:23" · aria-live=polite
Status line	13:23
Result	☐ Matches plan ☐ Issue: _____

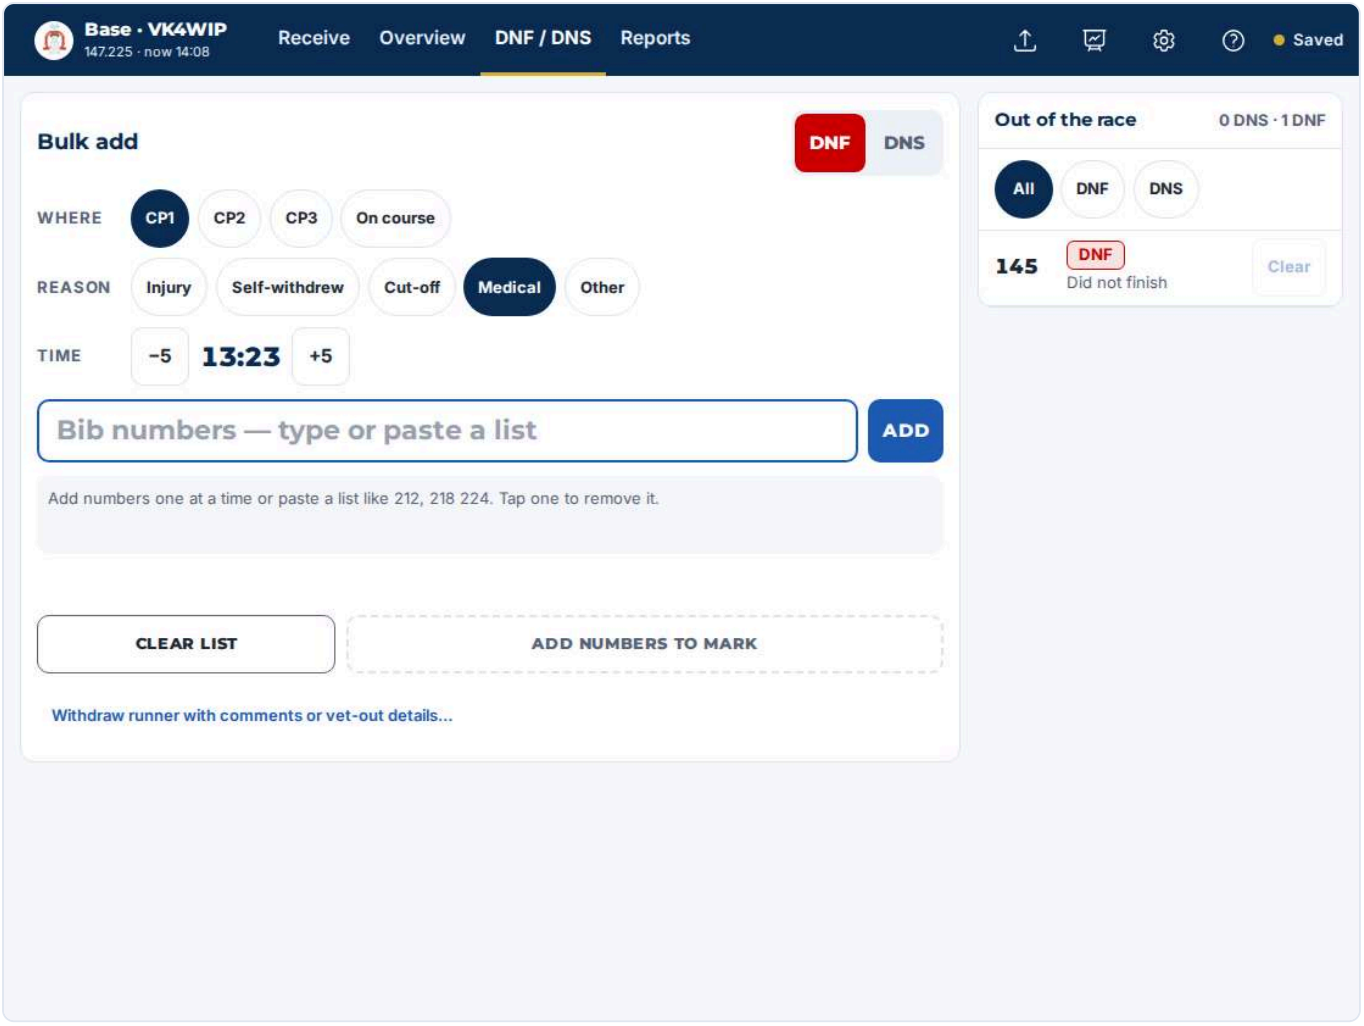


ST-04 1112×834

Plan	§4.11 validation table / Fixes D1 B10
Event	**Paste "108, 130 131; 999 130" and press Enter (108 was reported at CP2)**
Plan says	*Not in race / listed twice → rejected (white, 2px red border, struck through — same as Receive); DNF at CP1 but seen at a later CP → warning "Seen later at CP2".*
App showed	• Chip 108: "108 Seen later at CP2" · name "Remove 108, Seen later at CP2" · border 2px solid rgb(212, 175, 55) • Chip 999: "999 Not in race" · name "Remove 999, Not in race" · background rgb(255, 255, 255) · border 2px solid rgb(204, 0, 0) · text-decoration line-through • Second 130: "130 Listed twice" · name "Remove 130, Listed twice"
Status line	13:23 · 5 numbers added
Result	☐ Matches plan ☐ Issue: _____

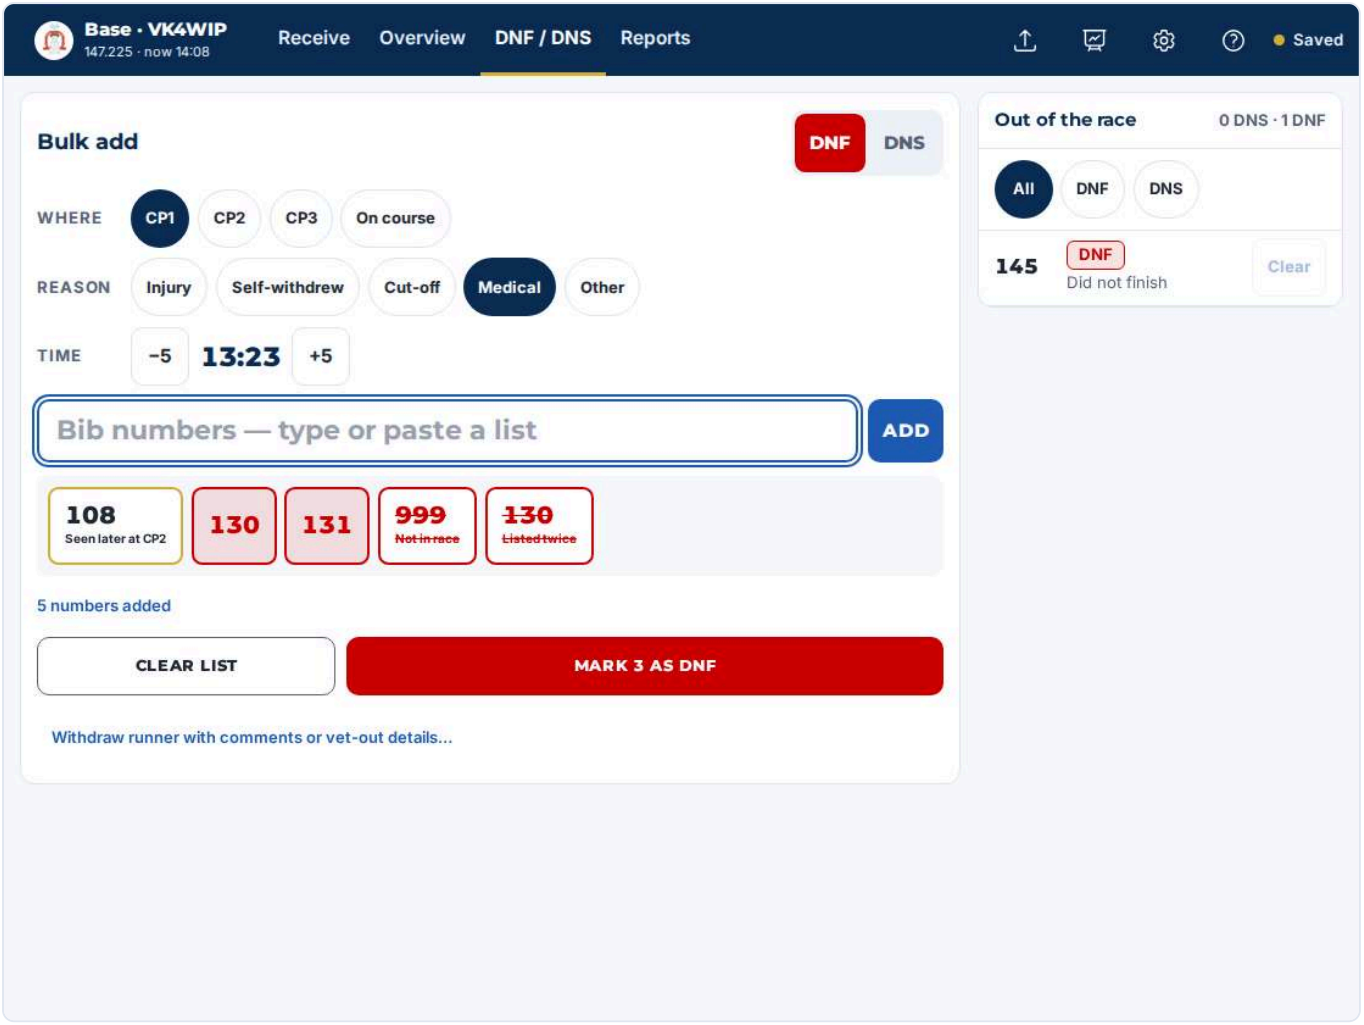


ST-05 1112×834

Plan	§4.11
Event	**Tap "Mark N as DNF"**
Plan says	*Primary Mark N as DNF (red). Undo. DNF writes withdrawal_records + runner status.*
App showed	• Status line: "3 marked DNF" · aria-live=polite • Row 108: "108 DNF CP1 · Medical · 13:23 Clear"
Status line	13:23 · 3 marked DNF
Result	☐ Matches plan ☐ Issue: _____

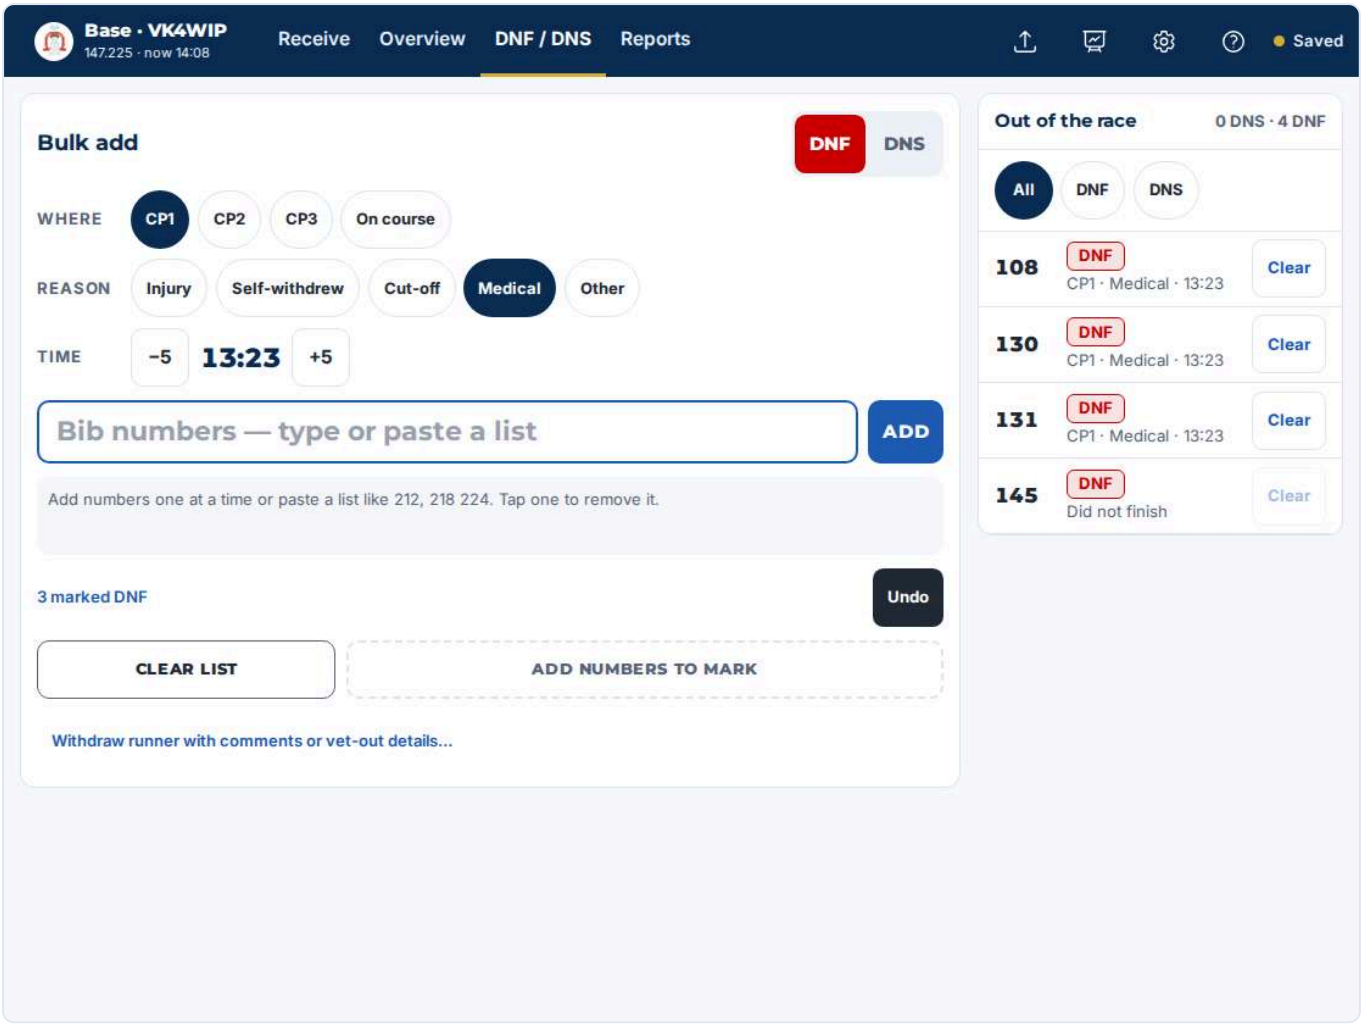


ST-06 1112×834

Plan	§4.11
Event	**Tap "Undo"**
Plan says	*Undo.*
App showed	• Status line: "Undone" · aria-live=polite • Row 108: gone
Status line	13:23 · Undone
Result	☐ Matches plan ☐ Issue: _____

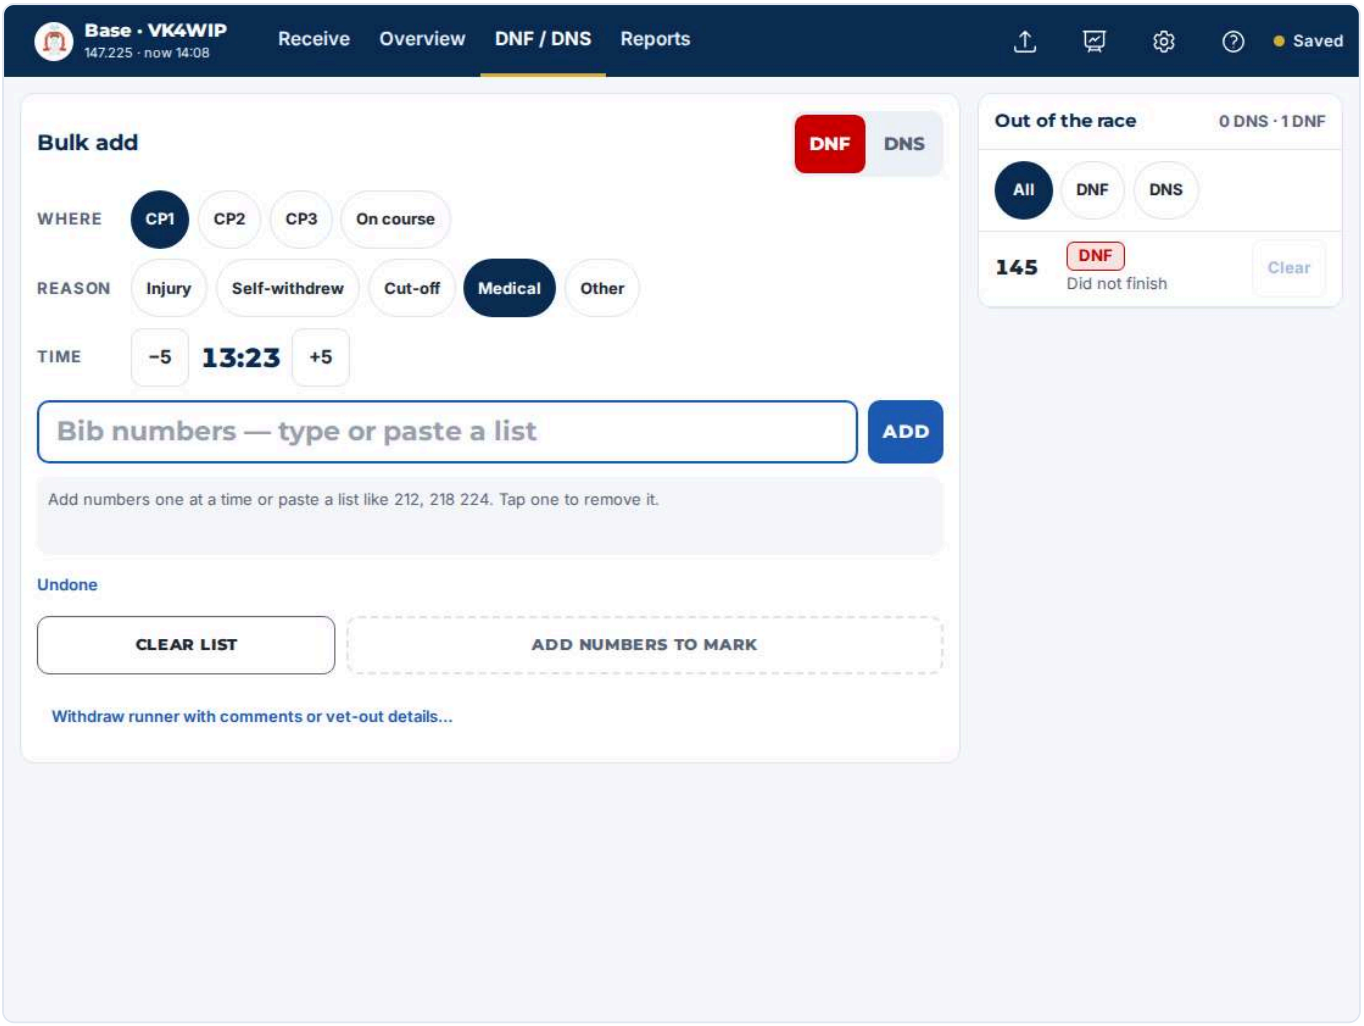


ST-07 1112×834

Plan	§4.11 validation table
Event	**Paste "108 130 131" → Mark as DNF; switch to DNS, add "101 130"**
Plan says	*DNS but recorded at a checkpoint → warning "Seen CP2 — started"; currently the other status → "Was DNF — will change".*
App showed	• Chip 101: "101 Seen CP2 — started" · name "Remove 101, Seen CP2 — started" • Chip 130: "130 Was DNF — will change" · name "Remove 130, Was DNF — will change" • DNS explainer: "Non-starters: runners who never crossed the start. Anyone already recorded at a checkpoint is flagged."
Status line	2 numbers added
Result	☐ Matches plan ☐ Issue: _____

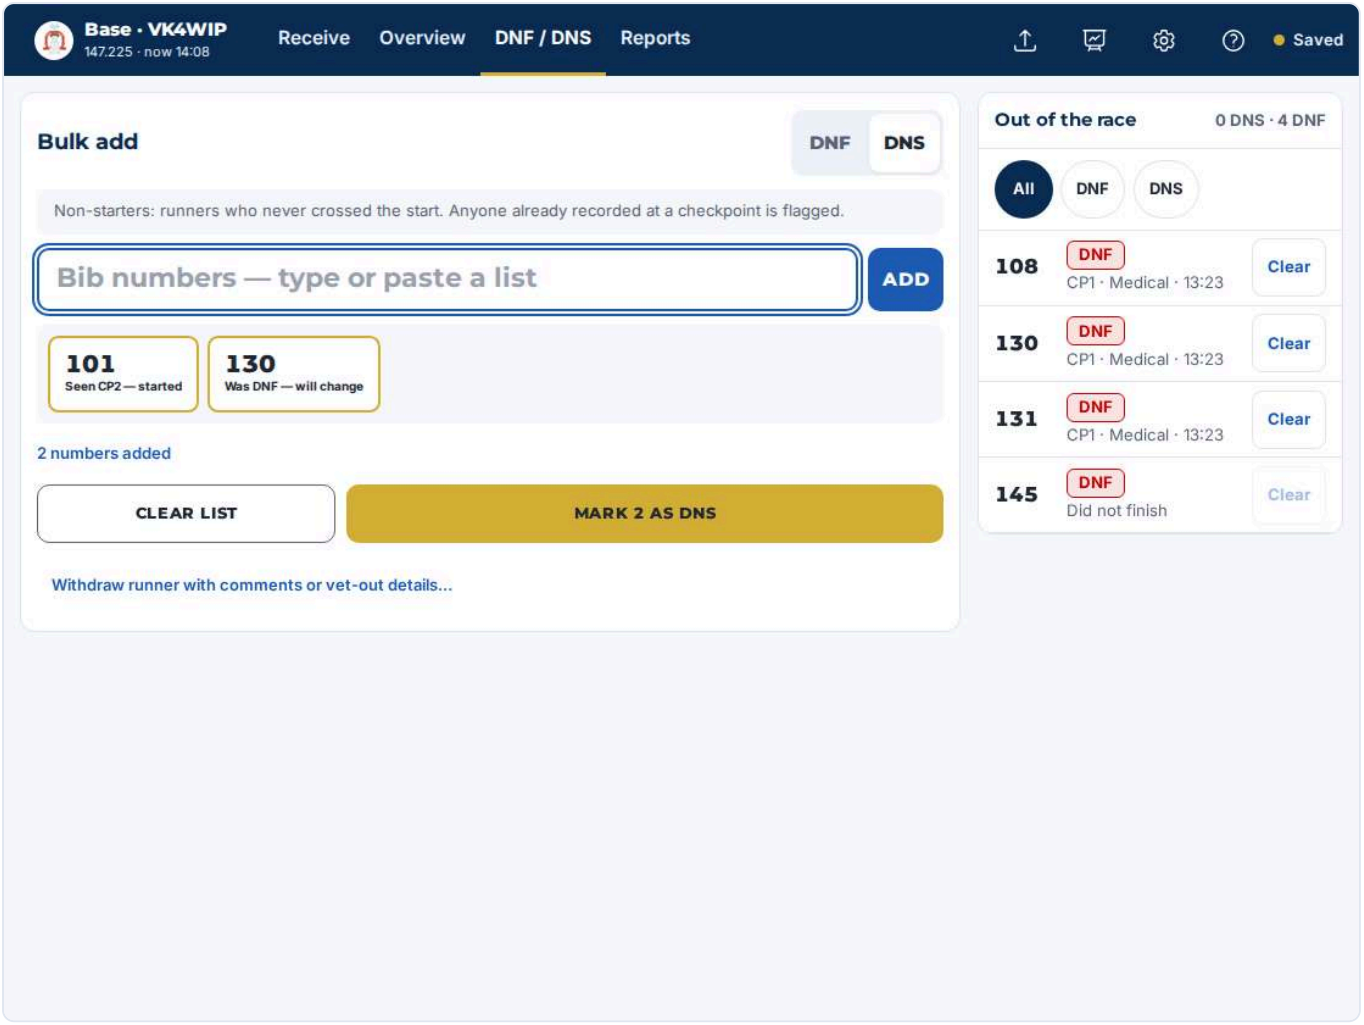


ST-08 1112×834

Plan	§4.11
Event	**Tap "Mark 2 as DNS"**
Plan says	*DNS sets runner status non-starter. Audit-log every change.*
App showed	• Status line: "2 marked DNS" · aria-live=polite • Row 101: "101 DNS Did not start Clear"
Status line	2 marked DNS
Result	☐ Matches plan ☐ Issue: _____

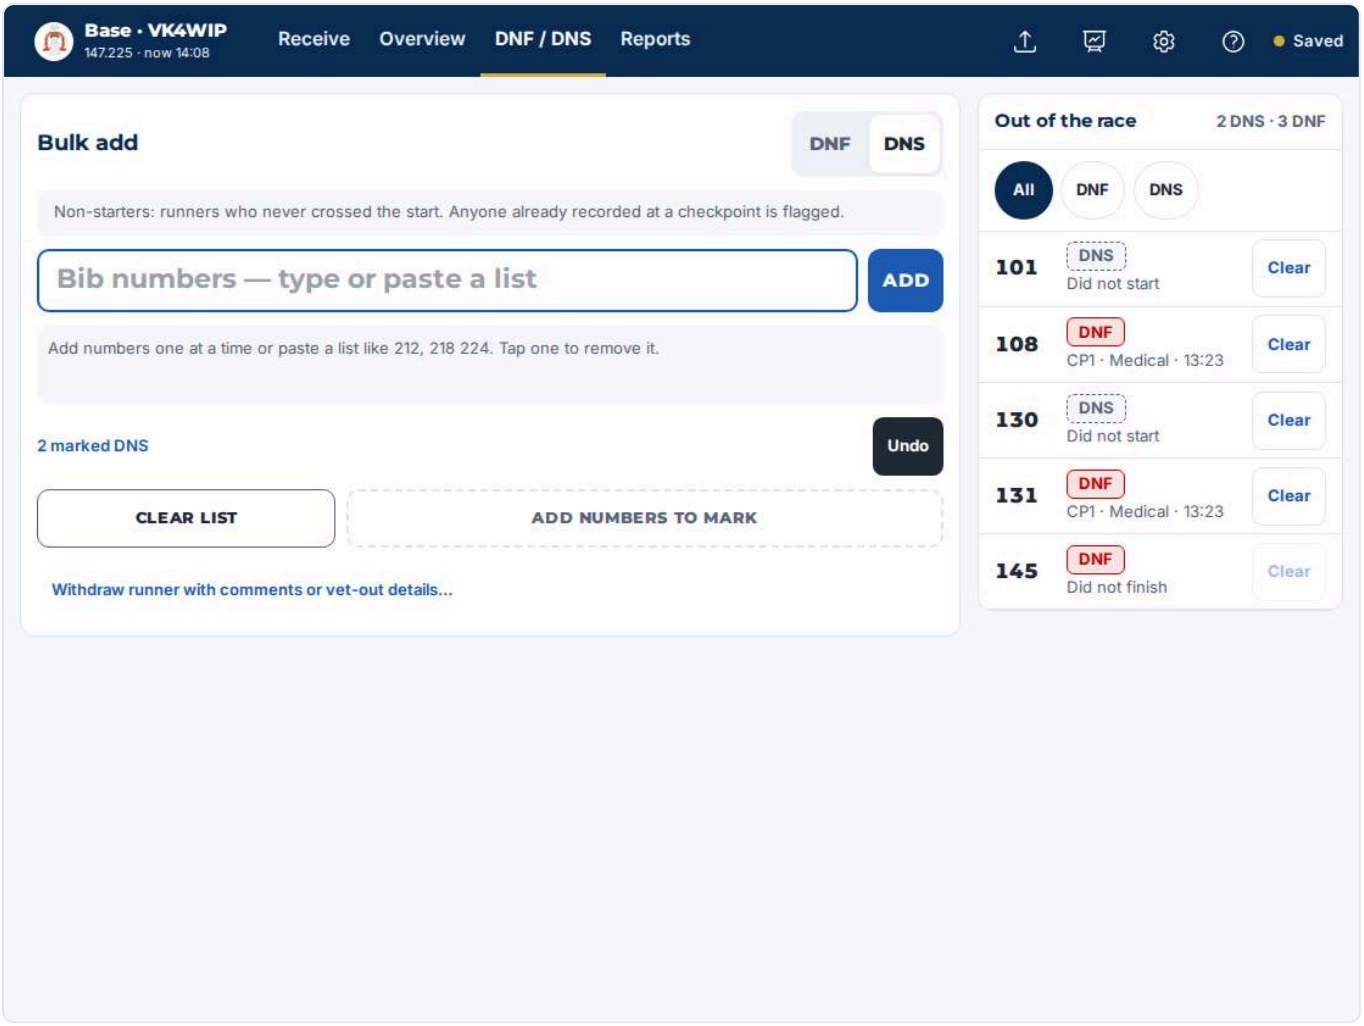


ST-09 1112×834

Plan	Fixes D3
Event	**Switch to DNF and add "131" again**
Plan says	*"Already DNF" → rejected.*
App showed	• Chip 131: "131 Already DNF" · name "Remove 131, Already DNF" · border 2px solid rgb(204, 0, 0) · text-decoration line-through • Mark button: "ADD NUMBERS TO MARK" · disabled
Status line	13:23 · 131 added
Result	☐ Matches plan ☐ Issue: _____

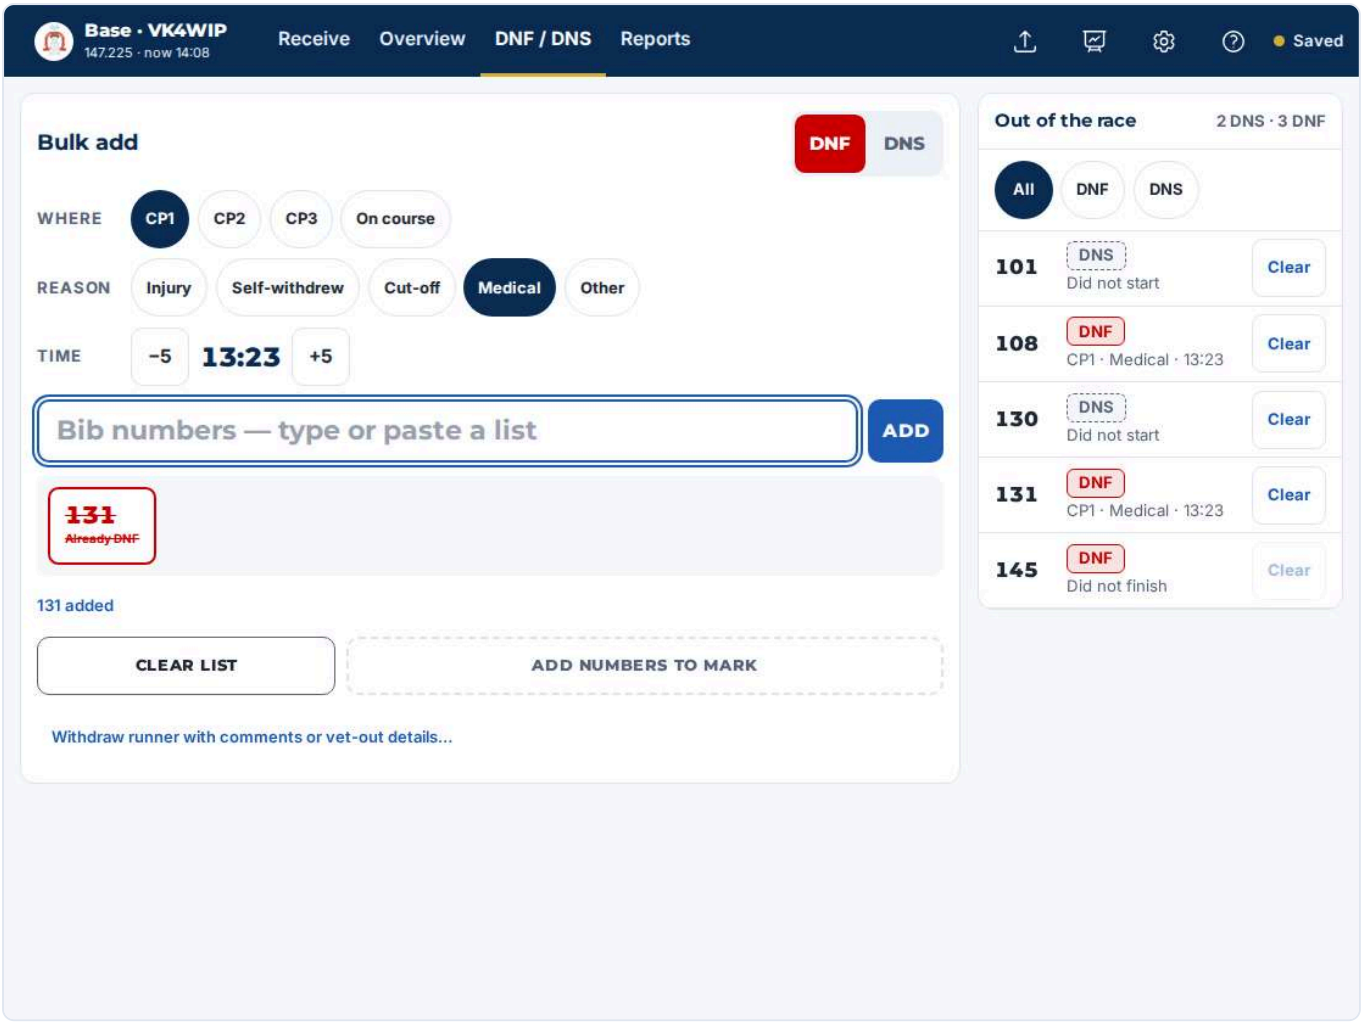


ST-10 1112×834

Plan	§4.11 / Fixes B10
Event	**Clear list; out list filter "DNF"**
Plan says	*Rows (bib, status chip, "CP1 · Medical · 07:12") — two lines on narrow panels so the detail is never cut off.*
App showed	• Row 131 detail: "CP1 · Medical · 13:23" • Detail cut off?: no
Status line	13:23 · List cleared
Result	☐ Matches plan ☐ Issue: _____

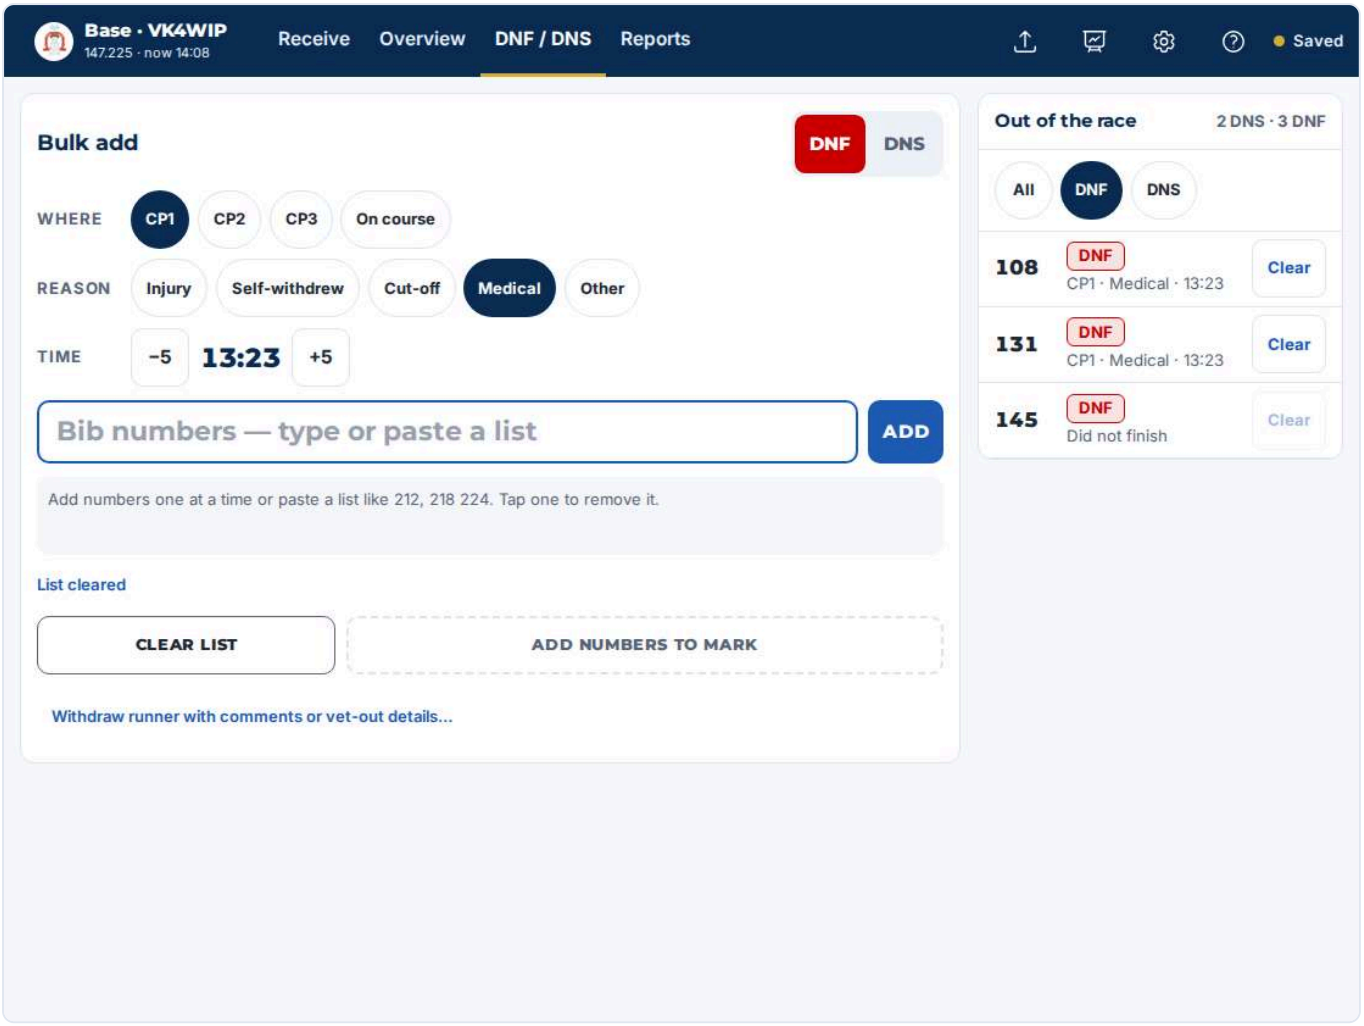


ST-11 1112×834

Plan	§4.11
Event	**Tap "Clear" on 131**
Plan says	*Clear → back in race, Undo.*
App showed	• Status line: "131 back in the race" · aria-live=polite • Row 131: gone
Status line	13:23 · 131 back in the race
Result	☐ Matches plan ☐ Issue: _____

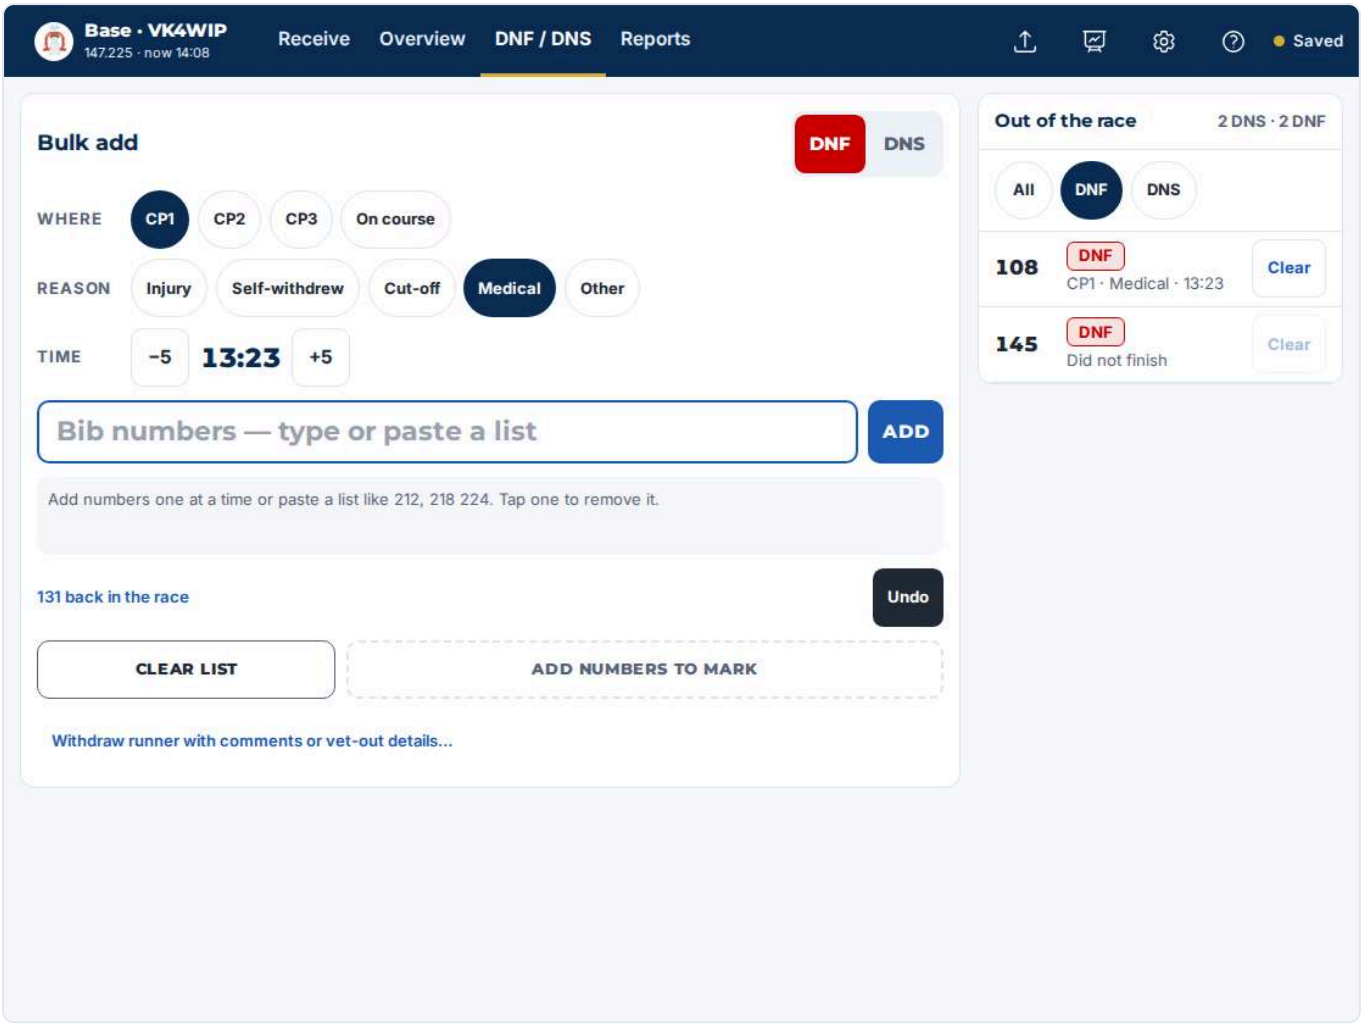


ST-12 1112×834

Plan	§4.11
Event	**Tap "Undo", then filter "All"**
Plan says	*Undo.*
App showed	• Row 131: "131 DNF CP1 · Medical · 13:23 Clear"
Status line	13:23 · Undone
Result	☐ Matches plan ☐ Issue: _____

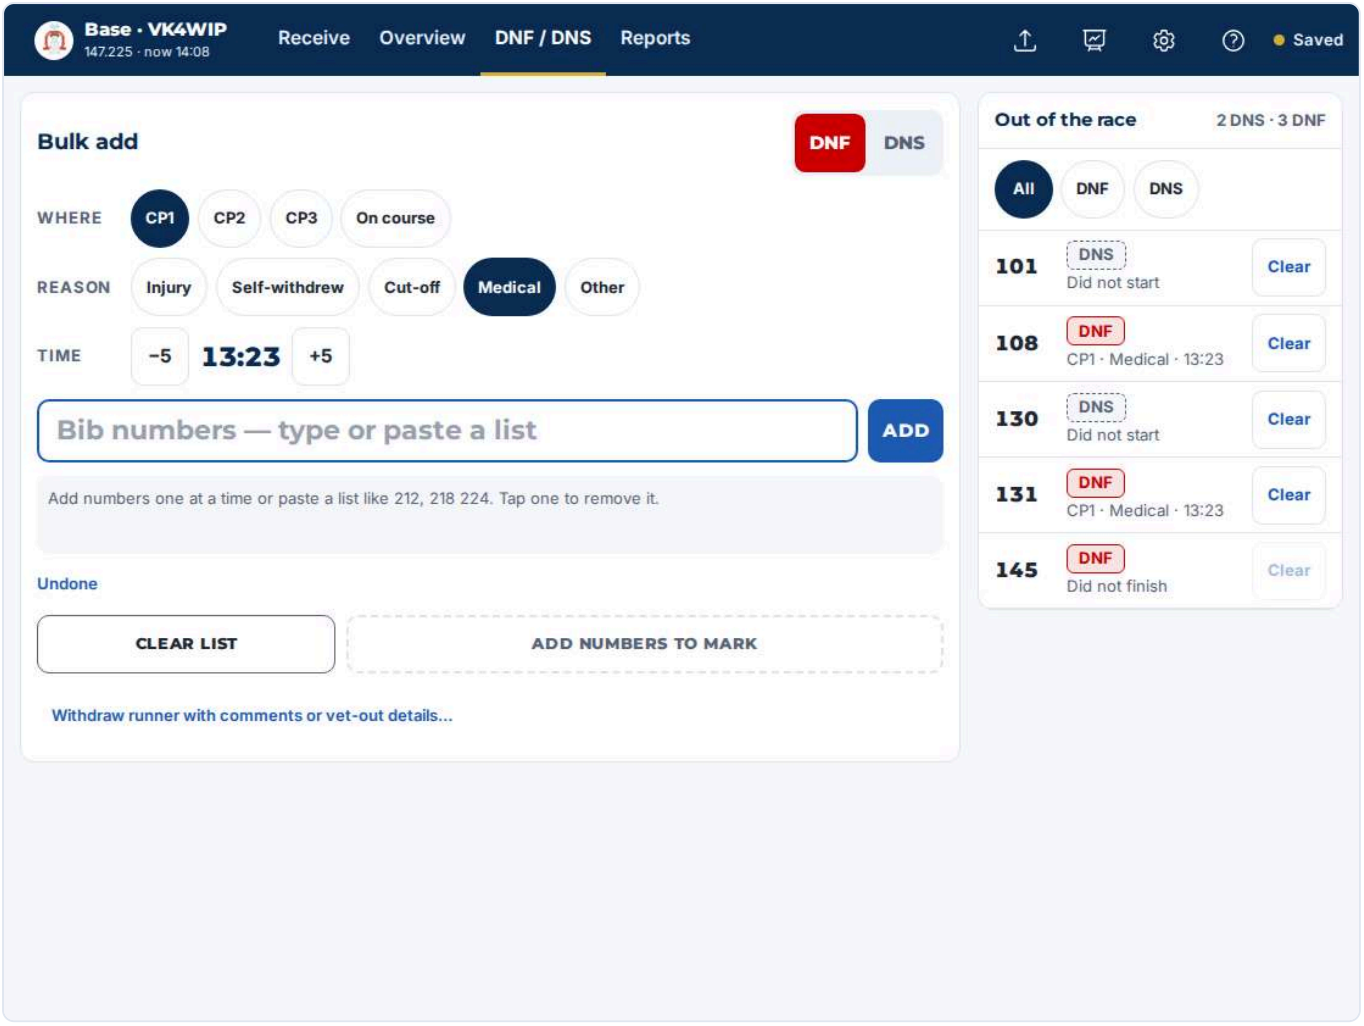


ST-13 1112×834

Plan	Fixes D3
Event	**Tap "Clear" on the DNS row for 130, then "Undo"**
Plan says	*Clear on a DNS row.*
App showed	• Row 130 after Clear: back in the race • Row 130 after Undo: "130 DNS Did not start Clear"
Status line	13:23 · Undone
Result	☐ Matches plan ☐ Issue: _____

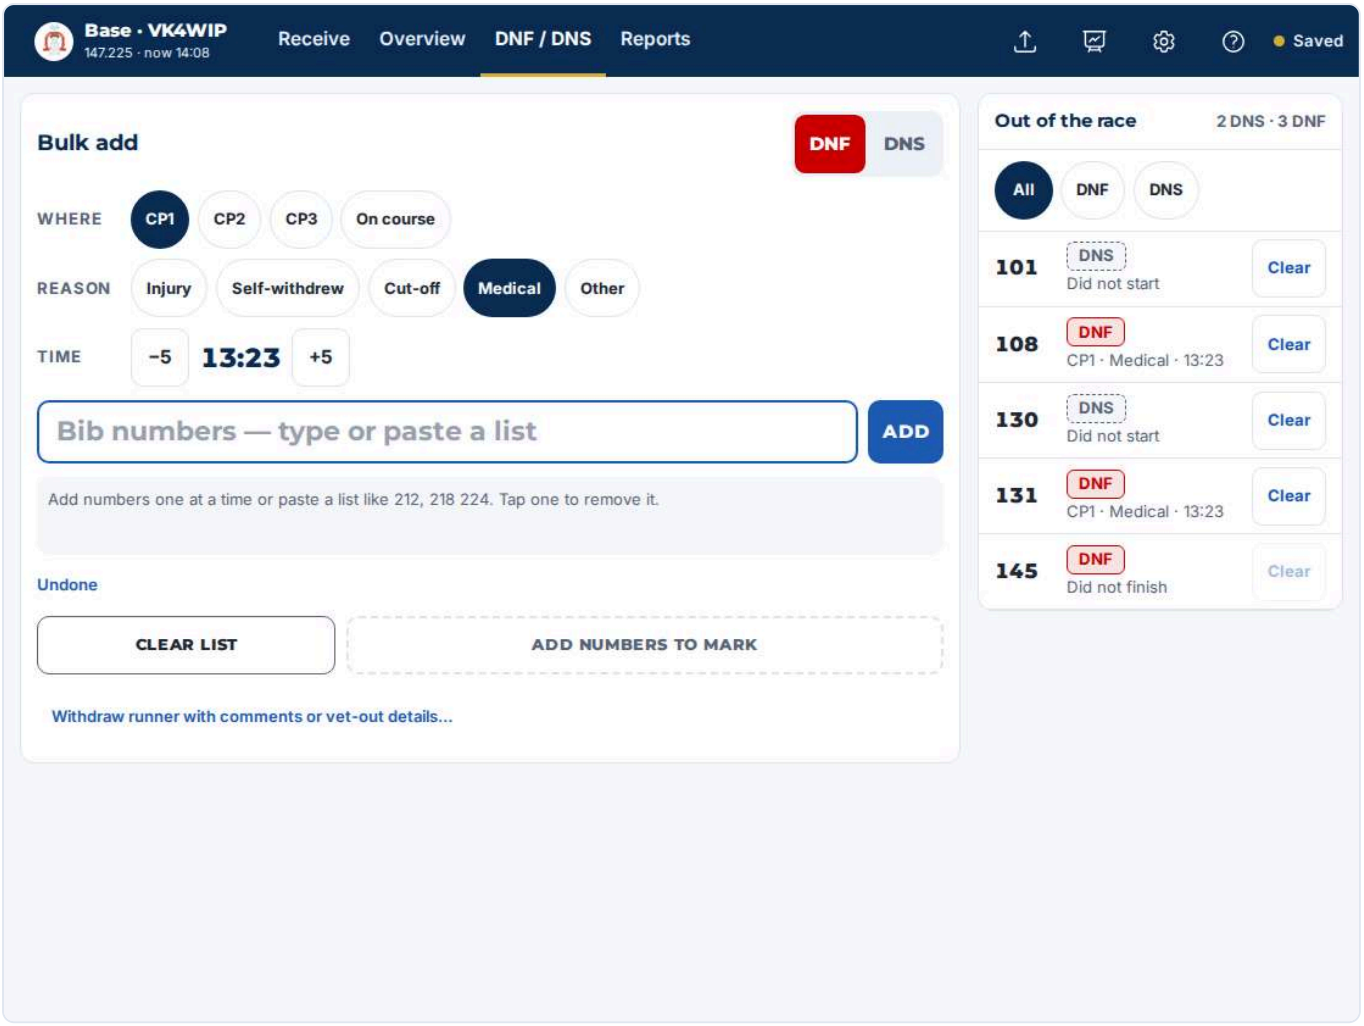


ST-14 1112×834

Plan	Fixes D3
Event	**Look at 145 (marked DNF at CP2 by the checkpoint)**
Plan says	*A checkpoint-only DNF shows Clear disabled.*
App showed	• Clear for 145: "Clear" · name "Clear DNF for 145" · title=Recorded at a checkpoint — clear it there · disabled
Status line	13:23 · Undone
Result	☐ Matches plan ☐ Issue: _____

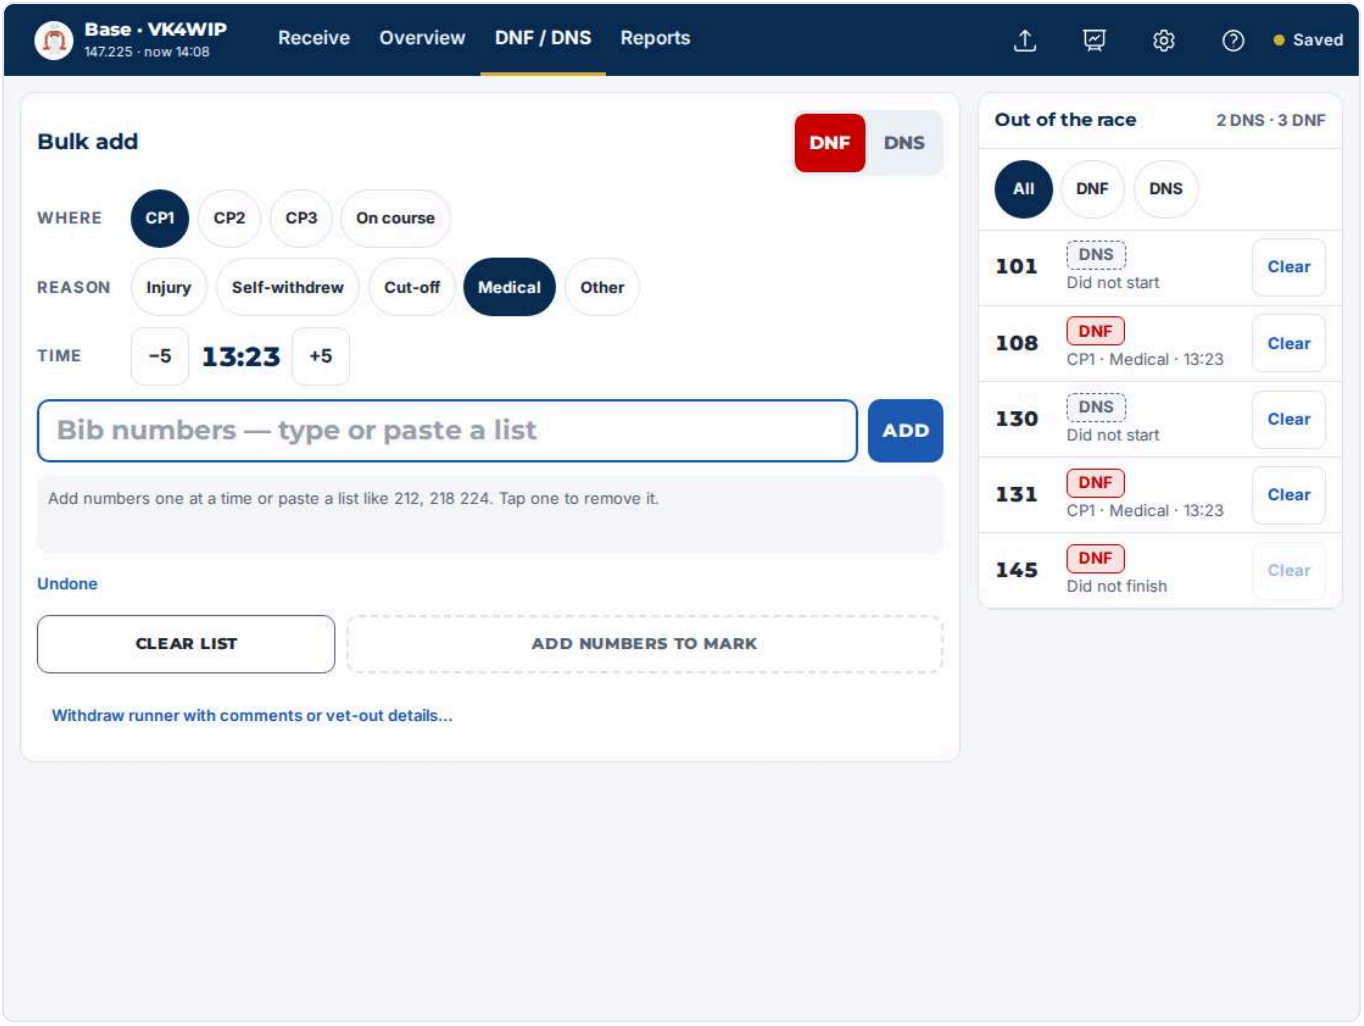


ST-15 1112×834

Plan	§4.9 validation table
Event	**Receive → CP2 → add 131 (DNF) and 101 (DNS)**
Plan says	*Marked DNF / DNS → rejected "DNF" / "DNS".*
App showed	• Chips: Remove 131, DNF | Remove 101, DNS
Status line	101 added at 13:40
Result	☐ Matches plan ☐ Issue: _____

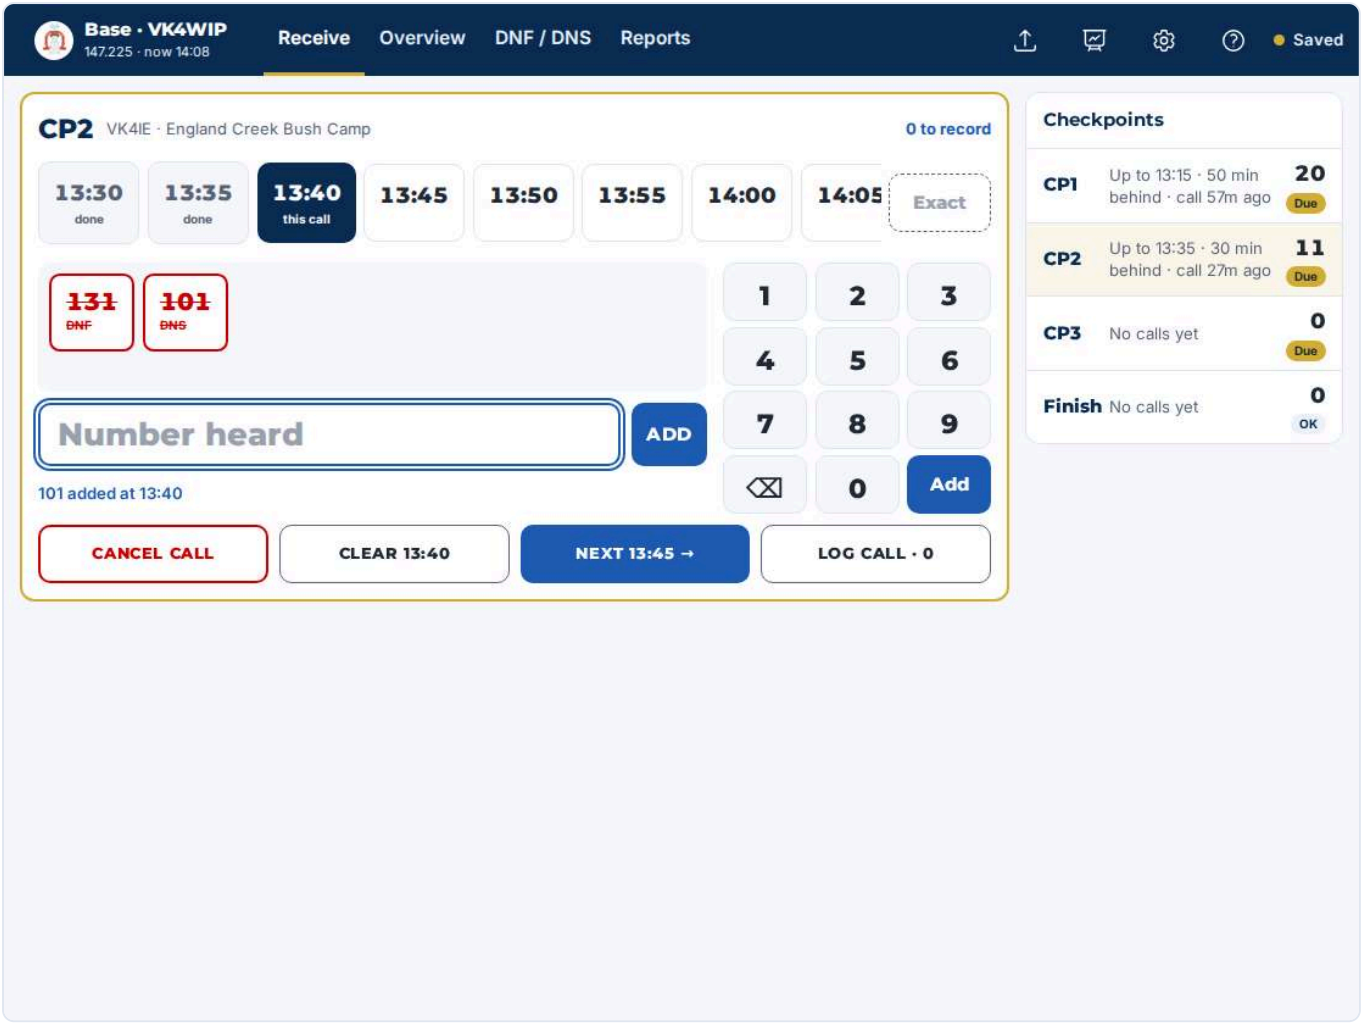


ST-16 1112×834

Plan	Fixes B11 / §3.5
Event	**Cancel call; DNF / DNS → "Withdraw runner with comments or vet-out details…"**
Plan says	*Bottom sheet with design-system components, 24-hour date/time (TimeStepper + date text, no browser datetime-local), reasons Injury, Self-withdrew, Cut-off, Medical, Other; comments; red primary "Withdraw runner", plain Cancel. No "*" reverse syntax advertised.*
App showed	• Time: "14:08" · aria-live=polite • Date: "Wed 21 Oct 2026" • Reasons: Injury, Self-withdrew, Cut-off, Medical, Other • Primary: "WITHDRAW RUNNER" · background rgb(204, 0, 0) • Mentions "*": no
Status line	14:08
Result	☐ Matches plan ☐ Issue: _____

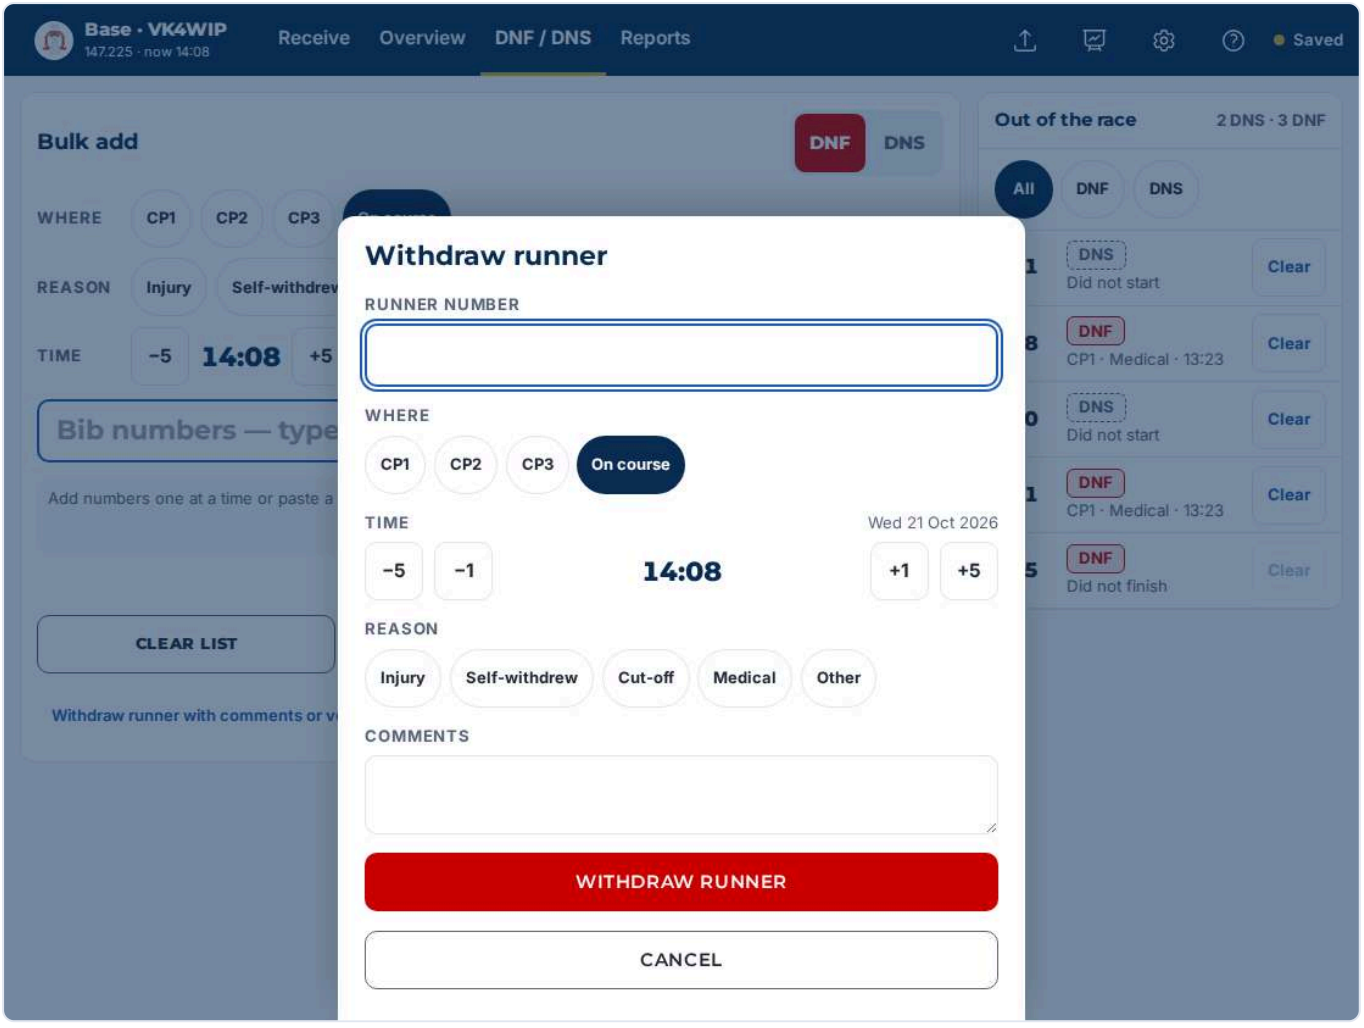


ST-17 1112×834

Plan	Fixes B11
Event	**Withdraw 133 at CP2, Injury, comment "Rolled ankle"**
Plan says	*Submits; appears in the out list; Undo offered.*
App showed	• Row 133: "133 DNF CP2 · Injury · 14:08 Clear" • Undo bar: "133 withdrawn UNDO" · role=status
Status line	14:08 · 133 withdrawn UNDO
Result	☐ Matches plan ☐ Issue: _____

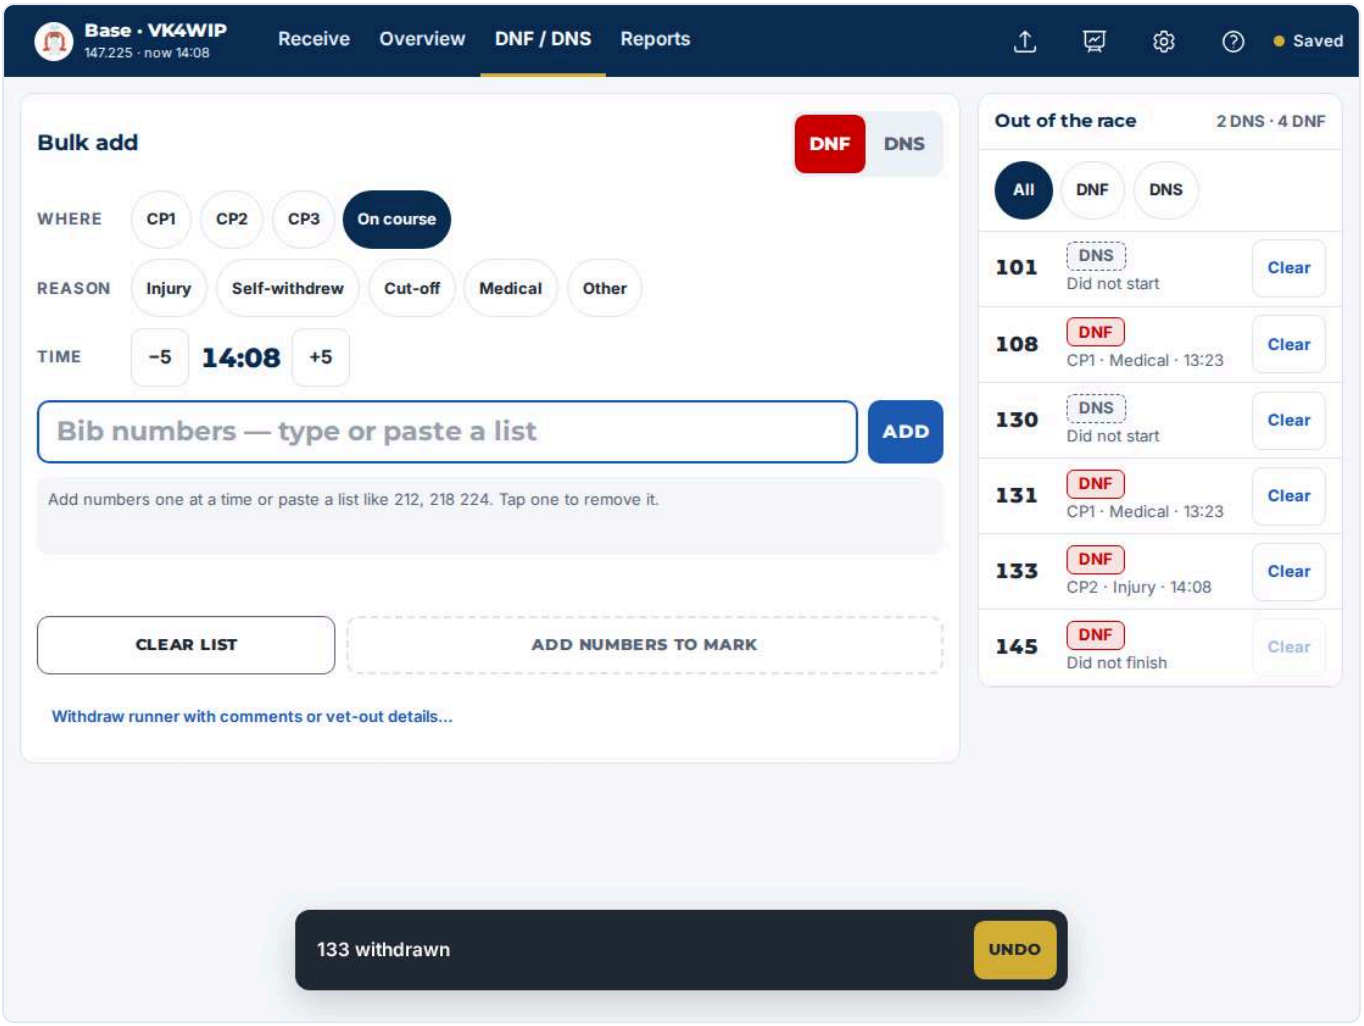

ST-18 1112×834


Plan	Fixes B11
Event	**Tap "Undo"**
Plan says	*Undo works.*
App showed	• Row 133: gone
Status line	14:08
Result	☐ Matches plan ☐ Issue: _____

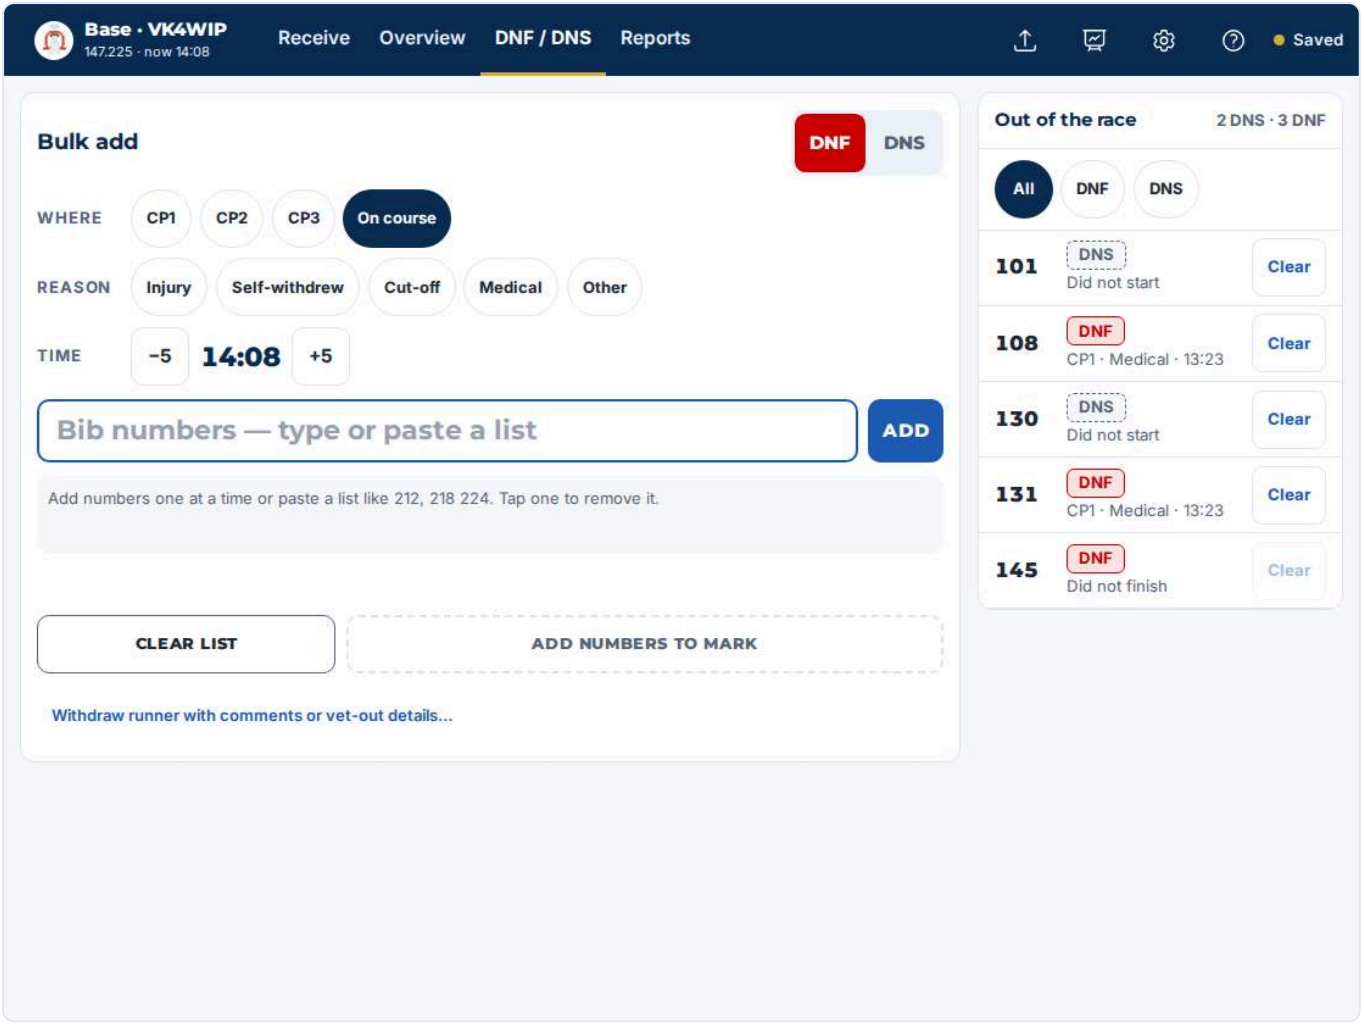

Base — Overview


BO-01 1280×800

Plan	§4.10 / Fixes A1 A4
Event	**Tap the "Overview" tab (desktop 1280)**
Plan says	*Red role="alert" only for overdue runners; if a checkpoint is only behind on calls, a gold note "CP2 hasn't reported past 10:40 · 14 expected". On course = in the race, not finished, with "N not seen yet".*
App showed	• Awaiting note: "CP2 hasn't reported past 13:35 · 10 expected" · background rgba(212, 175, 55, 0.1) • Red alerts: 0 • On course tile: "On course 55 36 not seen yet"
Result	☐ Matches plan ☐ Issue: _____

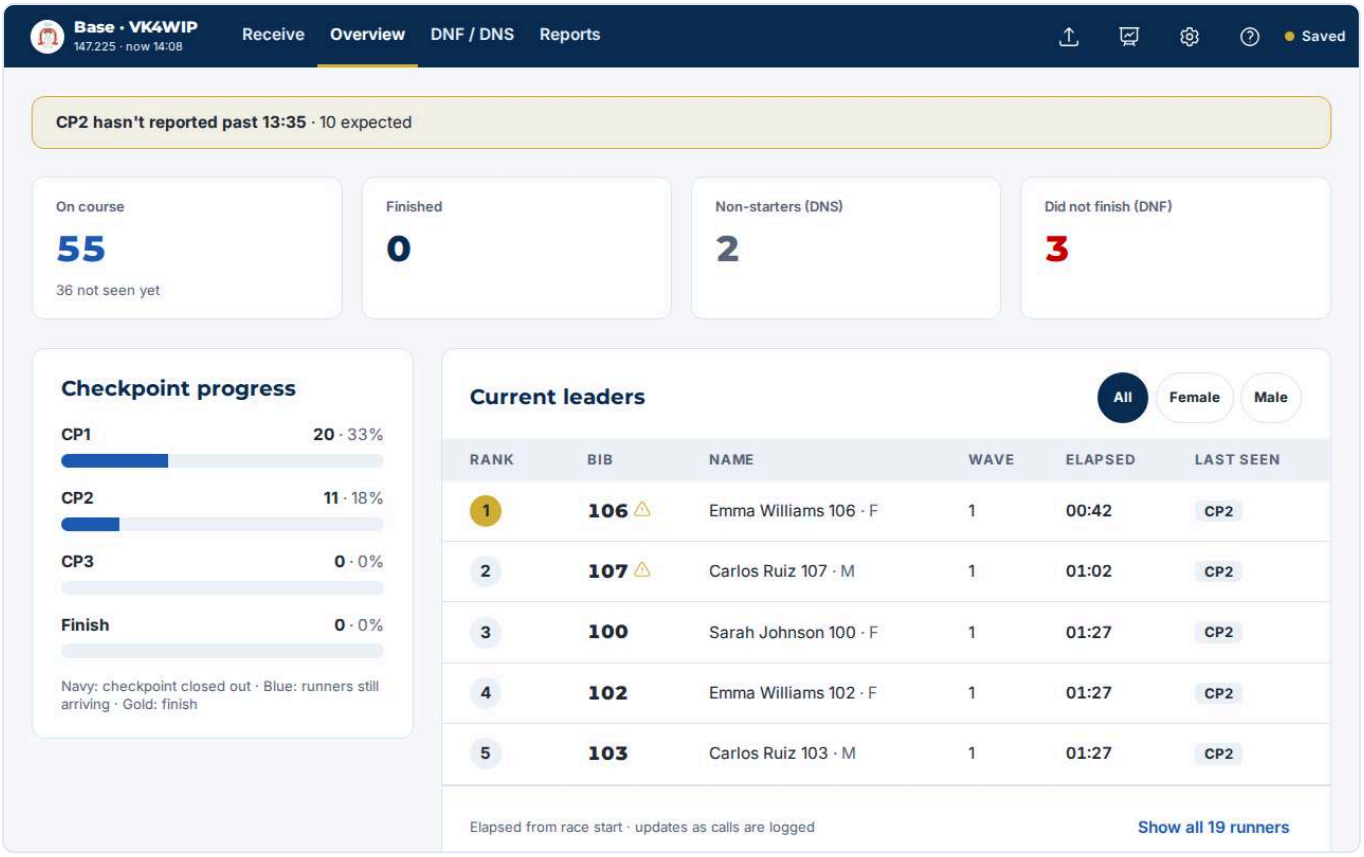


BO-02 1280×800

Plan	§4.10 / Fixes B13
Event	**Look at Current leaders**
Plan says	*Gold warning icon after the bib (aria-label "Open data issue") for duplicates, out-of-order times, sightings after DNF/DNS and impossible pace. Elapsed HH:MM.*
App showed	• Leaders: 106 ⚠ 00:42 | 107 ⚠ 01:02 | 100 01:27 | 102 01:27 | 103 01:27
Result	☐ Matches plan ☐ Issue: _____

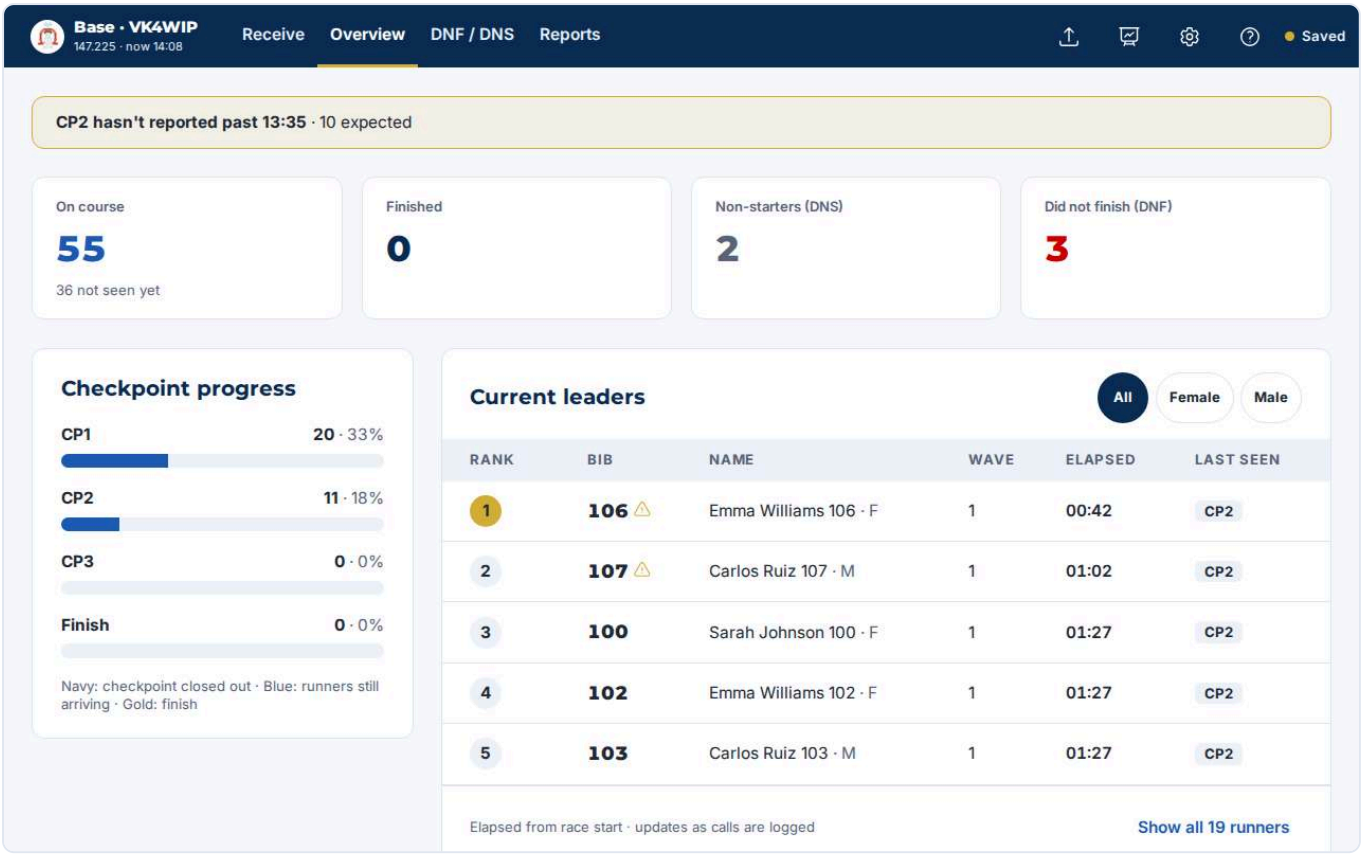


BO-03 1280×800

Plan	§4.10
Event	**Tap leader filter "Female"**
Plan says	*Leaderboard filter pills (All, Female, Male, Wave 1…).*
App showed	• Female: "Female" · aria-pressed=true · background rgb(11, 45, 83)
Result	☐ Matches plan ☐ Issue: _____

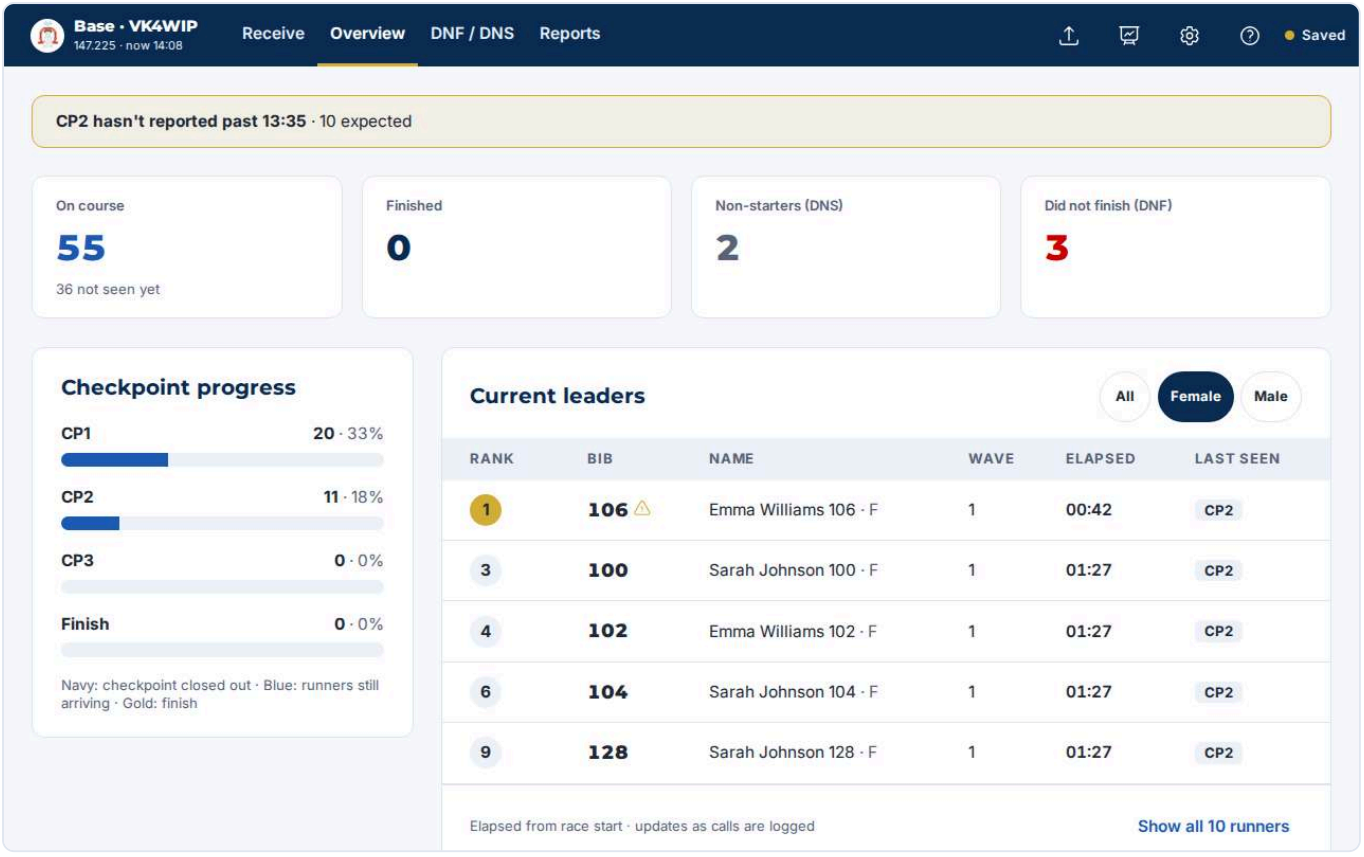


BO-04 1280×800

Plan	Fixes A1 / D3
Event	**Receive → CP2 → latest block → add 150 and 777 (not in race) → Complete → Next call → Overview**
Plan says	*Once the checkpoint has reported past expected + 10 min, the runners are overdue: red banner with role="alert".*
App showed	• Alert: "10 runners overdue at CP2 Not reported although the checkpoint has reported past their expected time. 110, 111, 112, 113 +6 VIEW RUNNERS" · role=alert · background rgba(204, 0, 0, 0.1)
Status line	10 runners overdue at CP2 Not reported although the checkpoint has reported past their expected time. 110, 111, 112, 113 +6 VIEW RUNNERS
Result	☐ Matches plan ☐ Issue: _____

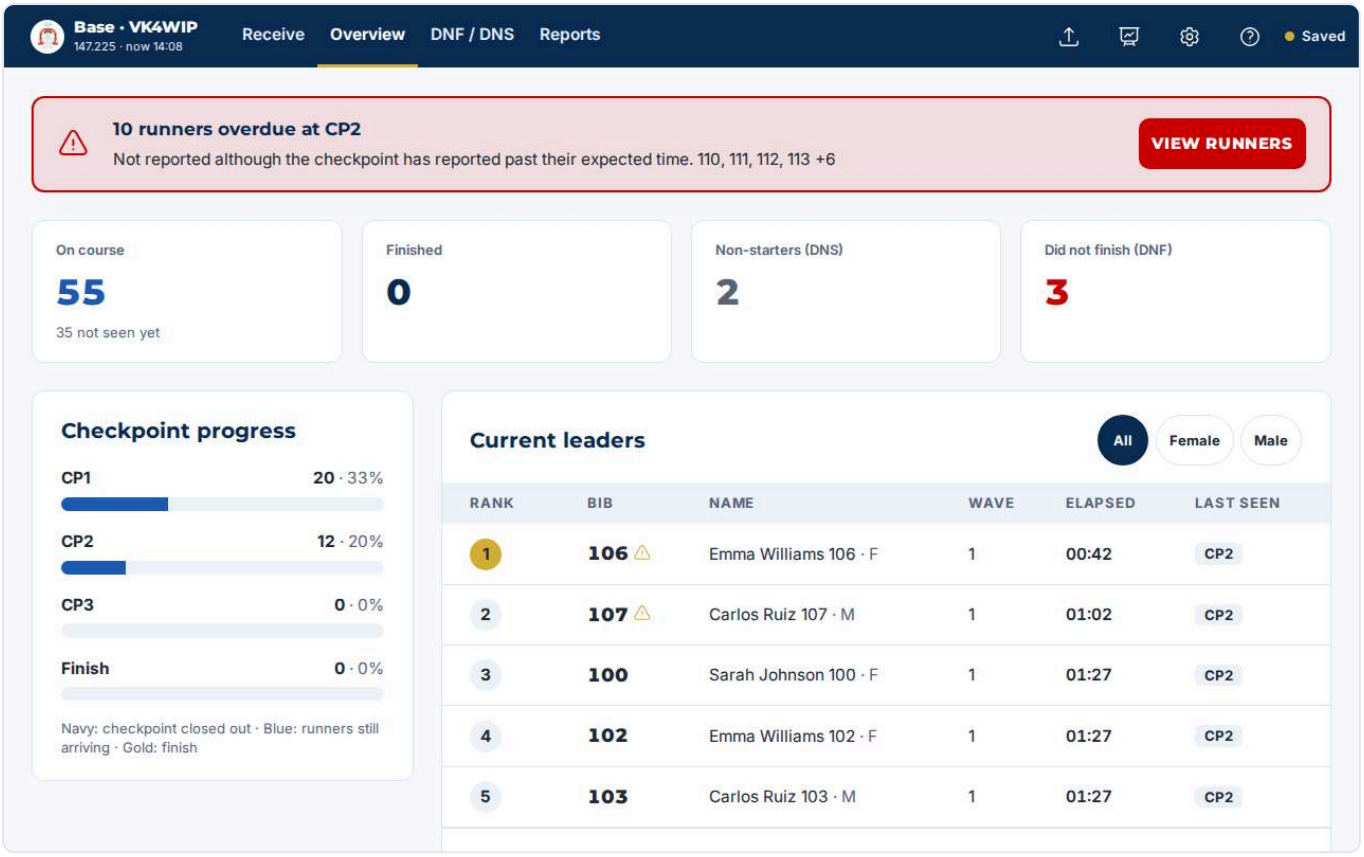

BO-05 1280×800

Plan	§4.10
Event	**Tap "View runners" on the overdue alert**
Plan says	*"View runners" → Reports › Overdue.*
App showed	• Report heading: "Overdue runners"
Result	☐ Matches plan ☐ Issue: _____

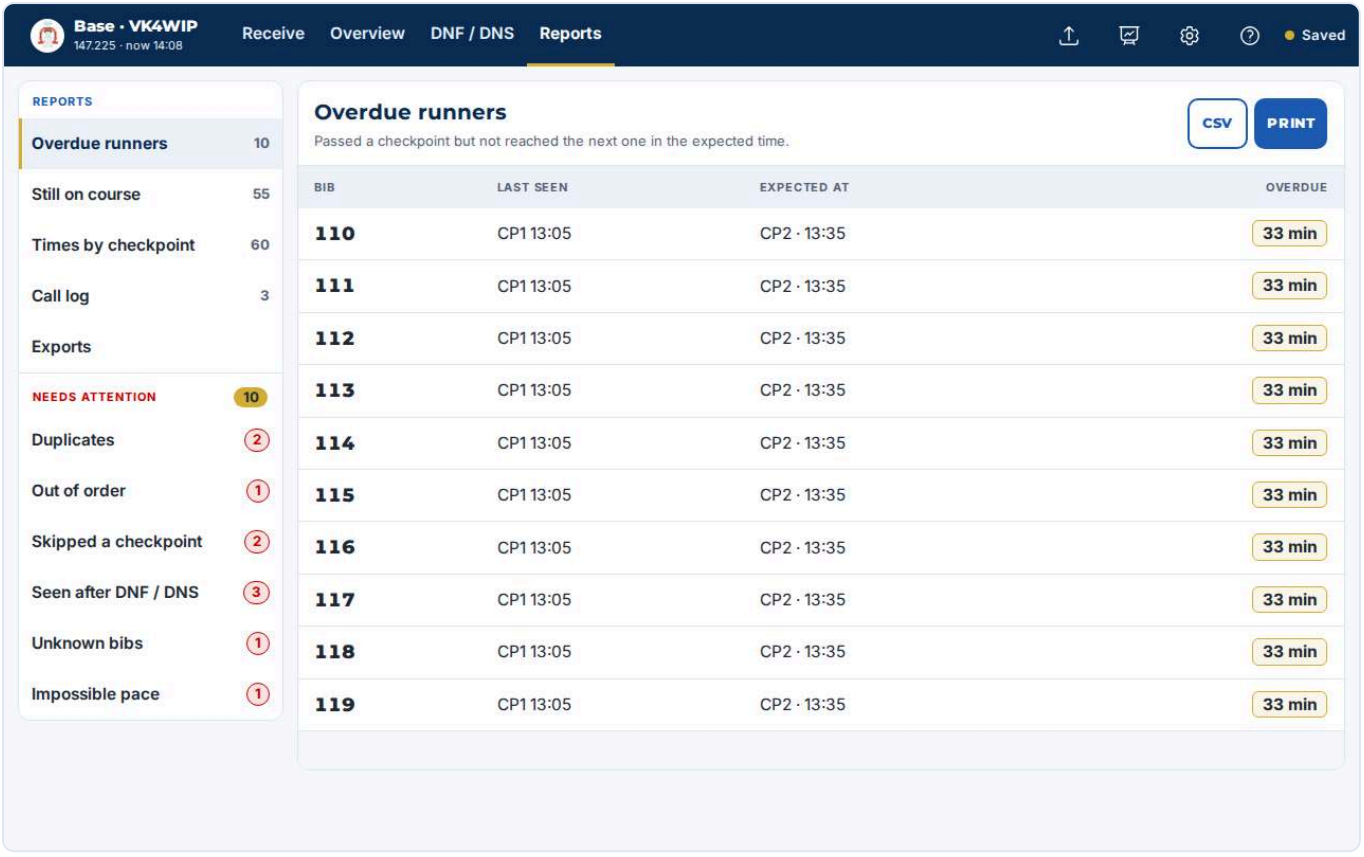

Base — Reports & data checks

RP-01 1280×800

Plan §4.12 / Fixes A1


Event **Reports › "Overdue runners"**

Plan says *Bib, last seen, expected at, overdue minutes. An "Awaiting report" group underneath, by checkpoint, with "reported up to HH:MM".*

App showed


- Overdue rows: 10
- First row: 110 CP1 13:05 CP2 · 13:35 33 min
- Awaiting report group: none — CP2 has now reported past everyone

Result ☐ Matches plan ☐ Issue: _____

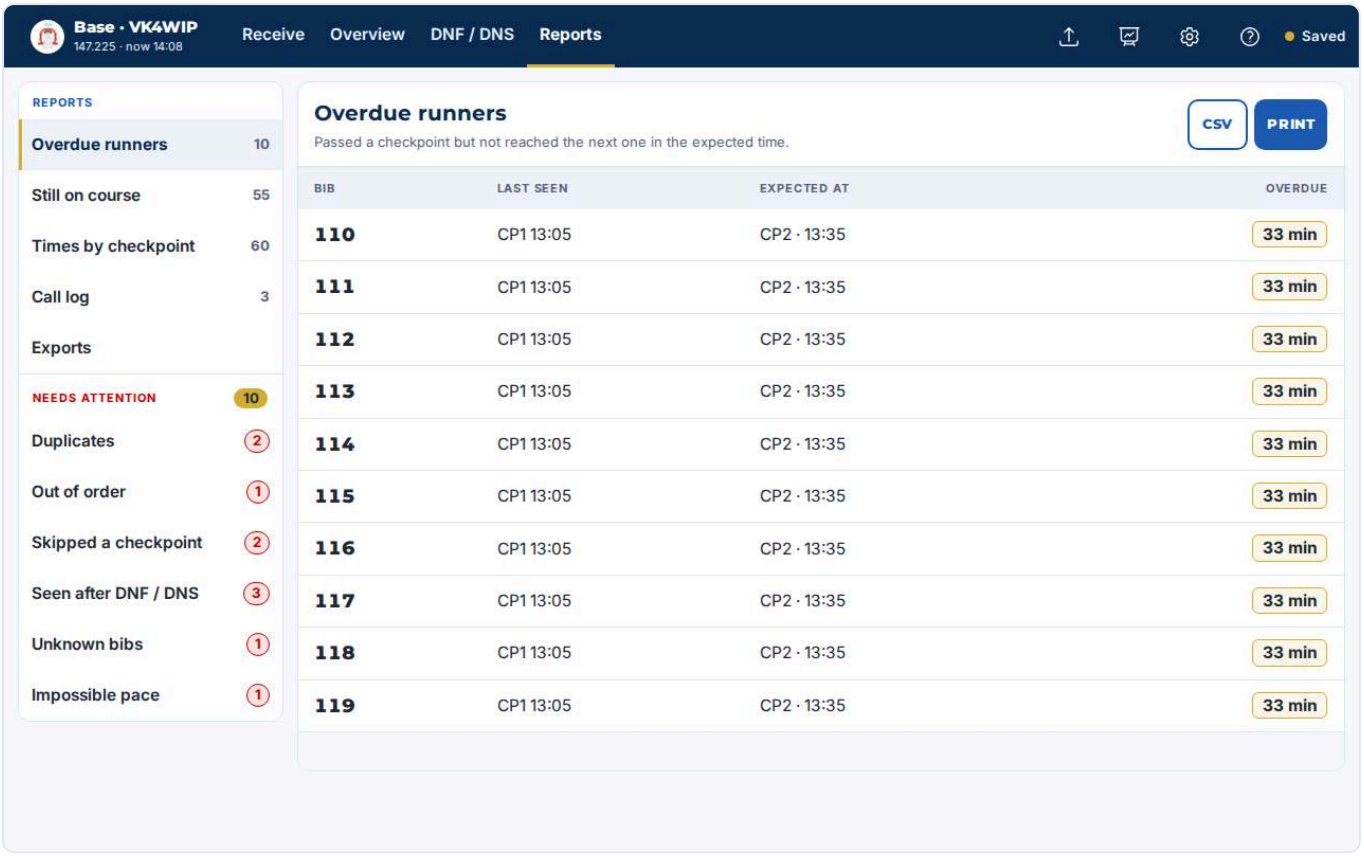


RP-02 1280×800

Plan	§4.12 / Fixes A1
Event	**Click "CSV"**
Plan says	*CSV gets a Status column.*
App showed	• Downloaded: Mt-Glorious-Mountain-Trails-overdue-runners.csv • First lines: Bib,Status,Last seen,Last time,Expected at,Expected time,Late (min),Next CP reported up to | 110,Overdue,CP1,13:05,CP2,13:35,33,14:05 | 111,Overdue,CP1,13:05,CP2,13:35,33,14:05
Result	☐ Matches plan ☐ Issue: _____

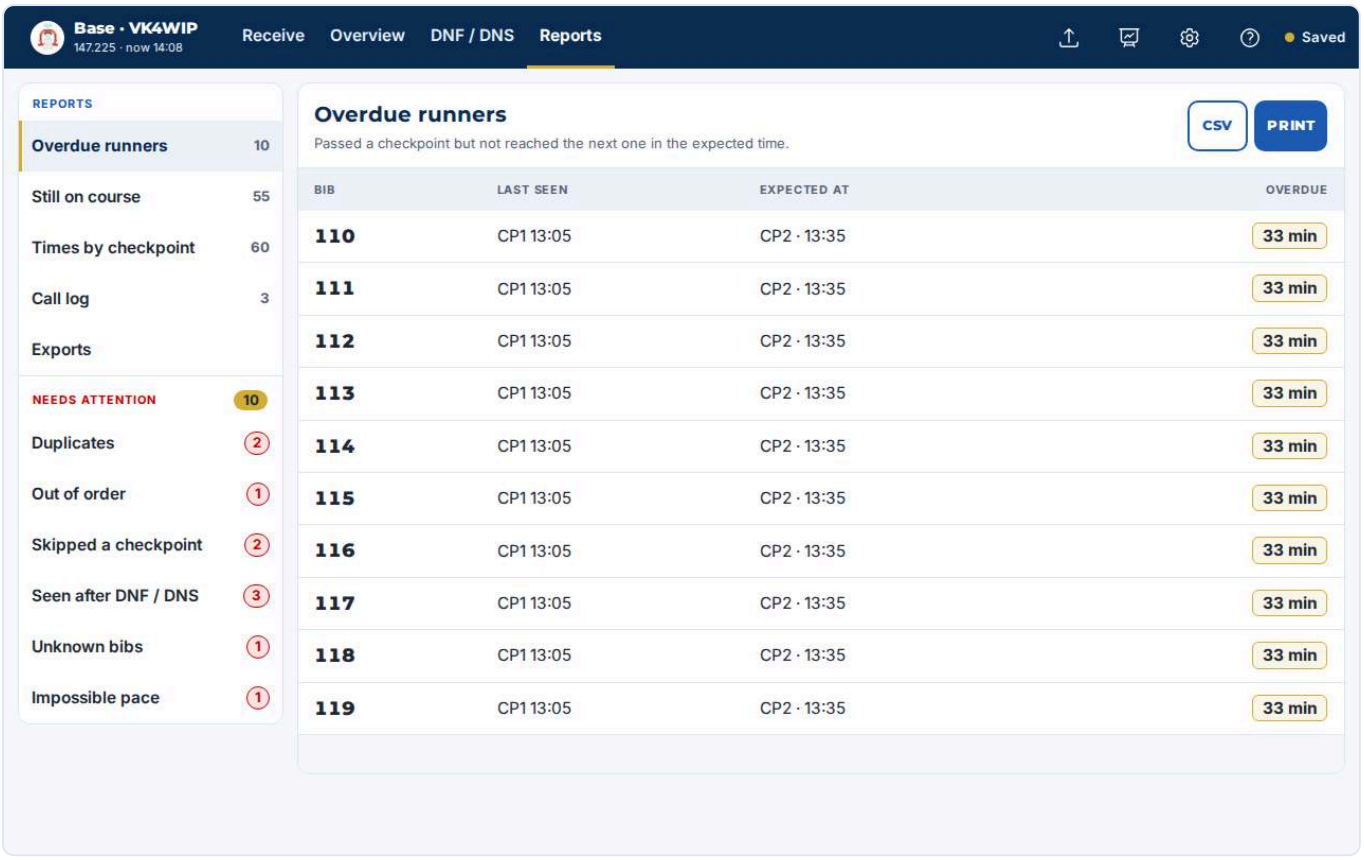


RP-03 1280×800

Plan	Fixes D3
Event	**Click "Print"**
Plan says	*Print.*
App showed	• window.print() called: 1
Result	☐ Matches plan ☐ Issue: _____

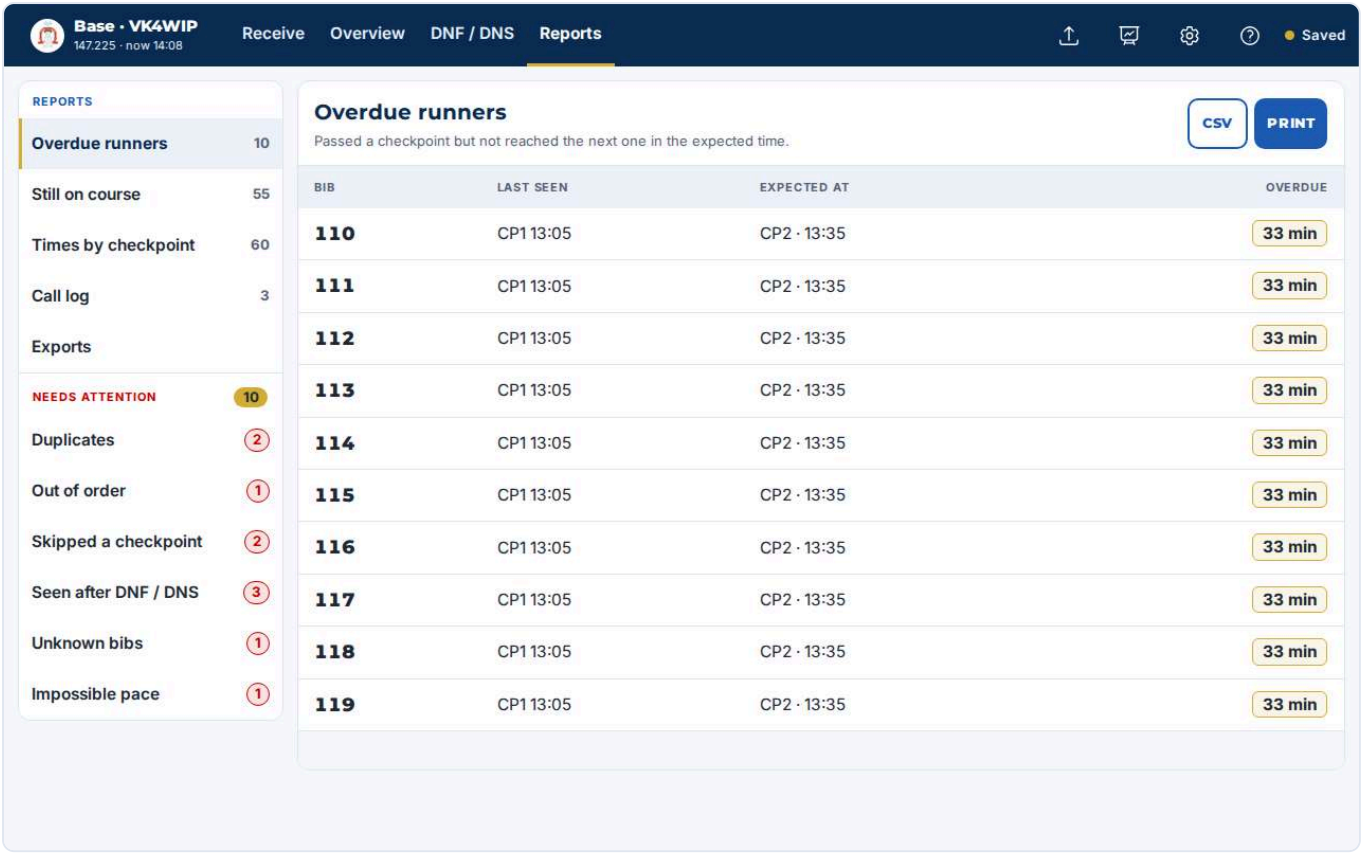

RP-04 1280×800

Plan	§4.12 / Fixes A4
Event	**Click "Still on course"**
Plan says	*Same count as the Overview tile; grouped by last checkpoint passed.*
App showed	• Sidebar: "Still on course 55" • Not seen since start: "Not seen since start 35 120, 121, 122, 123, 124, 125, 126, 127, 129, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 146, 147, 148, 149, 151, 1..."
Result	☐ Matches plan ☐ Issue: _____

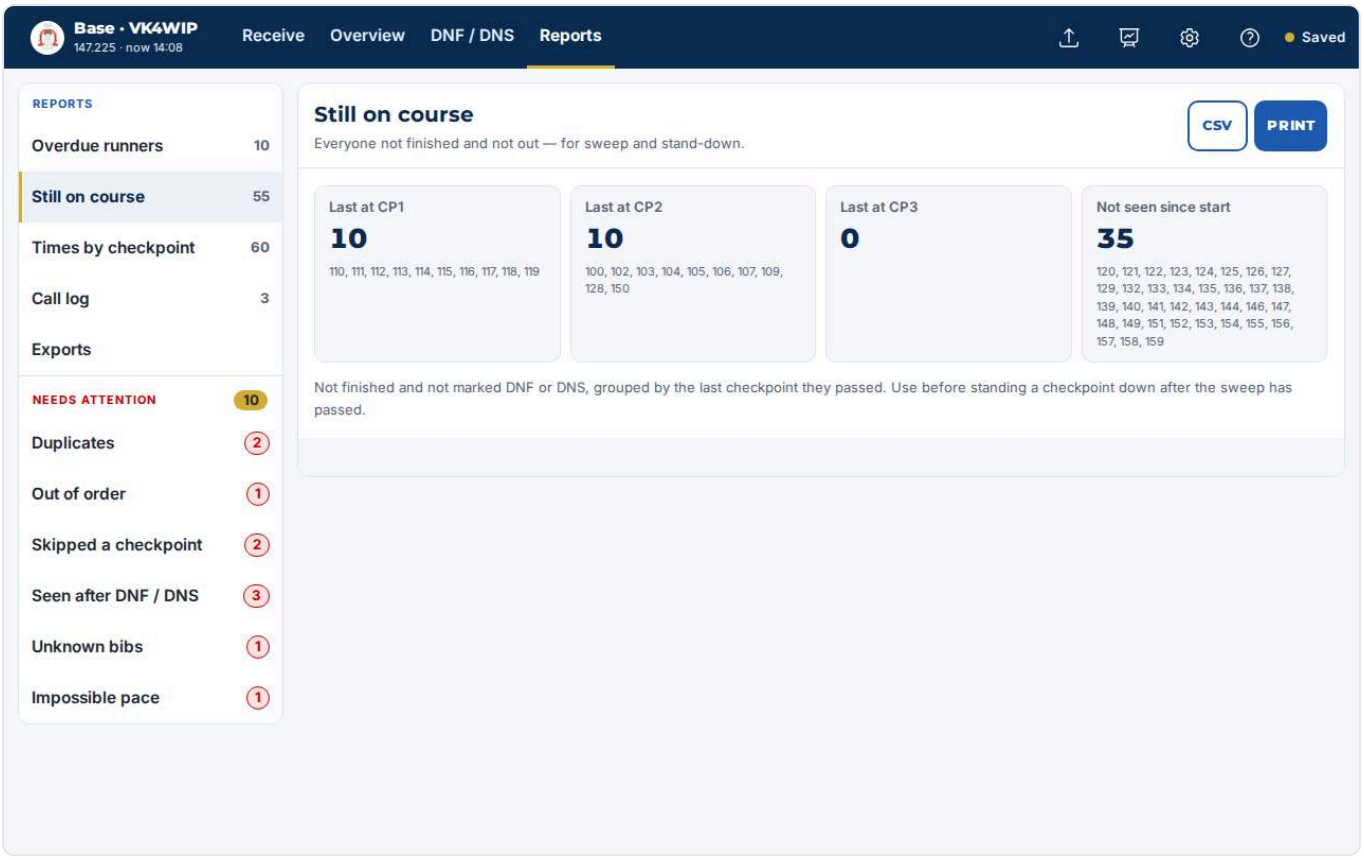

RP-05 1280×800


Plan §4.12 / Fixes A5

Event **Click "Times by checkpoint"**

Plan says *Never replace a recorded time. Status column (DNS, DNF @CPx); DNF only in an empty cell at the withdrawal checkpoint; a time recorded while DNS / after DNF has a gold outline.*

App showed
- Row 101: "101 DNS 13:05 13:35 — —"
- Flagged cell: "13:05" · title=Recorded after DNS/DNF · border 2px solid rgb(212, 175, 55)

Result ☐ Matches plan ☐ Issue: _____

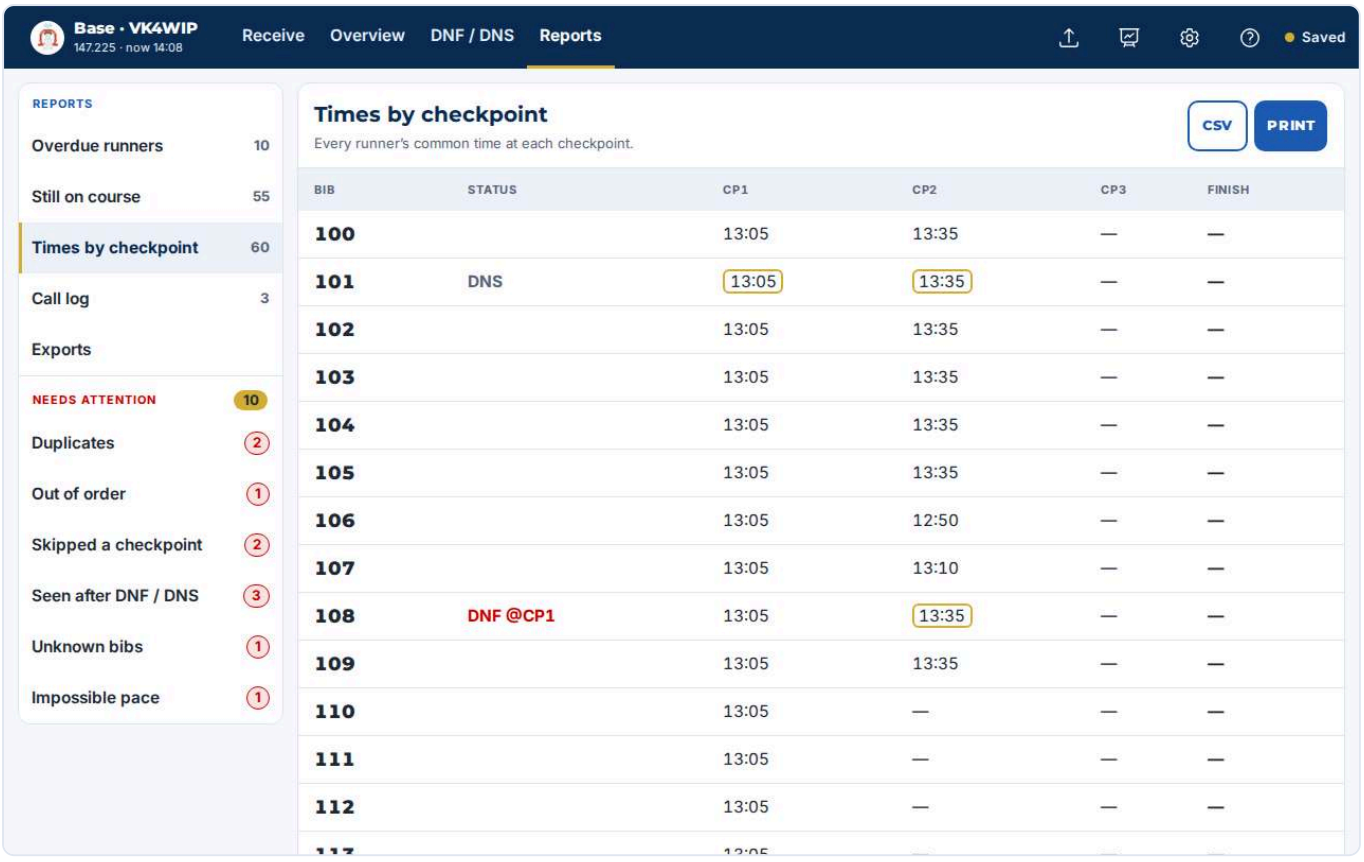

RP-06 1280×800


Plan §4.12

Event **Click "Call log"**

Plan says *Per checkpoint: calls received, numbers, last call time, up to.*


App showed
- CP1 row: "CP1 1 0 13:11 13:15"

Result ☐ Matches plan ☐ Issue: _____

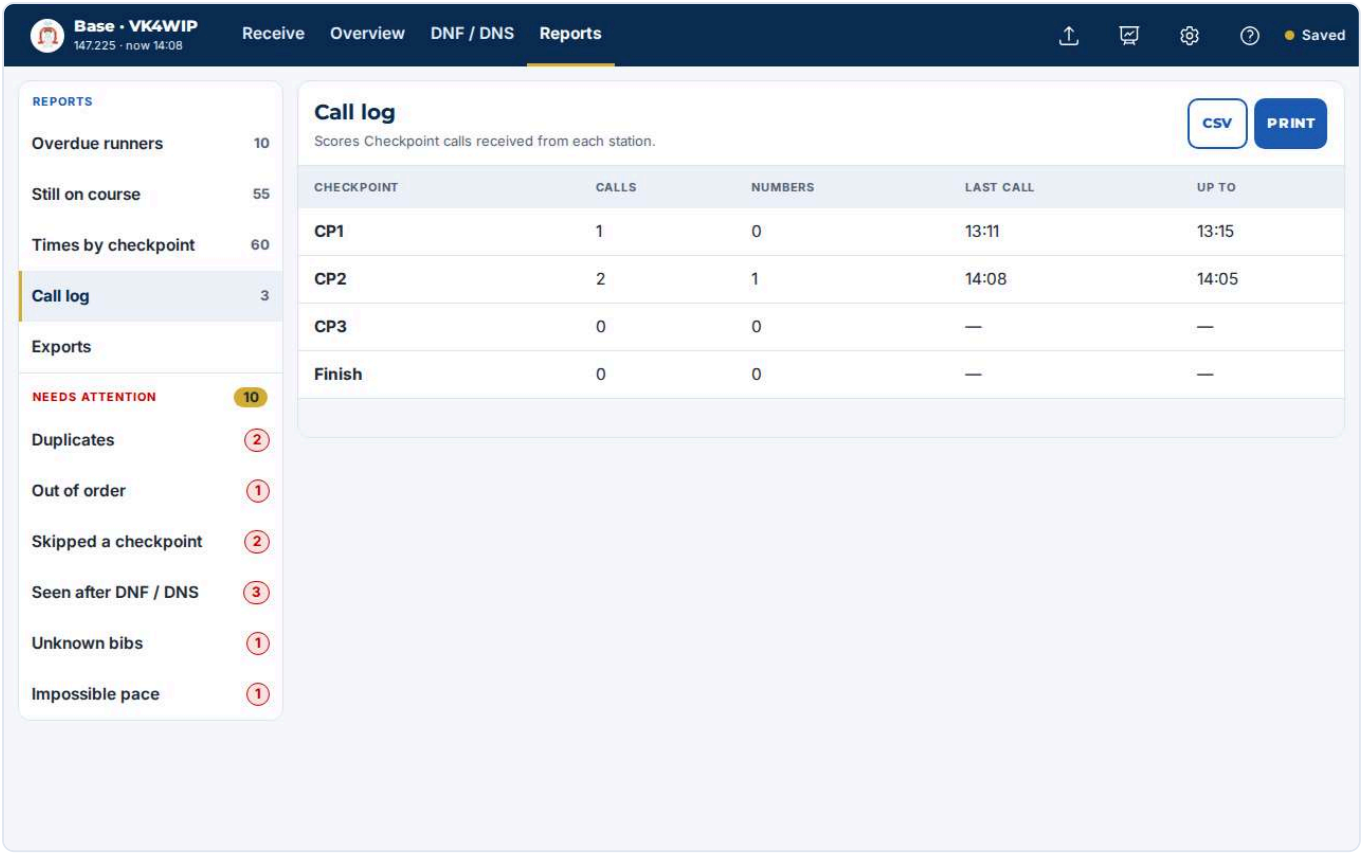


RP-07 1280×800

Plan	§4.12 Needs attention
Event	**Click "Duplicates"**
Plan says	*Keep A / Keep B (or Merge if identical).*
App showed	• 105: "105 CP1 — 2 times 13:05 (call 13:11) and 13:15 (call 13:21) Keep 13:05 Keep 13:15" • 115: "115 CP1 — same time twice 13:05 in 2 calls Merge"
Result	☐ Matches plan ☐ Issue: _____

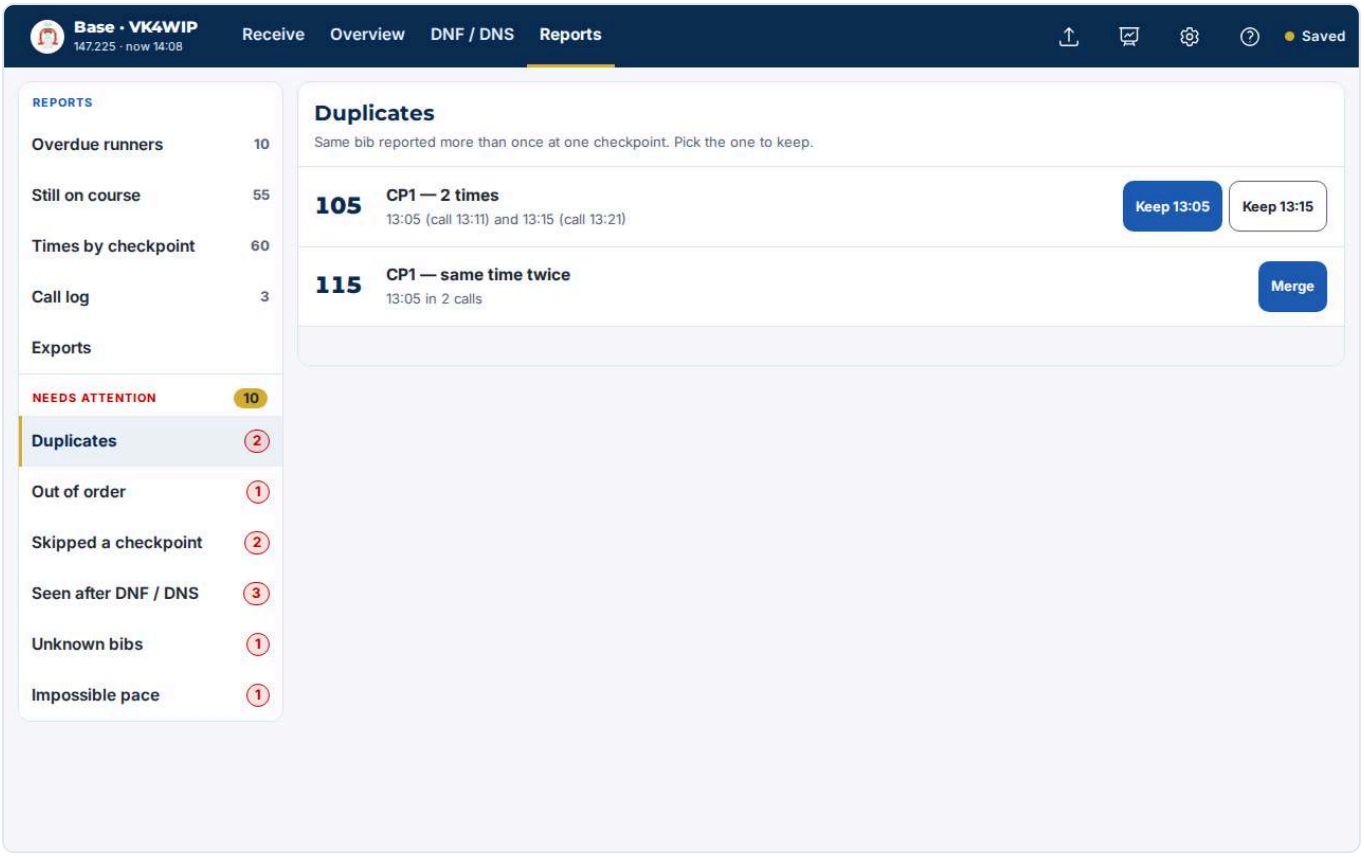


RP-08 1280×800

Plan	§4.12 / Fixes B12
Event	**Click the first "Keep HH:MM" on 105**
Plan says	*Resolving removes it; Undo labelled with what it undoes.*
App showed	• Status line: "105: Keep 13:05" · aria-live=polite • Undo: "Undo 105: Keep 13:05"
Status line	105: Keep 13:05
Result	☐ Matches plan ☐ Issue: _____

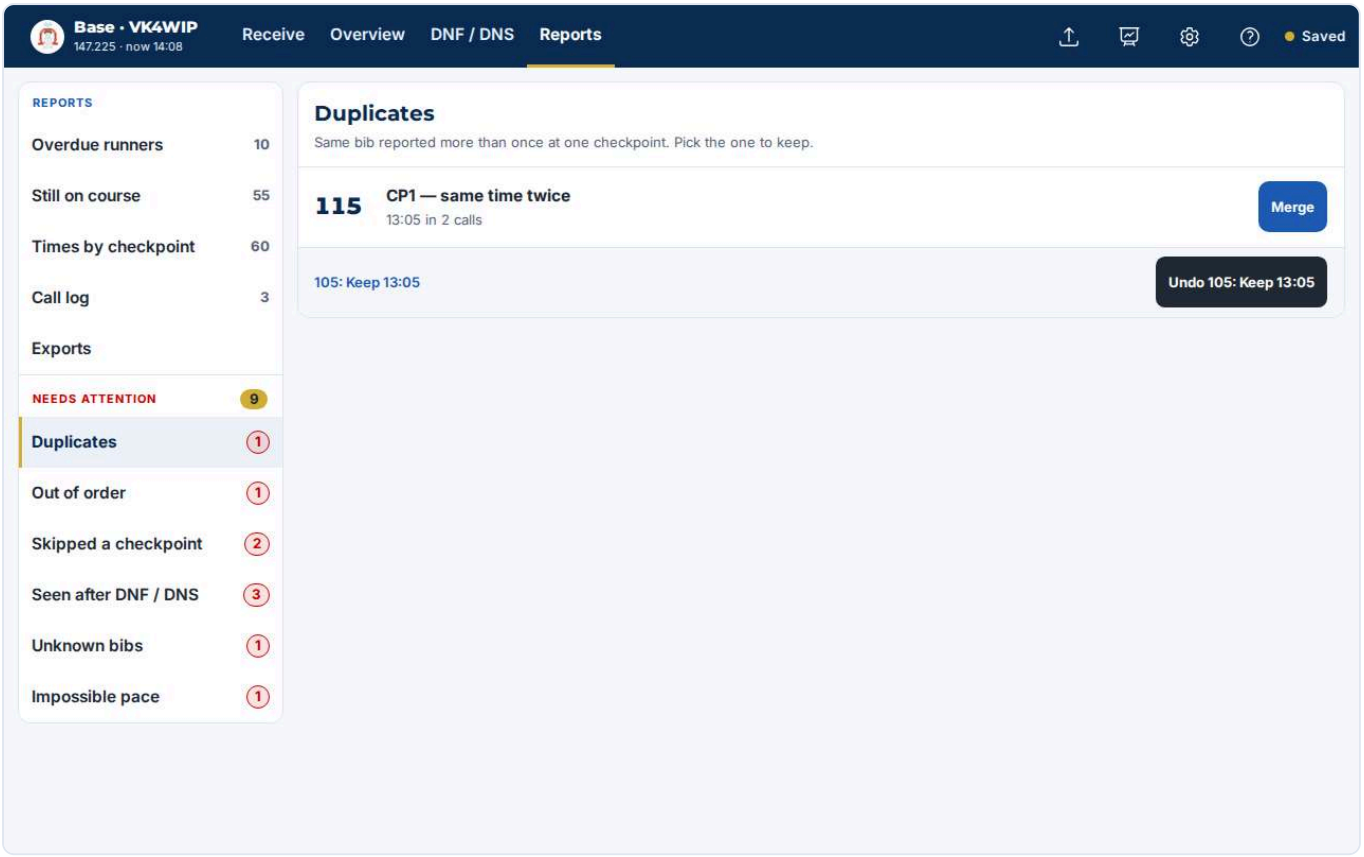


RP-09 1280×800

Plan	§4.12
Event	**Click the Undo**
Plan says	*Undo brings it back.*
App showed	• 105: "105 CP1 — 2 times 13:05 (call 13:11) and 13:15 (call 13:21) Keep 13:05 Keep 13:15"
Status line	Undone
Result	☐ Matches plan ☐ Issue: _____

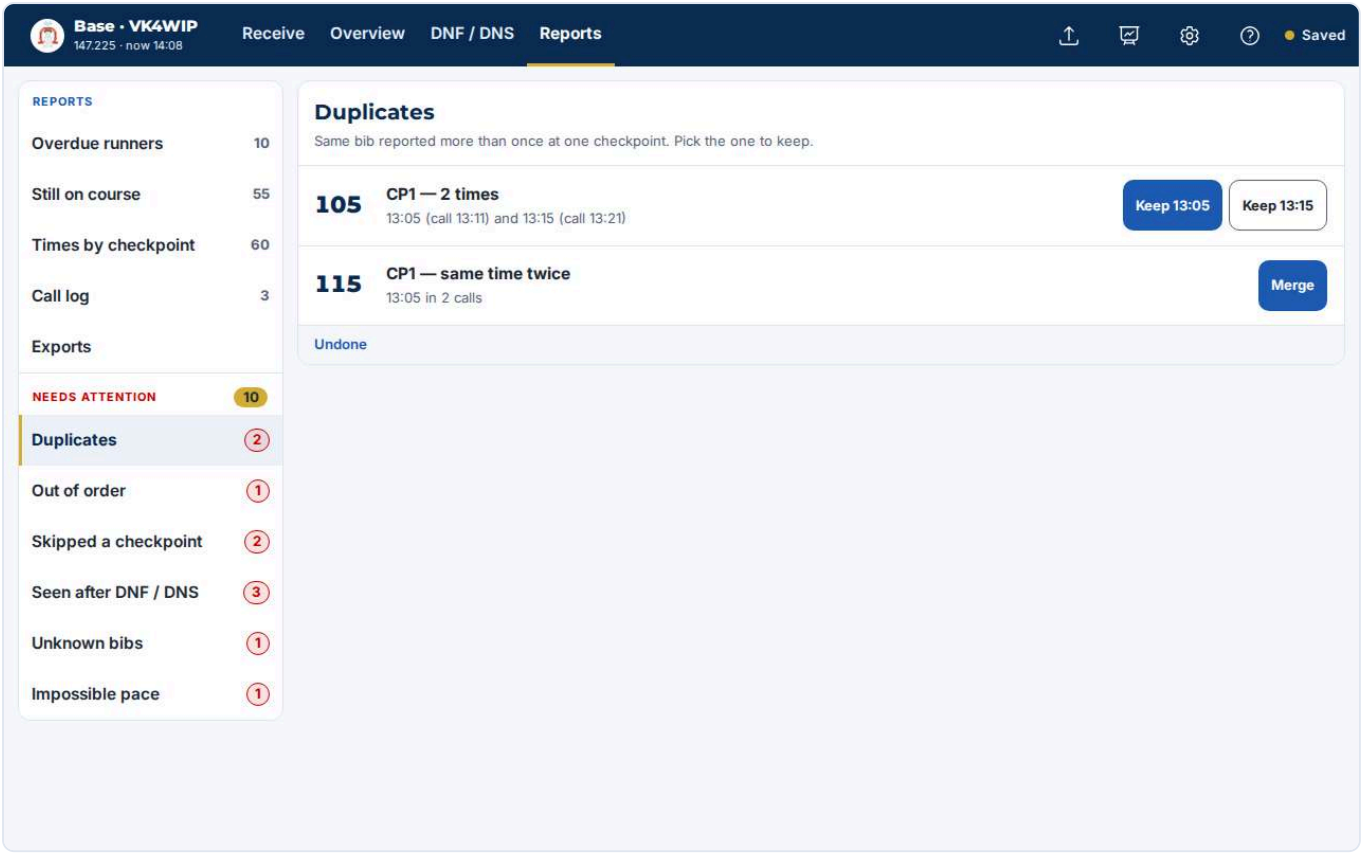


RP-10 1280×800

Plan	Fixes D3
Event	**Click "Merge" on 115 (same time twice)**
Plan says	*Merge (identical duplicates).*
App showed	• Status line: "115: Merge" · aria-live=polite • 115 row: resolved
Status line	115: Merge
Result	☐ Matches plan ☐ Issue: _____

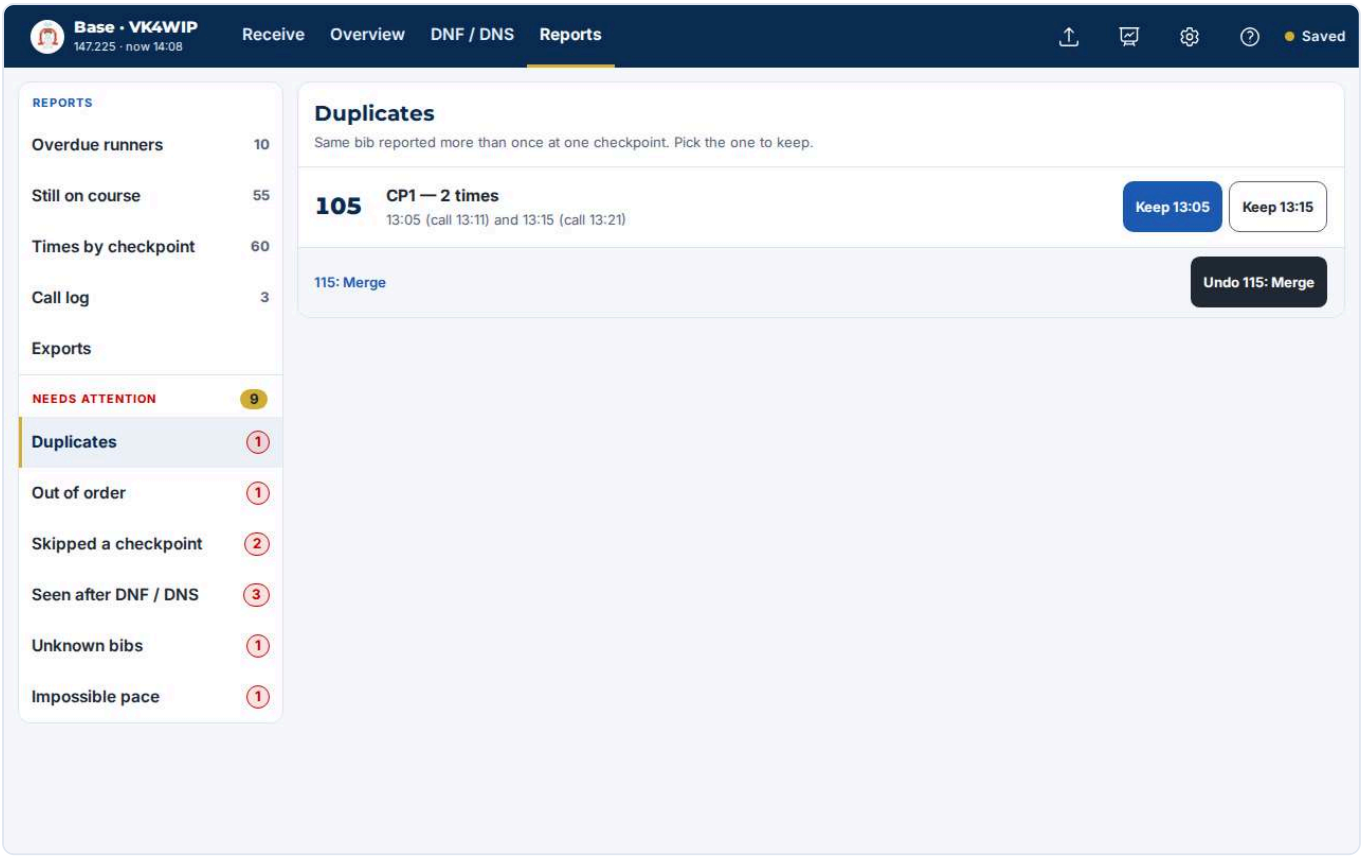


RP-11 1280×800

Plan	§4.12 / Fixes B12
Event	**Click "Out of order"**
Plan says	*Ask CPx / Mark checked. The Undo from the last list is gone.*
App showed	• 106: "106 CP2 before CP1 CP1 13:05 → CP2 12:50 Ask CP2 Mark checked" • Undo button: none
Result	☐ Matches plan ☐ Issue: _____

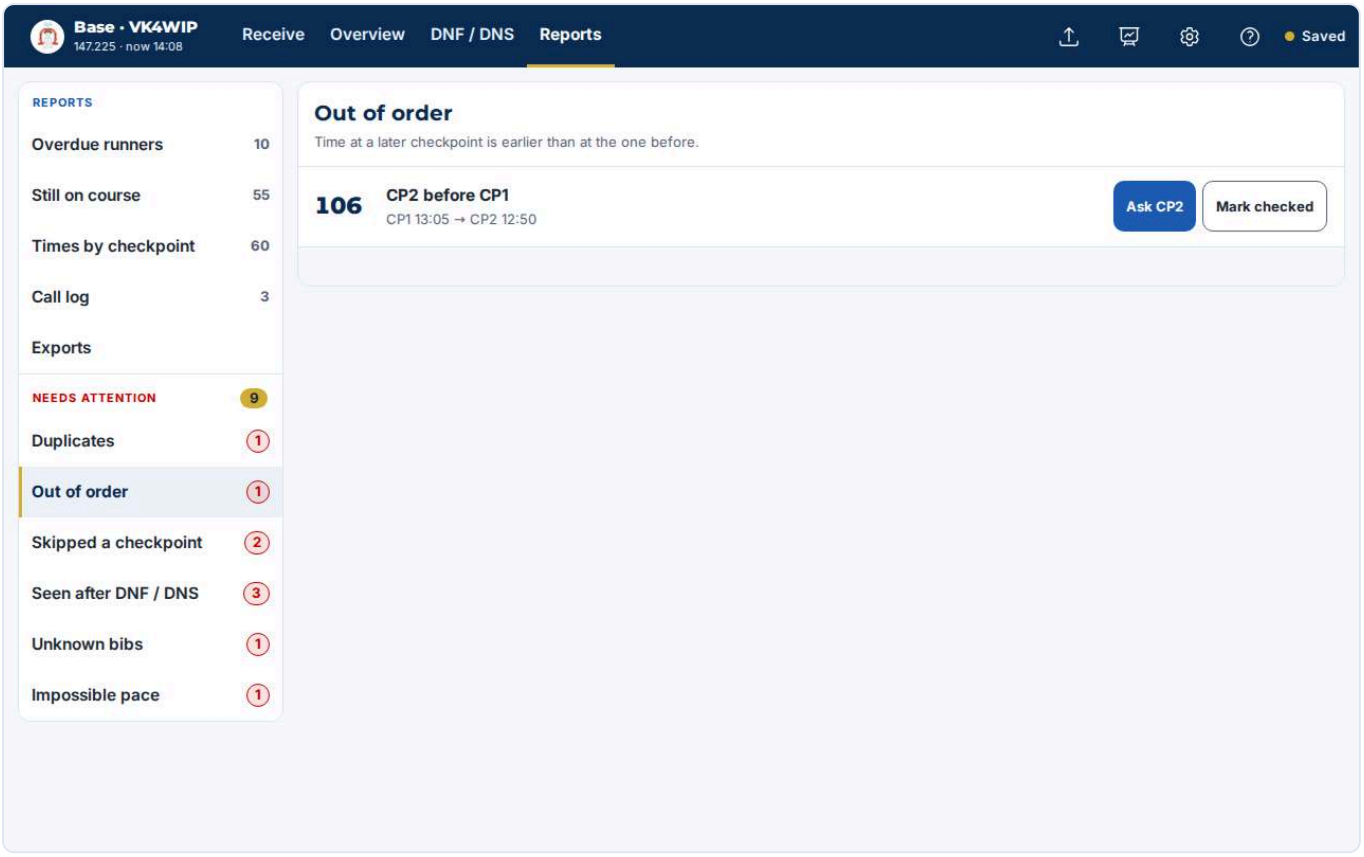


RP-12 1280×800

Plan	§4.12
Event	**Click "Ask CP2"**
Plan says	*Resolutions persist so resolved items don't reappear.*
App showed	• Status line: "106: Ask CP2" · aria-live=polite • Undo: "Undo 106: Ask CP2"
Status line	106: Ask CP2
Result	☐ Matches plan ☐ Issue: _____

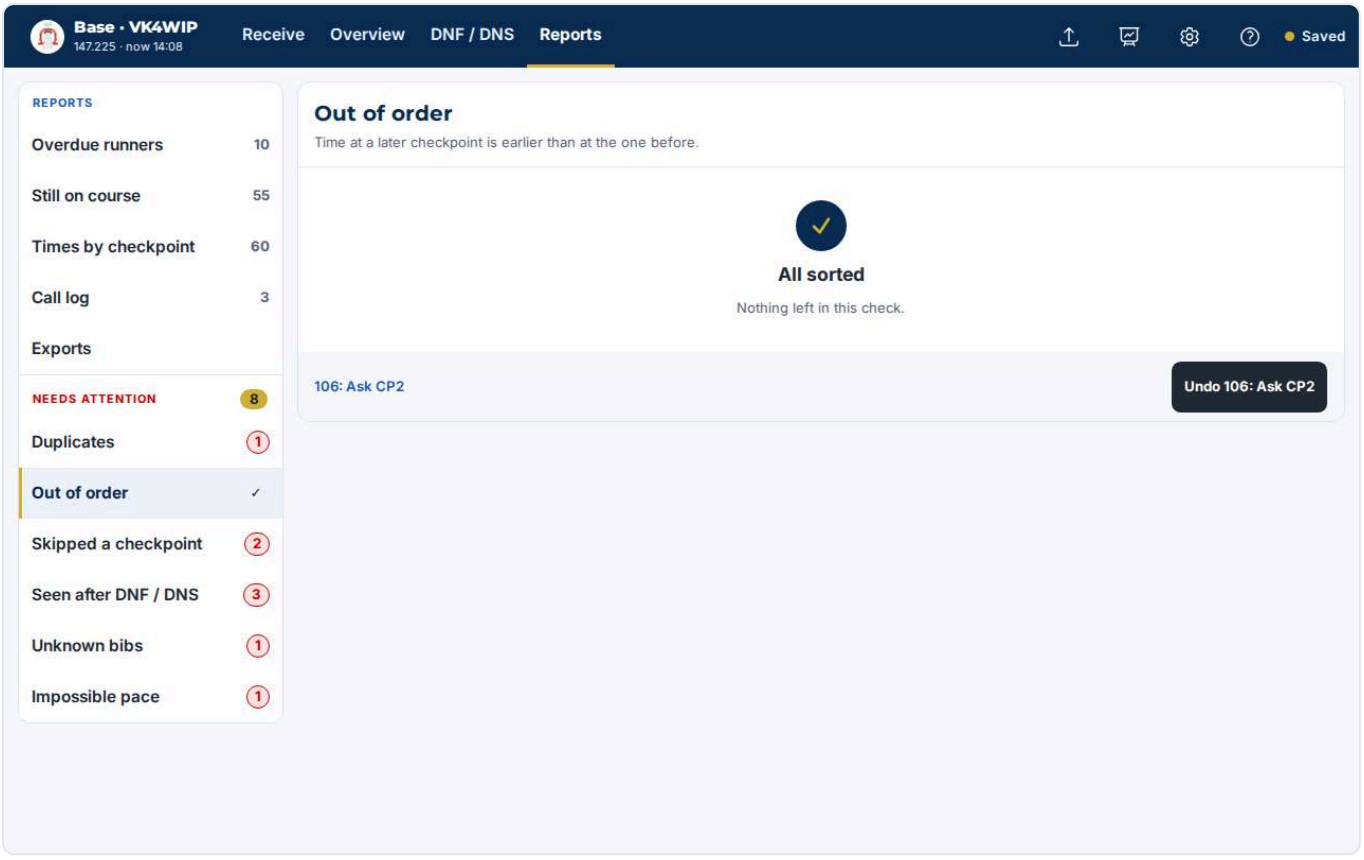


RP-13 1280×800

Plan	§4.12 / Fixes D1
Event	**Click "Skipped a checkpoint"**
Plan says	*Has later CP time, missing an earlier CP (128: seen CP2, never at CP1) → Ask CPx / Mark checked.*
App showed	• 128: "128 Not reported at CP1 CP2 13:35 Ask CP1 Mark checked"
Result	☐ Matches plan ☐ Issue: _____

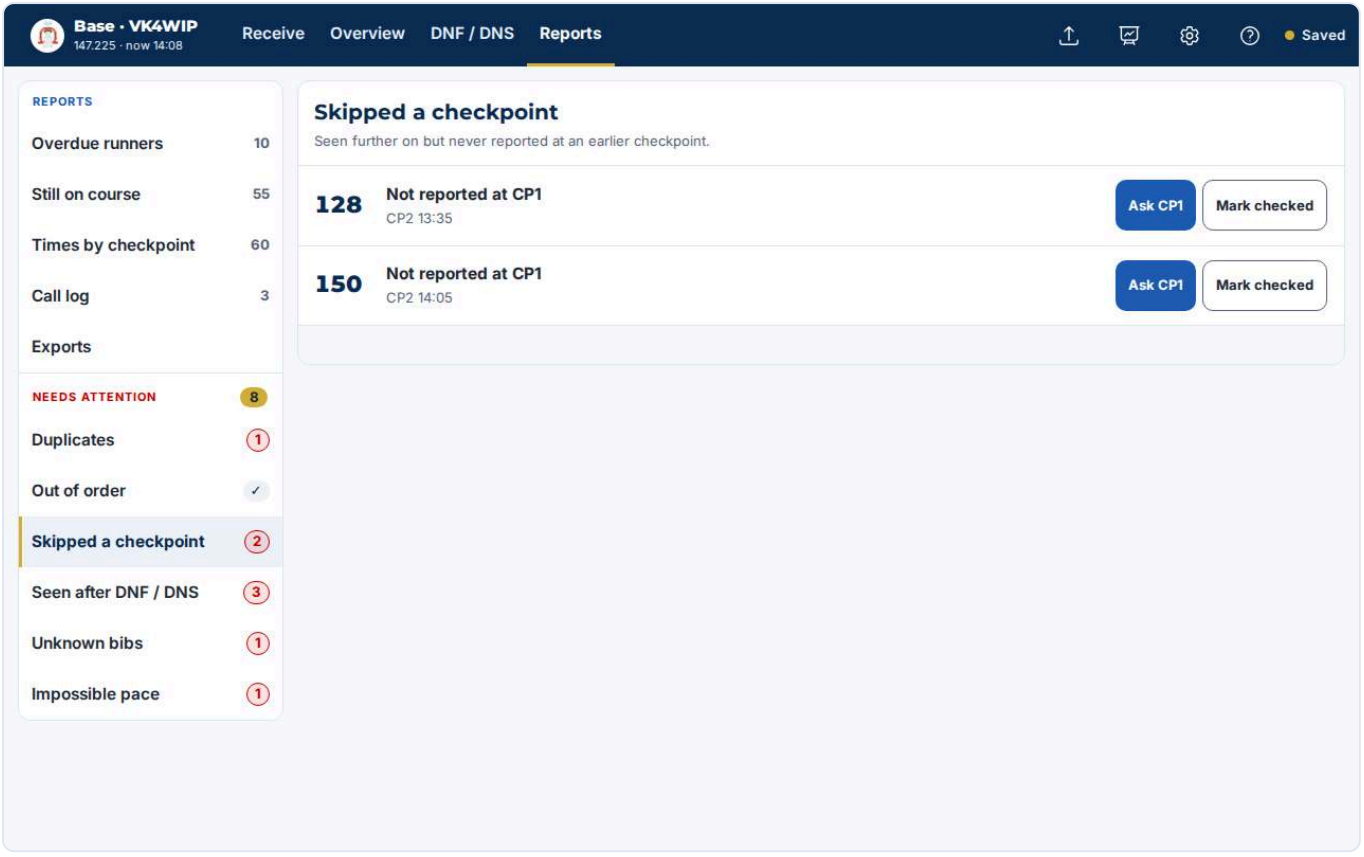


RP-14 1280×800

Plan	§4.12
Event	**Click "Seen after DNF / DNS"**
Plan says	*Checkpoint time after DNF time, or any time while DNS → Clear DNF/DNS / Remove that time.*
App showed	• 101: "101 DNS, but seen at CP1 Marked DNS → CP1 13:05 Clear DNS Remove CP1 time" • 108: "108 DNF, then seen at CP2 DNF CP1 · Medical · 13:23 → CP2 13:35 Clear DNF Remove CP2 time"
Result	☐ Matches plan ☐ Issue: _____

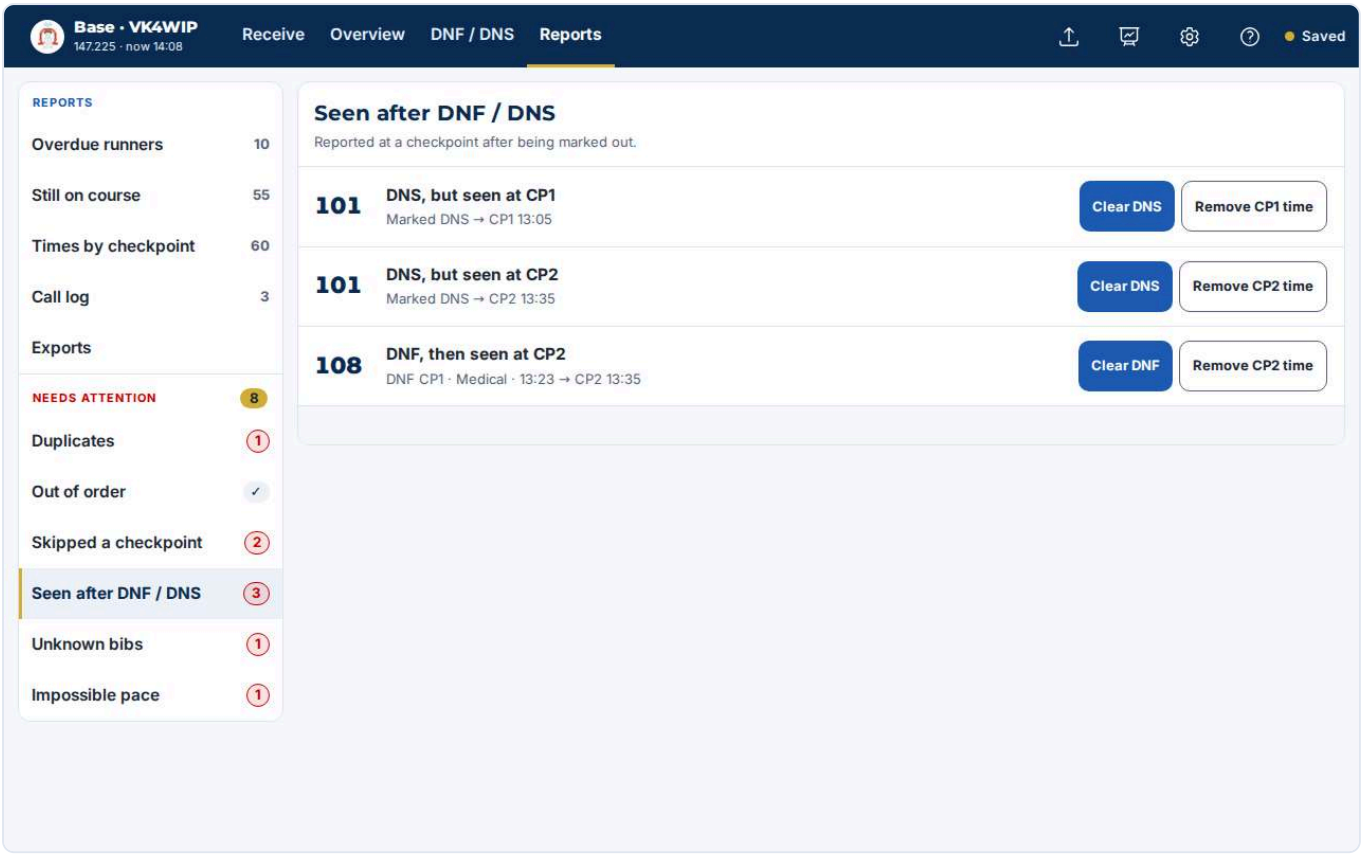


RP-15 1280×800

Plan	Fixes D3
Event	**Click "Remove CP2 time" on 108**
Plan says	*Remove CPx time.*
App showed	• Status line: "108: Remove CP2 time" · aria-live=polite • 108 row: resolved
Status line	108: Remove CP2 time
Result	☐ Matches plan ☐ Issue: _____

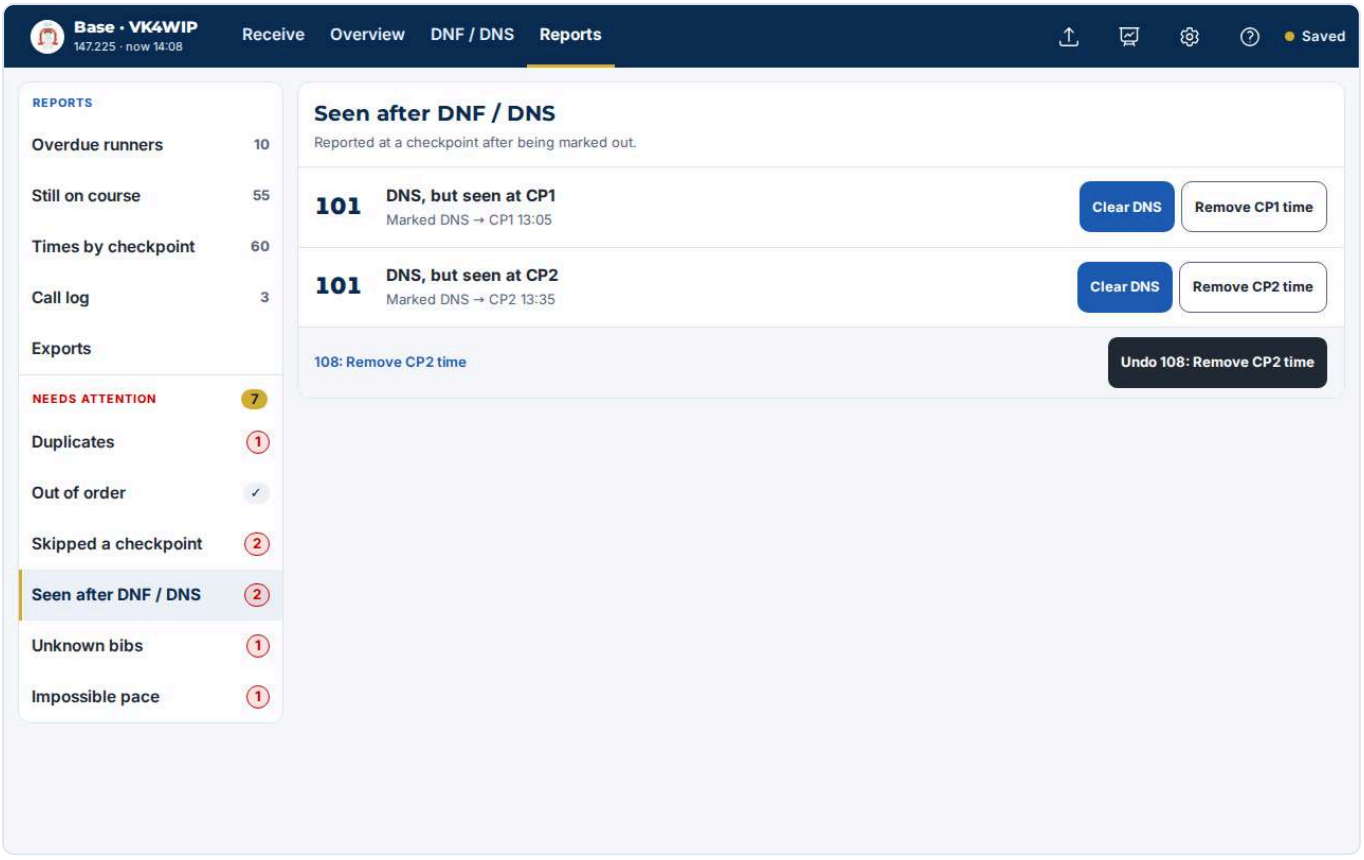


RP-16 1280×800

Plan	Fixes D3
Event	**Click "Clear DNS" on 101**
Plan says	*Clear DNS from a check.*
App showed	• Status line: "101: Clear DNS" · aria-live=polite • 101 rows: 0
Status line	101: Clear DNS
Result	☐ Matches plan ☐ Issue: _____

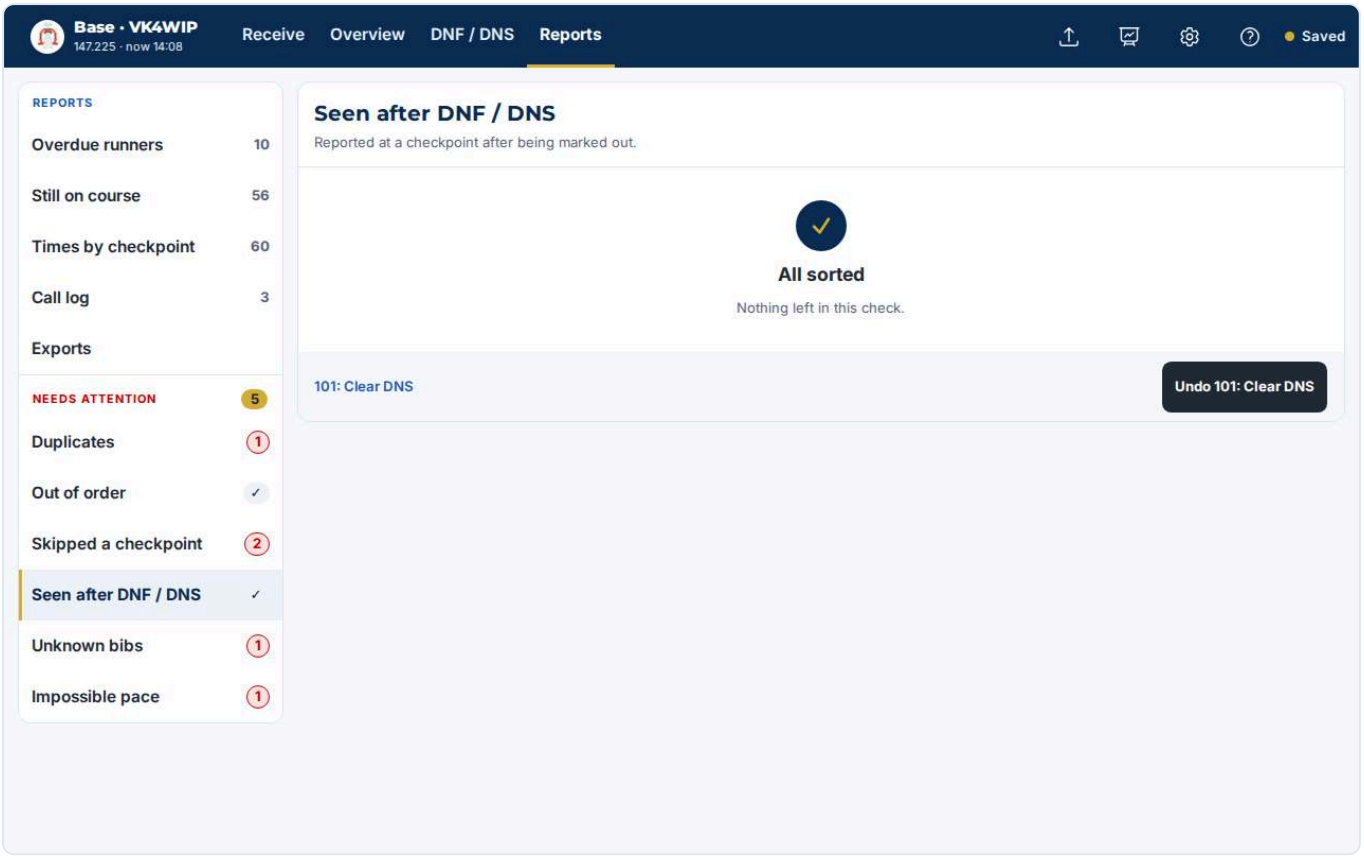


RP-17 1280×800

Plan	§4.12
Event	**Click "Unknown bibs"**
Plan says	*Numbers outside the race reported in calls → Remove / Keep for review.*
App showed	• Rows: 777 Not in race CP2 call at 14:08, block 14:05 Remove Keep for review
Result	☐ Matches plan ☐ Issue: _____

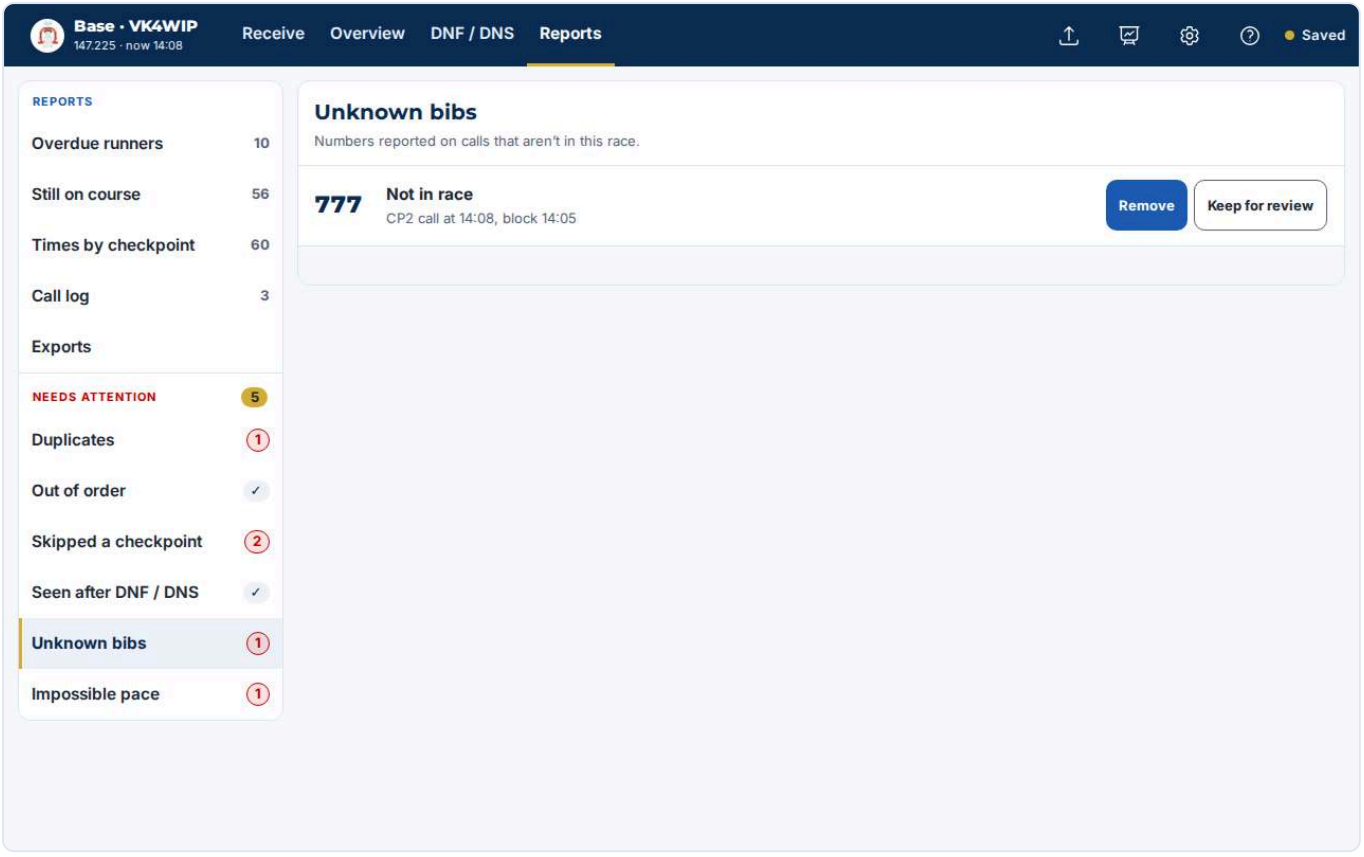


RP-18 1280×800

Plan	Fixes D3
Event	**Click "Keep for review" on the first row**
Plan says	*Keep for review.*
App showed	• Status line: "777: Keep for review" · aria-live=polite
Status line	777: Keep for review
Result	☐ Matches plan ☐ Issue: _____

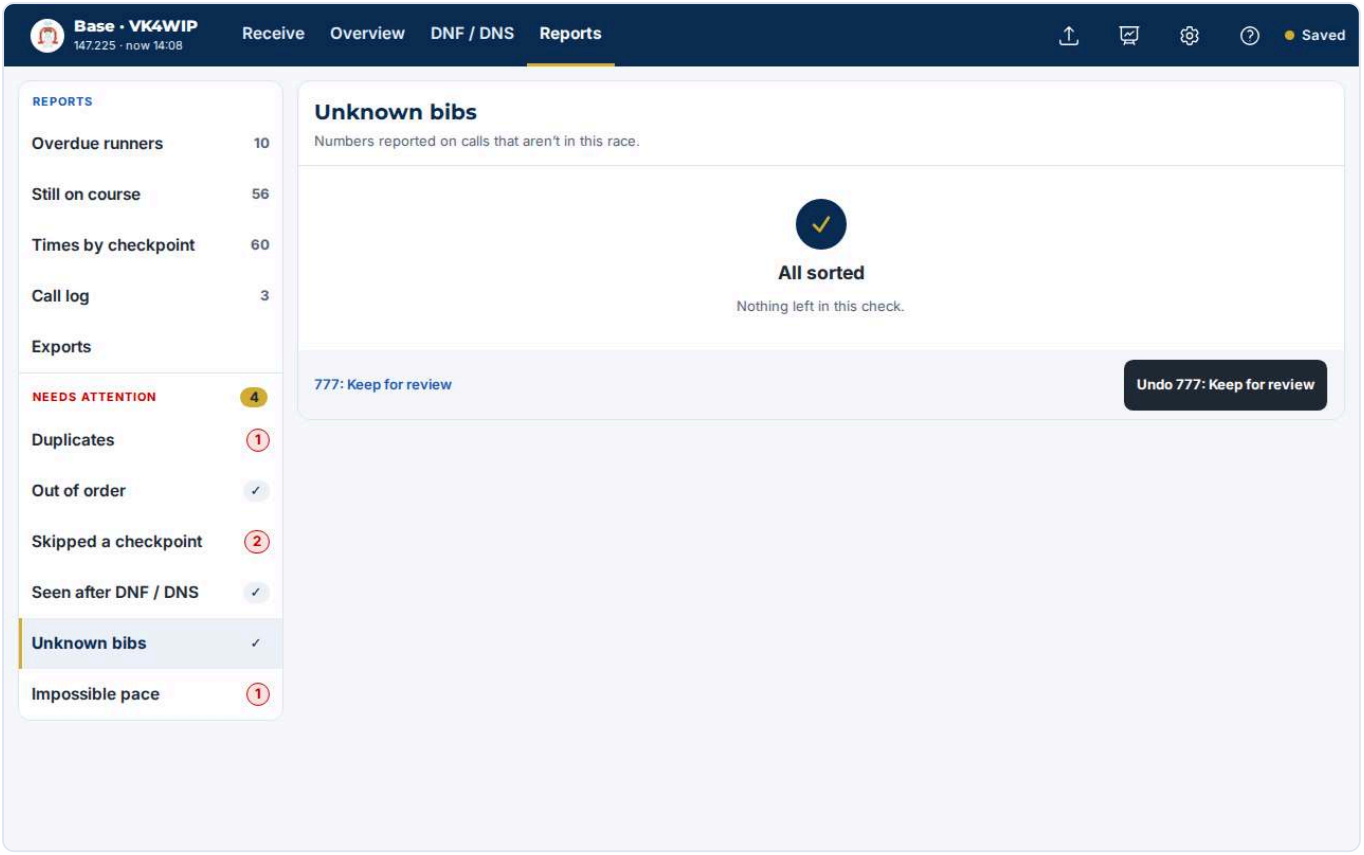


RP-19 1280×800

Plan	§4.12
Event	**Click "Impossible pace"**
Plan says	*Split speed above 20 km/h → Ask CPx / Mark checked.*
App showed	• 107: "107 CP1 → CP2 in 5 min 6 km · CP1 13:05 → CP2 13:10 · 72 km/h Ask CP2 Mark checked"
Result	☐ Matches plan ☐ Issue: _____

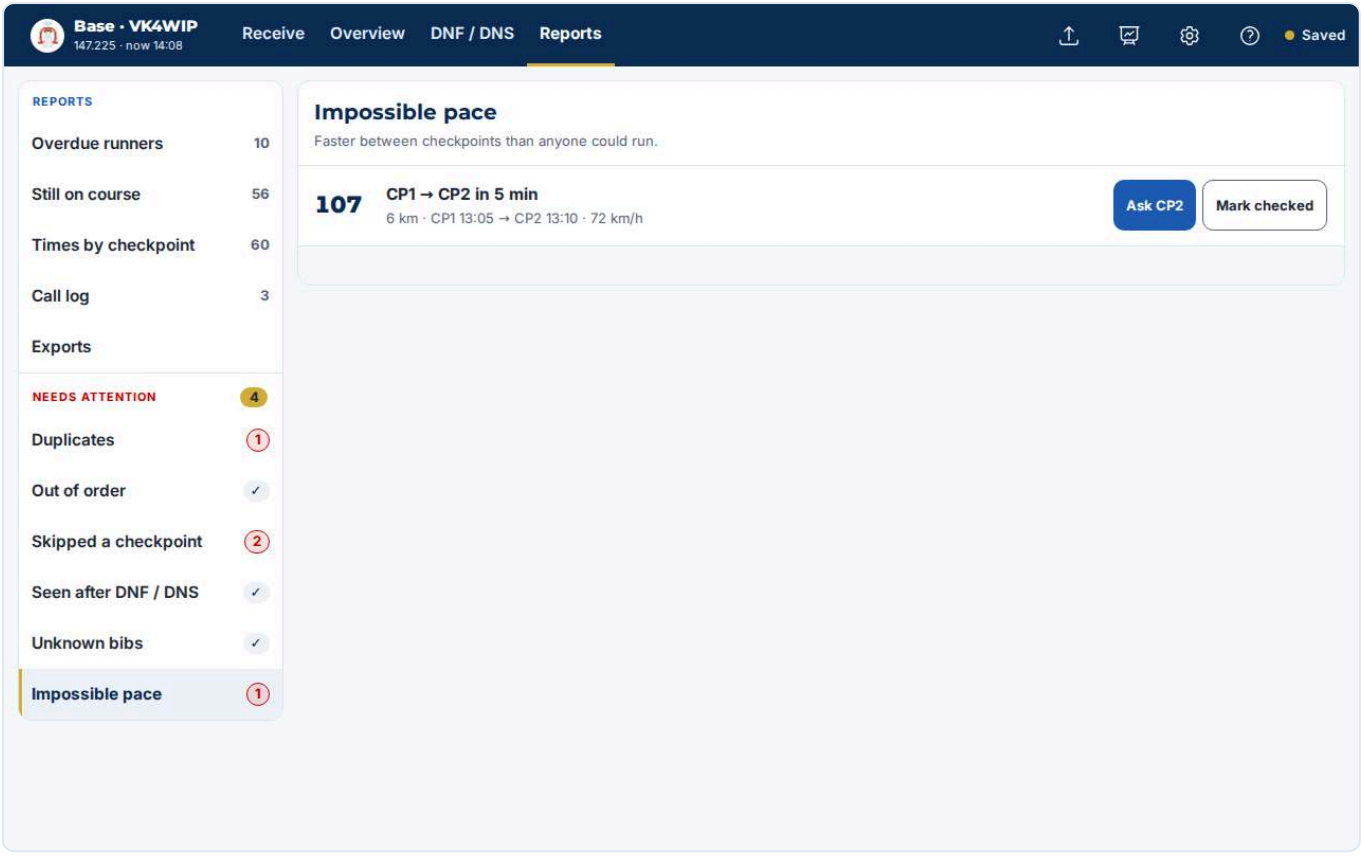


RP-20 1280×800

Plan	§4.12
Event	**Click "Mark checked", reload, open Reports › Impossible pace**
Plan says	*Resolved items don't reappear.*
App showed	• Count: "✓" • Empty state: "All sorted"
Result	☐ Matches plan ☐ Issue: _____

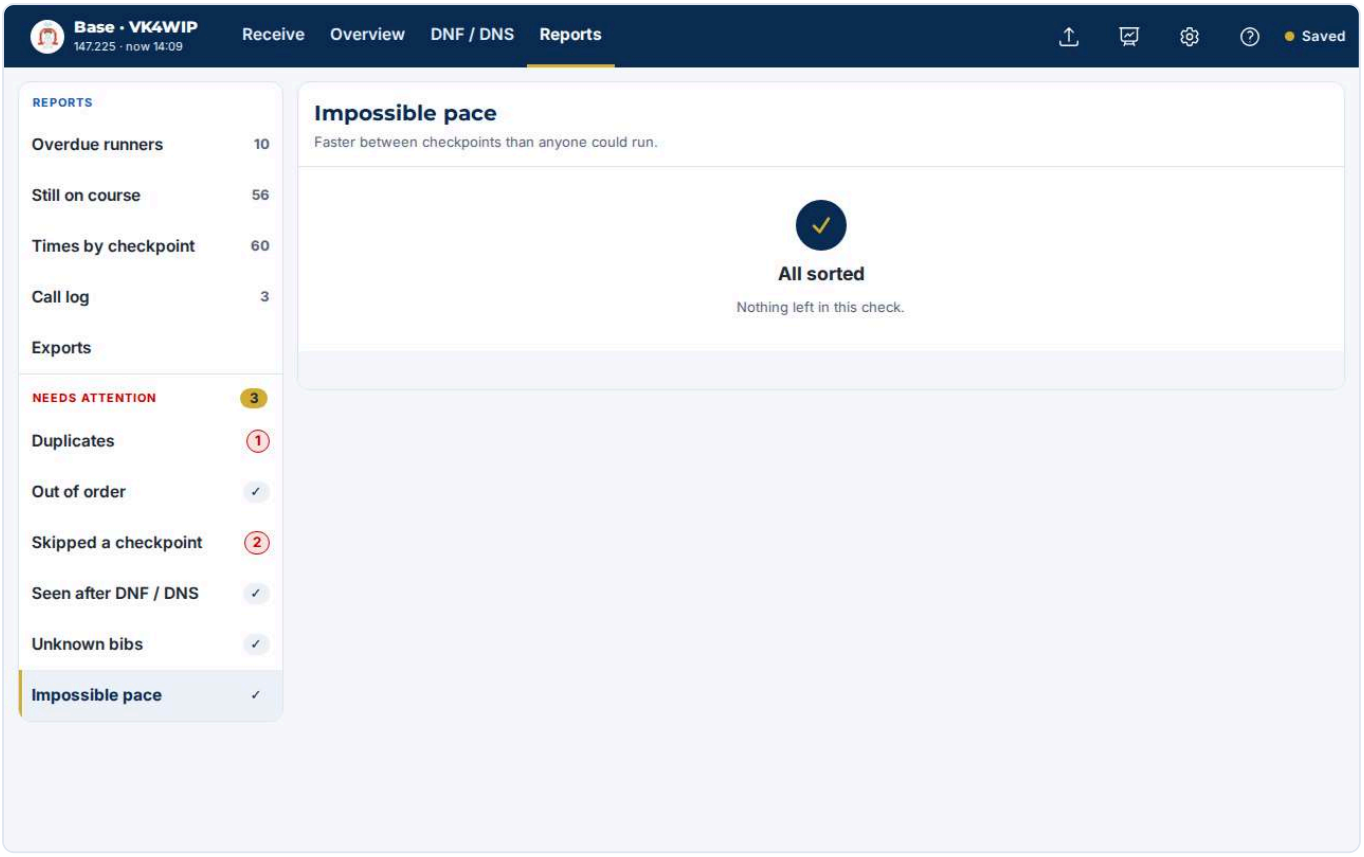

RP-21 1280×800


Plan	§4.12
Event	**Click "Exports"**
Plan says	*Existing exports kept.*
App showed	• Export cards: Missing Numbers Report, Out List Report, Checkpoint Log Report, Race Summary Report, Finisher List, Full Officials Report, Split Times, CSV, Excel, HTML
Result	☐ Matches plan ☐ Issue: _____

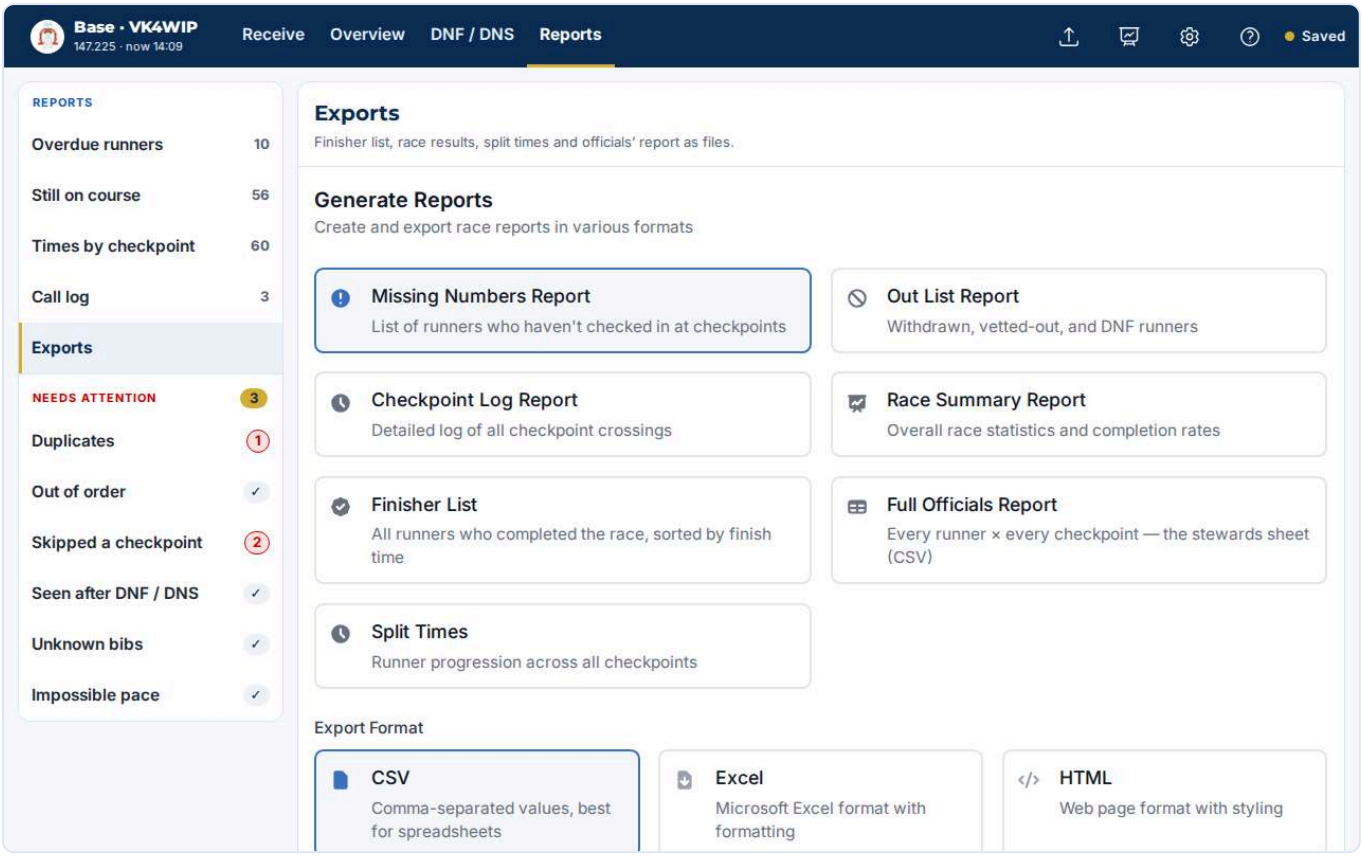

Base — Ask reminder


AS-01 1280×800

Plan	Fixes E3
Event	**Tap the "Receive" tab**
Plan says	*An "ask" resolution shows a gold note on that checkpoint's row in the Receive board and on its "Who's calling?" button ("Ask about 106").*
App showed	• CP2 button: "CP2 OK VK4IE · up to 14:05 Ask about 106" · name "CP2, OK, ask about 106" • Board note: "Ask about 106 Asked" · background rgba(212, 175, 55, 0.1) · border 1px solid rgb(212, 175, 55)
Result	☐ Matches plan ☐ Issue: _____

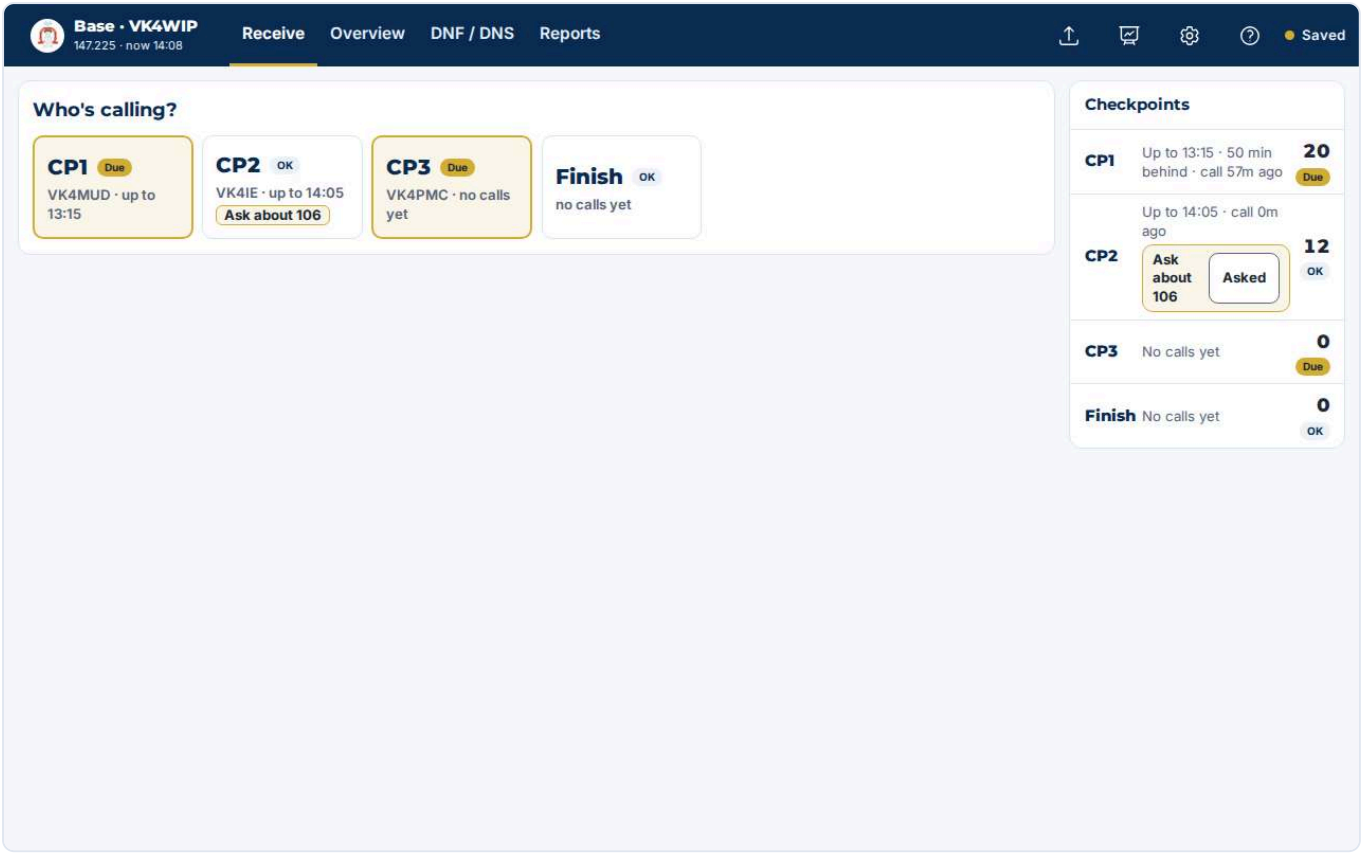


AS-02 1280×800

Plan	Fixes E3
Event	**Tap "Asked" on the note**
Plan says	*Cleared by an "Asked" button on the note (Undo).*
App showed	• Board note: cleared • Undo line: "Asked CP2 about 106 Undo" · role=status
Status line	Asked CP2 about 106 Undo
Result	☐ Matches plan ☐ Issue: _____

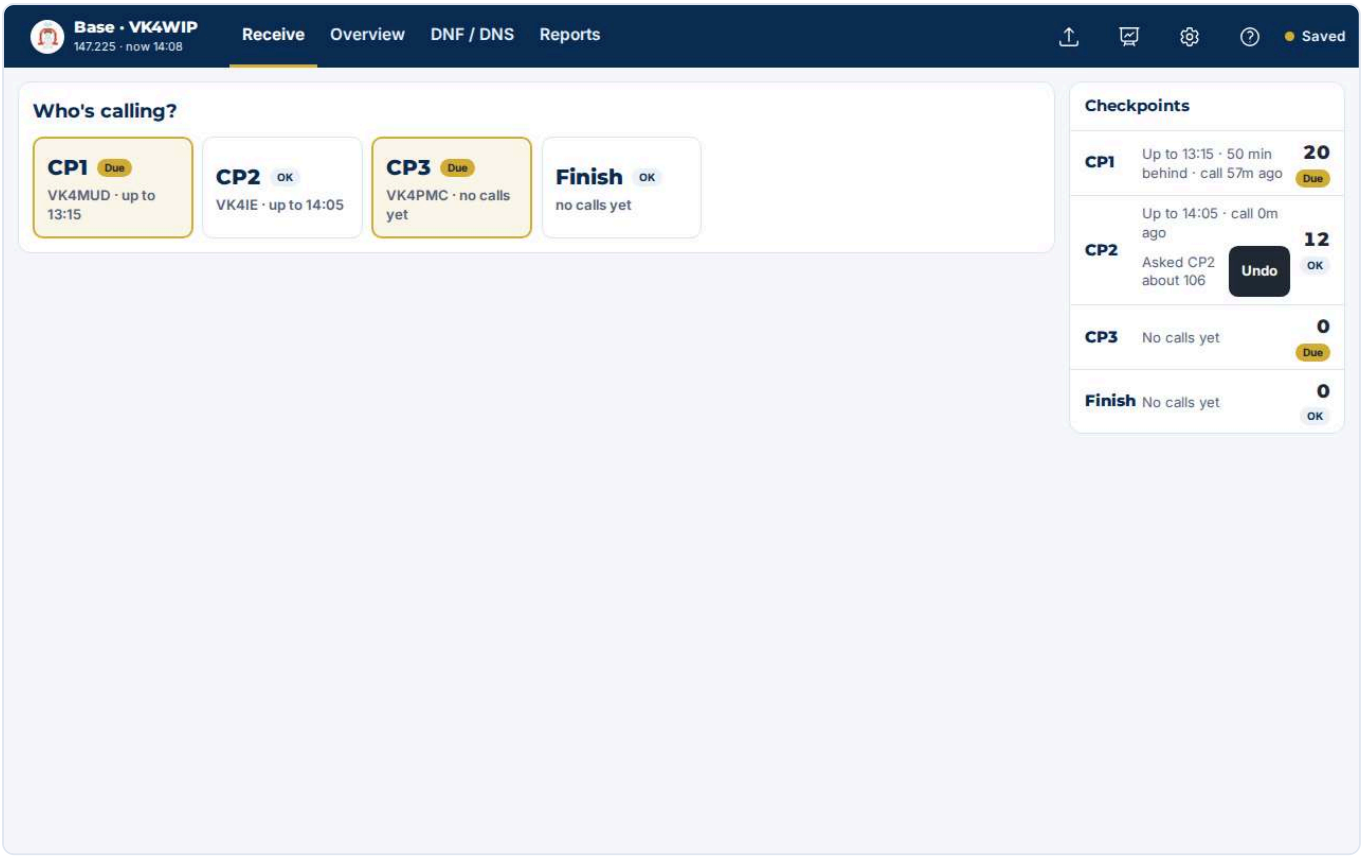


AS-03 1280×800

Plan	Fixes E3
Event	**Tap "Undo"**
Plan says	*Undo brings the reminder back.*
App showed	• Board note: "Ask about 106 Asked"
Result	☐ Matches plan ☐ Issue: _____

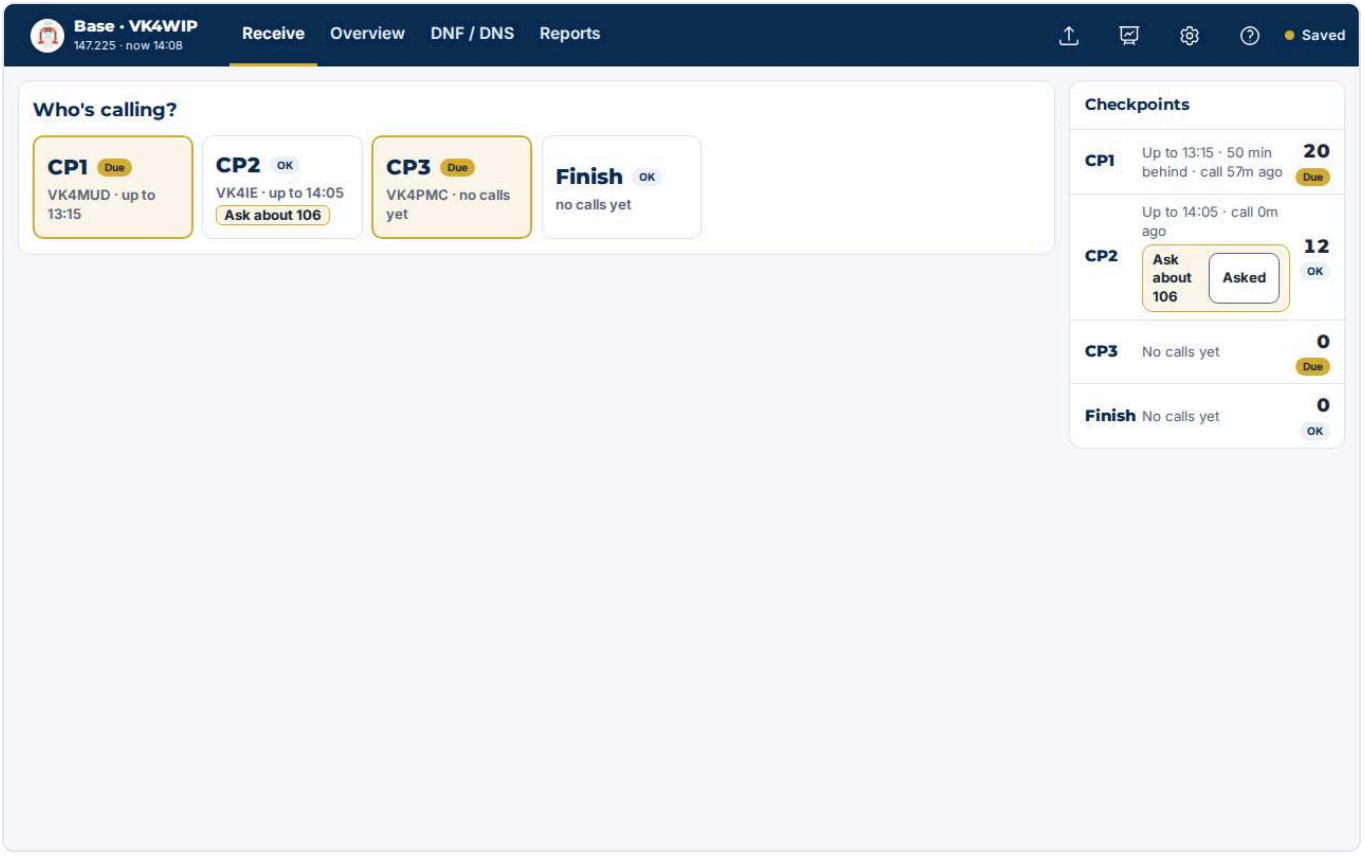

AS-04 1280×800


Plan	Fixes E3
Event	**Tap "Asked" again, then back to Reports**
Plan says	*The issue stays resolved.*
App showed	• Out of order count: "✓"
Result	☐ Matches plan ☐ Issue: _____

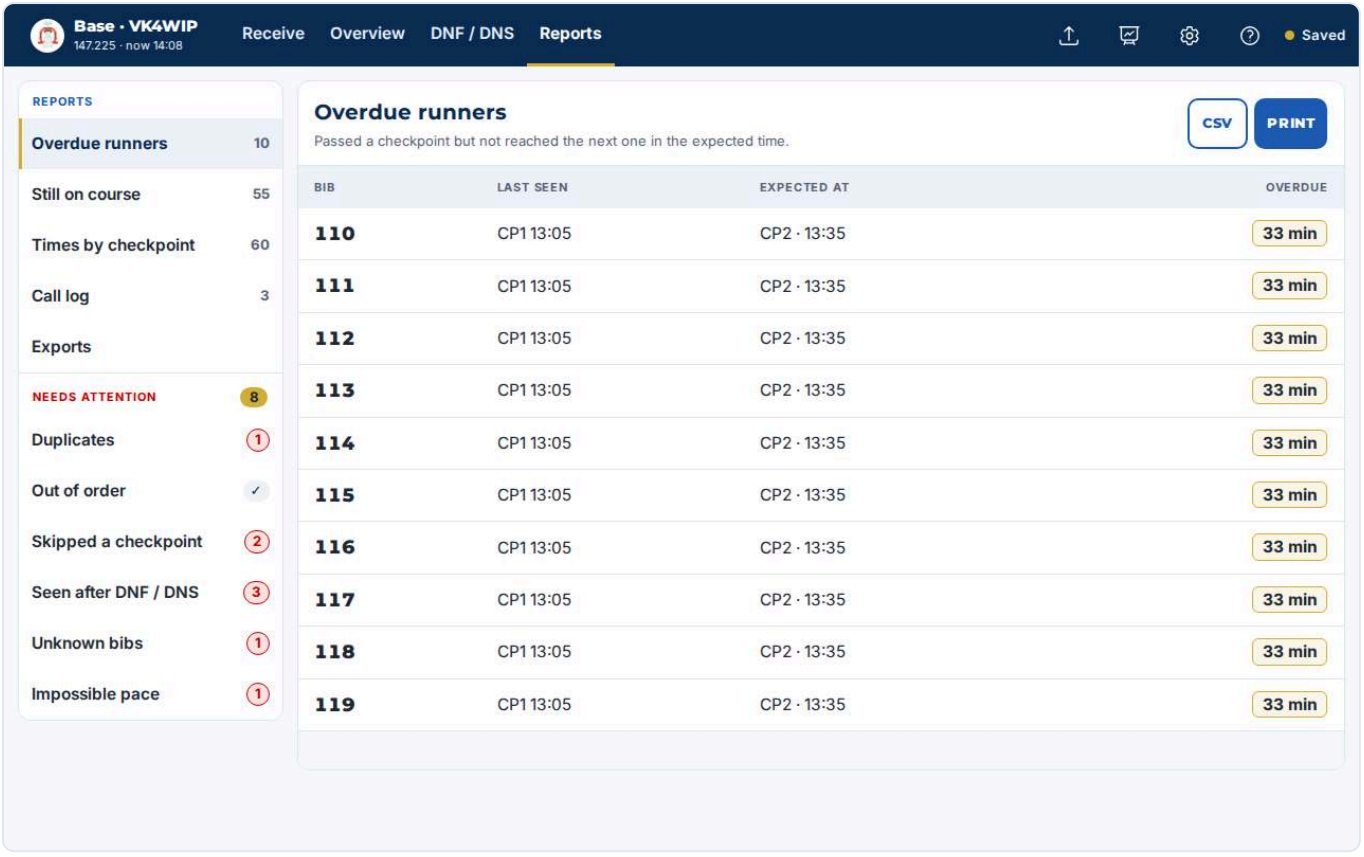

Base — phone and accessibility


PH-01 390×844

Plan	Fixes D3
Event	**Phone 390×844: Overview**
Plan says	*Base Overview on a phone (the leaders table scrolls in its box).*
App showed	• Page width: 390px (viewport 390px)
Status line	10 runners overdue at CP2 Not reported although the checkpoint has reported past their expected time. 110, 111, 112, 113 +6 VIEW RUNNERS
Result	☐ Matches plan ☐ Issue: _____

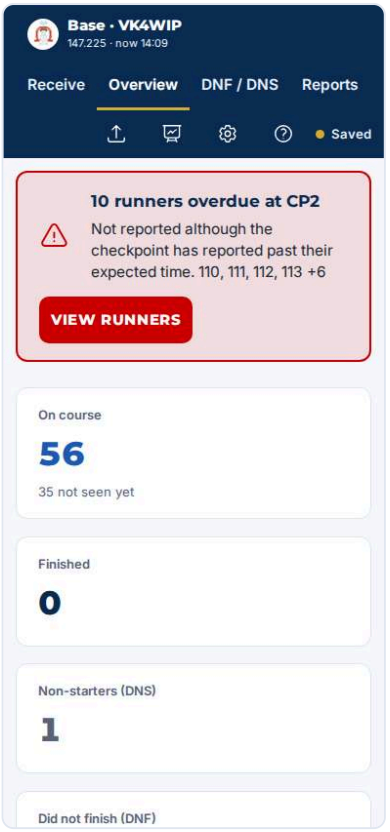


PH-02 390×844

Plan	Fixes D3
Event	**Phone: DNF / DNS**
Plan says	*DNF / DNS on a phone (bulk add above the out list).*
App showed	• Page width: 390px (viewport 390px) • Out list below bulk add: yes
Status line	14:09
Result	☐ Matches plan ☐ Issue: _____

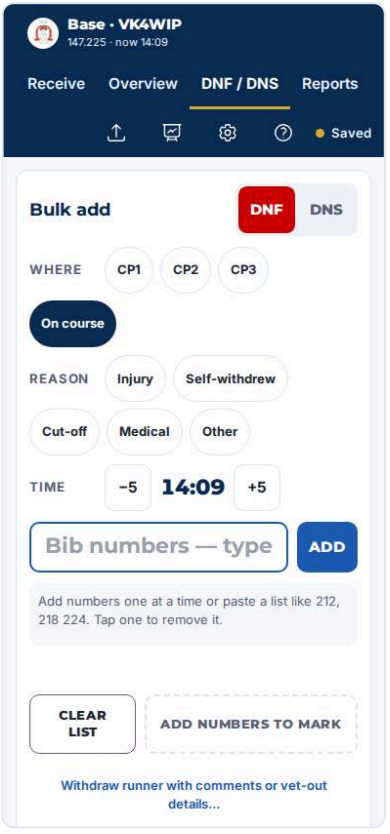


PH-03 390×844

Plan	Fixes D3
Event	**Phone: Reports**
Plan says	*Reports on a phone (stacked: list of reports above the report).*
App showed	• Page width: 390px (viewport 390px) • Report below the list: yes
Result	☐ Matches plan ☐ Issue: _____

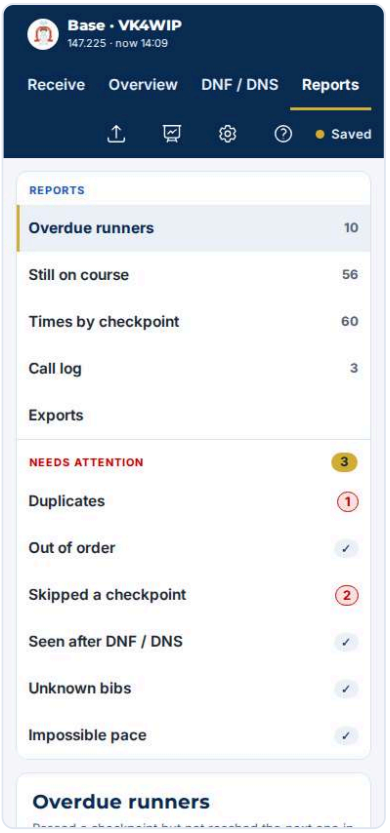

A11Y-01 390×844

Plan	Fixes D3
Event	**Check the status lines**
Plan says	*Status lines are aria-live="polite"; overdue banner is role="alert".*
App showed	• Reports status line: aria-live=polite • DNF / DNS status line: aria-live=polite • Receive status line: aria-live=polite
Result	☐ Matches plan ☐ Issue: _____

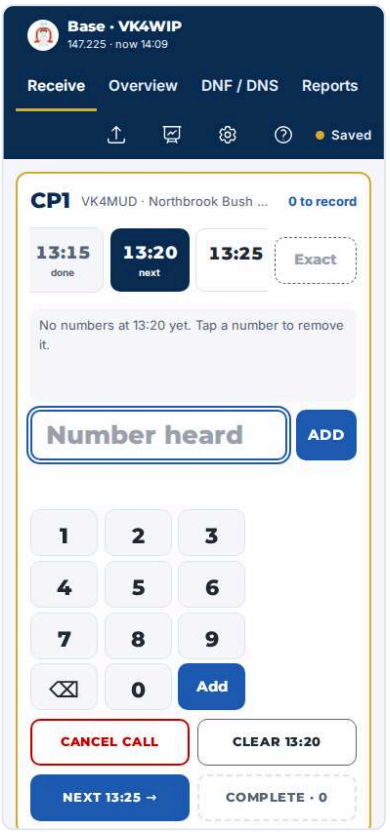

Appendix — the plan (IMPLEMENTATION_SPEC.md, verbatim)

RaceTracker Pro — VK4WIP UI redesign: implementation spec

Status: approved design, ready to build. Design sources: `design/screens/*.dc.html`.

Target repo: `bwhite001/RaceTrackers` (React 18, Vite, Tailwind, Zustand, Dexie v10, PWA).

Owner: Brandon White VK4BRW. Club: Ipswich & District Radio Club, Inc. (VK4WIP).

---

1. Goals

1. Restyle the whole app on the VK4WIP brand (navy / blue / gold / red, Montserrat + Inter).
2. Make checkpoint work safe and fast on a **phone**, one-handed, in sunlight.
3. Rebuild base station as a **receive** workflow — the inverse of a checkpoint read-out — that works on **tablet (primary), phone and desktop** without being tall.
4. Follow the WICEN radio procedure (see `reference/` PDF): Scores Checkpoint calls, common times in 5-minute blocks, every number read individually.
5. Let anyone fix mistakes: undo everywhere, edit times, restore accidental unmarks, base-controlled DNF/DNS, and data-check reports.

Non-goals: real-time device sync, RFID, new auth. Radio phrases are **not** shown in the UI (they live in `docs/radio-procedure.md` for the user guide).

---

2. Global rules (apply everywhere)

#	Rule
G1	**Every bib is handled individually.** Never collapse numbers into ranges ("144 to 148") in call-out, read-out, base receive, or previews. Ranges are only accepted in *Race setup* to define the field.
G2	**Common times are 5-minute blocks** (07:40, 07:45 …) unless an operator types an exact time. Block = `floor(minutes / 5) * 5`.
G3	**Times are never in the future** and never before race start. Base is often 45–60 min behind, so past blocks must be one tap away.
G4	**24-hour times** (`07:45`), Australian English, en-AU dates.
G5	**Undo** after every destructive or bulk action (snackbar/inline Undo). Two-tap confirm for "Cancel call" when it would discard data.
G6	Touch targets ≥ 44px (primary actions 48–56px). Real `<button>` / `<input>` / `<label>`; icon-only buttons need `aria-label`. Text contrast ≥ 4.5:1.
G7	**Status colours stay inside the club palette and differ by lightness/border, not hue alone** (see §3.3). Users may still recolour in Settings.
G8	One gold primary action per screen. Red only for DNF / destructive / safety alerts.
G9	No emoji in UI (replace existing ones, e.g. 📝 📋 🏃 in base views). Use line icons (Heroicons outline is already a dependency).
G10	Use `src/services/timeUtils.js` for all time maths; store ISO strings. The designs use a fixed demo clock of 07:47 — replace with real now.
G11	Respect module isolation (CLAUDE.md): checkpoint code only touches `checkpoint_runners`; base only `base_station_runners` + base tables.

---

3. Design system

3.1 Tokens (`design-tokens/`)

Replace the Tailwind-default navy/red/gold in `tailwind.config.js` and the CSS variables in `src/index.css` with the values in `design-tokens/tailwind.vk4wip.js` and `design-tokens/tokens.css`. Keep existing class names working by aliasing (`primary-*`, `navy-*`, `accent-red-*`, `accent-gold-*`, `gold-*`) — see the comments in that file.

Token	Hex	Use
navy	`#0B2D53`	App bars, headings, "called in" state, selected chips
blue	`#1E5CB3`	"Passed" state, links, focus rings, secondary buttons, info
gold	`#D4AF37`	Primary button (ink text), "call due", pending/needs-attention, active-tab underline
red	`#CC0000`	DNF, destructive actions, overdue/safety alerts only
ink	`#222A35`	Body text; text on gold
muted	`#5A6579`	Secondary text (do **not** lighten — contrast)
paper	`#F7F8FB`	Page background
band	`#EEF3FA`	Panels, selected rows, segmented-control track
border	`#E0E6F0`	Card / divider borders

surface-alt	`#E9F2FF`	Light text on navy
Tints	`rgba(30,92,179,.1)` blue · `rgba(212,175,55,.1)` gold · `rgba(204,0,0,.1)` red	Backgrounds for states

Radii: 6 (chips), 10 (buttons, inputs, tiles), 12 (cards), 14 (sheets), 9999 (pills/badges). Shadows: `0 2px 10px rgba(0,0,0,.08)` (buttons/cards), `0 10px 30px rgba(0,0,0,.18)` (sheets/toasts).

3.2 Typography

- **Montserrat** 600/700/800 — headings, bib numbers, button labels, big times. Bib numbers use `font-variant-numeric: tabular-nums`.
- **Inter** 400–700 — body, labels, tables.
- Load both via the PWA (self-host or Google Fonts with `display=swap`; precache in the service worker so they work offline — bump the PWA version per CLAUDE.md).
- Keep the existing `--font-scale` setting; all sizes scale with it.

3.3 Runner state styles (single source of truth — put in a `statusStyles.js` helper)

State	Tile / chip	Label
Not passed	white, 1px border `#E0E6F0`	—
Passed (not called in)	solid blue, white text	time `07:44`
Passed, edited after call-in	solid blue + `✎` prefix on time	"Correction" chip in lists
Called in	solid navy, white text	`✓ 07:31` (gold tick)
Unmarked earlier (restorable)	white, **2px dashed blue**	`was 07:37`
DNS	paper bg, **1px dashed muted**, number struck through	`DNS`
DNF	red tint, **2px red border**, red text	`DNF`
Base check: OK	solid blue	—
Base check: info (e.g. not seen at previous CP)	solid blue + 2px navy border	note
Base check: warning (duplicate / already logged)	white, 2px gold border	note
Base check: rejected (not in race / out)	white, 2px red border, struck through	note

3.4 Buttons

Montserrat 800, uppercase, letter-spacing .6px, radius 10, min-height 48.

- **Primary**: gold bg, ink text, shadow. One per screen.
- **Secondary**: transparent, 2px blue border, blue text.
- **Neutral solid**: blue bg, white text (Add, Next block).
- **Plain**: white, 1px muted border, ink text.
- **Destructive**: red bg white text (Mark DNF) or red outline (Cancel call, first tap).
- **Disabled/locked**: white or band bg, dashed border, muted text, `cursor: not-allowed`, `disabled` attribute.

3.5 Shared shell components (build first, Phase 0)

Component	Spec	Design ref
`AppBar`	Navy bar. Phone: back button (44px), title (Montserrat 700 18px), subtitle (12px `#E9F2FF`), right "Saved" status (8px gold dot). Base: badge (32px white circle with `public/pwa-512x512.png`), "Base · VK4WIP", "147.225 · now HH:MM", inline tabs, single row on tablet.	all
`CheckpointTabBar`	Bottom nav, 72px, 3 tabs (Mark off, Callout, Overview), line icons, active = navy text + 3px gold top border, `aria-current="page"`. Callout tab shows a gold count badge = runners passed but not called in.	`CpMarkOff`
`BaseTabs`	Inline in AppBar: Receive · Overview · DNF / DNS · Reports. Active = white bold + 3px gold underline. Horizontally scrollable on phone.	`BaseEntry`
`StatTile`	Small tiles with Montserrat 800 number + 11px label. Gold variant for "To call in".	`CpMarkOff`
`UndoBar`	Dark ink pill above tab bar or inline status line with an Undo button (gold or ink). Auto-dismiss ~6s, cleared by the next action.	`CpMarkOff`, `BaseEntry`
`BottomSheet`	Navy 55% scrim, white sheet radius 14 top, `role="dialog"`, closes on scrim tap / Cancel.	`CpMarkOff`
`TimeStepper`	−5 / −1 / big time / +1 / +5. Clamp to [race start, now].	`CpMarkOff`, `CpOverview`
`BlockPicker`	Horizontally scrolling row of 5-minute block buttons (64×48), labels `done` / `next` / `this call`, selected = navy; plus an "Exact" time input at the end (dashed when unused, navy when set).	`BaseEntry`
`NumberPad`	3×4 grid: 1–9, ⌫, 0, Add (blue). 46–52px keys. Always paired with a real numeric `<input>` that also accepts keyboard + Enter.	`BaseEntry`
`BibChip`	Number (Montserrat 800 18–20px) + optional 10–11px note; style per §3.3; tap = remove (with Undo).	`BaseEntry`

4. Screens

Each section: route → component(s) → layout → behaviour → data. Design file in brackets.

4.1 Home / role picker [`Home.dc.html`]

Route `/` → `components/Home/Homepage.jsx`.

- Navy header: badge, "RaceTracker", "Ipswich & District Radio Club · VK4WIP", "Offline ready" status. Current race card (name, date, checkpoint count, start time).
- Three role cards (≥76px): **Checkpoint**, **Base station**, **Race setup** — icon tile, title, one-line description, chevron. Navigation protection unchanged.
- Primary button at bottom: **Scan race QR code** (existing import flow).
- Footer lockup: "Ipswich & District Radio Club · VK4WIP".

4.2 Race setup [`RaceSetup.dc.html`]

Route `/race-maintenance/setup` → `components/Setup/RaceSetup.jsx`. Restyle only; keep the 4-step wizard.

- Navy header with step "Step 3 of 4 · Runners" and a 4-segment gold progress bar.
- Runner ranges input (ranges allowed **here only**), live count ("250 runners will be created") and first/last preview chips.
- Link to CSV / WebScorer import. Back (secondary) + Next (primary).

4.3 Share config [`ShareConfig.dc.html`]

Existing QR export: large QR in a white card with shadow, runner/checkpoint count; Download / Email / Copy tiles; primary "Show full screen" (`QRDisplayFullscreen`). Note "Works without internet — device to device".

4.4 Settings [`Settings.dc.html`]

`components/Settings/SettingsModal.jsx` (may become a page on phone). Sections: Display (Theme segmented: Light / Dark / Sunlight; text-size slider), Status colours (rows with swatch, name, description; "Reset to club colours"), Race data (Share or import race config).

- **Sunlight** = new high-contrast theme option (pure white bg, ink text, thicker borders). Optional for v1 — if skipped, show Light/Dark only.

4.5 Checkpoint — Mark off [`CpMarkOff.dc.html`] (interactive)

Route `/checkpoint/:checkpointId` → `views/CheckpointView.jsx` + `components/Checkpoint/RunnerGrid.jsx`, `QuickEntryBar.jsx`.

Layout (390px phone): AppBar (checkpoint number, location + operator callsign) with 3 StatTiles (Passed, Still to come, **To call in** gold) → quick-entry input + gold **Mark** → status line (aria-live) → group chips (20 per group: 100–119 …, horizontally scrolling) → 4-column tile grid (64px rows) → CheckpointTabBar.

Behaviour:

1. **Tap a not-passed tile** → mark passed at now (actualTime = now, commonTime = block).
2. **Tap a passed or called-in tile** → opens the **Edit sheet** (never unmarks directly — this replaces the current tap-again-to-unmark / double-click behaviour).
3. **Edit sheet**: bib, status line ("Passed · not called in yet" / "Called in to base"), "Marked at HH:MM". TimeStepper (clamped). Primary **Save HH:MM** (or "Keep time" if unchanged). Secondary **Unmark runner**. Cancel.
4. If the runner was **called in** and the time changes → warning box "Base already has 07:31. A changed time goes back on the callout sheet as a correction." Saving sets status back to passed with `correction = true` so it reappears on the callout sheet; tile shows `✎`.
5. **Unmark** → tile becomes "unmarked earlier" (dashed blue, `was HH:MM`) and an UndoBar "142 unmarked · Undo" appears. Undo restores the original record exactly.
6. **Tap an unmarked-earlier tile** → sheet in restore mode: "Unmarked earlier · It had been marked at 07:37", TimeStepper preset to the original, primary **Mark at 07:37**, secondary **Use now (HH:MM)**.
7. Quick entry accepts multiple numbers separated by commas/spaces (individual numbers only), marks each at now, jumps the grid to the group of the first number, message "3 runners marked at 07:47".
8. DNS/DNF tiles are not editable here (use Overview).

Data (`checkpoint_runners`): add `originalTime` (first mark), `editedAt`, `correction` (bool), `unmarkedAt` + `unmarkedTime` (for restore). See §5.

4.6 Checkpoint — Callout sheet [`CpCallout.dc.html`]

`components/Checkpoint/CalloutSheet.jsx`.

- AppBar subtitle: `CP3 · VK4PMC → VK4WIP · 147.225` (checkpoint, operator callsign, base callsign, frequency — from race config; hide pieces that aren't configured).
- **Call-due banner** (gold) when either: ≥ 5 runners waiting, or the oldest uncalled runner is ≥ 5 min old (configurable; WICEN brief: every 5–10 competitors, ≤ ~5 min delay). Text: "Call due — 9 waiting, oldest 6 min".
- Called-in blocks collapse to one compact row (navy tick, `07:30 – 07:35 · 4`, numbers, "Sent 07:36").
- **Next call card** (gold border, gold tint): heading "Next call · 2 blocks", badge "9 competitors", then one white card per pending block: `Common time 07:40 · 5` + the numbers in Montserrat 800 22px separated by `·`.
- Buttons: **Read out** (secondary, opens 4.7) + **Base copied — mark sent** (primary) → marks every runner in the pending blocks `calledIn = true`, `callInTime = now`.
- Below: **Official message** and **Request stand down** (plain buttons; v1 can open a simple notes modal / log entry).
- Corrections (runners with `correction = true`) appear in the pending list tagged "Correction".
- **No radio phrases on screen.**

4.7 Checkpoint — Read-out mode (busy blocks) [`CpReadout.dc.html`] (interactive)

New view, e.g. `modules/checkpoint-operations/components/ReadOutView.jsx`, opened from Callout.

- Header: "Read-out", `CP3 · block 07:45–07:50 · 27 competitors`, progress "X of N copied by base", segmented progress bar (one segment per over: gold = done, white = current, faint = to come).
- Numbers are split into **overs of up to 5 numbers** (`overSize` setting, default 5, range 3–10). **Each bib is its own row** (G1).
- Current over card: lead line `Common time 07:45` (first over) / `Continuing 07:45` (later overs); one row per number with a **checkbox** (28px, whole row is the label, ≥56px tall). The **next unticked** row is highlighted (band bg + 2px blue border + "Read next"); ticked rows go muted with strike-through.
- Primary **Base copied — next** is **locked until every number in the over is ticked** (shows "Tick each number as you read · 2 of 5").
- **Reset** (secondary) clears ticks on the current over. **Previous over** steps back.
- Finishing the last over → done state "All 27 copied", which marks the block called in.
- Persist read-out progress so an interrupted read resumes at the same over.

4.8 Checkpoint — Overview (fix anything) [`CpOverview.dc.html`] (interactive)

Existing overview tab.

- Header: % through, "142 of 250 through", stacked bar (called in / passed not called / to come / out), `role="img"` with aria-label.
- 4 StatTiles: Passed, To come, DNS, DNF. Filter pills: All · Passed · To come · DNS / DNF.
- Scrollable runner list; **tap a row to expand** (one open at a time, `aria-expanded`). Actions by status:

Status	Actions
Called in	TimeStepper, **Undo call-in**, **Reset — not passed**, **Mark DNF** (+ note "Base already has HH:MM. Changing the time sends a correction.")
Passed	TimeStepper, **Mark called in**, **Reset — not passed**, **Mark DNF**
To come	**Passed now (HH:MM)** (gold), **Mark DNS**, **Mark DNF**
DNS / DNF	**Clear DNS/DNF**, **Passed now** (+ note that base is flagged)

- Changing the time of a called-in runner → status passed + `correction = true`.
- Every action shows UndoBar; totals, bar and the Callout badge update live.

4.9 Base — Receive [`BaseEntry.dc.html` , tablet `BaseEntryTablet.dc.html` , phone `BaseEntryPhone.dc.html`] (interactive)

Route `/base-station/operations`, tab **Receive** → replaces `DataEntry` / `BatchEntryLayout` UI in `modules/base-operations`. **One responsive component** — no separate tablet/phone builds.

Layout: AppBar + BaseTabs (single row on tablet). Main = flex-wrap: receive panel (`flex: 999 1 480px`) + checkpoint board (`flex: 1 1 260px`). Tablet landscape (1112×834) and desktop: side by side, **must fit in 834px height without page scroll**. Phone: stacks, receive panel first.

Idle — "Who's calling?": grid (`auto-fill, minmax(140px,1fr)`) of compact buttons (≥64px) for Start, CP1–CP4, Finish: short name, status pill (Due gold / OK / Closed), `VK4PMC · up to 07:15`. "Due" = runners expected and no call for ≥ 8 min (constant `CALL_DUE_MINUTES = 8`, configurable).

Tap a checkpoint → straight into receiving (no separate acknowledge step):

- Header row: CP short name, operator · location, "N to record".
- **BlockPicker** from `lastBlock − 5` to the current block. Default selection = **that checkpoint's next unreceived block** (`lastBlock + 5` , capped at now) — base is usually behind. Chips: `done` (≤ lastBlock, muted), `next` , `this call` (has numbers in this call, blue border), selected = navy. "Exact" input accepts `HH:MM` or `HHMM` between race start and now; sets a non-block time and shows it selected.
- **Numbers box** (scrolls internally, max ~210px): shows **only the current block's numbers**. Switching block clears the box and the typed number (nothing is lost). Other blocks in the call show underneath as pills: "Also in this call: 07:40 · 5" — tap to switch back.
- Input + **Add** + NumberPad side by side (pad `flex: 0 1 220px`). Enter adds. Each added number becomes a BibChip validated live:

Check	Kind	Note
Not in race range	rejected (red)	"Not in race"
Marked DNF / DNS	rejected	"DNF" / "DNS"
Same bib earlier in this call	warning (gold)	"Said twice"
Already logged at this checkpoint	warning	"Had 07:40"
Not logged at previous checkpoint	info (navy border)	"Not seen CP2"
Otherwise	ok (blue)	—

Only **ok + info** are recorded. Tap a chip to remove (Undo).

- Status line (aria-live) + inline **Undo** when available.
- **Action row** (`repeat(auto-fit, minmax(110px,1fr))`):
- **Cancel call** — red outline; if numbers exist, first tap turns solid red "Tap again to cancel" and says how many will be dropped.
- **Clear 07:40** — clears all numbers in the current block (Undo).
- **Next 07:45 →** — move to the next 5-minute block, clear the box; disabled "At now" at the current block.
- **Complete · N** — gold primary; records the call.
- **Complete** → writes base_station_runners (`commonTime` = each number's block, `markOffEntryTime` = now, `checkpointNumber`), writes a `radio_calls` record, updates the board (count, last call = now, `lastBlock` = max block received). Done card: "N recorded at CP3", "Blocks 07:40, 07:45 · 2 skipped (flagged)", **Undo** (reopens the call, reverts writes) and **Next call**.
- **Checkpoint board**: rows with short name, "Up to 07:15 · 30 min behind · call 11m ago", count, Due/OK/Closed pill; active checkpoint row gold-tinted. "behind" shown when ≥ 15 min.

4.10 Base — Overview [`BaseOverview.dc.html`]

Existing overview tab restyled: red overdue alert banner (`role="alert"` , "View runners" → Reports › Overdue), stat tiles (On course, Finished, DNS, DNF), checkpoint progress bars (navy = closed out, blue = arriving, gold = finish), leaderboard table with filter pills (All, Female, Male, Wave 1…), gold rank badge for #1, overflow-x box on phone.

4.11 Base — DNF / DNS [`BaseStatus.dc.html`] (interactive)

Tab **DNF / DNS** → evolves `BulkDnsView.jsx` + `WithdrawalDialog.jsx` . Base is the authority for race-wide DNF/DNS.

- **Bulk add** panel: DNF/DNS segmented toggle (DNF active = red). DNF shows **Where** pills (CP1–CP4, On course), **Reason** pills (Injury, Self-withdrew, Cut-off, Medical, Other — optional, tap again to unset), **Time** (−5/+5, clamped). DNS shows a one-line explainer.
- Input accepts **one number or a pasted list** (`212, 218 224` — commas, spaces, semicolons, newlines). Chips validated:

Check	Kind	Note
Not in race / listed twice	rejected	"Not in race" / "Listed twice"
Already this status	rejected	"Already DNF"
Currently the other status	warning	"Was DNS — will change"
DNS but recorded at a checkpoint	warning	"Seen CP2 — started"
DNF at CPx but seen at a later CP	warning	"Seen later at CP3"

- **Clear list** + primary **Mark 6 as DNF** (red for DNF, gold for DNS; disabled when 0). Undo.
- **Out of the race** panel: totals "3 DNS · 3 DNF", filter pills, rows (bib, status chip, "CP2 · Injury · 07:12" / "Did not start", **Clear** → back in race, Undo).
- DNF writes `withdrawal_records` (checkpoint, withdrawalTime, reason) + runner status; DNS sets runner status `non-starter` . Audit-log every change.
- Open question for Brandon (default shown): checkpoint-marked DNFs count immediately; a future "confirm" queue is out of scope.

4.12 Base — Reports & data checks [`BaseReports.dc.html`] (interactive)

Tab **Reports** → evolves `ReportsPanel.jsx` , `ReportBuilder.jsx` , `DuplicateEntriesDialog.jsx` , `MissingNumbersList.jsx` .

Layout: sidebar (`flex: 1 1 250px`) + report panel (`flex: 999 1 520px`); stacks on phone.

Reports (CSV + Print buttons; reuse existing export utilities):

Report	Content
Overdue runners	Bib, last seen (CP + time), expected at, overdue minutes (gold badge; red ≥ 60). Expected time = last seen + typical split for that leg (median of recorded splits).
Still on course	Not finished and not out, grouped by last checkpoint passed (tiles). For sweep / stand-down.
Times by checkpoint	Matrix bib × CP1…Finish (common times; DNF/DNS shown in place).
Call log	Per checkpoint: calls received, numbers, last call time, up to (lastBlock). From `radio_calls` .

Needs attention (sidebar group with total gold badge; each item red count badge or ✓). Each issue row: bib, headline, detail, 1–2 action buttons; resolving removes it (Undo).

Check	Detection	Actions
Duplicates	same bib, same checkpoint, >1 base record (different or same time)	Keep A / Keep B (or Merge if identical)
Out of order	time at CP(n+1) < time at CP(n)	Ask CPx (flag for radio check) / Mark checked
Skipped a checkpoint	has later CP time, missing an earlier CP	Ask CPx / Mark checked
Seen after DNF / DNS	checkpoint time after DNF time, or any time while DNS	Clear DNF/DNS / Remove that time
Unknown bibs	numbers outside the race reported in calls (keep them in `radio_calls.rejected`)	Remove / Keep for review
Impossible pace	split speed above a threshold (default > 20 km/h; checkpoint distances from race config, e.g. CP1 5 km, CP2 11 km, CP3 14.5 km, CP4 17.5 km)	Ask CPx / Mark checked

Resolutions persist in a new `data_issue_resolutions` table so resolved items don't reappear; "Mark checked" = acknowledged, data unchanged.

---

5. Data model changes (Dexie v11 — additive)

Add `this.version(11).stores({...})` , keeping v10 tables. New indexed fields only where queried; others are data columns.

```
this.version(11).stores({
  checkpoint_runners: "++id, [raceId+checkpointNumber+number], raceId, checkpointNumber, number, actualTime, commonTime, calledIn,
markOffTime, callInTime, status, notes, correction",
```

```
  base_station_runners: "++id, [raceId+checkpointNumber+number], raceId, checkpointNumber, number, commonTime, markOffEntryTime,
status, notes, callId",
  radio_calls: "++id, [raceId+checkpointNumber], raceId, checkpointNumber, receivedAt, undoneAt",
  data_issue_resolutions: "++id, [raceId+issueKey], raceId, issueKey, resolvedAt",
  readout_progress: "++id, [raceId+checkpointNumber+blockTime], raceId, checkpointNumber, blockTime",
});
```

Table / field	Purpose
`checkpoint_runners.originalTime`	first marked time (restore)
`.editedAt`, `.correction`	time changed after call-in → resend
`.unmarkedAt`, `.unmarkedTime`	"was HH:MM" restore after accidental unmark
`base_station_runners.callId`	link to `radio_calls`; Undo call deletes by callId
`.manualTime` (bool)	exact time, not a 5-min block
`radio_calls`	`{raceId, checkpointNumber, receivedAt, blocks:[{time, numbers[]}], recorded, skipped: [{number, reason}], rejected:[…], undoneAt}`
`checkpoints` data columns	`operatorCallsigns[]`, `distanceKm`, `locationName` (Receive board, pace check)
`races` data columns	`baseCallsign` (VK4WIP), `frequency` (147.225), `callDueMinutes`, `overSize`
`withdrawal_records.reason`	DNF reason (Injury, Self-withdrew, Cut-off, Medical, Other)
`data_issue_resolutions`	`{issueKey: "dup:142:3", resolution, resolvedAt}`
`readout_progress`	`{tickedNumbers[], overIndex}` for resuming a read-out

Never cross `checkpoint_runners` ↔ `base_station_runners` (G11). Audit-log all base edits (`audit_log`).

---

6. State & logic notes

- Put pure logic in testable services:
- `services/blocks.js`: `toBlock(t)`, `blocksBetween(from, to)`, `nextBlock(t, now)`, `clampTime(t, raceStart, now)`.
- `services/receiveValidation.js`: `checkBaseNumber(num, ctx)` → `{kind: ok|info|warn|bad, note}` per §4.9 table.
- `services/statusValidation.js`: DNF/DNS checks per §4.11.
- `services/dataChecks.js`: one function per check in §4.12, each returning issues with stable `issueKey`s.
- `services/readout.js`: `splitIntoOvers(numbers, overSize)` — **no range collapsing**.
- `services/callout.js`: `isCallDue({waiting, oldestMinutes}, settings)`.
- Base receive call state can live in `baseOperationsStore` as a draft (survives tab switches, cleared on Complete/Cancel).
- Undo: keep a single-level snapshot per screen (`undoSnapshot`), cleared by the next action.

---

7. Accessibility checklist

- All interactive elements are native buttons/inputs; tab bar uses `nav` + `aria-current`.
- Sheets: `role="dialog"`, labelled, focus trapped, Escape closes.
- Live regions for status lines (`aria-live="polite"`) and alerts (`role="alert"`).
- Checkbox rows in Read-out are `<label>` wrapping a real checkbox.
- Progress bars expose an aria-label with the counts.
- States never rely on colour alone (borders, strike-through, text labels).

---

8. Testing (required by CLAUDE.md)

Unit (Vitest): blocks, receive validation, status validation, each data check, `splitIntoOvers` (assert never produces ranges), call-due logic, restore-after-unmark, correction flag.

Playwright journeys (add to `test/e2e/playwright/`, register in `generate-guide.js` `SECTION_MAP` / `CHAPTERS`, regenerate the guide):

1. `checkpoint-edit-time` — mark, open sheet, change time, save; unmark + Undo; unmark, later restore original time.
2. `checkpoint-correction` — called-in runner time edited → appears on callout as correction.
3. `checkpoint-readout` — 12 waiting runners → read-out with 3 overs; next locked until all ticked; Reset clears ticks.
4. `checkpoint-overview-fix` — undo call-in, reset to not passed, mark DNS, clear DNS, each with Undo.
5. `base-receive-blocks` — pick behind checkpoint, default block = next unreceived; add 5, Next block, add 5; switch back via "Also in this call"; Complete; board updates; Undo call.
6. `base-receive-validation` — unknown bib, duplicate, already logged, not seen at previous CP → correct chip states and only valid numbers recorded.
7. `base-receive-actions` — Clear block + Undo; Cancel call two-tap.
8. `base-bulk-dnf` — paste list, warnings shown, apply, clear one, Undo.
9. `base-reports-checks` — seed a duplicate and an out-of-order time; resolve both; counts reach ✓.
10. Viewports: run 5 at 1112×834 (tablet landscape — assert no vertical page scroll on Receive) and 390×844.

---

9. Phases

Phase	Scope	Done when

0	Tokens (`design-tokens/`), fonts, `statusStyles.js`, AppBar, CheckpointTabBar, BaseTabs, UndoBar, BottomSheet, TimeStepper, BlockPicker, NumberPad, BibChip; remove emoji	Existing screens render in new palette; tests green
1	Home, Race setup, Share config, Settings restyle	Matches designs
2	Mark off (edit sheet, undo, restore) + Overview (fix anything); v11 checkpoint fields	Journeys 1, 2, 4
3	Callout sheet + Read-out	Journey 3
4	Base Receive + `radio_calls` + board	Journeys 5–7, tablet height check
5	DNF / DNS bulk + Base overview restyle	Journey 8
6	Reports + data checks + resolutions	Journey 9; user guide regenerated

---

10. Sample data (for seeds / demos only)

From the WICEN brief (`reference/`): Mt Glorious Mountain Trails, Sun 8 Nov 2026, start 06:30, base VK4WIP on 147.225 MHz (+0.6, CTCSS 91.5), simplex fallback 147.500.

CP	Location	Operators	Distance
Start	White Cedar Picnic Area	VK4BRW	0 km
CP1	Northbrook Bush Camp	VK4MUD, VK4MKD, VK4EAR	5 km
CP2	England Creek Bush Camp	VK4IE, VK4TBA	11 km
CP3	England Creek Rd & Joyners Ridge Rd	VK4PMC, VK4JBX	14.5 km
CP4	Near Apiary Site, Joyners Ridge Rd	VK4AJG, VK4DTB	17.5 km
Finish	Maiala Picnic Area	VK4GJW, VK4ENE, VK4NNA	22 km

Runner counts and bib numbers in the designs are illustrative.