

#### Q1 to Q12 have only one correct answer. Choose the correct option to answer your question.

- 1. Which of the following is an application of clustering?
  - a. Biological network analysis
  - b. Market trend prediction
  - c. Topic modeling
  - d. All of the above
- 2. On which data type, we cannot perform cluster analysis?
  - a. Time series data
  - b. Text data
  - c. Multimedia data
  - d. None
- 3. Netflix's movie recommendation system uses
  - a. Supervised learning
  - b. Unsupervised learning
  - c. Reinforcement learning and Unsupervised learning
  - d. All of the above
- 4. The final output of Hierarchical clustering is
  - a. The number of cluster centroids
  - b. The tree representing how close the data points are to each other
  - c. A map defining the similar data points into individual groups
  - d. All of the above
- 5. Which of the step is not required for K-means clustering?
  - a. A distance metric
  - b. Initial number of clusters
  - c. Initial guess as to cluster centroids
  - d. None
- 6. Which is the following is wrong?
  - a. k-means clustering is a vector quantization method
  - b. k-means clustering tries to group n observations into k clusters
  - c. k-nearest neighbour is same as k-means
  - d. None
- 7. Which of the following metrics, do we have for finding dissimilarity between two clusters in hierarchical clustering?

LIP ROBO


- i. Single-link
- ii. Complete-link
- iii.Average-link

#### Options:

- a. 1 and 2
- b. 1 and 3
- c. 2 and 3
- d. 1, 2 and 3
- 8. Which of the following are true?
- i. Clustering analysis is negatively affected by multicollinearity of features
- ii. Clustering analysis is negatively affected by heteroscedasticity Options:
  - a. 1 only
  - b. 2 only
  - c. 1 and 2
  - d. None of them



9. In the figure above, if you draw a horizontal line on y-axis for y=2. What will be the number of clusters formed?



- a. 2
- b. 4
- c. 3
- d. 5
- 10. For which of the following tasks might clustering be a suitable approach?
- a. Given sales data from a large number of products in a supermarket, estimate future sales for each of these products.
- b. Given a database of information about your users, automatically group them into different market segments.
- c. Predicting whether stock price of a company will increase tomorrow.
- d. Given historical weather records, predict if tomorrow's weather will be sunny or rainy.
- 11. Given, six points with the following attributes:

point	x coordinate	y coordinate 0.5306	
p1	0.4005		
p2	0.2148	0.3854	
р3	0.3457	0.3156	
p4	0.2652	0.1875	
p5	0.0789	0.4139	
р6	0.4548	0.3022	


Table: X-Y coordinates of six points.

	p1	p2	р3	p4	p5	p6
p1	0.0000	0.2357	0.2218	0.3688	0.3421	0.2347
p2	0.2357	0.0000	0.1483	0.2042	0.1388	0.2540
р3	0.2218	0.1483	0.0000	0.1513	0.2843	0.1100
p4	0.3688	0.2042	0.1513	0.0000	0.2932	0.2216
$p_5$	0.3421	0.1388	0.2843	0.2932	0.0000	0.3921
p6	0.2347	0.2540	0.1100	0.2216	0.3921	0.0000

Table : Distance Matrix for Six Points

Which of the following clustering representations and dendrogram depicts the use of MIN or Single linkproximity function in hierarchical clustering:



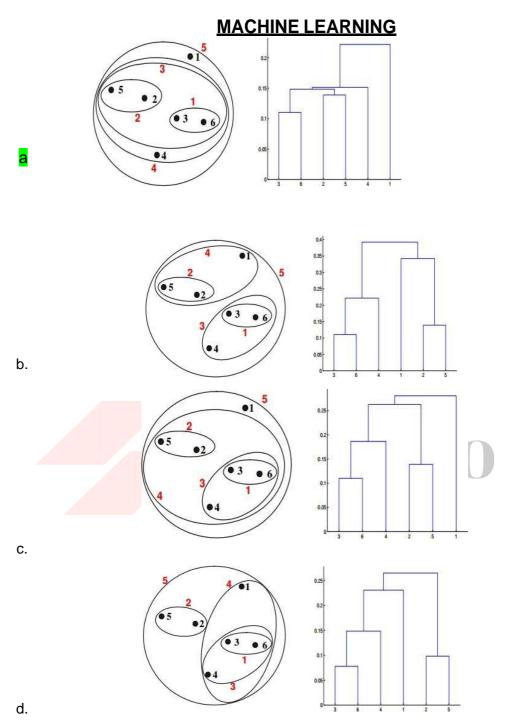

12. Given, six points with the following attributes:




point	x coordinate	y coordinate 0.5306	
p1	0.4005		
p2	0.2148	0.3854	
р3	0.3457	0.3156	
p4	0.2652	0.1875	
p5	0.0789	0.4139	
р6	0.4548	0.3022	

Table: X-Y coordinates of six points.


	p1	p2	р3	p4	p5	p6
p1	0.0000	0.2357	0.2218	0.3688	0.3421	0.2347
p2	0.2357	0.0000	0.1483	0.2042	0.1388	0.2540
р3	0.2218	0.1483	0.0000	0.1513	0.2843	0.1100
p4	0.3688	0.2042	0.1513	0.0000	0.2932	0.2216
$p_5$	0.3421	0.1388	0.2843	0.2932	0.0000	0.3921
р6	0.2347	0.2540	0.1100	0.2216	0.3921	0.0000

Table : Distance Matrix for Six Points

Which of the following clustering representations and dendrogram depicts the use of MAX or Complete link proximity function in hierarchical clustering.

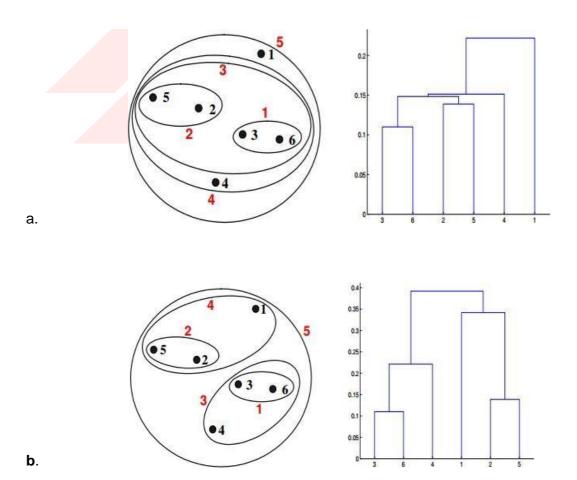



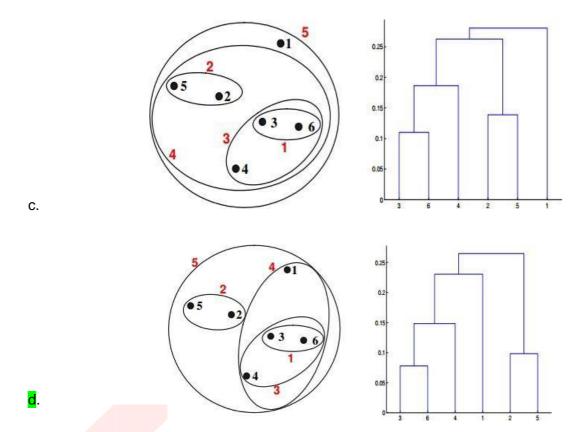

### Q13 to Q14 are subjective answers type questions, Answers them in their own words briefly

1. What is the importance of clustering?

The use for clustering is to find relationships within the data to form groups/clusters of data points based on their similarity. This is useful when you don't know what label/class each sample may have ahead of time (unsupervised learning).

#### 2. How can I improve my clustering performance?

K-means clustering algorithm can be significantly improved by using a better initialization technique, and by repeating (re-starting) the algorithm.

When the data has overlapping clusters, k-means can improve the results of the initialization technique.

When the data has well separated clusters, the performance of k-means depends completely on the goodness of the initialization.

Initialization using simple furthest point heuristic (Maxmin) reduces the clustering error of k-means from 15% to 6%, on average.









