

TensorFlow Tutorial

Welcome to this week's programming assignment. Until now, you've always used numpy to build neural networks. Now we will step you through a deep learning framework that will allow you to build neural networks more easily. Machine learning frameworks like TensorFlow, PaddlePaddle, Torch, Caffe, Keras, and many others can speed up your machine learning development significantly. All of these frameworks also have a lot of documentation, which you should feel free to read. In this assignment, you will learn to do the following in TensorFlow:

- Initialize variables
- Start your own session
- Train algorithms
- Implement a Neural Network

Programing frameworks can not only shorten your coding time, but sometimes also perform optimizations that speed up your code.

Updates

If you were working on the notebook before this update...

- The current notebook is version "v3b".
- You can find your original work saved in the notebook with the previous version name (it may be either TensorFlow Tutorial version 3" or "TensorFlow Tutorial version 3a.)
- To view the file directory, click on the "Coursera" icon in the top left of this notebook.

List of updates

- forward_propagation instruction now says 'A1' instead of 'a1' in the formula for Z2; and are updated to say 'A2' instead of 'Z2' in the formula for Z3.
- create_placeholders instruction refer to the data type "tf.float32" instead of float.
- in the model function, the x axis of the plot now says "iterations (per fives)" instead of iterations(per tens)
- In the linear_function, comments remind students to create the variables in the order suggested by the starter code. The comments are updated to reflect this order.
- The test of the cost function now creates the logits without passing them through a sigmoid function (since the cost function will include the sigmoid in the built-in tensorflow function).
- In the 'model' function, the minibatch_cost is now divided by minibatch_size (instead of num_minibatches).
- Updated print statements and 'expected output that are used to check functions, for easier visual comparison.

1 - Exploring the Tensorflow Library

To start, you will import the library:

```
In [3]: import math
import numpy as np
import h5py
import matplotlib.pyplot as plt
import tensorflow as tf
from tensorflow.python.framework import ops
from tf_utils import load_dataset, random_mini_batches, convert_to_one_hot, predict

%matplotlib inline
np.random.seed(1)
```

Now that you have imported the library, we will walk you through its different applications. You will start with an example, where we compute for you the loss of one training example.

$$loss = \mathcal{L}(\hat{y}, y) = (\hat{y}^{(i)} - y^{(i)})^2 \quad (1)$$

```
In [4]: y_hat = tf.constant(36, name='y_hat')           # Define y_hat constant. Set
to 36.
y = tf.constant(39, name='y')                         # Define y. Set to 39

loss = tf.Variable((y - y_hat)**2, name='loss')        # Create a variable for the loss

#initialize the variables
init = tf.global_variables_initializer()               # When init is run later (session.run(init)),
                                                        # the loss variable will be initialized and ready to be computed
with tf.Session() as session:                         # Create a session and print the output
    session.run(init)                                  # Initializes the variables
    print(session.run(loss))                          # Prints the loss
```

9

Writing and running programs in TensorFlow has the following steps:

1. Create Tensors (variables) that are not yet executed/evaluated.
2. Write operations between those Tensors.
3. Initialize your Tensors.
4. Create a Session.
5. Run the Session. This will run the operations you'd written above.

Therefore, when we created a variable for the loss, we simply defined the loss as a function of other quantities, but did not evaluate its value. To evaluate it, we had to run `init=tf.global_variables_initializer()`. That initialized the loss variable, and in the last line we were finally able to evaluate the value of `loss` and print its value.

Now let us look at an easy example. Run the cell below:

A cost function is basically the difference between the obtained \hat{y} and the ground truth value, greater the difference, worse the predictions, that is why we perform gradient descent in order to obtain the w and b values for the least possible cost

REMEMBER INIT PARAMS -> FORWARD PROP (COMPUTE w , z , \hat{y}) -> BACK PROP (COMPUTE GRADIENTS) -> GRADIENT DESCENT (TRAIN PARAMS w AND b) -> OPTIMIZE (UPDATE PARAMS)

INITIALIZATION -> CREATE A SESSION -> ONLY THEN OPERATION

```
In [5]: #this will only add em to the computational graph  
#to evaluate you must create a session  
a = tf.constant(2)  
b = tf.constant(10)  
c = tf.multiply(a,b)  
print(c)
```

```
Tensor("Mul:0", shape=(), dtype=int32)
```

As expected, you will not see 20! You got a tensor saying that the result is a tensor that does not have the shape attribute, and is of type "int32". All you did was put in the 'computation graph', but you have not run this computation yet. In order to actually multiply the two numbers, you will have to create a session and run it.

```
In [6]: sess = tf.Session()
        print(sess.run(c))
```

20

Great! To summarize, **remember to initialize your variables, create a session and run the operations inside the session.**

Next, you'll also have to know about placeholders. A placeholder is an object whose value you can specify only later. To specify values for a placeholder, you can pass in values by using a "feed dictionary" (feed_dict variable). Below, we created a placeholder for x. This allows us to pass in a number later when we run the session.

```
In [7]: # Change the value of x in the feed_dict

        x = tf.placeholder(tf.int64, name = 'x')
        print(sess.run(2 * x, feed_dict = {x: 3}))
        sess.close()
```

6

When you first defined x you did not have to specify a value for it. A placeholder is simply a variable that you will assign data to only later, when running the session. We say that you **feed data** to these placeholders when running the session.

Here's what's happening: When you specify the operations needed for a computation, you are telling TensorFlow how to construct a computation graph. The computation graph can have some placeholders whose values you will specify only later. Finally, when you run the session, you are telling TensorFlow to execute the computation graph.

1.1 - Linear function

Lets start this programming exercise by computing the following equation: $Y = WX + b$, where W and X are random matrices and b is a random vector.

Exercise: Compute $WX + b$ where W , X , and b are drawn from a random normal distribution. W is of shape (4, 3), X is (3,1) and b is (4,1). As an example, here is how you would define a constant X that has shape (3,1):

```
X = tf.constant(np.random.randn(3,1), name = "X")
```

You might find the following functions helpful:

- `tf.matmul(..., ...)` to do a matrix multiplication
- `tf.add(..., ...)` to do an addition
- `np.random.randn(...)` to initialize randomly

```
In [8]: # GRADED FUNCTION: linear_function

def linear_function():
    """
    Implements a linear function:
        Initializes X to be a random tensor of shape (3,1)
        Initializes W to be a random tensor of shape (4,3)
        Initializes b to be a random tensor of shape (4,1)
    Returns:
        result -- runs the session for Y = WX + b
    """

    np.random.seed(1)

    """
    Note, to ensure that the "random" numbers generated match the expected results,
    please create the variables in the order given in the starting code below.
    (Do not re-arrange the order).
    """

    ### START CODE HERE ### (4 lines of code)
    #adds the following variables into a computational graph
    X = tf.constant(np.random.randn(3, 1), name='X')
    W = tf.constant(np.random.randn(4, 3), name='W') #defining variables in tensorflow (like for react we use state)
    b = tf.constant(np.random.randn(4, 1), name='B')
    Y = tf.add(tf.matmul(W, X), b) #matrix multiplication and addition, using tensorflow
    ### END CODE HERE ###

    # Create the session using tf.Session() and run it with sess.run(...) on the variable you want to calculate

    ### START CODE HERE ###
    init = tf.global_variables_initializer()
    sess = tf.Session()
    sess.run(init)
    result = sess.run(Y) #creation and running of a tensorflow session (runs the computational graph)
    ### END CODE HERE ###

    # close the session
    sess.close()

    return result
```

```
In [9]: print( "result = \n" + str(linear_function()))
```

```
result =
[[-2.15657382]
 [ 2.95891446]
 [-1.08926781]
 [-0.84538042]]
```

Expected Output :

```

result =
[[-2.15657382]
 [ 2.95891446]
 [-1.08926781]
 [-0.84538042]]

```

1.2 - Computing the sigmoid

Great! You just implemented a linear function. Tensorflow offers a variety of commonly used neural network functions like `tf.sigmoid` and `tf.softmax`. For this exercise lets compute the sigmoid function of an input.

You will do this exercise using a placeholder variable `x`. When running the session, you should use the feed dictionary to pass in the input `z`. In this exercise, you will have to (i) create a placeholder `x`, (ii) define the operations needed to compute the sigmoid using `tf.sigmoid`, and then (iii) run the session.

Exercise : Implement the sigmoid function below. You should use the following:

- `tf.placeholder(tf.float32, name = "...")`
- `tf.sigmoid(...)`
- `sess.run(..., feed_dict = {x: z})`

Note that there are two typical ways to create and use sessions in tensorflow:

Method 1:

```

sess = tf.Session()
# Run the variables initialization (if needed), run the operations
result = sess.run(..., feed_dict = {...})
sess.close() # Close the session

```

Method 2:

```

with tf.Session() as sess:
    # run the variables initialization (if needed), run the operations
    result = sess.run(..., feed_dict = {...})
    # This takes care of closing the session for you :)

```

```
In [10]: # GRADED FUNCTION: sigmoid

def sigmoid(z):
    """
    Computes the sigmoid of z

    Arguments:
    z -- input value, scalar or vector

    Returns:
    results -- the sigmoid of z
    """

    ### START CODE HERE ### ( approx. 4 lines of code)
    # Create a placeholder for x. Name it 'x'.
    x = tf.placeholder(tf.float32, name='x')    #a placeholder is variable wh
    o's value we define later

    # compute sigmoid(x)
    sigmoid = tf.sigmoid(x)
    init = tf.global_variables_initializer()

    # Create a session, and run it. Please use the method 2 explained above.
    # You should use a feed_dict to pass z's value to x.
    with tf.Session() as sess:
        sess.run(init)
        # Run session and call the output "result"
        result = sess.run(sigmoid, feed_dict={x: z})    #feed dict passes the va
        lue into our variable

    ### END CODE HERE ###

    return result
```

```
In [11]: print ("sigmoid(0) = " + str(sigmoid(0)))
print ("sigmoid(12) = " + str(sigmoid(12)))
```

```
sigmoid(0) = 0.5
sigmoid(12) = 0.999994
```

Expected Output :

sigmoid(0)	0.5
sigmoid(12)	0.999994

To summarize, you now know how to:

1. Create placeholders
2. Specify the computation graph corresponding to operations you want to compute
3. Create the session
4. Run the session, using a feed dictionary if necessary to specify placeholder variables' values.

1.3 - Computing the Cost

You can also use a built-in function to compute the cost of your neural network. So instead of needing to write code to compute this as a function of $a^{[2](i)}$ and $y^{(i)}$ for $i=1\dots m$:

$$J = -\frac{1}{m} \sum_{i=1}^m \left(y^{(i)} \log a^{[2](i)} + (1 - y^{(i)}) \log(1 - a^{[2](i)}) \right) \quad (2)$$

you can do it in one line of code in tensorflow!

Exercise: Implement the cross entropy loss. The function you will use is:

- `tf.nn.sigmoid_cross_entropy_with_logits(logits = ..., labels = ...)`

Your code should input z , compute the sigmoid (to get a) and then compute the cross entropy cost J . All this can be done using one call to `tf.nn.sigmoid_cross_entropy_with_logits`, which computes

$$-\frac{1}{m} \sum_{i=1}^m \left(y^{(i)} \log \sigma(z^{[2](i)}) + (1 - y^{(i)}) \log(1 - \sigma(z^{[2](i)})) \right) \quad (2)$$


```
In [12]: # GRADED FUNCTION: cost

def cost(logits, labels):
    """
    Computes the cost using the sigmoid cross entropy

    Arguments:
    logits -- vector containing z, output of the last linear unit (before the
    final sigmoid activation)
    labels -- vector of labels y (1 or 0)

    Note: What we've been calling "z" and "y" in this class are respectively c
    alled "logits" and "Labels"
    in the TensorFlow documentation. So logits will feed into z, and labels in
    to y.

    Returns:
    cost -- runs the session of the cost (formula (2))
    """

    ### START CODE HERE ###

    # Create the placeholders for "Logits" (z) and "Labels" (y) (approx. 2 lin
    es)
    z = tf.placeholder(tf.float32, name='z') #output of the last linear unit
    y = tf.placeholder(tf.float32, name='y') #ground truth labels

    # Use the loss function (approx. 1 line)
    #this following powerful af function computes the sigmoid and the cost fun
    ction all in one line
    cost = tf.nn.sigmoid_cross_entropy_with_logits(logits=z, labels=y)

    # Create a session (approx. 1 line). See method 1 above.
    sess = tf.Session()

    # Run the session (approx. 1 line).
    #REMEMBER THE FEED_DICT IS THE WAY WE PASS DATA INTO THE PLACEHOLDER VARIA
    BLES
    cost = sess.run(cost, feed_dict={z: logits, y: labels})

    # Close the session (approx. 1 line). See method 1 above.
    sess.close()

    ### END CODE HERE ###

    return cost
```

```
In [13]: logits = np.array([0.2,0.4,0.7,0.9])

cost = cost(logits, np.array([0,0,1,1]))
print ("cost = " + str(cost))


cost = [ 0.79813886  0.91301525  0.40318605  0.34115386]
```

Expected Output :

```
cost = [ 0.79813886  0.91301525  0.40318605  0.34115386]
```

1.4 - Using One Hot encodings

Many times in deep learning you will have a y vector with numbers ranging from 0 to C-1, where C is the number of classes. If C is for example 4, then you might have the following y vector which you will need to convert as follows:

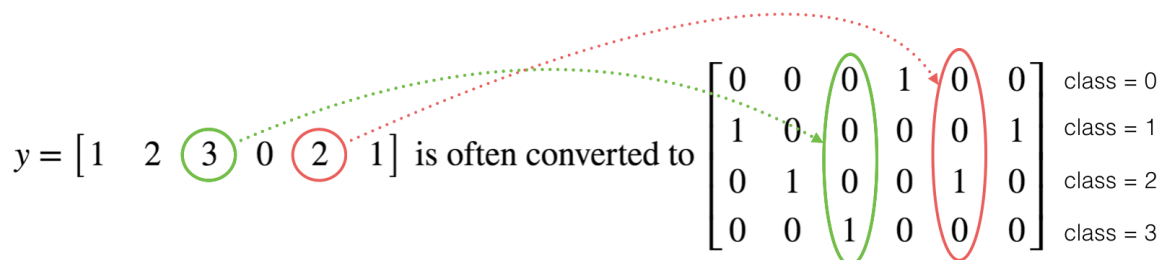

This is called a "one hot" encoding, because in the converted representation exactly one element of each column is "hot" (meaning set to 1). To do this conversion in numpy, you might have to write a few lines of code. In tensorflow, you can use one line of code:

- `tf.one_hot(labels, depth, axis)`

Exercise: Implement the function below to take one vector of labels and the total number of classes C , and return the one hot encoding. Use `tf.one_hot()` to do this.

```
In [13]: # GRADED FUNCTION: one_hot_matrix

def one_hot_matrix(labels, C):
    """
    Creates a matrix where the i-th row corresponds to the ith class number and
    the jth column corresponds to the jth training example. So if example j
    had a label i. Then entry (i,j) will be 1.

    Arguments:
    labels -- vector containing the labels
    C -- number of classes, the depth of the one hot dimension

    Returns:
    one_hot -- one hot matrix
    """

    ### START CODE HERE ###

    # Create a tf.constant equal to C (depth), name it 'C'. (approx. 1 line)
    C = tf.constant(C, name='C') #again, declaring a variable WITH an initial
    variable (placeholder is w/o initial variable)

    # Use tf.one_hot, be careful with the axis (approx. 1 line)
    #this super powerful line does the conversion to the "yes/no" matrix
    one_hot_matrix = tf.one_hot(labels, C, axis=0)

    # Create the session (approx. 1 line)
    sess = tf.Session()

    # Run the session (approx. 1 line)
    one_hot = sess.run(one_hot_matrix)

    # Close the session (approx. 1 line). See method 1 above.
    sess.close()

    ### END CODE HERE ###

    return one_hot
```

```
In [14]: labels = np.array([1,2,3,0,2,1])
one_hot = one_hot_matrix(labels, C = 4)
print ("one_hot = \n" + str(one_hot))
```

```
one_hot =
[[ 0.  0.  0.  1.  0.  0.]
 [ 1.  0.  0.  0.  0.  1.]
 [ 0.  1.  0.  0.  1.  0.]
 [ 0.  0.  1.  0.  0.  0.]
```

Expected Output:

```
one_hot =  
[[ 0.  0.  0.  1.  0.  0.]  
 [ 1.  0.  0.  0.  0.  1.]  
 [ 0.  1.  0.  0.  1.  0.]  
 [ 0.  0.  1.  0.  0.  0.]]
```

1.5 - Initialize with zeros and ones

Now you will learn how to initialize a vector of zeros and ones. The function you will be calling is `tf.ones()`. To initialize with zeros you could use `tf.zeros()` instead. These functions take in a shape and return an array of dimension shape full of zeros and ones respectively.

Exercise: Implement the function below to take in a shape and to return an array (of the shape's dimension of ones).

- `tf.ones(shape)`

```
In [15]: # GRADED FUNCTION: ones

def ones(shape):
    """
    Creates an array of ones of dimension shape

    Arguments:
    shape -- shape of the array you want to create

    Returns:
    ones -- array containing only ones
    """

    ### START CODE HERE ###

    # Create "ones" tensor using tf.ones(...). (approx. 1 line)
    #initializes a matrix of 1s and 0s of shape, shape
    ones = tf.ones(shape)

    # Create the session (approx. 1 line)
    sess = tf.Session()

    # Run the session to compute 'ones' (approx. 1 line)
    ones = sess.run(ones)

    # Close the session (approx. 1 line). See method 1 above.
    sess.close()

    ### END CODE HERE ###
    return ones
```

```
In [16]: print ("ones = " + str(ones([3])))

ones = [ 1.  1.  1.]
```

Expected Output:

ones	[1. 1. 1.]
-----------------	-------------

2 - Building your first neural network in tensorflow

In this part of the assignment you will build a neural network using tensorflow. Remember that there are two parts to implement a tensorflow model:

- Create the computation graph
- Run the graph

Let's delve into the problem you'd like to solve!


2.0 - Problem statement: SIGNS Dataset

One afternoon, with some friends we decided to teach our computers to decipher sign language. We spent a few hours taking pictures in front of a white wall and came up with the following dataset. It's now your job to build an algorithm that would facilitate communications from a speech-impaired person to someone who doesn't understand sign language.

- **Training set:** 1080 pictures (64 by 64 pixels) of signs representing numbers from 0 to 5 (180 pictures per number).
- **Test set:** 120 pictures (64 by 64 pixels) of signs representing numbers from 0 to 5 (20 pictures per number).

Note that this is a subset of the SIGNS dataset. The complete dataset contains many more signs.

Here are examples for each number, and how an explanation of how we represent the labels. These are the original pictures, before we lowered the image resolution to 64 by 64 pixels.

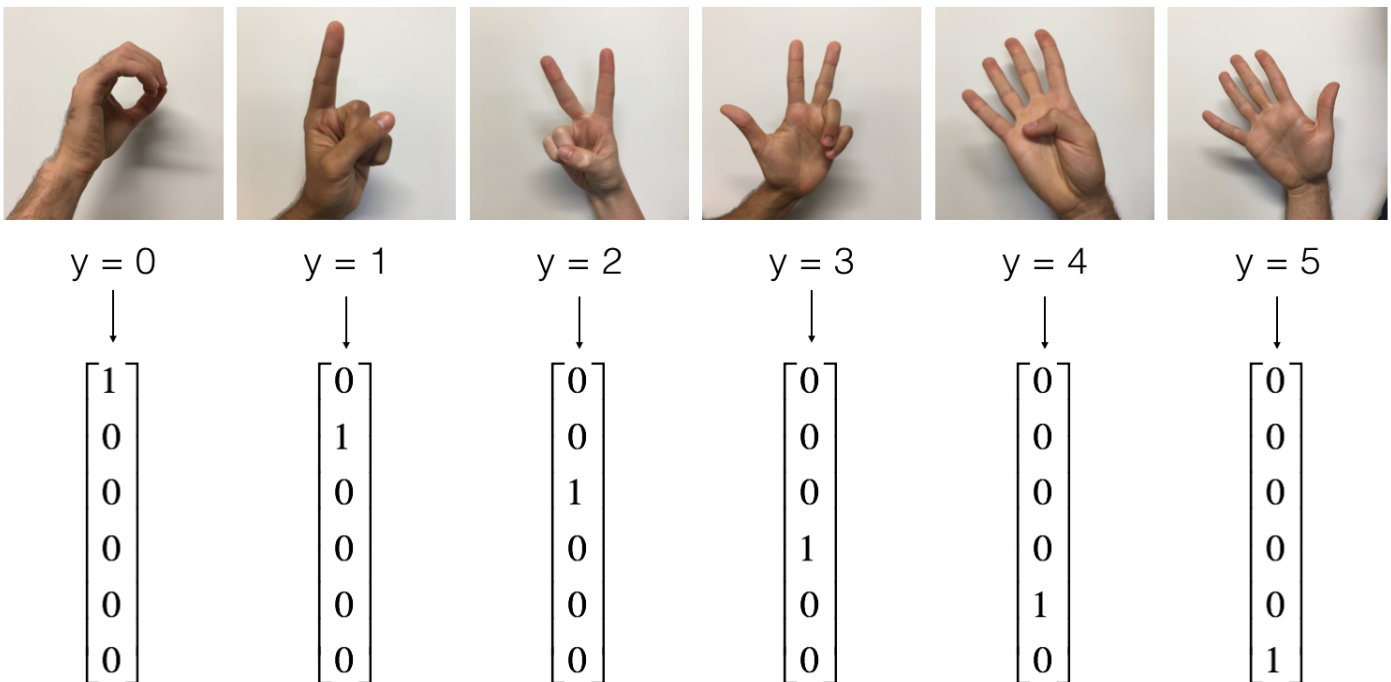

****Figure 1**:** SIGNS dataset


Run the following code to load the dataset.

```
In [17]: # Loading the dataset
X_train_orig, Y_train_orig, X_test_orig, Y_test_orig, classes = load_dataset()
```

Change the index below and run the cell to visualize some examples in the dataset.

```
In [18]: # Example of a picture
index = 50
plt.imshow(X_train_orig[index])
print ("y = " + str(np.squeeze(Y_train_orig[:, index])))
```

y = 0

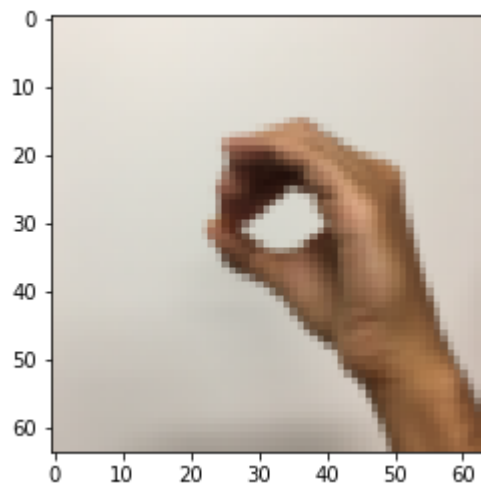

As usual you flatten the image dataset, then normalize it by dividing by 255. On top of that, you will convert each label to a one-hot vector as shown in Figure 1. Run the cell below to do so.

```
In [19]: # Flatten the training and test images
X_train_flatten = X_train_orig.reshape(X_train_orig.shape[0], -1).T
X_test_flatten = X_test_orig.reshape(X_test_orig.shape[0], -1).T
# Normalize image vectors
X_train = X_train_flatten/255.
X_test = X_test_flatten/255.
# Convert training and test labels to one hot matrices
Y_train = convert_to_one_hot(Y_train_orig, 6)
Y_test = convert_to_one_hot(Y_test_orig, 6)

print ("number of training examples = " + str(X_train.shape[1]))
print ("number of test examples = " + str(X_test.shape[1]))
print ("X_train shape: " + str(X_train.shape))
print ("Y_train shape: " + str(Y_train.shape))
print ("X_test shape: " + str(X_test.shape))
print ("Y_test shape: " + str(Y_test.shape))

number of training examples = 1080
number of test examples = 120
X_train shape: (12288, 1080)
Y_train shape: (6, 1080)
X_test shape: (12288, 120)
Y_test shape: (6, 120)
```

Note that 12288 comes from $64 \times 64 \times 3$. Each image is square, 64 by 64 pixels, and 3 is for the RGB colors. Please make sure all these shapes make sense to you before continuing.

Your goal is to build an algorithm capable of recognizing a sign with high accuracy. To do so, you are going to build a tensorflow model that is almost the same as one you have previously built in numpy for cat recognition (but now using a softmax output). It is a great occasion to compare your numpy implementation to the tensorflow one.

The model is *LINEAR -> RELU -> LINEAR -> RELU -> LINEAR -> SOFTMAX*. The SIGMOID output layer has been converted to a SOFTMAX. A SOFTMAX layer generalizes SIGMOID to when there are more than two classes.

2.1 - Create placeholders

Your first task is to create placeholders for X and Y. This will allow you to later pass your training data in when you run your session.

Exercise: Implement the function below to create the placeholders in tensorflow.


```
In [20]: # GRADED FUNCTION: create_placeholders

def create_placeholders(n_x, n_y):
    """
    Creates the placeholders for the tensorflow session.

    Arguments:
    n_x -- scalar, size of an image vector (num_px * num_px = 64 * 64 * 3 = 12
288)
    n_y -- scalar, number of classes (from 0 to 5, so -> 6)

    Returns:
    X -- placeholder for the data input, of shape [n_x, None] and dtype "tf.fl
oat32"
    Y -- placeholder for the input labels, of shape [n_y, None] and dtype "tf.
float32"

    Tips:
    - You will use None because it let's us be flexible on the number of examp
les you will for the placeholders.
    In fact, the number of examples during test/train is different.
    """

    ### START CODE HERE ### (approx. 2 lines)
    #initialization variables placeholders (so no initial values) of specified
shape
    X = tf.placeholder(tf.float32, [n_x, None], name="X")
    Y = tf.placeholder(tf.float32, [n_y, None], name="Y")
    ### END CODE HERE ###

    return X, Y
```

```
In [21]: X, Y = create_placeholders(12288, 6)
print ("X = " + str(X))
print ("Y = " + str(Y))

X = Tensor("X_1:0", shape=(12288, ?), dtype=float32)
Y = Tensor("Y:0", shape=(6, ?), dtype=float32)
```

Expected Output:

X	Tensor("Placeholder_1:0", shape=(12288, ?), dtype=float32) (not necessarily Placeholder_1)
Y	Tensor("Placeholder_2:0", shape=(6, ?), dtype=float32) (not necessarily Placeholder_2)

2.2 - Initializing the parameters

Your second task is to initialize the parameters in tensorflow.

Exercise: Implement the function below to initialize the parameters in tensorflow. You are going use Xavier Initialization for weights and Zero Initialization for biases. The shapes are given below. As an example, to help you, for W1 and b1 you could use:

```
W1 = tf.get_variable("W1", [25,12288], initializer = tf.contrib.layers.xavier_initializer(seed = 1))  
b1 = tf.get_variable("b1", [25,1], initializer = tf.zeros_initializer())
```

Please use `seed = 1` to make sure your results match ours.

In [22]: *# GRADED FUNCTION: initialize_parameters*

```
def initialize_parameters():
    """
    Initializes parameters to build a neural network with tensorflow. The shapes
    are:

        W1 : [25, 12288]
        b1 : [25, 1]
        W2 : [12, 25]
        b2 : [12, 1]
        W3 : [6, 12]
        b3 : [6, 1]

    Returns:
    parameters -- a dictionary of tensors containing W1, b1, W2, b2, W3, b3
    """

    tf.set_random_seed(1)                # so that your "random" numbers match ours

    ### START CODE HERE ### (approx. 6 lines of code)
    #get variable, "gets" it if present, else initializes it, of given shape, initialize W with Xavier initialization
     #(tis the weights initialization technique that tries to make the variance of the outputs of a layer to be equal
     #to the variance of its inputs)
    W1 = tf.get_variable("W1", [25, 12288], initializer = tf.contrib.layers.xavier_initializer(seed=1))
    b1 = tf.get_variable("b1", [25, 1], initializer = tf.zeros_initializer())
    W2 = tf.get_variable("W2", [12, 25], initializer = tf.contrib.layers.xavier_initializer(seed=1))
    b2 = tf.get_variable("b2", [12, 1], initializer = tf.zeros_initializer())
    W3 = tf.get_variable("W3", [6, 12], initializer = tf.contrib.layers.xavier_initializer(seed=1))
    b3 = tf.get_variable("b3", [6, 1], initializer = tf.zeros_initializer())
    ### END CODE HERE ###

    parameters = {"W1": W1,
                  "b1": b1,
                  "W2": W2,
                  "b2": b2,
                  "W3": W3,
                  "b3": b3}

    return parameters
```

```
In [23]: tf.reset_default_graph()
with tf.Session() as sess:
    parameters = initialize_parameters()
    print("W1 = " + str(parameters["W1"]))
    print("b1 = " + str(parameters["b1"]))
    print("W2 = " + str(parameters["W2"]))
    print("b2 = " + str(parameters["b2"]))

W1 = <tf.Variable 'W1:0' shape=(25, 12288) dtype=float32_ref>
b1 = <tf.Variable 'b1:0' shape=(25, 1) dtype=float32_ref>
W2 = <tf.Variable 'W2:0' shape=(12, 25) dtype=float32_ref>
b2 = <tf.Variable 'b2:0' shape=(12, 1) dtype=float32_ref>
```

Expected Output:

W1	< tf.Variable 'W1:0' shape=(25, 12288) dtype=float32_ref >
b1	< tf.Variable 'b1:0' shape=(25, 1) dtype=float32_ref >
W2	< tf.Variable 'W2:0' shape=(12, 25) dtype=float32_ref >
b2	< tf.Variable 'b2:0' shape=(12, 1) dtype=float32_ref >

As expected, the parameters haven't been evaluated yet.

2.3 - Forward propagation in tensorflow

You will now implement the forward propagation module in tensorflow. The function will take in a dictionary of parameters and it will complete the forward pass. The functions you will be using are:

- `tf.add(..., ...)` to do an addition
- `tf.matmul(..., ...)` to do a matrix multiplication
- `tf.nn.relu(...)` to apply the ReLU activation

Question: Implement the forward pass of the neural network. We commented for you the numpy equivalents so that you can compare the tensorflow implementation to numpy. It is important to note that the forward propagation stops at `z3`. The reason is that in tensorflow the last linear layer output is given as input to the function computing the loss. Therefore, you don't need `a3`!

It is important to note that the forward propagation stops at `z3`. The reason is that in tensorflow the last linear layer output is given as input to the function computing the loss. Therefore, you don't need `a3`!

```

In [24]: # GRADED FUNCTION: forward_propagation

def forward_propagation(X, parameters):
    """
    Implements the forward propagation for the model: LINEAR -> RELU -> LINEAR
    -> RELU -> LINEAR -> SOFTMAX

    Arguments:
    X -- input dataset placeholder, of shape (input size, number of examples)
    parameters -- python dictionary containing your parameters "W1", "b1", "W
    2", "b2", "W3", "b3"
                    the shapes are given in initialize_parameters

    Returns:
    Z3 -- the output of the last LINEAR unit
    """

    # Retrieve the parameters from the dictionary "parameters"
    W1 = parameters['W1']
    b1 = parameters['b1']
    W2 = parameters['W2']
    b2 = parameters['b2']
    W3 = parameters['W3']
    b3 = parameters['b3']

    ### START CODE HERE ### (approx. 5 lines)                # Numpy Equivalent
s:
    #tf equivalents
    Z1 = tf.add(tf.matmul(W1, X), b1)
    # Z1 = np.dot(W1, X) + b1
    A1 = tf.nn.relu(Z1)
    # A1 = relu(Z1)
    Z2 = tf.add(tf.matmul(W2, A1), b2)
    # Z2 = np.dot(W2, A1) + b2
    A2 = tf.nn.relu(Z2)
    # A2 = relu(Z2)
    Z3 = tf.add(tf.matmul(W3, A2), b3)
    # Z3 = np.dot(W3, A2) + b3
    ### END CODE HERE ###

    return Z3

```

```

In [25]: tf.reset_default_graph()

with tf.Session() as sess:
    X, Y = create_placeholders(12288, 6)
    parameters = initialize_parameters()
    Z3 = forward_propagation(X, parameters)
    print("Z3 = " + str(Z3))

Z3 = Tensor("Add_2:0", shape=(6, ?), dtype=float32)

```

Expected Output:

Z3	Tensor("Add_2:0", shape=(6, ?), dtype=float32)
---------------	--

You may have noticed that the forward propagation doesn't output any cache. You will understand why below, when we get to backpropagation.

2.4 Compute cost

As seen before, it is very easy to compute the cost using:

```
tf.reduce_mean(tf.nn.softmax_cross_entropy_with_logits(logits = ..., labels = ...))
```

Question: Implement the cost function below.

- It is important to know that the "logits" and "labels" inputs of `tf.nn.softmax_cross_entropy_with_logits` are expected to be of shape (number of examples, num_classes). We have thus transposed Z3 and Y for you.
- Besides, `tf.reduce_mean` basically does the summation over the examples.

```
In [26]: # GRADED FUNCTION: compute_cost

def compute_cost(Z3, Y):
    """
    Computes the cost

    Arguments:
    Z3 -- output of forward propagation (output of the last LINEAR unit), of shape (6, number of examples)
    Y -- "true" labels vector placeholder, same shape as Z3

    Returns:
    cost - Tensor of the cost function
    """

    # to fit the tensorflow requirement for tf.nn.softmax_cross_entropy_with_logits(...,...)
    logits = tf.transpose(Z3)
    labels = tf.transpose(Y)

    ### START CODE HERE ### (1 line of code)
    #this one liner calculates A3 as well as the cost
    #the A3 value wasnt used previously since it is automatically used here (since we use tf.nn.softmax over here the
    #calculation of A3 is done directly)
    cost = tf.reduce_mean(tf.nn.softmax_cross_entropy_with_logits(logits=logits, labels=labels))
    ### END CODE HERE ###

    return cost
```

```
In [27]: tf.reset_default_graph()

with tf.Session() as sess:
    X, Y = create_placeholders(12288, 6)
    parameters = initialize_parameters()
    Z3 = forward_propagation(X, parameters)
    cost = compute_cost(Z3, Y)
    print("cost = " + str(cost))

cost = Tensor("Mean:0", shape=(), dtype=float32)
```

Expected Output:

cost	Tensor("Mean:0", shape=(), dtype=float32)
-----------------	---

2.5 - Backward propagation & parameter updates

This is where you become grateful to programming frameworks. All the backpropagation and the parameters update is taken care of in 1 line of code. It is very easy to incorporate this line in the model.

After you compute the cost function. You will create an "optimizer" object. You have to call this object along with the cost when running the tf.session. When called, it will perform an optimization on the given cost with the chosen method and learning rate.

For instance, for gradient descent the optimizer would be:

```
optimizer = tf.train.GradientDescentOptimizer(learning_rate = learning_rate).minimize(cost)
```

To make the optimization you would do:

```
_ , c = sess.run([optimizer, cost], feed_dict={X: minibatch_X, Y: minibatch_Y})
```

This computes the backpropagation by passing through the tensorflow graph in the reverse order. From cost to inputs.

Note When coding, we often use `_` as a "throwaway" variable to store values that we won't need to use later. Here, `_` takes on the evaluated value of `optimizer`, which we don't need (and `c` takes the value of the `cost` variable).

2.6 - Building the model

Now, you will bring it all together!

Exercise: Implement the model. You will be calling the functions you had previously implemented.


```
In [28]: def model(X_train, Y_train, X_test, Y_test, learning_rate = 0.0001,
            num_epochs = 1500, minibatch_size = 32, print_cost = True):
    """
    Implements a three-layer tensorflow neural network: LINEAR->RELU->LINEAR->
    RELU->LINEAR->SOFTMAX.

    Arguments:
    X_train -- training set, of shape (input size = 12288, number of training
    examples = 1080)
    Y_train -- test set, of shape (output size = 6, number of training example
    s = 1080)
    X_test -- training set, of shape (input size = 12288, number of training e
    xamples = 120)
    Y_test -- test set, of shape (output size = 6, number of test examples = 1
    20)
    learning_rate -- Learning rate of the optimization
    num_epochs -- number of epochs of the optimization loop
    minibatch_size -- size of a minibatch
    print_cost -- True to print the cost every 100 epochs
```

```

Returns:
parameters -- parameters learnt by the model. They can then be used to pre
dict.
"""

ops.reset_default_graph()                                # to be able to rerun th
e model without overwriting tf variables
tf.set_random_seed(1)                                    # to keep consistent res
ults
seed = 3                                                  # to keep consistent res
ults
(n_x, m) = X_train.shape                                  # (n_x: input size, m :
number of examples in the train set)
n_y = Y_train.shape[0]                                    # n_y : output size
costs = []                                                # To keep track of the c
ost

# Create Placeholders of shape (n_x, n_y)
### START CODE HERE ### (1 line)
X, Y = create_placeholders(n_x, n_y)
### END CODE HERE ###

# Initialize parameters
### START CODE HERE ### (1 line)
parameters = initialize_parameters()
### END CODE HERE ###

# Forward propagation: Build the forward propagation in the tensorflow gra
ph
### START CODE HERE ### (1 line)
Z3 = forward_propagation(X, parameters)
### END CODE HERE ###

# Cost function: Add cost function to tensorflow graph
### START CODE HERE ### (1 line)
cost = compute_cost(Z3, Y)
### END CODE HERE ###

# Backpropagation: Define the tensorflow optimizer. Use an AdamOptimizer.
### START CODE HERE ### (1 line)
#... no words...
optimizer = tf.train.AdamOptimizer(learning_rate=learning_rate).minimize(c
ost)
### END CODE HERE ###

# Initialize all the variables
init = tf.global_variables_initializer()

# Start the session to compute the tensorflow graph
with tf.Session() as sess:

    # Run the initialization
    sess.run(init)

    # Do the training loop
    for epoch in range(num_epochs):

```

```

epoch_cost = 0. # Defines a cost related to
an epoch
num_minibatches = int(m / minibatch_size) # number of minibatches
of size minibatch_size in the train set
seed = seed + 1
minibatches = random_mini_batches(X_train, Y_train, minibatch_size
, seed)

for minibatch in minibatches:

    # Select a minibatch
    (minibatch_X, minibatch_Y) = minibatch

    # IMPORTANT: The line that runs the graph on a minibatch.
    # Run the session to execute the "optimizer" and the "cost", t
he feedict should contain a minibatch for (X,Y).
    ### START CODE HERE ### (1 line)
    _ , minibatch_cost = sess.run([optimizer, cost], feed_dict={X:
minibatch_X, Y: minibatch_Y})
    ### END CODE HERE ###

    epoch_cost += minibatch_cost / minibatch_size

# Print the cost every epoch
if print_cost == True and epoch % 100 == 0:
    print ("Cost after epoch %i: %f" % (epoch, epoch_cost))
if print_cost == True and epoch % 5 == 0:
    costs.append(epoch_cost)

# plot the cost
plt.plot(np.squeeze(costs))
plt.ylabel('cost')
plt.xlabel('iterations (per fives)')
plt.title("Learning rate =" + str(learning_rate))
plt.show()

# Lets save the parameters in a variable
parameters = sess.run(parameters)
print ("Parameters have been trained!")

# Calculate the correct predictions
correct_prediction = tf.equal(tf.argmax(Z3), tf.argmax(Y))

# Calculate accuracy on the test set
accuracy = tf.reduce_mean(tf.cast(correct_prediction, "float"))

print ("Train Accuracy:", accuracy.eval({X: X_train, Y: Y_train}))
print ("Test Accuracy:", accuracy.eval({X: X_test, Y: Y_test}))


return parameters

```

Run the following cell to train your model! On our machine it takes about 5 minutes. Your "Cost after epoch 100" should be 1.048222. If it's not, don't waste time; interrupt the training by clicking on the square (■) in the upper bar of the notebook, and try to correct your code. If it is the correct cost, take a break and come back in 5 minutes!

```
In [29]: parameters = model(X_train, Y_train, X_test, Y_test)
```

```
Cost after epoch 0: 1.913693  
Cost after epoch 100: 1.048222  
Cost after epoch 200: 0.756012  
Cost after epoch 300: 0.590844  
Cost after epoch 400: 0.483423  
Cost after epoch 500: 0.392928  
Cost after epoch 600: 0.323629  
Cost after epoch 700: 0.262100  
Cost after epoch 800: 0.210199  
Cost after epoch 900: 0.171622  
Cost after epoch 1000: 0.145907  
Cost after epoch 1100: 0.110942  
Cost after epoch 1200: 0.088966  
Cost after epoch 1300: 0.061226  
Cost after epoch 1400: 0.053860
```

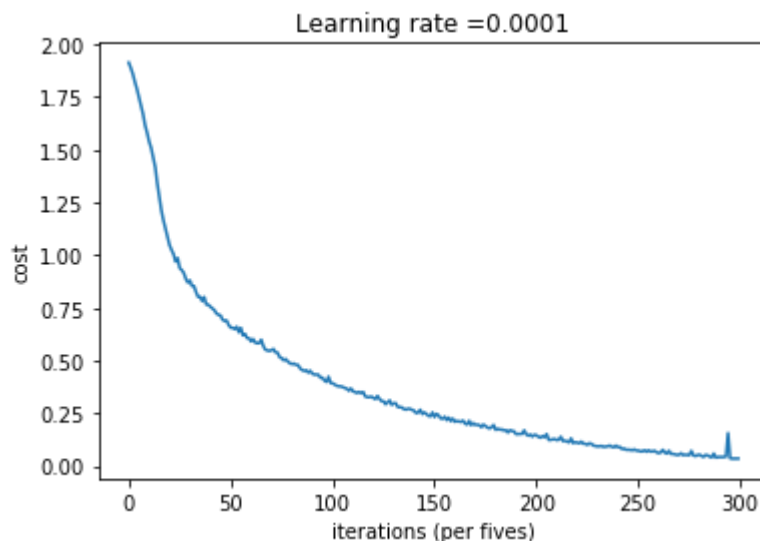

```
Parameters have been trained!  
Train Accuracy: 0.999074  
Test Accuracy: 0.716667
```

Expected Output:

Train Accuracy	0.999074
Test Accuracy	0.716667

Amazing, your algorithm can recognize a sign representing a figure between 0 and 5 with 71.7% accuracy.

Insights:

- Your model seems big enough to fit the training set well. However, given the difference between train and test accuracy, you could try to add L2 or dropout regularization to reduce overfitting.
- Think about the session as a block of code to train the model. Each time you run the session on a minibatch, it trains the parameters. In total you have run the session a large number of times (1500 epochs) until you obtained well trained parameters.

2.7 - Test with your own image (optional / ungraded exercise)

Congratulations on finishing this assignment. You can now take a picture of your hand and see the output of your model. To do that:

1. Click on "File" in the upper bar of this notebook, then click "Open" to go on your Coursera Hub.
2. Add your image to this Jupyter Notebook's directory, in the "images" folder
3. Write your image's name in the following code
4. Run the code and check if the algorithm is right!

```
In [ ]: import scipy
        from PIL import Image
        from scipy import ndimage

        ## START CODE HERE ## (PUT YOUR IMAGE NAME)
        my_image = "thumbs_up.jpg"
        ## END CODE HERE ##

        # We preprocess your image to fit your algorithm.
        fname = "images/" + my_image
        image = np.array(ndimage.imread(fname, flatten=False))
        image = image/255.
        my_image = scipy.misc.imresize(image, size=(64,64)).reshape((1, 64*64*3)).T
        my_image_prediction = predict(my_image, parameters)

        plt.imshow(image)
        print("Your algorithm predicts: y = " + str(np.squeeze(my_image_prediction)))
```

You indeed deserved a "thumbs-up" although as you can see the algorithm seems to classify it incorrectly. The reason is that the training set doesn't contain any "thumbs-up", so the model doesn't know how to deal with it! We call that a "mismatched data distribution" and it is one of the various of the next course on "Structuring Machine Learning Projects".

What you should remember:

- Tensorflow is a programming framework used in deep learning
- The two main object classes in tensorflow are Tensors and Operators.
- When you code in tensorflow you have to take the following steps:
 - Create a graph containing Tensors (Variables, Placeholders ...) and Operations (tf.matmul, tf.add, ...)
 - Create a session
 - Initialize the session
 - Run the session to execute the graph
- You can execute the graph multiple times as you've seen in model()
- The backpropagation and optimization is automatically done when running the session on the "optimizer" object.