


M4: Beta Build

EEL4908 CpE Design 2

Hardened RISC-V Exam Computer

October 2, 2026

Cannon Spencer George Rushevich Justin Reyes Gabriel Velazquez

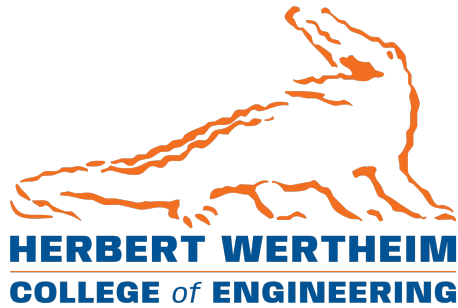

1 Beta objective

The beta goal is a **classroom bring-up path** plus a **control loop**: boards phone home, and an instructor start/stop command launches or tears down Safe Exam Browser on every online board. T2 states the demo bar as two boards accepting one start command. This report is the build that that plan tests.

Repository: <https://github.com/cannon-spencer/riscv-exam-computer>.

Commit tested: 027d47894359fdc4bdf7c9e229fe81d56dff1a36

Demo video: <https://youtu.be/UAvpBsoGMOk>

Alpha (M3) flashed a CI Debian image and proved a heartbeat to a LAN listener. SEB was in-tree but not auto-installed. Beta iterates that: pre-built SEB and **seb-agent** install in minutes, the heartbeat goes through a public HTTPS name, and start/stop is a job in the heartbeat reply.

2 Vertical features

Element	Beta
External interface	Student: SEB on HDMI (<code>xinit</code> + <code>openbox</code>). Instructor: HTTP API (<code>GET /machines</code> , <code>POST /start</code> , <code>POST /stop</code>) on the laptop, reached as https://riscv-exam-computer.download .
Persistent state	CI OS image on SD; <code>~/safe-exam-browser</code> ; <code>~/seb-agent</code> user unit; <code>start-seb.sh</code> / <code>stop-seb.sh</code> ; <code>sudoers</code> . Server inventory is in memory only.
Internal systems	<code>flash-os.sh</code> , <code>install-software.sh</code> , <code>install-seb.sh</code> , <code>deploy-server.sh</code> . Agent POSTs heartbeat every 5 s and execs the sudo wrappers. Server queues at most one job per host.

Table 1: Vertical features in the beta build.

3 Specification mapping

Criterion	Beta
Usability	Flash + the two install scripts put agent and SEB on a board. Instructor starts and stops SEB without SSH. Student sees SEB on HDMI. Remaining product work is exam configuration from the server and making the kiosk usable on this SoC.
Interface	Public HTTPS heartbeat and job reply; localhost :8000 for development. HDMI is the student surface. No instructor web UI yet (curl is the control).
Navigation	Repeatable: flash image, install agent, install SEB, <code>deploy-server.sh</code> , then <code>POST /start</code> and <code>/stop</code> . Campus SSH uses <code>ufdevice</code> + Tailscale.
Perception	Docker logs show heartbeats. <code>/machines</code> lists host, state, and age. HDMI: SEB up after start, text console after stop. Agent journal records started/stopped. Non-team user testing: 2 students outside the team each used one board for about 5 minutes. We ran <code>POST /start</code> and <code>/stop</code> while they watched the HDMI display. They were asked to start the exam browser, open Canvas, and return to the text screen without help. User 1 and 2 were able to successfully log in and use canvas. Both users noted the responsiveness of the canvas page. User 2 was asked to repeat, a failed log in caused redirection from canvas, and User 2 was unable to renavigate inside of SEB.
Responsiveness	Agent sleeps 5 s between POSTs (no busy wait). Jobs ride the next heartbeat (at most one interval plus launch). Canvas click latency is a known limit, not a control-loop failure.
Robustness	User <code>systemd</code> unit restarts the agent; <code>linger</code> keeps it up without a login. Stop script restores the framebuffer console. Control URL has no auth (see bugs).
Consistency	Same release ELF, same scripts, same public URL. <code>/start</code> broadcasts to every host seen in the last 15 s.
Aesthetic rigor	Lightweight image (no GNOME). SEB is the exam chrome; <code>openbox</code> is only enough window manager for the WebKit view.

Table 2: M4 specification mapping.

4 Work completed this milestone

Work since the alpha build (T1/M3). Dated notes live under `docs/log/`.

Classroom bring-up. `flash-os.sh` writes the GitHub Orange Pi image. `install-seb.sh` copies the pre-compiled SEB ELF and Qt/WebKit packages. `install-software.sh` deploys the agent user unit (`linger`) and the start/stop scripts plus sudoers. The lab board already runs the X session (`openbox` / `xorg` / `xinit`); `install-seb.sh` does not yet apt those packages. Board bring-up is minutes, not an on-desk SEB compile.

Control plane. Oracle VM dropped. `deploy-server.sh` runs Axum in Docker and a named Cloudflare tunnel. The agent POSTs to `https://riscv-exam-computer.download/heartbeat`. The server records hosts and returns `job: start|stop`. `POST /start` and `/stop` enqueue every online board. One board (`orangepirv`) is written up: queued, HDMI session, stop back to `vt1`. Two-board start (T2 DEMO-01): run on 10/2/2026 with boards `orangepirv1` and `orangepirv2`. `POST /start` queued both, and SEB appeared on both within 90 s.

Kiosk session. No desktop on the fleet image. `start-seb.sh` is `xinit` on `:1 vt3`, `openbox`, WebKitGTK SEB, `-windowed`. Lab launches use a local start file (not in the repo). Next is a server-pushed `.seb`.

Parallel GPU work (isolated board). WebKitGTK rebuilt with OpenGL ES (~11.5 h) and SEB run in cage on PowerVR. GPU compositing verified; Canvas still CPU-bound (JS on one JH7110 core). That environment is not the fleet image. See the 9/30 GPU performance log.

Campus access. Eduroam does not allow laptop-to-board SSH. ufddevice + Tailscale is the documented path.

5 Known bugs and limitations

Beta is start/stop of a kiosk session. Remaining work is exam configuration and performance on this SoC. T2 is the test plan for this build.

ID	Description	Status
BLK-02	No riscv64 Qt6 WebEngine; WebKitGTK is the browser.	Constraint
PERF-01	Full Canvas is not exam-usable. Clicks take many seconds; GPU path (isolated board) only composites/scrolls. JS stays on one core.	Open; thinner start URL is the next try
LIM-01	Control API has no authentication. Anyone who knows the URL can POST /start.	Open
LIM-02	/start and /stop broadcast to all online boards; no per-board targeting.	By design for beta
LIM-03	Server inventory is in memory only (lost on restart).	Open
LIM-04	Fleet kiosk is X11/xinit; GLES+cage work is not merged into install scripts.	Two tracks
LIM-05	Server does not yet distribute exam configuration (.seb).	Next
BUG-03	Failed UF login can land on ufl.edu with no way back under lockdown.	Open
BUG-01, BUG-02	Alpha WebKitGTK signals / spell-check pointer issues on the release ELF.	Not seen in the release build

Table 3: Known bugs and limitations.