


Marvell FC card's setting


Boot to BIOS, choose the card's setting



Choose “Adapter Settings”

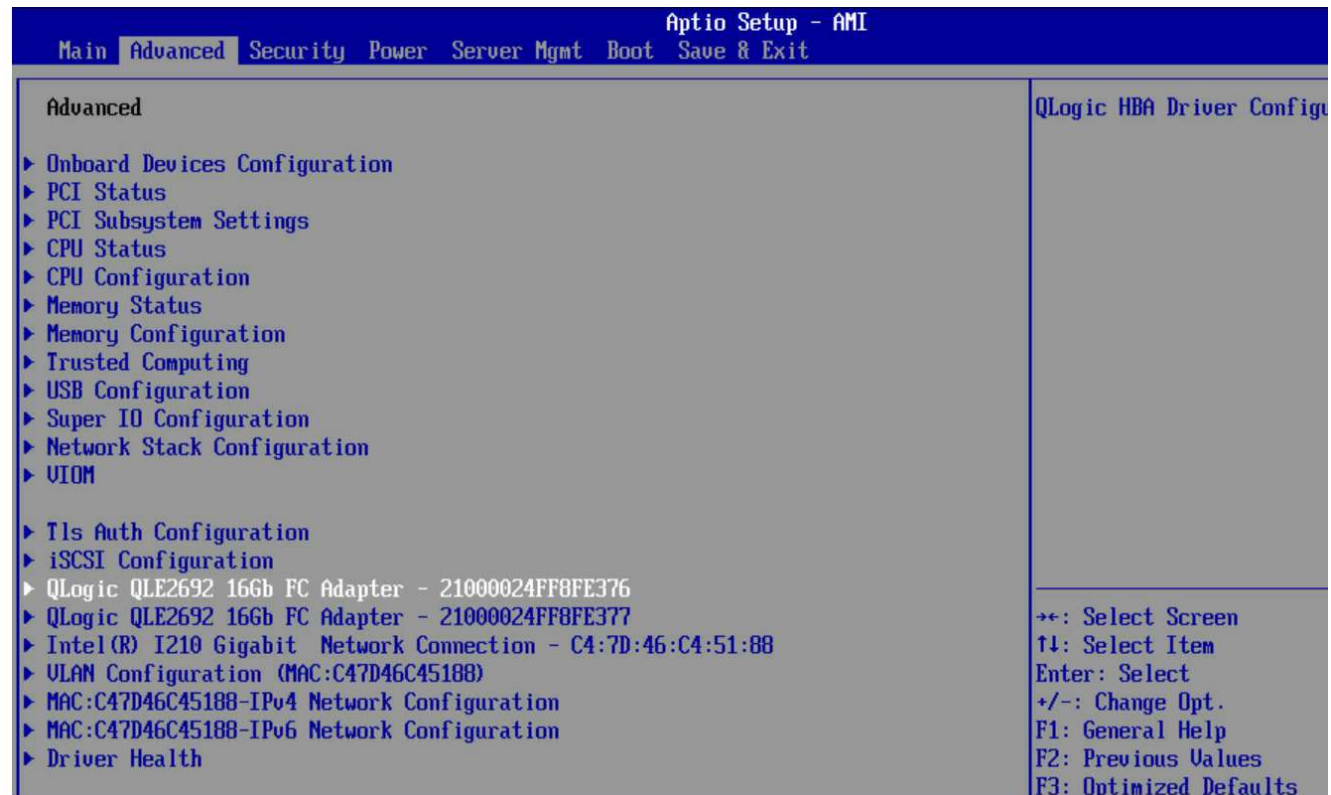

Set “Point To Point” for Connection Option

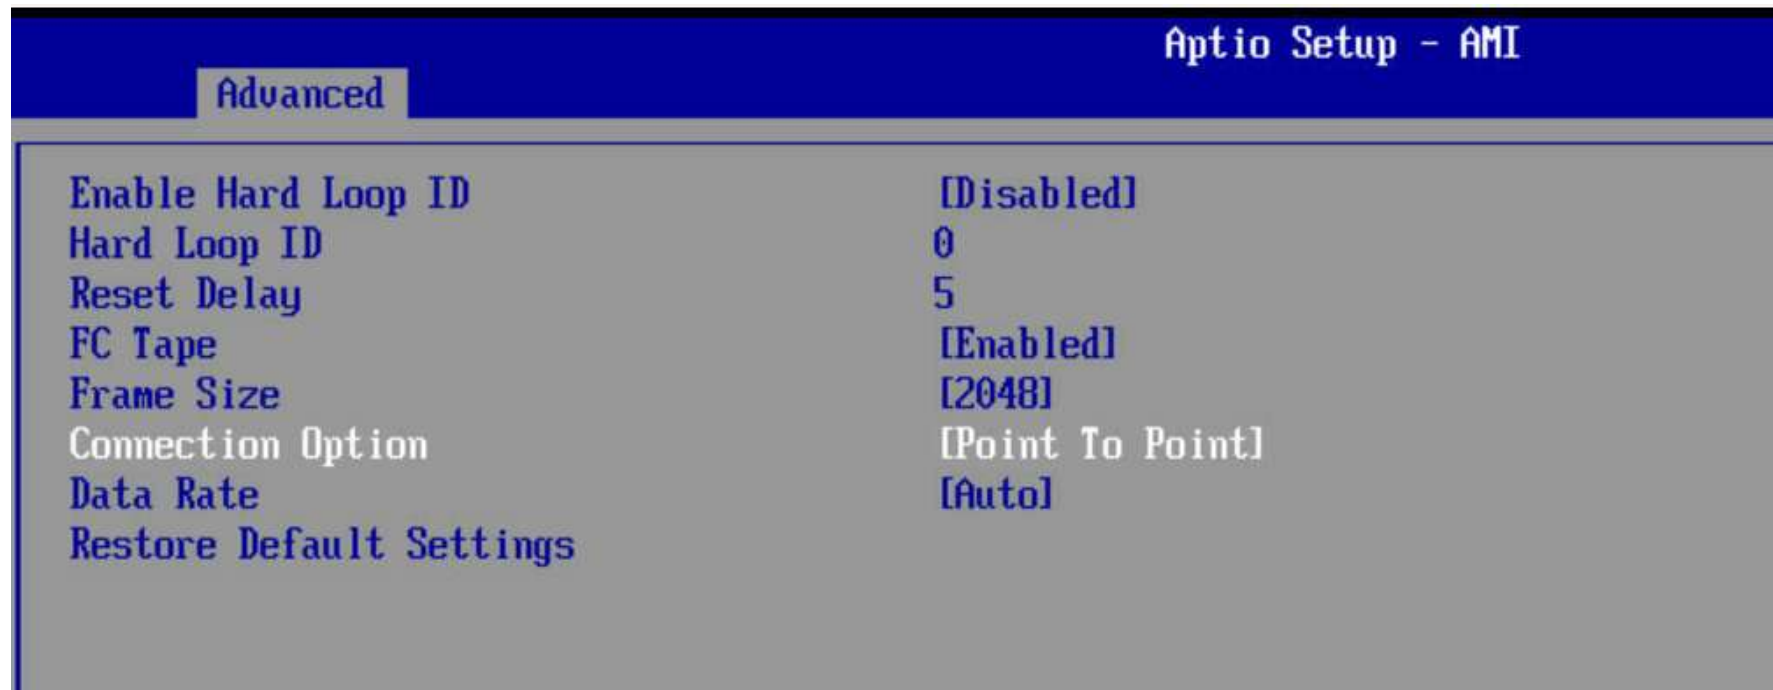

Choose “Boot Settings”




Set “Enabled” for Adapter Driver & Fabric Assigned Boot LUN

Aptio Setup - AMI	
Advanced	
Selective Login	[Disabled]
Selective Lun Login	[Disabled]
Legacy BIOS Selectable Boot	[Disabled]
World Login	[Disabled]
Adapter Driver	[Enabled]
Fabric Assigned Boot LUN	[Enabled]

Aptio Setup - AMI	
Advanced	
Selective Login	[Disabled]
Selective Lun Login	[Disabled]
Legacy BIOS Selectable Boot	[Disabled]
World Login	[Disabled]
Adapter Driver	[Enabled]
Fabric Assigned Boot LUN	[Enabled]

- Do the same steps for another FC port.


Save Changes and Reset

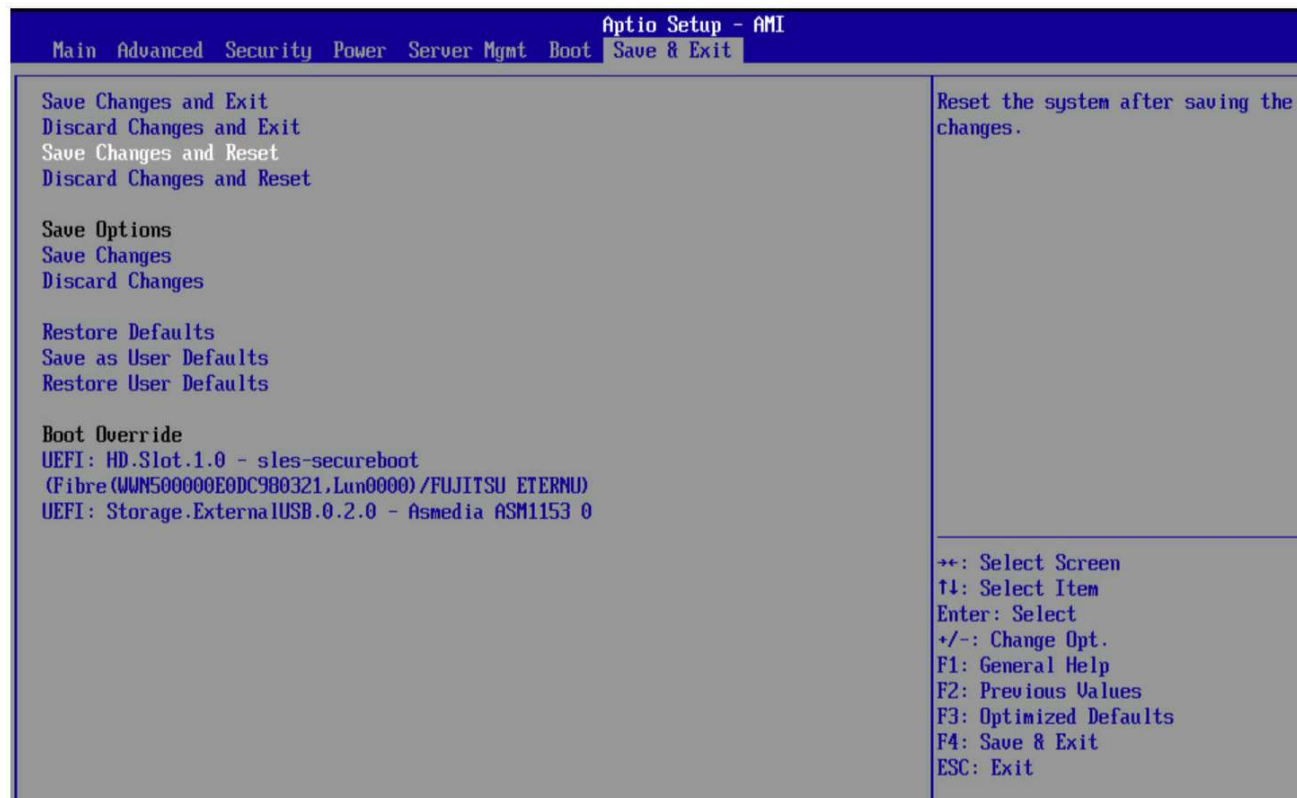

- After confirmed the setting, please install OS.
- Install FC card's driver.
- Update BIOS to the latest version (R0.75 or later)

- Reboot the system and boot to BIOS


Boot to BIOS, choose the card's setting

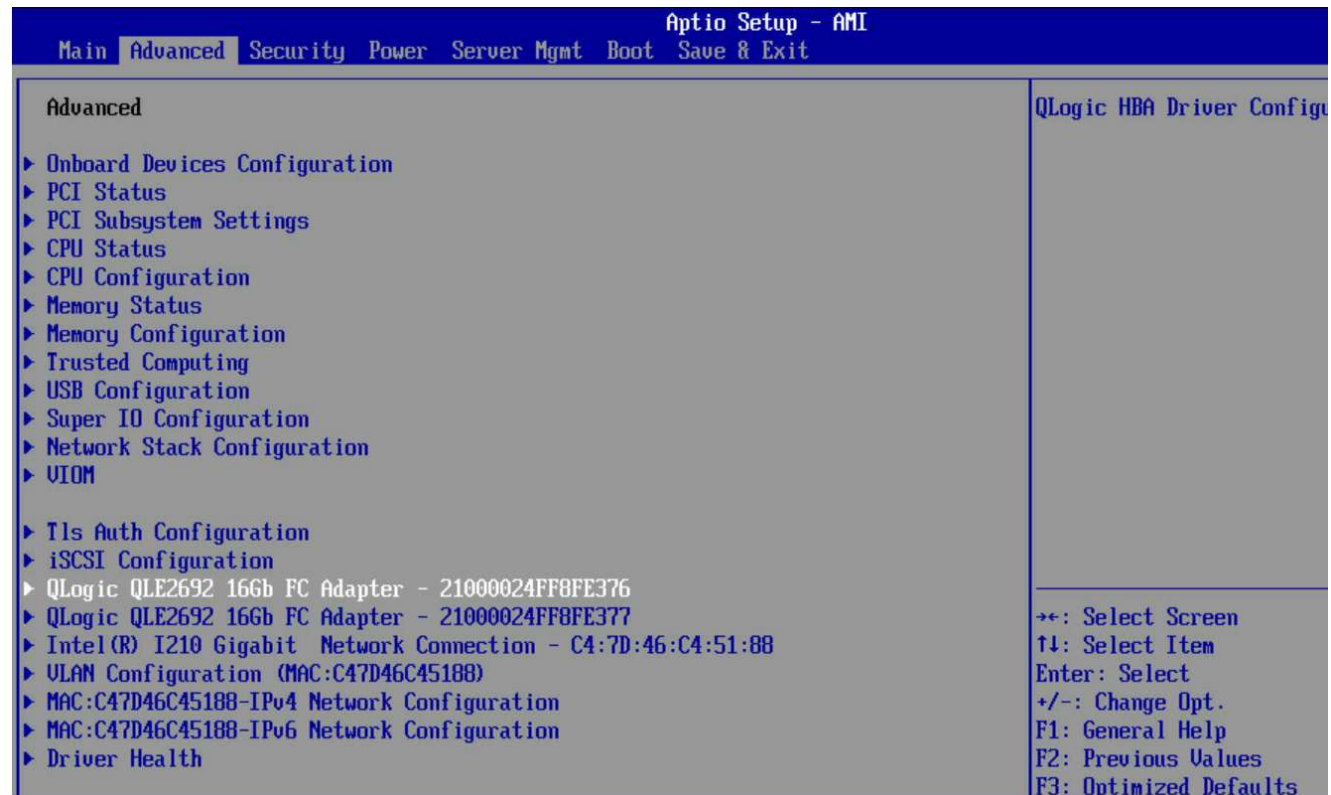


Choose “WWN Database”



Check it has listed your target WWN

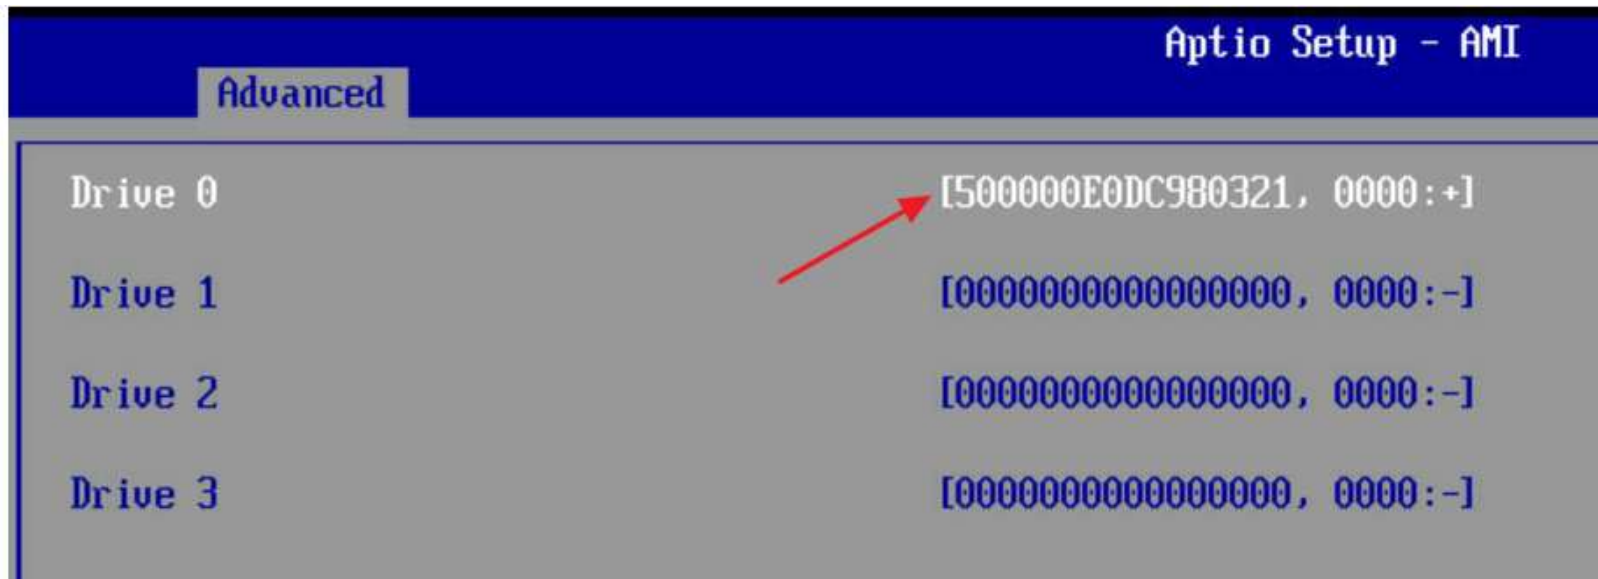


If there is no WWN listed, please press “Enter” and add your target WWN

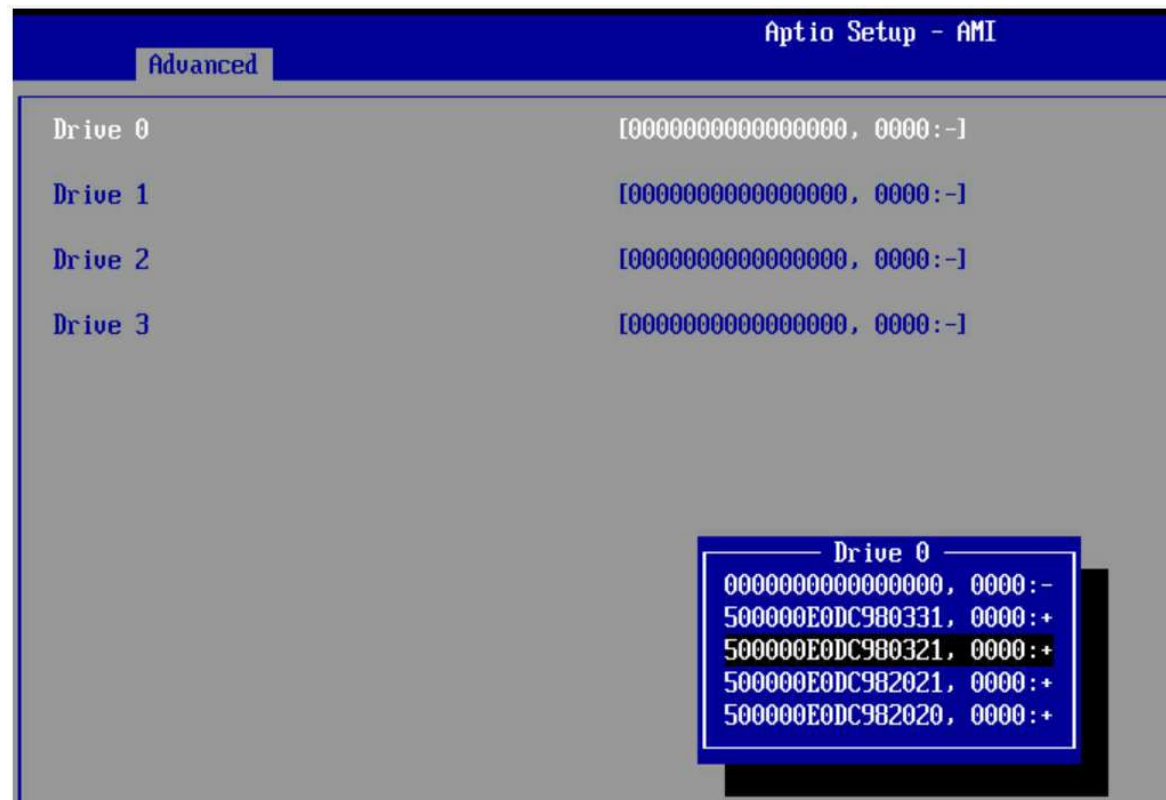


- Do the same steps for another FC port.

Save Changes and Reset

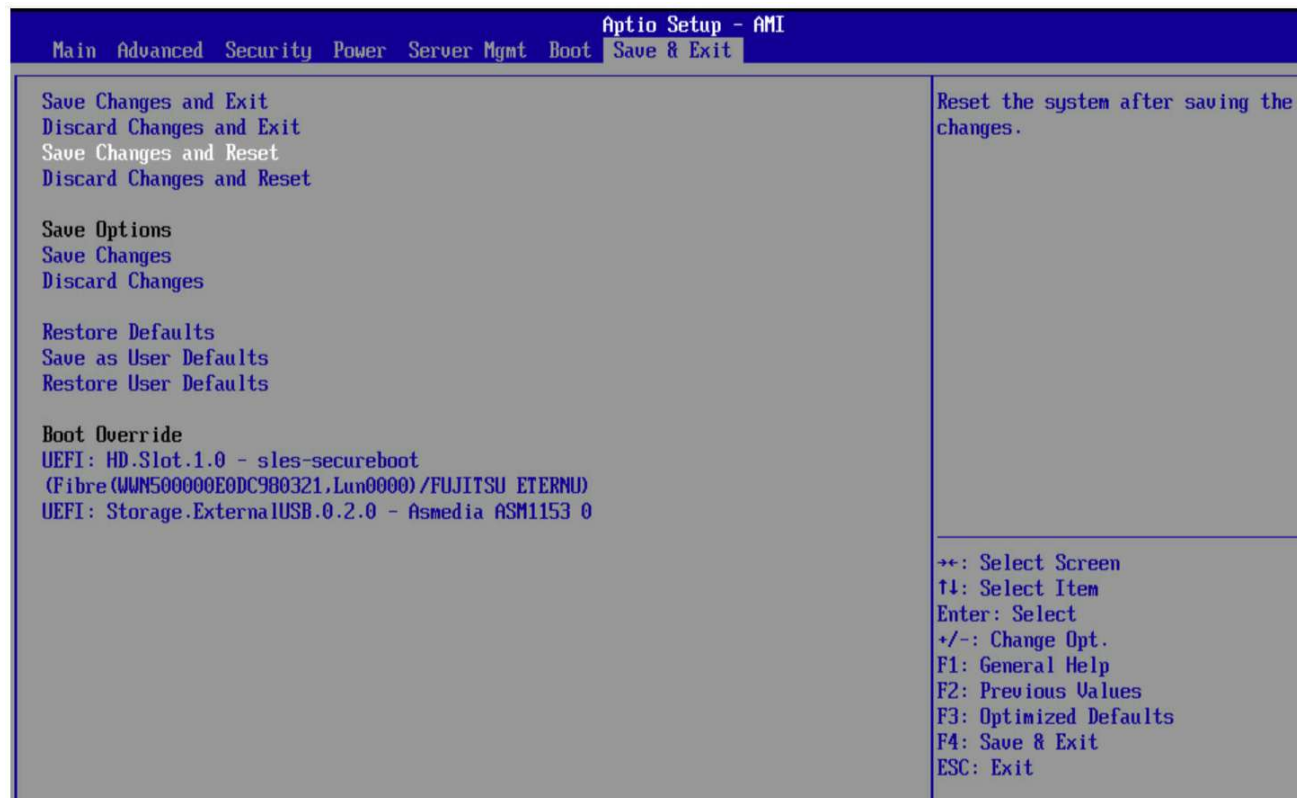

- Boot to BIOS

Check it has listed your target WWN

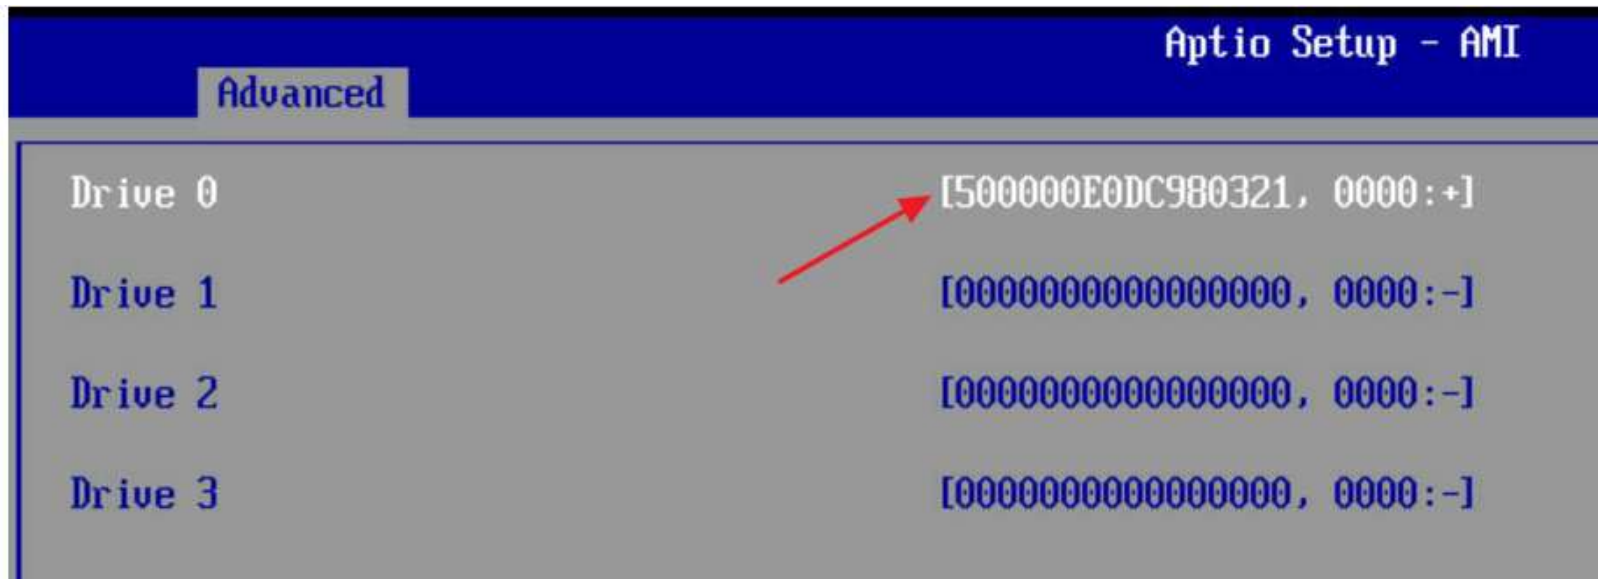

- After confirmed the setting, please run the reboot cycles.