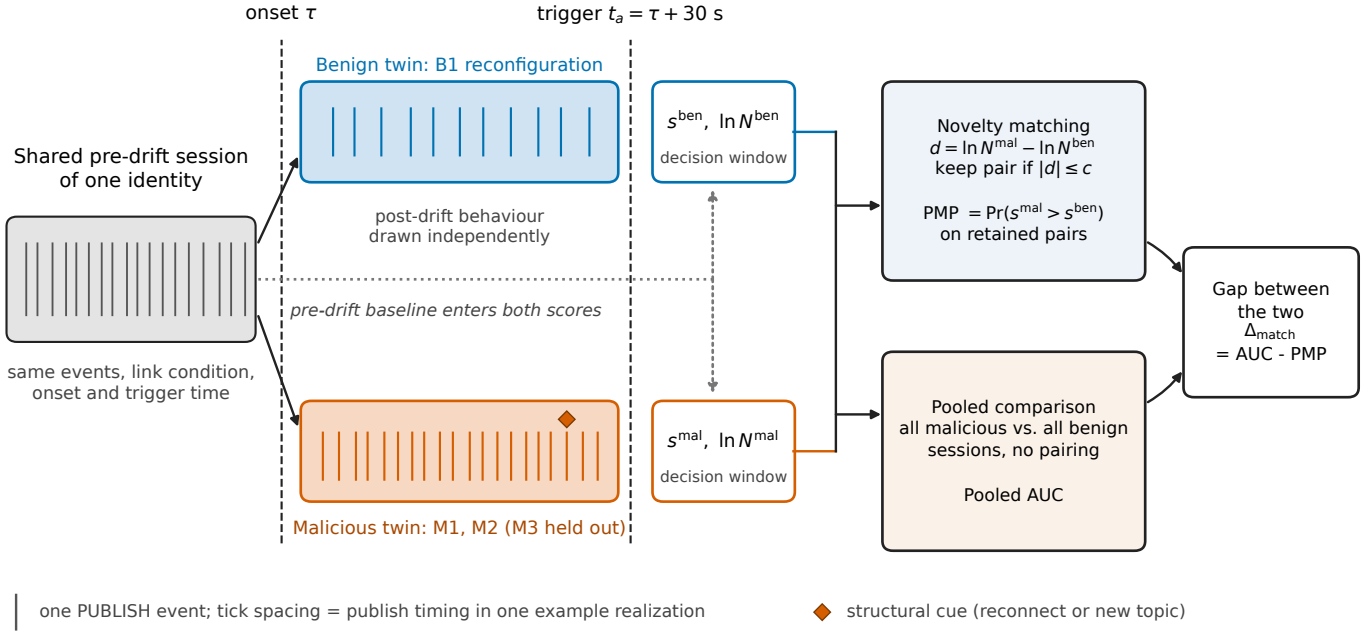
onset τ
trigger $t_a = \tau + 30$ s
Benign twin: B1 reconfiguration
Shared pre-drift session of one identity
post-drift behaviour drawn independently
pre-drift baseline enters both scores
same events, link condition, onset and trigger time
Malicious twin: M1, M2 (M3 held out)
s^{ben}, $\ln N^{ben}$
decision window
s^{mal}, $\ln N^{mal}$
decision window
Novelty matching
$d = \ln N^{mal} - \ln N^{ben}$
keep pair if $|d| \le c$
PMP $= \Pr(s^{mal} > s^{ben})$
on retained pairs
Pooled comparison
all malicious vs. all benign sessions, no pairing
Pooled AUC
Gap between the two
Δ_{match}
= AUC - PMP
one PUBLISH event; tick spacing = publish timing in one example realization
structural cue (reconnect or new topic)