Cisco VXLAN EVPN: DC1 and DC2 diagrams

Rendered from Infrahub main (`a7bcc19`) by the transforms site_diagrams, site_ports, site_tables and site_cable_schedule. Every box, port and cable comes from the Infrahub data; nothing is drawn by hand.


- Per site: Physical, Underlay, Overlay, VRF, Path, Racks, OOB
- Per switch: front-panel port view (port, far end, cable type and length)
- Per site: tables (devices, addressing, sessions) and the cable schedule

Drawings are vector pages at their native size: zoom in for port labels.

DC1 · Physical

Site diagrams · DC1.drawio


Physical: every cable; port at each end (short names); line width = speed

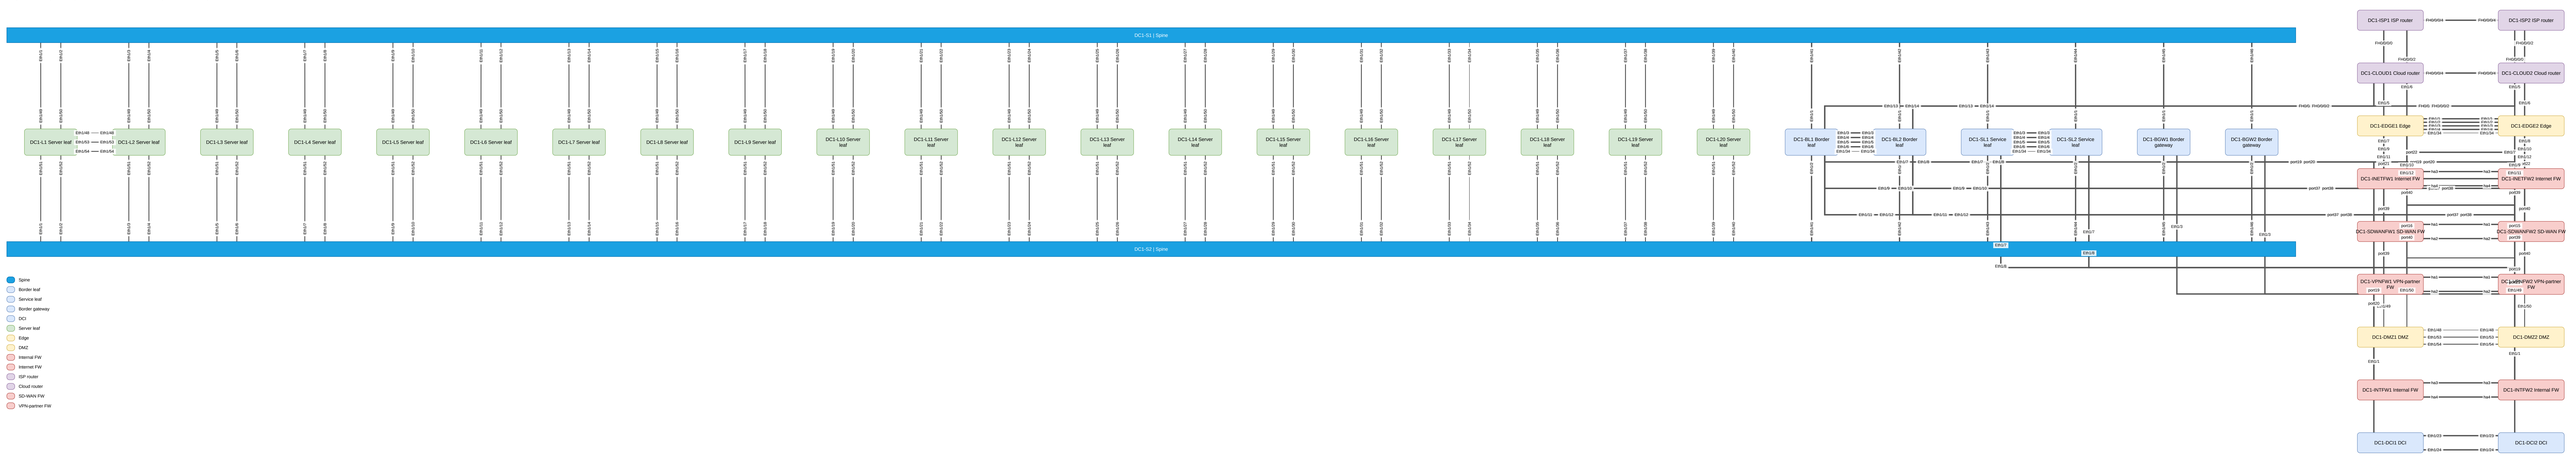

DC1 · Underlay

Site diagrams · DC1.drawio


Underlay: OSPF area 0, /31 on every routed link, loopback0 per device

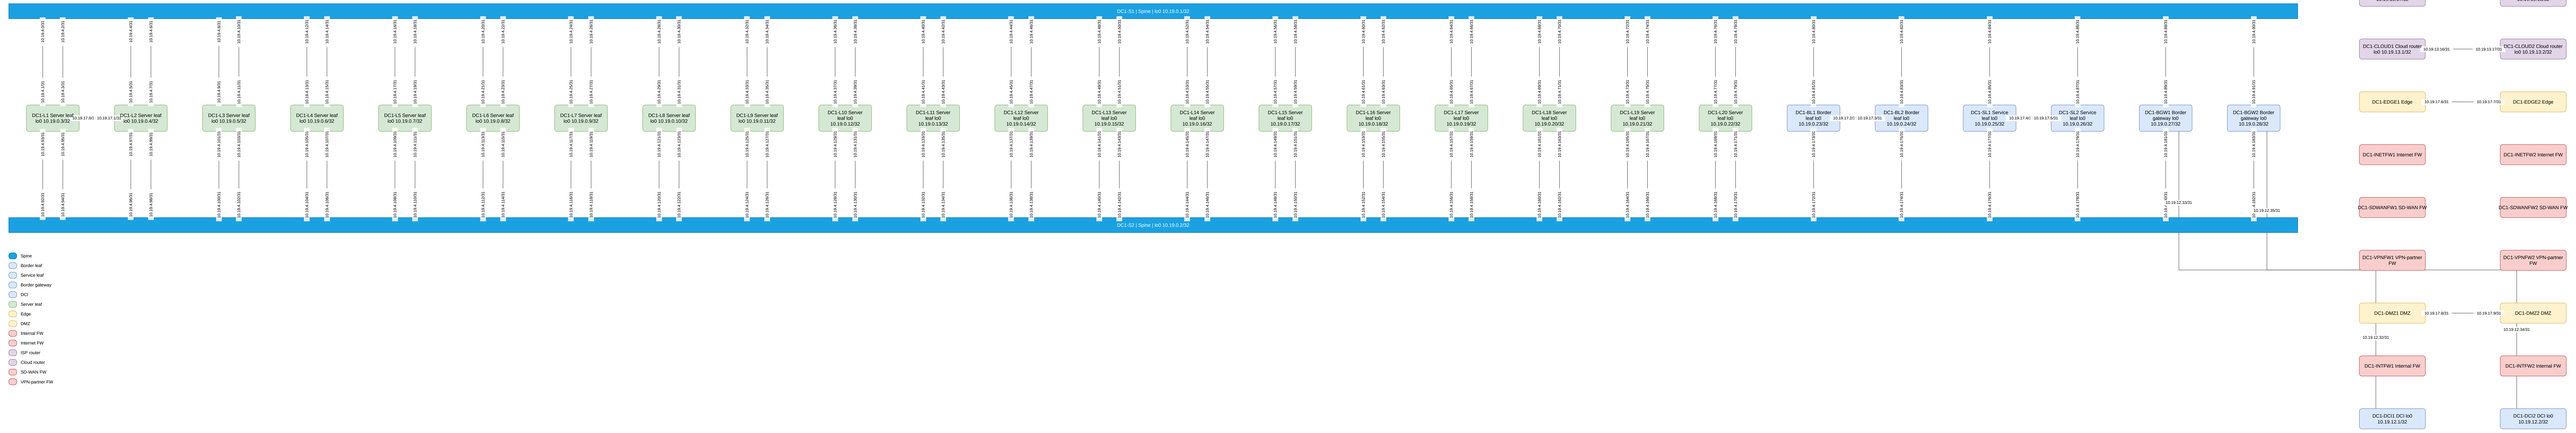

DC1 · Overlay

Site diagrams · DC1.drawio

Overlay: iBGP L2VPN EVPN to the spine route reflectors; VTEP = loopback1

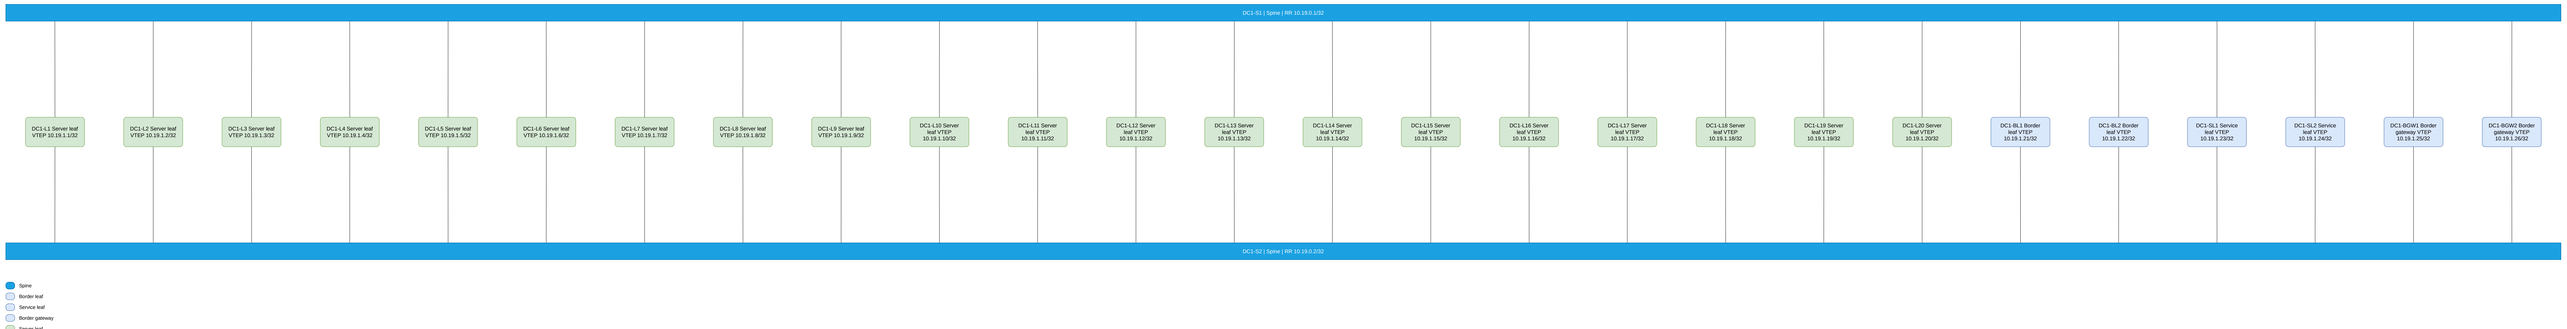

DC1 · VRF Site diagrams · DC1.drawio

VRF: one band per VRF; attachments = leaf pair firewall pair, /29, VLAN, eBGP peer ASN

VRF TRANSIT | L3VNI 50100 | segments 0 (hub)

DC1-VPC-SL1-SL2 DC1-SL1, DC1-SL2	DC1-INTFW1, DC1-INTFW2 AS 65110
DC1-VPC-BL1-BL2 DC1-BL1, DC1-BL2	DC1-INETFW1, DC1-INETFW2 AS 65140
DC1-VPC-BL1-BL2 DC1-BL1, DC1-BL2	DC1-CLOUD1 AS 65170
DC1-VPC-BL1-BL2 DC1-BL1, DC1-BL2	DC1-CLOUD2 AS 65170
DC1-VPC-BL1-BL2 DC1-BL1, DC1-BL2	DC1-SDWANFW1, DC1-SDWANFW2 AS 65120

VRF CITRIX | L3VNI 50022 | segments 4

DC1-VPC-SL1-SL2 DC1-SL1, DC1-SL2	DC1-INTFW1, DC1-INTFW2 AS 65110

VRF DEV | L3VNI 50002 | segments 20

DC1-VPC-SL1-SL2 DC1-SL1, DC1-SL2	DC1-INTFW1, DC1-INTFW2 AS 65110

VRF PARTNER | L3VNI 50031 | segments 0

DC1-VPC-SL1-SL2 DC1-SL1, DC1-SL2	DC1-INTFW1, DC1-INTFW2 AS 65110
DC1-VPC-BL1-BL2 DC1-BL1, DC1-BL2	DC1-VPNFW1, DC1-VPNFW2 AS 65130

VRF PROD | L3VNI 50001 | segments 20

DC1-VPC-SL1-SL2 DC1-SL1, DC1-SL2	DC1-INTFW1, DC1-INTFW2 AS 65110


VRF REPLICATION | L3VNI 50041 | segments 2

No firewall attachment in this site (carried inside the fabric only)

DC1 · Path

Site diagrams · DC1.drawio

Internet path: carrier > ISP router > edge > Internet FW > border leaf (TRANSIT) > service leaf > Internal FW > server leaves

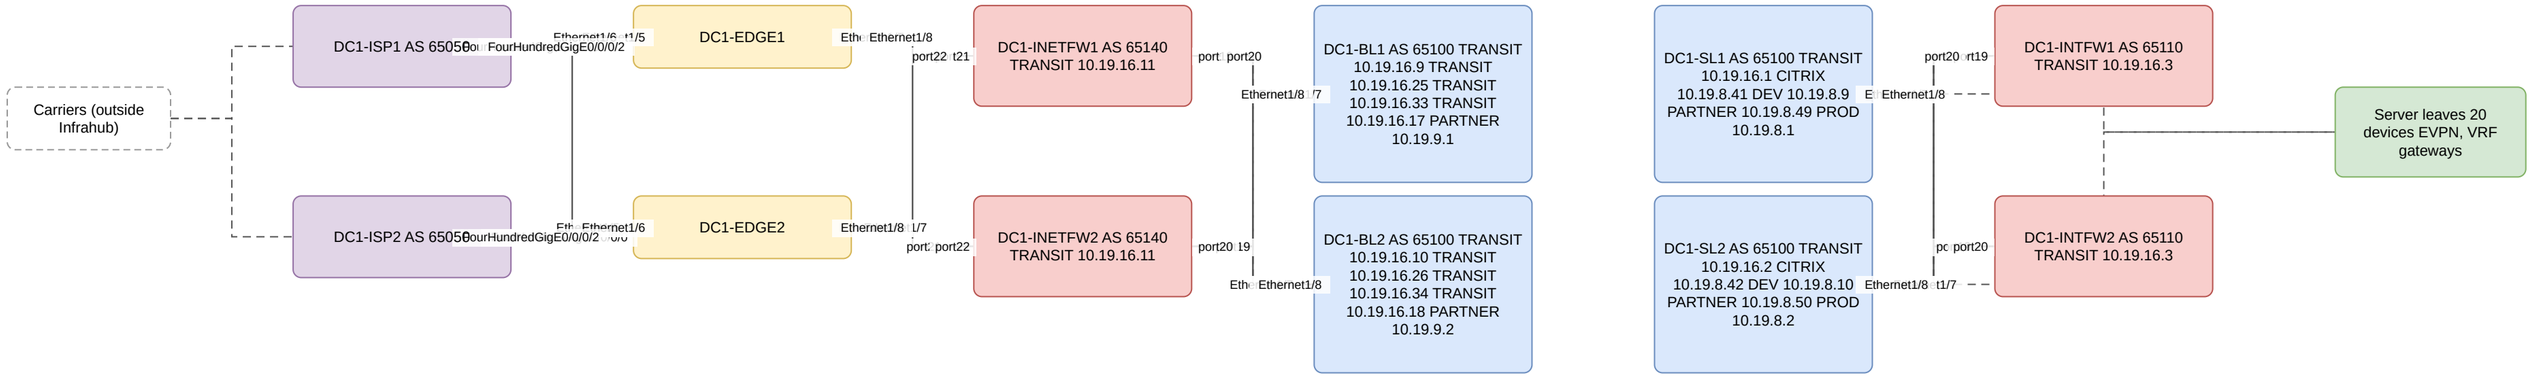

DC1 · Racks

Site diagrams · DC1.drawio

DC1 racks: front elevations; PDUs (0U, rear) listed under each rack

DC1-A01 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L1
- U40 DC1-MC1
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A02 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L2
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A03 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L3
- U40 DC1-MC2
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A04 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L4
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A05 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L5
- U40 DC1-MC3
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A06 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L6
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A07 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L7
- U40 DC1-MC4
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A08 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L8
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A09 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L9
- U40 DC1-MC5
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-A10 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L10
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-B03 (oob, 3 kW)

- U39-42 Copper panels
- U37-38 Fiber panels
- U35 DC1-OOB-MC1
- U33 DC1-OOB-CONSOLE1
- U31 DC1-OOB-PDU-AB1
- U29 OOB-FW1
- U27-25 (reserved)
- U24-21 (reserved)
- U20-16 (reserved)
- U15-13 (reserved)
- U12-9 (reserved)
- U8-6 (reserved)
- U5-4 (reserved)
- U3-1 (reserved)

PDUs: A, B

DC1-B04 (network, 25 kW)

- U39-42 Fiber panels (MPO)
- U37-38 Copper panels
- U34-35 DC1-S1
- U32 DC1-BL1
- U30 DC1-SL1
- U28 DC1-BGW1
- U26 DC1-EDGE1
- U24 DC1-DCI1
- U22 DC1-DMZ1
- U20 DC1-ISP1
- U18-17 (reserved for Phase 4)
- U15-16 Load balancer (reserved)
- U12-11 (reserved for Phase 4)
- U10-8 (reserved for Phase 4)
- U5-7 DC1-INTFW1
- U1-3 DC1-INETFW1

PDUs: A, B

DC1-B05 (patch)

PDUs: A, B

DC1-B06 (patch)

PDUs: A, B

DC1-B07 (patch)

PDUs: A, B

DC1-B08 (network, 25 kW)

- U39-42 Fiber panels (MPO)
- U37-38 Copper panels
- U34-35 DC1-S2
- U32 DC1-BL2
- U30 DC1-SL2
- U28 DC1-BGW2
- U26 DC1-EDGE2
- U24 DC1-DCI2
- U22 DC1-DMZ2
- U20 DC1-ISP2
- U18-17 (reserved for Phase 4)
- U15-16 Load balancer (reserved)
- U12-11 (reserved for Phase 4)
- U10-8 (reserved for Phase 4)
- U5-7 DC1-INTFW2
- U1-3 DC1-INETFW2

PDUs: A, B

DC1-B09 (oob, 3 kW)

- U39-42 Copper panels
- U37-38 Fiber panels
- U35 DC1-OOB-MC2
- U33 DC1-OOB-CONSOLE2
- U31 DC1-OOB-PDU-AB2
- U29 OOB-FW2
- U27-25 (reserved)
- U24-21 (reserved)
- U20-16 (reserved)
- U15-13 (reserved)
- U12-9 (reserved)
- U8-6 (reserved)
- U5-4 (reserved)
- U3-1 (reserved)

PDUs: A, B

DC1-B10 (growth, 25 kW)

PDUs: A, B

DC1-C01 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L11
- U40 DC1-MC6
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C02 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L12
- U40 DC1-MC7
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C03 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L13
- U40 DC1-MC8
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C04 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L14
- U40 DC1-MC9
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C05 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L15
- U40 DC1-MC10
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C06 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L16
- U40 DC1-MC11
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C07 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L17
- U40 DC1-MC12
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C08 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L18
- U40 DC1-MC13
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C09 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L19
- U40 DC1-MC14
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-C10 (server, 15 kW)

- U42 Patch panel
- U41 DC1-L20
- U40 DC1-MC15
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC1-D03 (san, 10 kW)

PDUs: A, B

DC1-D04 (san, 10 kW)

PDUs: A, B

DC1-D05 (patch)

DC1-D06 (patch)

DC1-D07 (san, 10 kW)


PDUs: A, B

DC1-D08 (san, 10 kW)

PDUs: A, B

DC1 · OOB Site diagrams · DC1.drawio


Out-of-band: OOB firewalls, aggregation, access (network + BMC) and console servers; management and console home runs counted per OOB device

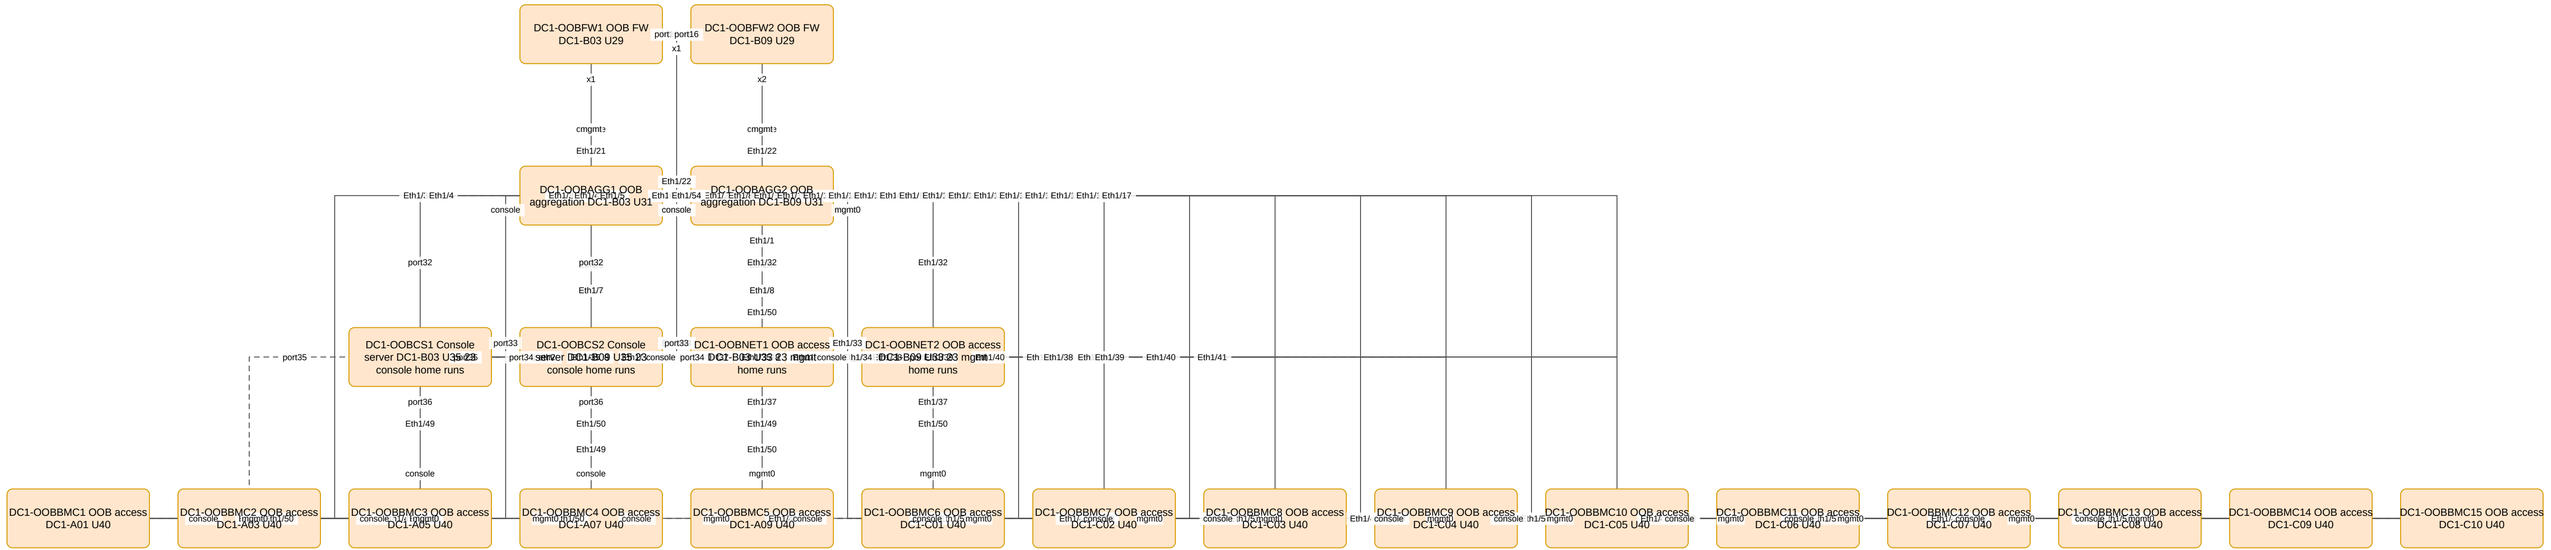

87 cables between OOB devices; 46 management and 46 console home runs from the other devices of the site


DC1 · DC1-BGW1 Port views · DC1-ports.drawio

DC1-BGW1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

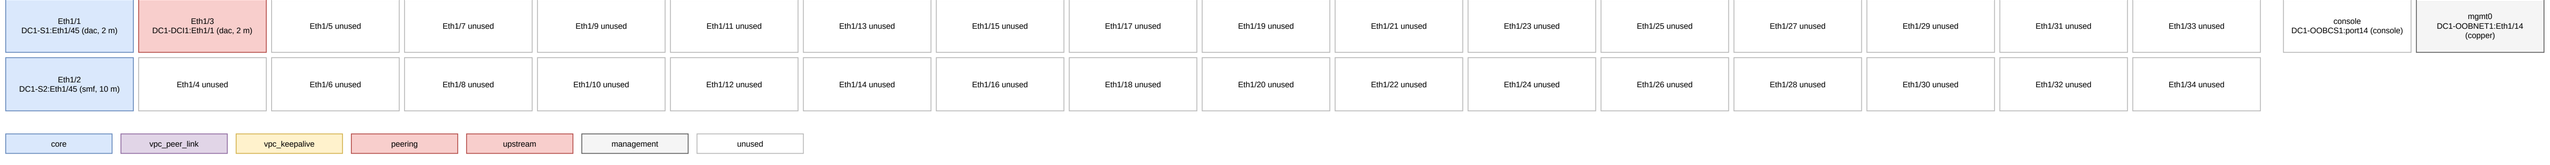

DC1 · DC1-BGW2 Port views · DC1-ports.drawio

DC1-BGW2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

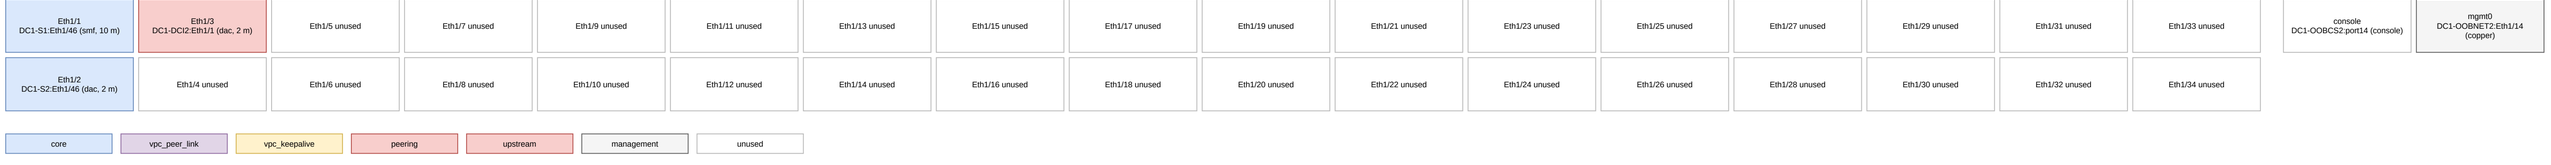


DC1 · DC1-BL1 Port views · DC1-ports.drawio

DC1-BL1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role




DC1 · DC1-BL2 Port views · DC1-ports.drawio

DC1-BL2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

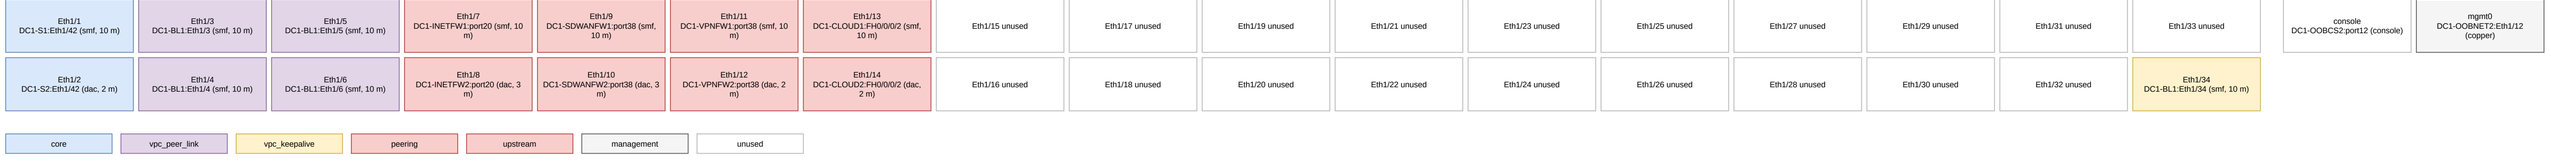


DC1 · DC1-DCI1 Port views · DC1-ports.drawio

DC1-DCI1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

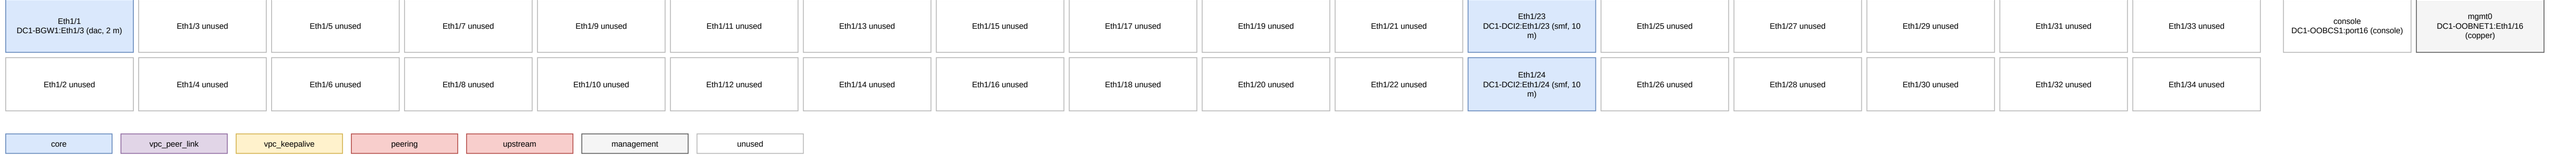

DC1 · DC1-DCI2 Port views · DC1-ports.drawio

DC1-DCI2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

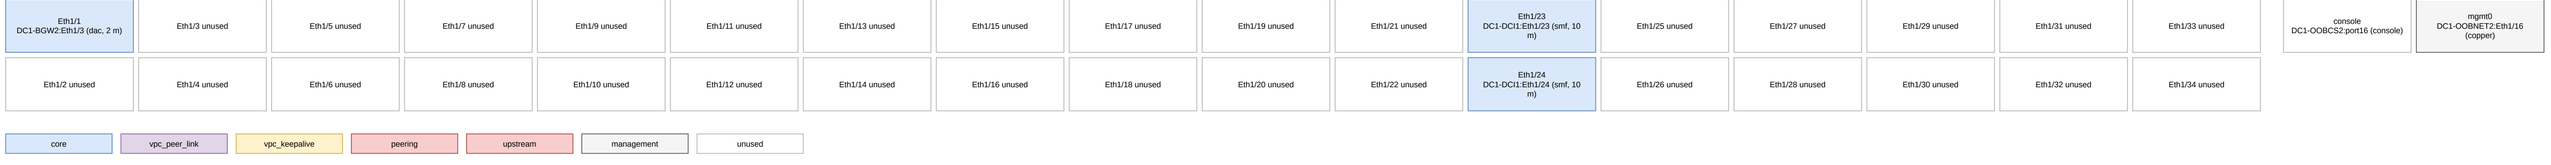

DC1 · DC1-DMZ1 Port views · DC1-ports.drawio

DC1-DMZ1 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-DMZ2 Port views · DC1-ports.drawio

DC1-DMZ2 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-EDGE1 Port views · DC1-ports.drawio

DC1-EDGE1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-EDGE2 Port views · DC1-ports.drawio

DC1-EDGE2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 DC1-EDGE1:Eth1/1 (smf, 10 m)	Eth1/3 DC1-EDGE1:Eth1/3 (smf, 10 m)	Eth1/5 DC1-ISP1:FH0/0/0/2 (smf, 10 m)	Eth1/7 DC1-INETFW1:port22 (smf, 10 m)	Eth1/9 DC1-SDWANFW1:port40 (smf, 10 m)	Eth1/11 DC1-VPNFW1:port40 (smf, 10 m)	Eth1/13 unused	Eth1/15 unused	Eth1/17 unused	Eth1/19 unused	Eth1/21 unused	Eth1/23 unused	Eth1/25 unused	Eth1/27 unused	Eth1/29 unused	Eth1/31 unused	Eth1/33 unused	console DC1-OOBCS2:port15 (console)	mgmt0 DC1-OOBNET2:Eth1/15 (copper)
Eth1/2 DC1-EDGE1:Eth1/2 (smf, 10 m)	Eth1/4 DC1-EDGE1:Eth1/4 (smf, 10 m)	Eth1/6 DC1-ISP2:FH0/0/0/2 (dac, 2 m)	Eth1/8 DC1-INETFW2:port22 (dac, 3 m)	Eth1/10 DC1-SDWANFW2:port40 (dac, 2 m)	Eth1/12 DC1-VPNFW2:port40 (dac, 2 m)	Eth1/14 unused	Eth1/16 unused	Eth1/18 unused	Eth1/20 unused	Eth1/22 unused	Eth1/24 unused	Eth1/26 unused	Eth1/28 unused	Eth1/30 unused	Eth1/32 unused	Eth1/34 DC1-EDGE1:Eth1/34 (smf, 10 m)	

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused

DC1 · DC1-L1 Port views · DC1-ports.drawio

DC1-L1 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L2 Port views · DC1-ports.drawio

DC1-L2 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L3 Port views · DC1-ports.drawio

DC1-L3 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L4 Port views · DC1-ports.drawio

DC1-L4 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L5 Port views · DC1-ports.drawio

DC1-L5 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L6 Port views · DC1-ports.drawio

DC1-L6 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L7 Port views · DC1-ports.drawio

DC1-L7 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L8 Port views · DC1-ports.drawio

DC1-L8 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L9 Port views · DC1-ports.drawio

DC1-L9 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L10 Port views · DC1-ports.drawio

DC1-L10 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L11 Port views · DC1-ports.drawio

DC1-L11 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L12 Port views - DC1-ports.drawio

DC1-L12 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L13 Port views - DC1-ports.drawio

DC1-L13 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L14 Port views - DC1-ports.drawio

DC1-L14 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L15 Port views - DC1-ports.drawio

DC1-L15 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L16 Port views - DC1-ports.drawio

DC1-L16 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L17 Port views - DC1-ports.drawio

DC1-L17 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L18 Port views - DC1-ports.drawio

DC1-L18 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L19 Port views - DC1-ports.drawio

DC1-L19 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-L20 Port views - DC1-ports.drawio

DC1-L20 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC1 · DC1-S1 Port views · DC1-ports.drawio

DC1-S1 | N9K-C9364D-GX2A | 64 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 DC1-L1:Eth1/49 (unif, 15 m)	Eth1/3 DC1-L2:Eth1/49 (unif, 15 m)	Eth1/5 DC1-L3:Eth1/49 (unif, 15 m)	Eth1/7 DC1-L4:Eth1/49 (unif, 15 m)	Eth1/9 DC1-L5:Eth1/49 (unif, 10 m)	Eth1/11 DC1-L6:Eth1/49 (unif, 15 m)	Eth1/13 DC1-L7:Eth1/49 (unif, 15 m)	Eth1/15 DC1-L8:Eth1/49 (unif, 15 m)	Eth1/17 DC1-L9:Eth1/49 (unif, 15 m)	Eth1/19 DC1-L10:Eth1/49 (unif, 15 m)	Eth1/21 DC1-L11:Eth1/49 (unif, 15 m)	Eth1/23 DC1-L12:Eth1/49 (unif, 15 m)	Eth1/25 DC1-L13:Eth1/49 (unif, 15 m)	Eth1/27 DC1-L14:Eth1/49 (unif, 15 m)	Eth1/29 DC1-L15:Eth1/49 (unif, 10 m)	Eth1/31 DC1-L16:Eth1/49 (unif, 15 m)	Eth1/33 DC1-L17:Eth1/49 (unif, 15 m)	Eth1/35 DC1-L18:Eth1/49 (unif, 15 m)	Eth1/37 DC1-L19:Eth1/49 (unif, 15 m)	Eth1/39 DC1-L20:Eth1/49 (unif, 15 m)	Eth1/41 DC1-BL1:Eth1/1 (dac, 2 m)	Eth1/43 DC1-SL1:Eth1/1 (dac, 2 m)	Eth1/45 DC1-BOW1:Eth1/1 (dac, 2 m)	Eth1/47 unused	Eth1/49 unused	Eth1/51 unused	Eth1/53 unused	Eth1/55 unused	Eth1/57 unused	Eth1/59 unused	Eth1/61 unused	Eth1/63 unused	console DC1-OOBCS1:port1 (console)	mgmt0 DC1-OOBNET1:Eth1/11 (copper)
Eth1/2 DC1-L1:Eth1/50 (unif, 15 m)	Eth1/4 DC1-L2:Eth1/50 (unif, 15 m)	Eth1/6 DC1-L3:Eth1/50 (unif, 15 m)	Eth1/8 DC1-L4:Eth1/50 (unif, 15 m)	Eth1/10 DC1-L5:Eth1/50 (unif, 10 m)	Eth1/12 DC1-L6:Eth1/50 (unif, 15 m)	Eth1/14 DC1-L7:Eth1/50 (unif, 15 m)	Eth1/16 DC1-L8:Eth1/50 (unif, 15 m)	Eth1/18 DC1-L9:Eth1/50 (unif, 15 m)	Eth1/20 DC1-L10:Eth1/50 (unif, 15 m)	Eth1/22 DC1-L11:Eth1/50 (unif, 15 m)	Eth1/24 DC1-L12:Eth1/50 (unif, 15 m)	Eth1/26 DC1-L13:Eth1/50 (unif, 15 m)	Eth1/28 DC1-L14:Eth1/50 (unif, 15 m)	Eth1/30 DC1-L15:Eth1/50 (unif, 10 m)	Eth1/32 DC1-L16:Eth1/50 (unif, 15 m)	Eth1/34 DC1-L17:Eth1/50 (unif, 15 m)	Eth1/36 DC1-L18:Eth1/50 (unif, 15 m)	Eth1/38 DC1-L19:Eth1/50 (unif, 15 m)	Eth1/40 DC1-L20:Eth1/50 (unif, 15 m)	Eth1/42 DC1-BL2:Eth1/1 (unif, 10 m)	Eth1/44 DC1-SL2:Eth1/1 (unif, 10 m)	Eth1/46 DC1-BOW2:Eth1/1 (unif, 10 m)	Eth1/48 unused	Eth1/50 unused	Eth1/52 unused	Eth1/54 unused	Eth1/56 unused	Eth1/58 unused	Eth1/60 unused	Eth1/62 unused	Eth1/64 unused		

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused

DC1 · DC1-S2 Port views · DC1-ports.drawio


DC1-S2 | N9K-C9364D-GX2A | 64 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 DC1-L1:Eth1/51 (uef, 15 m)	Eth1/3 DC1-L2:Eth1/51 (uef, 15 m)	Eth1/5 DC1-L3:Eth1/51 (uef, 15 m)	Eth1/7 DC1-L4:Eth1/51 (uef, 15 m)	Eth1/9 DC1-L5:Eth1/51 (uef, 15 m)	Eth1/11 DC1-L6:Eth1/51 (uef, 15 m)	Eth1/13 DC1-L7:Eth1/51 (uef, 10 m)	Eth1/15 DC1-L8:Eth1/51 (uef, 15 m)	Eth1/17 DC1-L9:Eth1/51 (uef, 15 m)	Eth1/19 DC1-L10:Eth1/51 (uef, 15 m)	Eth1/21 DC1-L11:Eth1/51 (uef, 15 m)	Eth1/23 DC1-L12:Eth1/51 (uef, 15 m)	Eth1/25 DC1-L13:Eth1/51 (uef, 15 m)	Eth1/27 DC1-L14:Eth1/51 (uef, 15 m)	Eth1/29 DC1-L15:Eth1/51 (uef, 15 m)	Eth1/31 DC1-L16:Eth1/51 (uef, 15 m)	Eth1/33 DC1-L17:Eth1/51 (uef, 10 m)	Eth1/35 DC1-L18:Eth1/51 (uef, 15 m)	Eth1/37 DC1-L19:Eth1/51 (uef, 15 m)	Eth1/39 DC1-L20:Eth1/51 (uef, 15 m)	Eth1/41 DC1-BL1:Eth1/2 (uef, 10 m)	Eth1/43 DC1-SL1:Eth1/2 (uef, 10 m)	Eth1/45 DC1-BGW1:Eth1/2 (uef, 10 m)	Eth1/47 unused	Eth1/49 unused	Eth1/51 unused	Eth1/53 unused	Eth1/55 unused	Eth1/57 unused	Eth1/59 unused	Eth1/61 unused	Eth1/63 unused	console DC1-OOBNET2:Eth1/1 (console)	mgmt0 DC1-OOBNET2:Eth1/11 (oobport)
Eth1/2 DC1-L1:Eth1/52 (uef, 15 m)	Eth1/4 DC1-L2:Eth1/52 (uef, 15 m)	Eth1/6 DC1-L3:Eth1/52 (uef, 15 m)	Eth1/8 DC1-L4:Eth1/52 (uef, 15 m)	Eth1/10 DC1-L5:Eth1/52 (uef, 15 m)	Eth1/12 DC1-L6:Eth1/52 (uef, 15 m)	Eth1/14 DC1-L7:Eth1/52 (uef, 10 m)	Eth1/16 DC1-L8:Eth1/52 (uef, 15 m)	Eth1/18 DC1-L9:Eth1/52 (uef, 15 m)	Eth1/20 DC1-L10:Eth1/52 (uef, 15 m)	Eth1/22 DC1-L11:Eth1/52 (uef, 15 m)	Eth1/24 DC1-L12:Eth1/52 (uef, 15 m)	Eth1/26 DC1-L13:Eth1/52 (uef, 15 m)	Eth1/28 DC1-L14:Eth1/52 (uef, 15 m)	Eth1/30 DC1-L15:Eth1/52 (uef, 15 m)	Eth1/32 DC1-L16:Eth1/52 (uef, 15 m)	Eth1/34 DC1-L17:Eth1/52 (uef, 10 m)	Eth1/36 DC1-L18:Eth1/52 (uef, 15 m)	Eth1/38 DC1-L19:Eth1/52 (uef, 15 m)	Eth1/40 DC1-L20:Eth1/52 (uef, 15 m)	Eth1/42 DC1-BL2:Eth1/2 (dac, 2 m)	Eth1/44 DC1-SL2:Eth1/2 (dac, 2 m)	Eth1/46 DC1-BGW2:Eth1/2 (dac, 2 m)	Eth1/48 unused	Eth1/50 unused	Eth1/52 unused	Eth1/54 unused	Eth1/56 unused	Eth1/58 unused	Eth1/60 unused	Eth1/62 unused	Eth1/64 unused		

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused


DC1 · DC1-SL1 Port views · DC1-ports.drawio

DC1-SL1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

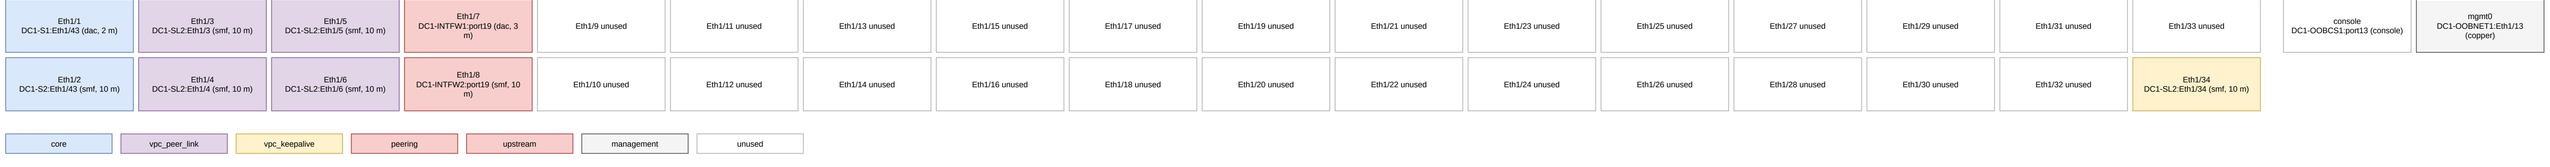

DC1 · DC1-SL2 Port views · DC1-ports.drawio

DC1-SL2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

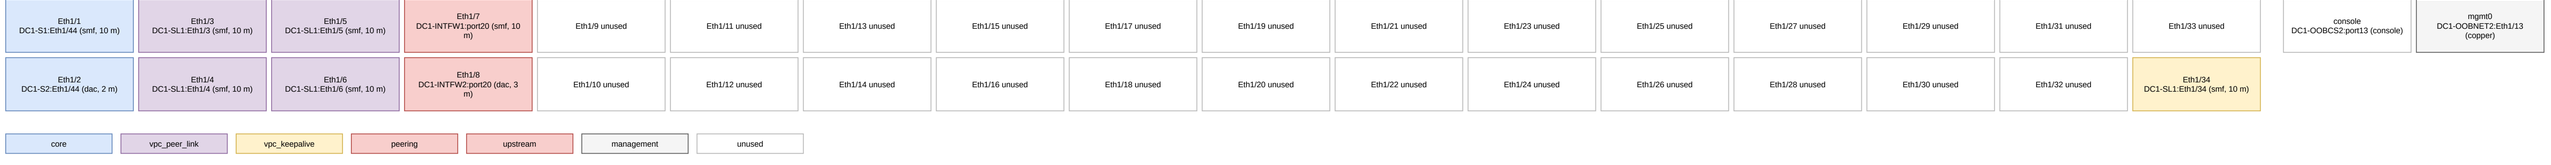

DC1: addressing, segments and BGP sessions

Generated by Infrahub (site_tables transform). Do not edit by hand.

Prefix hierarchy

Prefix	Description	Role	Member type
10.16.0.0/18	PROD VRF block		prefix
10.16.10.0/24	PROD VLAN 1010 (stretched)		address
10.16.11.0/24	PROD VLAN 1011 (stretched)		address
10.16.12.0/24	PROD VLAN 1012 (stretched)		address
10.16.13.0/24	PROD VLAN 1013 (stretched)		address
10.16.14.0/24	PROD VLAN 1014 (stretched)		address
10.16.15.0/24	PROD VLAN 1015 (stretched)		address
10.16.16.0/24	PROD VLAN 1016 (stretched)		address
10.16.17.0/24	PROD VLAN 1017 (stretched)		address
10.16.40.0/24	PROD VLAN 1040 (DC1-local)		address
10.16.41.0/24	PROD VLAN 1041 (DC1-local)		address
10.16.42.0/24	PROD VLAN 1042 (DC1-local)		address
10.16.43.0/24	PROD VLAN 1043 (DC1-local)		address
10.16.44.0/24	PROD VLAN 1044 (DC1-local)		address
10.16.45.0/24	PROD VLAN 1045 (DC1-local)		address
10.16.46.0/24	PROD VLAN 1046 (DC1-local)		address
10.16.47.0/24	PROD VLAN 1047 (DC1-local)		address
10.16.48.0/24	PROD VLAN 1048 (DC1-local)		address
10.16.49.0/24	PROD VLAN 1049 (DC1-local)		address
10.16.50.0/24	PROD VLAN 1050 (DC1-local)		address
10.16.51.0/24	PROD VLAN 1051 (DC1-local)		address
10.16.64.0/18	DEV VRF block		prefix
10.16.74.0/24	DEV VLAN 1110 (stretched)		address
10.16.75.0/24	DEV VLAN 1111 (stretched)		address
10.16.76.0/24	DEV VLAN 1112 (stretched)		address
10.16.77.0/24	DEV VLAN 1113 (stretched)		address
10.16.78.0/24	DEV VLAN 1114 (stretched)		address
10.16.79.0/24	DEV VLAN 1115 (stretched)		address
10.16.80.0/24	DEV VLAN 1116 (stretched)		address
10.16.81.0/24	DEV VLAN 1117 (stretched)		address
10.16.82.0/24	DEV VLAN 1118 (stretched)		address
10.16.104.0/24	DEV VLAN 1140 (DC1-local)		address
10.16.105.0/24	DEV VLAN 1141 (DC1-local)		address
10.16.106.0/24	DEV VLAN 1142 (DC1-local)		address
10.16.107.0/24	DEV VLAN 1143 (DC1-local)		address
10.16.108.0/24	DEV VLAN 1144 (DC1-local)		address
10.16.109.0/24	DEV VLAN 1145 (DC1-local)		address
10.16.110.0/24	DEV VLAN 1146 (DC1-local)		address
10.16.111.0/24	DEV VLAN 1147 (DC1-local)		address

Prefix	Description	Role	Member type
10.16.112.0/24	DEV VLAN 1148 (DC1-local)		address
10.16.113.0/24	DEV VLAN 1149 (DC1-local)		address
10.16.114.0/24	DEV VLAN 1150 (DC1-local)		address
10.16.128.0/20	DC1 DMZ block (behind the Internet FW)		prefix
10.16.128.0/24	DC1 DMZ VLAN 1400 (LB VIPs)		address
10.16.129.0/24	DC1 DMZ VLAN 1401 (LB self IPs and SNAT)		address
10.16.130.0/24	DC1 DMZ VLAN 1402 (DMZ servers)		address
10.16.131.0/24	DC1 DMZ VLAN 1403 (DMZ servers)		address
10.16.132.0/24	DC1 DMZ VLAN 1404 (DMZ servers)		address
10.16.133.0/24	DC1 DMZ VLAN 1405 (DMZ servers)		address
10.16.134.0/24	DC1 DMZ VLAN 1406 (DMZ servers)		address
10.16.135.0/24	DC1 DMZ VLAN 1407 (DMZ servers)		address
10.16.136.0/24	DC1 DMZ VLAN 1408 (DMZ servers)		address
10.16.137.0/24	DC1 DMZ VLAN 1409 (DMZ servers)		address
10.16.138.0/24	DC1 DMZ VLAN 1410 (DMZ servers)		address
10.16.139.0/24	DC1 DMZ VLAN 1411 (DMZ servers)		address
10.16.140.0/24	DC1 DMZ VLAN 1412 (DMZ servers)		address
10.16.141.0/24	DC1 DMZ VLAN 1413 (DMZ servers)		address
10.16.142.0/24	DC1 DMZ VLAN 1414 (DMZ servers)		address
10.16.143.0/24	DC1 DMZ VLAN 1415 (DMZ servers)		address
10.16.144.0/20	CITRIX VRF block (DC1)		prefix
10.16.144.0/24	CITRIX VLAN 1500 (DC1-local)		address
10.16.145.0/24	CITRIX VLAN 1501 (DC1-local)		address
10.16.160.0/21	PARTNER VRF block, NAT /28s (DC1)		prefix
10.16.160.0/28	PARTNER01 translated /28 (DC1 VPN-partner FW source NAT)		address
10.16.176.0/24	REPLICATION VLAN 1598 (DC1-local)		address
10.19.0.0/24	DC1 loopback0 (router ID, BGP peering)		address
10.19.1.0/24	DC1 loopback1 (VTEP source)		address
10.19.2.0/25	DC1 vPC anycast VTEPs (one per vPC domain with NVE)		address
10.19.2.128/25	DC1 Multi-Site VIP (anycast BGW pair)		address
10.19.3.0/24	DC1 vPC backup underlay SVI /31s	link	prefix
10.19.3.6/31	DC1-VPC-L1-L2 vPC backup underlay		address
10.19.3.8/31	DC1-VPC-BL1-BL2 vPC backup underlay		address
10.19.3.10/31	DC1-VPC-SL1-SL2 vPC backup underlay		address
10.19.4.0/22	DC1 fabric p2p /31s	link	prefix
10.19.4.0/31	DC1-S1 Ethernet1/1 link		address
10.19.4.2/31	DC1-S1 Ethernet1/2 link		address
10.19.4.4/31	DC1-S1 Ethernet1/3 link		address
10.19.4.6/31	DC1-S1 Ethernet1/4 link		address
10.19.4.8/31	DC1-S1 Ethernet1/5 link		address
10.19.4.10/31	DC1-S1 Ethernet1/6 link		address
10.19.4.12/31	DC1-S1 Ethernet1/7 link		address
10.19.4.14/31	DC1-S1 Ethernet1/8 link		address

Prefix	Description	Role	Member type
10.19.4.16/31	DC1-S1 Ethernet1/9 link		address
10.19.4.18/31	DC1-S1 Ethernet1/10 link		address
10.19.4.20/31	DC1-S1 Ethernet1/11 link		address
10.19.4.22/31	DC1-S1 Ethernet1/12 link		address
10.19.4.24/31	DC1-S1 Ethernet1/13 link		address
10.19.4.26/31	DC1-S1 Ethernet1/14 link		address
10.19.4.28/31	DC1-S1 Ethernet1/15 link		address
10.19.4.30/31	DC1-S1 Ethernet1/16 link		address
10.19.4.32/31	DC1-S1 Ethernet1/17 link		address
10.19.4.34/31	DC1-S1 Ethernet1/18 link		address
10.19.4.36/31	DC1-S1 Ethernet1/19 link		address
10.19.4.38/31	DC1-S1 Ethernet1/20 link		address
10.19.4.40/31	DC1-S1 Ethernet1/21 link		address
10.19.4.42/31	DC1-S1 Ethernet1/22 link		address
10.19.4.44/31	DC1-S1 Ethernet1/23 link		address
10.19.4.46/31	DC1-S1 Ethernet1/24 link		address
10.19.4.48/31	DC1-S1 Ethernet1/25 link		address
10.19.4.50/31	DC1-S1 Ethernet1/26 link		address
10.19.4.52/31	DC1-S1 Ethernet1/27 link		address
10.19.4.54/31	DC1-S1 Ethernet1/28 link		address
10.19.4.56/31	DC1-S1 Ethernet1/29 link		address
10.19.4.58/31	DC1-S1 Ethernet1/30 link		address
10.19.4.60/31	DC1-S1 Ethernet1/31 link		address
10.19.4.62/31	DC1-S1 Ethernet1/32 link		address
10.19.4.64/31	DC1-S1 Ethernet1/33 link		address
10.19.4.66/31	DC1-S1 Ethernet1/34 link		address
10.19.4.68/31	DC1-S1 Ethernet1/35 link		address
10.19.4.70/31	DC1-S1 Ethernet1/36 link		address
10.19.4.72/31	DC1-S1 Ethernet1/37 link		address
10.19.4.74/31	DC1-S1 Ethernet1/38 link		address
10.19.4.76/31	DC1-S1 Ethernet1/39 link		address
10.19.4.78/31	DC1-S1 Ethernet1/40 link		address
10.19.4.80/31	DC1-S1 Ethernet1/41 link		address
10.19.4.82/31	DC1-S1 Ethernet1/42 link		address
10.19.4.84/31	DC1-S1 Ethernet1/43 link		address
10.19.4.86/31	DC1-S1 Ethernet1/44 link		address
10.19.4.88/31	DC1-S1 Ethernet1/45 link		address
10.19.4.90/31	DC1-S1 Ethernet1/46 link		address
10.19.4.92/31	DC1-S2 Ethernet1/1 link		address
10.19.4.94/31	DC1-S2 Ethernet1/2 link		address
10.19.4.96/31	DC1-S2 Ethernet1/3 link		address
10.19.4.98/31	DC1-S2 Ethernet1/4 link		address
10.19.4.100/31	DC1-S2 Ethernet1/5 link		address

Prefix	Description	Role	Member type
10.19.4.102/31	DC1-S2 Ethernet1/6 link		address
10.19.4.104/31	DC1-S2 Ethernet1/7 link		address
10.19.4.106/31	DC1-S2 Ethernet1/8 link		address
10.19.4.108/31	DC1-S2 Ethernet1/9 link		address
10.19.4.110/31	DC1-S2 Ethernet1/10 link		address
10.19.4.112/31	DC1-S2 Ethernet1/11 link		address
10.19.4.114/31	DC1-S2 Ethernet1/12 link		address
10.19.4.116/31	DC1-S2 Ethernet1/13 link		address
10.19.4.118/31	DC1-S2 Ethernet1/14 link		address
10.19.4.120/31	DC1-S2 Ethernet1/15 link		address
10.19.4.122/31	DC1-S2 Ethernet1/16 link		address
10.19.4.124/31	DC1-S2 Ethernet1/17 link		address
10.19.4.126/31	DC1-S2 Ethernet1/18 link		address
10.19.4.128/31	DC1-S2 Ethernet1/19 link		address
10.19.4.130/31	DC1-S2 Ethernet1/20 link		address
10.19.4.132/31	DC1-S2 Ethernet1/21 link		address
10.19.4.134/31	DC1-S2 Ethernet1/22 link		address
10.19.4.136/31	DC1-S2 Ethernet1/23 link		address
10.19.4.138/31	DC1-S2 Ethernet1/24 link		address
10.19.4.140/31	DC1-S2 Ethernet1/25 link		address
10.19.4.142/31	DC1-S2 Ethernet1/26 link		address
10.19.4.144/31	DC1-S2 Ethernet1/27 link		address
10.19.4.146/31	DC1-S2 Ethernet1/28 link		address
10.19.4.148/31	DC1-S2 Ethernet1/29 link		address
10.19.4.150/31	DC1-S2 Ethernet1/30 link		address
10.19.4.152/31	DC1-S2 Ethernet1/31 link		address
10.19.4.154/31	DC1-S2 Ethernet1/32 link		address
10.19.4.156/31	DC1-S2 Ethernet1/33 link		address
10.19.4.158/31	DC1-S2 Ethernet1/34 link		address
10.19.4.160/31	DC1-S2 Ethernet1/35 link		address
10.19.4.162/31	DC1-S2 Ethernet1/36 link		address
10.19.4.164/31	DC1-S2 Ethernet1/37 link		address
10.19.4.166/31	DC1-S2 Ethernet1/38 link		address
10.19.4.168/31	DC1-S2 Ethernet1/39 link		address
10.19.4.170/31	DC1-S2 Ethernet1/40 link		address
10.19.4.172/31	DC1-S2 Ethernet1/41 link		address
10.19.4.174/31	DC1-S2 Ethernet1/42 link		address
10.19.4.176/31	DC1-S2 Ethernet1/43 link		address
10.19.4.178/31	DC1-S2 Ethernet1/44 link		address
10.19.4.180/31	DC1-S2 Ethernet1/45 link		address
10.19.4.182/31	DC1-S2 Ethernet1/46 link		address
10.19.8.0/22	DC1 firewall attachments for tenant VRFs	link	prefix
10.19.8.0/25	DC1 Internal FW tenant VRF /29s (fixed slot per VRF)	link	prefix

Prefix	Description	Role	Member type
10.19.8.0/29	DC1-PROD-INTFW attachment /29 (VLAN 3100)	link	address
10.19.8.8/29	DC1-DEV-INTFW attachment /29 (VLAN 3101)	link	address
10.19.8.40/29	DC1-CITRIX-INTFW attachment /29 (VLAN 3105)	link	address
10.19.8.48/29	DC1-PARTNER-INTFW attachment /29 (VLAN 3106)	link	address
10.19.8.128/30	DC1-INTFW vlink PROD <-> TRANSIT	link	address
10.19.8.132/30	DC1-INTFW vlink DEV <-> TRANSIT	link	address
10.19.8.148/30	DC1-INTFW vlink CITRIX <-> TRANSIT	link	address
10.19.8.152/30	DC1-INTFW vlink PARTNER <-> TRANSIT	link	address
10.19.9.0/26	DC1 VPN-partner FW attachment /29s (border leaves, PARTNER)	link	prefix
10.19.9.0/29	DC1-PARTNER-VPNFW attachment /29 (VLAN 3300)	link	address
10.19.12.0/24	DC1 DCI switches: loopbacks .0/28, iBGP link .16/31, BGW<->DCI /31s from .32		prefix
10.19.12.0/28	DC1 DCI switch loopback0		address
10.19.12.16/31	DC1 DCI switch iBGP link (port-channel23)	link	address
10.19.12.32/31	DC1-BGW1 <-> DC1-DCI1 link	link	address
10.19.12.34/31	DC1-BGW2 <-> DC1-DCI2 link	link	address
10.19.13.0/24	DC1 cloud routers: loopbacks .0/28, iBGP link .16/31		prefix
10.19.13.0/28	DC1 cloud router loopback0		address
10.19.13.16/31	DC1 cloud router iBGP link	link	address
10.19.14.0/24	DC1 edge VLAN 3200: VRRP VIP, ISP routers, FW outside legs	link	address
10.19.15.0/24	DC1 ISP routers: cross-link /31, loopbacks		prefix
10.19.15.0/31	DC1 ISP router iBGP cross-link	link	address
10.19.15.16/28	DC1 ISP router loopback0		address
10.19.16.0/24	DC1 TRANSIT attachment /29s (fixed slot per device)	link	prefix
10.19.16.0/29	DC1-TRANSIT-INTFW attachment /29 (VLAN 3000)	link	address
10.19.16.8/29	DC1-TRANSIT-INETFW attachment /29 (VLAN 3001)	link	address
10.19.16.16/29	DC1-TRANSIT-SDWANFW attachment /29 (VLAN 3002)	link	address
10.19.16.24/29	DC1-TRANSIT-CLOUD1 attachment /29 (VLAN 3003)	link	address
10.19.16.32/29	DC1-TRANSIT-CLOUD2 attachment /29 (VLAN 3004)	link	address
10.19.17.0/24	DC1 vPC peer-keepalive /31s	link	prefix
10.19.17.0/31	DC1-VPC-L1-L2 vPC peer-keepalive		address
10.19.17.2/31	DC1-VPC-BL1-BL2 vPC peer-keepalive		address
10.19.17.4/31	DC1-VPC-SL1-SL2 vPC peer-keepalive		address
10.19.17.6/31	DC1-VPC-EDGE1-EDGE2 vPC peer-keepalive		address
10.19.17.8/31	DC1-VPC-DMZ1-DMZ2 vPC peer-keepalive		address
10.79.0.0/21	DC1 SD-WAN overlay (ADVPN hub tunnel, row 71 B)		address
10.98.0.0/30	DC1 ExpressRoute primary private peering (DC1-CLOUD1 .1, Microsoft .2, VLAN 200)	link	address
10.98.0.4/30	DC1 ExpressRoute secondary private peering (DC1-CLOUD2 .5, Microsoft .6, VLAN 200)	link	address
10.250.0.0/20	DC1 OOB	management	prefix
10.250.0.0/24	DC1 network-device mgmt (mgmt0)	management	address
10.250.1.0/24	DC1 OOB infrastructure (console servers, OOB switches, OOB FW)	management	address
10.250.2.0/24	DC1 OOB remote-access VPN pool	management	address
10.250.3.0/24	DC1 OOB links (/31s)	link	prefix
10.250.3.0/31	DC1-OOB-VPC-OOBAGG1-OOBAGG2 vPC peer-keepalive	link	address

Prefix	Description	Role	Member type
10.250.4.0/22	DC1 server BMCs	management	address
169.254.100.0/30	DC1 AWS private VIF 1 (DC1-CLOUD1 .2, AWS .1, VLAN 100); placeholder until AWS generates the peer IPs	link	address
169.254.101.0/30	DC1 AWS private VIF 2 (DC1-CLOUD2 .2, AWS .1, VLAN 101); placeholder until AWS generates the peer IPs	link	address
192.0.2.0/30	DC1-ISP1 <-> ISP-A handoff	link	address
192.0.2.4/30	DC1-ISP2 <-> ISP-B handoff	link	address
192.0.2.64/30	DC1-OOBFW <-> OOB-ISP handoff (placeholder)	link	address
198.51.100.0/24	DC1 public (documentation range)		prefix
198.51.100.0/25	DC1 Internet FW NAT pool		address
198.51.100.128/28	DC1 VPN-partner FW IPsec endpoints		address
198.51.100.144/28	DC1 SD-WAN FW (hub) WAN endpoints		address
198.51.100.160/27	DC1 published services (DMZ inbound)		address

VLAN -> L2VNI -> VRF (L3VNI)

VLAN	Segment	L2VNI	Prefix	VRF	L3VNI
1010	PROD-1010	11010	10.16.10.0/24	PROD	50001
1011	PROD-1011	11011	10.16.11.0/24	PROD	50001
1012	PROD-1012	11012	10.16.12.0/24	PROD	50001
1013	PROD-1013	11013	10.16.13.0/24	PROD	50001
1014	PROD-1014	11014	10.16.14.0/24	PROD	50001
1015	PROD-1015	11015	10.16.15.0/24	PROD	50001
1016	PROD-1016	11016	10.16.16.0/24	PROD	50001
1017	PROD-1017	11017	10.16.17.0/24	PROD	50001
1040	PROD-1040	11040	10.16.40.0/24	PROD	50001
1041	PROD-1041	11041	10.16.41.0/24	PROD	50001
1042	PROD-1042	11042	10.16.42.0/24	PROD	50001
1043	PROD-1043	11043	10.16.43.0/24	PROD	50001
1044	PROD-1044	11044	10.16.44.0/24	PROD	50001
1045	PROD-1045	11045	10.16.45.0/24	PROD	50001
1046	PROD-1046	11046	10.16.46.0/24	PROD	50001
1047	PROD-1047	11047	10.16.47.0/24	PROD	50001
1048	PROD-1048	11048	10.16.48.0/24	PROD	50001
1049	PROD-1049	11049	10.16.49.0/24	PROD	50001
1050	PROD-1050	11050	10.16.50.0/24	PROD	50001
1051	PROD-1051	11051	10.16.51.0/24	PROD	50001
1110	DEV-1110	11110	10.16.74.0/24	DEV	50002
1111	DEV-1111	11111	10.16.75.0/24	DEV	50002
1112	DEV-1112	11112	10.16.76.0/24	DEV	50002
1113	DEV-1113	11113	10.16.77.0/24	DEV	50002
1114	DEV-1114	11114	10.16.78.0/24	DEV	50002
1115	DEV-1115	11115	10.16.79.0/24	DEV	50002
1116	DEV-1116	11116	10.16.80.0/24	DEV	50002
1117	DEV-1117	11117	10.16.81.0/24	DEV	50002
1118	DEV-1118	11118	10.16.82.0/24	DEV	50002

VLAN	Segment	L2VNI	Prefix	VRF	L3VNI
1140	DEV-1140	11140	10.16.104.0/24	DEV	50002
1141	DEV-1141	11141	10.16.105.0/24	DEV	50002
1142	DEV-1142	11142	10.16.106.0/24	DEV	50002
1143	DEV-1143	11143	10.16.107.0/24	DEV	50002
1144	DEV-1144	11144	10.16.108.0/24	DEV	50002
1145	DEV-1145	11145	10.16.109.0/24	DEV	50002
1146	DEV-1146	11146	10.16.110.0/24	DEV	50002
1147	DEV-1147	11147	10.16.111.0/24	DEV	50002
1148	DEV-1148	11148	10.16.112.0/24	DEV	50002
1149	DEV-1149	11149	10.16.113.0/24	DEV	50002
1150	DEV-1150	11150	10.16.114.0/24	DEV	50002
1500	CITRIX-DC1-1500	11500	10.16.144.0/24	CITRIX	50022
1501	CITRIX-DC1-1501	11501	10.16.145.0/24	CITRIX	50022
1598	REPLICATION-DC1-1598	11598	10.16.176.0/24	REPLICATION	50041

VRF	L3VNI	L3VNI VLAN
CITRIX	50022	2522
DEV	50002	2502
PARTNER	50031	2531
PROD	50001	2501
REPLICATION	50041	2541
TRANSIT	50100	2599

BGP sessions

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-BGW1	10.19.0.27/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-BGW2	10.19.0.28/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-BL1	10.19.0.23/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-BL2	10.19.0.24/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L1	10.19.0.3/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L2	10.19.0.4/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L3	10.19.0.5/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L4	10.19.0.6/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L5	10.19.0.7/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L6	10.19.0.8/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L7	10.19.0.9/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L8	10.19.0.10/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L9	10.19.0.11/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L10	10.19.0.12/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L11	10.19.0.13/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L12	10.19.0.14/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L13	10.19.0.15/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L14	10.19.0.16/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L15	10.19.0.17/32	65100	route-reflector client

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L16	10.19.0.18/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L17	10.19.0.19/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L18	10.19.0.20/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L19	10.19.0.21/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-L20	10.19.0.22/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-SL1	10.19.0.25/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S1	10.19.0.1/32	65100	DC1-SL2	10.19.0.26/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-BGW1	10.19.0.27/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-BGW2	10.19.0.28/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-BL1	10.19.0.23/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-BL2	10.19.0.24/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L1	10.19.0.3/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L2	10.19.0.4/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L3	10.19.0.5/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L4	10.19.0.6/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L5	10.19.0.7/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L6	10.19.0.8/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L7	10.19.0.9/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L8	10.19.0.10/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L9	10.19.0.11/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L10	10.19.0.12/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L11	10.19.0.13/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L12	10.19.0.14/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L13	10.19.0.15/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L14	10.19.0.16/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L15	10.19.0.17/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L16	10.19.0.18/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L17	10.19.0.19/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L18	10.19.0.20/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L19	10.19.0.21/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-L20	10.19.0.22/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-SL1	10.19.0.25/32	65100	route-reflector client
iBGP L2VPN EVPN	default	DC1-S2	10.19.0.2/32	65100	DC1-SL2	10.19.0.26/32	65100	route-reflector client
eBGP	TRANSIT	DC1-SL1	10.19.16.1/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.16.3/29	65110	DC1-TRANSIT-INTFW VLAN 3000 (active unit only)
eBGP	TRANSIT	DC1-SL2	10.19.16.2/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.16.3/29	65110	DC1-TRANSIT-INTFW VLAN 3000 (active unit only)
eBGP	TRANSIT	DC1-BL1	10.19.16.9/29	65100	DC1-INETFW1/DC1-INETFW2	10.19.16.11/29	65140	DC1-TRANSIT-INETFW VLAN 3001 (active unit only)
eBGP	TRANSIT	DC1-BL2	10.19.16.10/29	65100	DC1-INETFW1/DC1-INETFW2	10.19.16.11/29	65140	DC1-TRANSIT-INETFW VLAN 3001 (active unit only)
eBGP	CITRIX	DC1-SL1	10.19.8.41/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.43/29	65110	DC1-CITRIX-INTFW VLAN 3105 (active unit only)
eBGP	CITRIX	DC1-SL2	10.19.8.42/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.43/29	65110	DC1-CITRIX-INTFW VLAN 3105 (active unit only)
eBGP	DEV	DC1-SL1	10.19.8.9/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.11/29	65110	DC1-DEV-INTFW VLAN 3101 (active unit only)
eBGP	DEV	DC1-SL2	10.19.8.10/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.11/29	65110	DC1-DEV-INTFW VLAN 3101 (active unit only)
eBGP	PARTNER	DC1-SL1	10.19.8.49/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.51/29	65110	DC1-PARTNER-INTFW VLAN 3106 (active unit only)
eBGP	PARTNER	DC1-SL2	10.19.8.50/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.51/29	65110	DC1-PARTNER-INTFW VLAN 3106 (active unit only)

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
eBGP	PROD	DC1-SL1	10.19.8.1/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.3/29	65110	DC1-PROD-INTFW VLAN 3100 (active unit only)
eBGP	PROD	DC1-SL2	10.19.8.2/29	65100	DC1-INTFW1/DC1-INTFW2	10.19.8.3/29	65110	DC1-PROD-INTFW VLAN 3100 (active unit only)
eBGP	TRANSIT	DC1-BL1	10.19.16.25/29	65100	DC1-CLOUD1	10.19.16.27/29	65170	DC1-TRANSIT-CLOUD1 VLAN 3003 (active unit only)
eBGP	TRANSIT	DC1-BL2	10.19.16.26/29	65100	DC1-CLOUD1	10.19.16.27/29	65170	DC1-TRANSIT-CLOUD1 VLAN 3003 (active unit only)
eBGP	TRANSIT	DC1-BL1	10.19.16.33/29	65100	DC1-CLOUD2	10.19.16.35/29	65170	DC1-TRANSIT-CLOUD2 VLAN 3004 (active unit only)
eBGP	TRANSIT	DC1-BL2	10.19.16.34/29	65100	DC1-CLOUD2	10.19.16.35/29	65170	DC1-TRANSIT-CLOUD2 VLAN 3004 (active unit only)
eBGP	TRANSIT	DC1-BL1	10.19.16.17/29	65100	DC1-SDWANFW1/DC1-SDWANFW2	10.19.16.19/29	65120	DC1-TRANSIT-SDWANFW VLAN 3002 (active unit only)
eBGP	TRANSIT	DC1-BL2	10.19.16.18/29	65100	DC1-SDWANFW1/DC1-SDWANFW2	10.19.16.19/29	65120	DC1-TRANSIT-SDWANFW VLAN 3002 (active unit only)
eBGP	PARTNER	DC1-BL1	10.19.9.1/29	65100	DC1-VPNFW1/DC1-VPNFW2	10.19.9.3/29	65130	DC1-PARTNER-VPNFW VLAN 3300 (active unit only)
eBGP	PARTNER	DC1-BL2	10.19.9.2/29	65100	DC1-VPNFW1/DC1-VPNFW2	10.19.9.3/29	65130	DC1-PARTNER-VPNFW VLAN 3300 (active unit only)
iBGP	default	DC1-ISP1	10.19.15.0/31	65050	DC1-ISP2	10.19.15.1/31	65050	cross-link FourHundredGigE0/0/0/4
eBGP	default	DC1-ISP1	192.0.2.2/30	65050	carrier	192.0.2.1/30		FourHundredGigE0/0/0/6
eBGP	default	DC1-ISP2	192.0.2.6/30	65050	carrier	192.0.2.5/30		FourHundredGigE0/0/0/6

Totals: 222 prefixes, 43 segments, 75 BGP sessions.

DC1: vendor cable schedule

Generated by Infrahub (site_cable_schedule transform). Do not edit by hand. Lengths in metres.

Cross-rack cables via patch racks (139)

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-BL1:Eth1/3-DC1-BL2:Eth1/3	smf	DC1-BL1:Eth1/3	2	DC1-B04-PP42:1	10	DC1-B06-PP42:1	2	DC1-B06-PP41:1	10	DC1-B08-PP42:1	2	DC1-BL2:Eth1/3
DC1-BL1:Eth1/4-DC1-BL2:Eth1/4	smf	DC1-BL1:Eth1/4	2	DC1-B04-PP42:2	10	DC1-B06-PP42:2	2	DC1-B06-PP41:2	10	DC1-B08-PP42:2	2	DC1-BL2:Eth1/4
DC1-BL1:Eth1/5-DC1-BL2:Eth1/5	smf	DC1-BL1:Eth1/5	2	DC1-B04-PP42:3	10	DC1-B06-PP42:3	2	DC1-B06-PP41:3	10	DC1-B08-PP42:3	2	DC1-BL2:Eth1/5
DC1-BL1:Eth1/6-DC1-BL2:Eth1/6	smf	DC1-BL1:Eth1/6	2	DC1-B04-PP42:4	10	DC1-B06-PP42:4	2	DC1-B06-PP41:4	10	DC1-B08-PP42:4	2	DC1-BL2:Eth1/6
DC1-BL1:Eth1/8-DC1-INETFW2:port19	smf	DC1-BL1:Eth1/8	2	DC1-B04-PP42:5	10	DC1-B06-PP42:5	2	DC1-B06-PP41:5	10	DC1-B08-PP42:5	3	DC1-INETFW2:port19
DC1-BL1:Eth1/10-DC1-SDWANFW2:port37	smf	DC1-BL1:Eth1/10	2	DC1-B04-PP42:6	10	DC1-B06-PP42:6	2	DC1-B06-PP41:6	10	DC1-B08-PP42:6	3	DC1-SDWANFW2:port37
DC1-BL1:Eth1/12-DC1-VPNFW2:port37	smf	DC1-BL1:Eth1/12	2	DC1-B04-PP42:7	10	DC1-B06-PP42:7	2	DC1-B06-PP41:7	10	DC1-B08-PP42:7	3	DC1-VPNFW2:port37
DC1-BL1:Eth1/14-DC1-CLOUD2:FH0/0/0/0	smf	DC1-BL1:Eth1/14	2	DC1-B04-PP42:8	10	DC1-B06-PP42:8	2	DC1-B06-PP41:8	10	DC1-B08-PP42:8	3	DC1-CLOUD2:FH0/0/0/0
DC1-BL1:Eth1/34-DC1-BL2:Eth1/34	smf	DC1-BL1:Eth1/34	2	DC1-B04-PP42:9	10	DC1-B06-PP42:9	2	DC1-B06-PP41:9	10	DC1-B08-PP42:9	2	DC1-BL2:Eth1/34
DC1-BL2:Eth1/7-DC1-INETFW1:port20	smf	DC1-BL2:Eth1/7	2	DC1-B08-PP42:10	10	DC1-B06-PP41:10	2	DC1-B06-PP42:10	10	DC1-B04-PP42:10	3	DC1-INETFW1:port20
DC1-BL2:Eth1/9-DC1-SDWANFW1:port38	smf	DC1-BL2:Eth1/9	2	DC1-B08-PP42:11	10	DC1-B06-PP41:11	2	DC1-B06-PP42:11	10	DC1-B04-PP42:11	3	DC1-SDWANFW1:port38
DC1-BL2:Eth1/11-DC1-VPNFW1:port38	smf	DC1-BL2:Eth1/11	2	DC1-B08-PP42:12	10	DC1-B06-PP41:12	2	DC1-B06-PP42:12	10	DC1-B04-PP42:12	3	DC1-VPNFW1:port38
DC1-BL2:Eth1/13-DC1-CLOUD1:FH0/0/0/2	smf	DC1-BL2:Eth1/13	2	DC1-B08-PP42:13	10	DC1-B06-PP41:13	2	DC1-B06-PP42:13	10	DC1-B04-PP42:13	3	DC1-CLOUD1:FH0/0/0/2
DC1-CLOUD1:FH0/0/0/4-DC1-CLOUD2:FH0/0/0/4	smf	DC1-CLOUD1:FH0/0/0/4	3	DC1-B04-PP42:14	10	DC1-B06-PP42:14	2	DC1-B06-PP41:14	10	DC1-B08-PP42:14	3	DC1-CLOUD2:FH0/0/0/4
DC1-DCI1:Eth1/23-DC1-DCI2:Eth1/23	smf	DC1-DCI1:Eth1/23	2	DC1-B04-PP42:15	10	DC1-B06-PP42:15	2	DC1-B06-PP41:15	10	DC1-B08-PP42:15	2	DC1-DCI2:Eth1/23
DC1-DCI1:Eth1/24-DC1-DCI2:Eth1/24	smf	DC1-DCI1:Eth1/24	2	DC1-B04-PP42:16	10	DC1-B06-PP42:16	2	DC1-B06-PP41:16	10	DC1-B08-PP42:16	2	DC1-DCI2:Eth1/24
DC1-DMZ1:Eth1/48-DC1-DMZ2:Eth1/48	smf	DC1-DMZ1:Eth1/48	2	DC1-B04-PP42:17	10	DC1-B06-PP42:17	2	DC1-B06-PP41:17	10	DC1-B08-PP42:17	2	DC1-DMZ2:Eth1/48
DC1-DMZ1:Eth1/50-DC1-INETFW2:port15	smf	DC1-DMZ1:Eth1/50	2	DC1-B04-PP42:18	10	DC1-B06-PP42:18	2	DC1-B06-PP41:18	10	DC1-B08-PP42:18	3	DC1-INETFW2:port15
DC1-DMZ1:Eth1/53-DC1-DMZ2:Eth1/53	smf	DC1-DMZ1:Eth1/53	2	DC1-B04-PP42:19	10	DC1-B06-PP42:19	2	DC1-B06-PP41:19	10	DC1-B08-PP42:19	2	DC1-DMZ2:Eth1/53
DC1-DMZ1:Eth1/54-DC1-DMZ2:Eth1/54	smf	DC1-DMZ1:Eth1/54	2	DC1-B04-PP42:20	10	DC1-B06-PP42:20	2	DC1-B06-PP41:20	10	DC1-B08-PP42:20	2	DC1-DMZ2:Eth1/54
DC1-DMZ2:Eth1/49-DC1-INETFW1:port16	smf	DC1-DMZ2:Eth1/49	2	DC1-B08-PP42:21	10	DC1-B06-PP41:21	2	DC1-B06-PP42:21	10	DC1-B04-PP42:21	3	DC1-INETFW1:port16

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-EDGE1:Eth1/1-DC1-EDGE2:Eth1/1	smf	DC1-EDGE1:Eth1/1	2	DC1-B04-PP42:22	10	DC1-B06-PP42:22	2	DC1-B06-PP41:22	10	DC1-B08-PP42:22	2	DC1-EDGE2:Eth1/1
DC1-EDGE1:Eth1/2-DC1-EDGE2:Eth1/2	smf	DC1-EDGE1:Eth1/2	2	DC1-B04-PP42:23	10	DC1-B06-PP42:23	2	DC1-B06-PP41:23	10	DC1-B08-PP42:23	2	DC1-EDGE2:Eth1/2
DC1-EDGE1:Eth1/3-DC1-EDGE2:Eth1/3	smf	DC1-EDGE1:Eth1/3	2	DC1-B04-PP42:24	10	DC1-B06-PP42:24	2	DC1-B06-PP41:24	10	DC1-B08-PP42:24	2	DC1-EDGE2:Eth1/3
DC1-EDGE1:Eth1/4-DC1-EDGE2:Eth1/4	smf	DC1-EDGE1:Eth1/4	2	DC1-B04-PP42:25	10	DC1-B06-PP42:25	2	DC1-B06-PP41:25	10	DC1-B08-PP42:25	2	DC1-EDGE2:Eth1/4
DC1-EDGE1:Eth1/6-DC1-ISP2:FH0/0/0/0	smf	DC1-EDGE1:Eth1/6	2	DC1-B04-PP42:26	10	DC1-B06-PP42:26	2	DC1-B06-PP41:26	10	DC1-B08-PP42:26	2	DC1-ISP2:FH0/0/0/0
DC1-EDGE1:Eth1/8-DC1-INETFW2:port21	smf	DC1-EDGE1:Eth1/8	2	DC1-B04-PP42:27	10	DC1-B06-PP42:27	2	DC1-B06-PP41:27	10	DC1-B08-PP42:27	3	DC1-INETFW2:port21
DC1-EDGE1:Eth1/10-DC1-SDWANFW2:port39	smf	DC1-EDGE1:Eth1/10	2	DC1-B04-PP42:28	10	DC1-B06-PP42:28	2	DC1-B06-PP41:28	10	DC1-B08-PP42:28	3	DC1-SDWANFW2:port39
DC1-EDGE1:Eth1/12-DC1-VPNFW2:port39	smf	DC1-EDGE1:Eth1/12	2	DC1-B04-PP42:29	10	DC1-B06-PP42:29	2	DC1-B06-PP41:29	10	DC1-B08-PP42:29	3	DC1-VPNFW2:port39
DC1-EDGE1:Eth1/34-DC1-EDGE2:Eth1/34	smf	DC1-EDGE1:Eth1/34	2	DC1-B04-PP42:30	10	DC1-B06-PP42:30	2	DC1-B06-PP41:30	10	DC1-B08-PP42:30	2	DC1-EDGE2:Eth1/34
DC1-EDGE2:Eth1/5-DC1-ISP1:FH0/0/0/2	smf	DC1-EDGE2:Eth1/5	2	DC1-B08-PP42:31	10	DC1-B06-PP41:31	2	DC1-B06-PP42:31	10	DC1-B04-PP42:31	2	DC1-ISP1:FH0/0/0/2
DC1-EDGE2:Eth1/7-DC1-INETFW1:port22	smf	DC1-EDGE2:Eth1/7	2	DC1-B08-PP42:32	10	DC1-B06-PP41:32	2	DC1-B06-PP42:32	10	DC1-B04-PP42:32	3	DC1-INETFW1:port22
DC1-EDGE2:Eth1/9-DC1-SDWANFW1:port40	smf	DC1-EDGE2:Eth1/9	2	DC1-B08-PP42:33	10	DC1-B06-PP41:33	2	DC1-B06-PP42:33	10	DC1-B04-PP42:33	3	DC1-SDWANFW1:port40
DC1-EDGE2:Eth1/11-DC1-VPNFW1:port40	smf	DC1-EDGE2:Eth1/11	2	DC1-B08-PP42:34	10	DC1-B06-PP41:34	2	DC1-B06-PP42:34	10	DC1-B04-PP42:34	3	DC1-VPNFW1:port40
DC1-INETFW1:ha3-DC1-INETFW2:ha3	smf	DC1-INETFW1:ha3	3	DC1-B04-PP42:35	10	DC1-B06-PP42:35	2	DC1-B06-PP41:35	10	DC1-B08-PP42:35	3	DC1-INETFW2:ha3
DC1-INETFW1:ha4-DC1-INETFW2:ha4	smf	DC1-INETFW1:ha4	3	DC1-B04-PP42:36	10	DC1-B06-PP42:36	2	DC1-B06-PP41:36	10	DC1-B08-PP42:36	3	DC1-INETFW2:ha4
DC1-INTFW1:ha3-DC1-INTFW2:ha3	smf	DC1-INTFW1:ha3	3	DC1-B04-PP42:37	10	DC1-B06-PP42:37	2	DC1-B06-PP41:37	10	DC1-B08-PP42:37	3	DC1-INTFW2:ha3
DC1-INTFW1:ha4-DC1-INTFW2:ha4	smf	DC1-INTFW1:ha4	3	DC1-B04-PP42:38	10	DC1-B06-PP42:38	2	DC1-B06-PP41:38	10	DC1-B08-PP42:38	3	DC1-INTFW2:ha4
DC1-ISP1:FH0/0/0/4-DC1-ISP2:FH0/0/0/4	smf	DC1-ISP1:FH0/0/0/4	2	DC1-B04-PP42:39	10	DC1-B06-PP42:39	2	DC1-B06-PP41:39	10	DC1-B08-PP42:39	2	DC1-ISP2:FH0/0/0/4
DC1-L1:Eth1/48-DC1-L2:Eth1/48	smf	DC1-L1:Eth1/48	2	DC1-A01-PP42:1	15	DC1-B05-PP40:1	1	DC1-B05-PP40:13	15	DC1-A02-PP42:1	2	DC1-L2:Eth1/48
DC1-L1:Eth1/53-DC1-L2:Eth1/53	smf	DC1-L1:Eth1/53	2	DC1-A01-PP42:2	15	DC1-B05-PP40:2	1	DC1-B05-PP40:14	15	DC1-A02-PP42:2	2	DC1-L2:Eth1/53
DC1-L1:Eth1/54-DC1-L2:Eth1/54	smf	DC1-L1:Eth1/54	2	DC1-A01-PP42:3	15	DC1-B05-PP40:3	1	DC1-B05-PP40:15	15	DC1-A02-PP42:3	2	DC1-L2:Eth1/54
DC1-S1:Eth1/1-DC1-L1:Eth1/49	smf	DC1-S1:Eth1/1	2	DC1-B04-PP42:40	7	DC1-B05-PP42:40	2	DC1-B05-PP40:4	15	DC1-A01-PP42:4	2	DC1-L1:Eth1/49
DC1-S1:Eth1/2-DC1-L1:Eth1/50	smf	DC1-S1:Eth1/2	2	DC1-B04-PP42:41	7	DC1-B05-PP42:41	2	DC1-B05-PP40:5	15	DC1-A01-PP42:5	2	DC1-L1:Eth1/50
DC1-S1:Eth1/3-DC1-L2:Eth1/49	smf	DC1-S1:Eth1/3	2	DC1-B04-PP42:42	7	DC1-B05-PP42:42	2	DC1-B05-PP40:16	15	DC1-A02-PP42:4	2	DC1-L2:Eth1/49

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-S1:Eth1/4-DC1-L2:Eth1/50	smf	DC1-S1:Eth1/4	2	DC1-B04-PP42:43	7	DC1-B05-PP42:43	2	DC1-B05-PP40:17	15	DC1-A02-PP42:5	2	DC1-L2:Eth1/50
DC1-S1:Eth1/5-DC1-L3:Eth1/49	smf	DC1-S1:Eth1/5	2	DC1-B04-PP42:44	7	DC1-B05-PP42:44	2	DC1-B05-PP40:25	15	DC1-A03-PP42:1	2	DC1-L3:Eth1/49
DC1-S1:Eth1/6-DC1-L3:Eth1/50	smf	DC1-S1:Eth1/6	2	DC1-B04-PP42:45	7	DC1-B05-PP42:45	2	DC1-B05-PP40:26	15	DC1-A03-PP42:2	2	DC1-L3:Eth1/50
DC1-S1:Eth1/7-DC1-L4:Eth1/49	smf	DC1-S1:Eth1/7	2	DC1-B04-PP42:46	7	DC1-B05-PP42:46	2	DC1-B05-PP40:37	10	DC1-A04-PP42:1	2	DC1-L4:Eth1/49
DC1-S1:Eth1/8-DC1-L4:Eth1/50	smf	DC1-S1:Eth1/8	2	DC1-B04-PP42:47	7	DC1-B05-PP42:47	2	DC1-B05-PP40:38	10	DC1-A04-PP42:2	2	DC1-L4:Eth1/50
DC1-S1:Eth1/9-DC1-L5:Eth1/49	smf	DC1-S1:Eth1/9	2	DC1-B04-PP42:48	7	DC1-B05-PP42:48	2	DC1-B05-PP40:49	10	DC1-A05-PP42:1	2	DC1-L5:Eth1/49
DC1-S1:Eth1/10-DC1-L5:Eth1/50	smf	DC1-S1:Eth1/10	2	DC1-B04-PP42:49	7	DC1-B05-PP42:49	2	DC1-B05-PP40:50	10	DC1-A05-PP42:2	2	DC1-L5:Eth1/50
DC1-S1:Eth1/11-DC1-L6:Eth1/49	smf	DC1-S1:Eth1/11	2	DC1-B04-PP42:50	10	DC1-B06-PP42:50	2	DC1-B06-PP40:61	10	DC1-A06-PP42:1	2	DC1-L6:Eth1/49
DC1-S1:Eth1/12-DC1-L6:Eth1/50	smf	DC1-S1:Eth1/12	2	DC1-B04-PP42:51	10	DC1-B06-PP42:51	2	DC1-B06-PP40:62	10	DC1-A06-PP42:2	2	DC1-L6:Eth1/50
DC1-S1:Eth1/13-DC1-L7:Eth1/49	smf	DC1-S1:Eth1/13	2	DC1-B04-PP42:52	10	DC1-B06-PP42:52	2	DC1-B06-PP40:73	10	DC1-A07-PP42:1	2	DC1-L7:Eth1/49
DC1-S1:Eth1/14-DC1-L7:Eth1/50	smf	DC1-S1:Eth1/14	2	DC1-B04-PP42:53	10	DC1-B06-PP42:53	2	DC1-B06-PP40:74	10	DC1-A07-PP42:2	2	DC1-L7:Eth1/50
DC1-S1:Eth1/15-DC1-L8:Eth1/49	smf	DC1-S1:Eth1/15	2	DC1-B04-PP42:54	10	DC1-B06-PP42:54	2	DC1-B06-PP40:85	15	DC1-A08-PP42:1	2	DC1-L8:Eth1/49
DC1-S1:Eth1/16-DC1-L8:Eth1/50	smf	DC1-S1:Eth1/16	2	DC1-B04-PP42:55	10	DC1-B06-PP42:55	2	DC1-B06-PP40:86	15	DC1-A08-PP42:2	2	DC1-L8:Eth1/50
DC1-S1:Eth1/17-DC1-L9:Eth1/49	smf	DC1-S1:Eth1/17	2	DC1-B04-PP42:56	10	DC1-B06-PP42:56	2	DC1-B06-PP40:97	15	DC1-A09-PP42:1	2	DC1-L9:Eth1/49
DC1-S1:Eth1/18-DC1-L9:Eth1/50	smf	DC1-S1:Eth1/18	2	DC1-B04-PP42:57	10	DC1-B06-PP42:57	2	DC1-B06-PP40:98	15	DC1-A09-PP42:2	2	DC1-L9:Eth1/50
DC1-S1:Eth1/19-DC1-L10:Eth1/49	smf	DC1-S1:Eth1/19	2	DC1-B04-PP42:58	10	DC1-B06-PP42:58	2	DC1-B06-PP40:109	15	DC1-A10-PP42:1	2	DC1-L10:Eth1/49
DC1-S1:Eth1/20-DC1-L10:Eth1/50	smf	DC1-S1:Eth1/20	2	DC1-B04-PP42:59	10	DC1-B06-PP42:59	2	DC1-B06-PP40:110	15	DC1-A10-PP42:2	2	DC1-L10:Eth1/50
DC1-S1:Eth1/21-DC1-L11:Eth1/49	smf	DC1-S1:Eth1/21	2	DC1-B04-PP42:60	7	DC1-B05-PP42:60	2	DC1-B05-PP39:1	15	DC1-C01-PP42:1	2	DC1-L11:Eth1/49
DC1-S1:Eth1/22-DC1-L11:Eth1/50	smf	DC1-S1:Eth1/22	2	DC1-B04-PP42:61	7	DC1-B05-PP42:61	2	DC1-B05-PP39:2	15	DC1-C01-PP42:2	2	DC1-L11:Eth1/50
DC1-S1:Eth1/23-DC1-L12:Eth1/49	smf	DC1-S1:Eth1/23	2	DC1-B04-PP42:62	7	DC1-B05-PP42:62	2	DC1-B05-PP39:13	15	DC1-C02-PP42:1	2	DC1-L12:Eth1/49
DC1-S1:Eth1/24-DC1-L12:Eth1/50	smf	DC1-S1:Eth1/24	2	DC1-B04-PP42:63	7	DC1-B05-PP42:63	2	DC1-B05-PP39:14	15	DC1-C02-PP42:2	2	DC1-L12:Eth1/50
DC1-S1:Eth1/25-DC1-L13:Eth1/49	smf	DC1-S1:Eth1/25	2	DC1-B04-PP42:64	7	DC1-B05-PP42:64	2	DC1-B05-PP39:25	15	DC1-C03-PP42:1	2	DC1-L13:Eth1/49
DC1-S1:Eth1/26-DC1-L13:Eth1/50	smf	DC1-S1:Eth1/26	2	DC1-B04-PP42:65	7	DC1-B05-PP42:65	2	DC1-B05-PP39:26	15	DC1-C03-PP42:2	2	DC1-L13:Eth1/50
DC1-S1:Eth1/27-DC1-L14:Eth1/49	smf	DC1-S1:Eth1/27	2	DC1-B04-PP42:66	7	DC1-B05-PP42:66	2	DC1-B05-PP39:37	10	DC1-C04-PP42:1	2	DC1-L14:Eth1/49

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-S1:Eth1/28-DC1-L14:Eth1/50	smf	DC1-S1:Eth1/28	2	DC1-B04-PP42:67	7	DC1-B05-PP42:67	2	DC1-B05-PP39:38	10	DC1-C04-PP42:2	2	DC1-L14:Eth1/50
DC1-S1:Eth1/29-DC1-L15:Eth1/49	smf	DC1-S1:Eth1/29	2	DC1-B04-PP42:68	7	DC1-B05-PP42:68	2	DC1-B05-PP39:49	10	DC1-C05-PP42:1	2	DC1-L15:Eth1/49
DC1-S1:Eth1/30-DC1-L15:Eth1/50	smf	DC1-S1:Eth1/30	2	DC1-B04-PP42:69	7	DC1-B05-PP42:69	2	DC1-B05-PP39:50	10	DC1-C05-PP42:2	2	DC1-L15:Eth1/50
DC1-S1:Eth1/31-DC1-L16:Eth1/49	smf	DC1-S1:Eth1/31	2	DC1-B04-PP42:70	10	DC1-B06-PP42:70	2	DC1-B06-PP39:61	10	DC1-C06-PP42:1	2	DC1-L16:Eth1/49
DC1-S1:Eth1/32-DC1-L16:Eth1/50	smf	DC1-S1:Eth1/32	2	DC1-B04-PP42:71	10	DC1-B06-PP42:71	2	DC1-B06-PP39:62	10	DC1-C06-PP42:2	2	DC1-L16:Eth1/50
DC1-S1:Eth1/33-DC1-L17:Eth1/49	smf	DC1-S1:Eth1/33	2	DC1-B04-PP42:72	10	DC1-B06-PP42:72	2	DC1-B06-PP39:73	10	DC1-C07-PP42:1	2	DC1-L17:Eth1/49
DC1-S1:Eth1/34-DC1-L17:Eth1/50	smf	DC1-S1:Eth1/34	2	DC1-B04-PP42:73	10	DC1-B06-PP42:73	2	DC1-B06-PP39:74	10	DC1-C07-PP42:2	2	DC1-L17:Eth1/50
DC1-S1:Eth1/35-DC1-L18:Eth1/49	smf	DC1-S1:Eth1/35	2	DC1-B04-PP42:74	10	DC1-B06-PP42:74	2	DC1-B06-PP39:85	15	DC1-C08-PP42:1	2	DC1-L18:Eth1/49
DC1-S1:Eth1/36-DC1-L18:Eth1/50	smf	DC1-S1:Eth1/36	2	DC1-B04-PP42:75	10	DC1-B06-PP42:75	2	DC1-B06-PP39:86	15	DC1-C08-PP42:2	2	DC1-L18:Eth1/50
DC1-S1:Eth1/37-DC1-L19:Eth1/49	smf	DC1-S1:Eth1/37	2	DC1-B04-PP42:76	10	DC1-B06-PP42:76	2	DC1-B06-PP39:97	15	DC1-C09-PP42:1	2	DC1-L19:Eth1/49
DC1-S1:Eth1/38-DC1-L19:Eth1/50	smf	DC1-S1:Eth1/38	2	DC1-B04-PP42:77	10	DC1-B06-PP42:77	2	DC1-B06-PP39:98	15	DC1-C09-PP42:2	2	DC1-L19:Eth1/50
DC1-S1:Eth1/39-DC1-L20:Eth1/49	smf	DC1-S1:Eth1/39	2	DC1-B04-PP42:78	10	DC1-B06-PP42:78	2	DC1-B06-PP39:109	15	DC1-C10-PP42:1	2	DC1-L20:Eth1/49
DC1-S1:Eth1/40-DC1-L20:Eth1/50	smf	DC1-S1:Eth1/40	2	DC1-B04-PP42:79	10	DC1-B06-PP42:79	2	DC1-B06-PP39:110	15	DC1-C10-PP42:2	2	DC1-L20:Eth1/50
DC1-S1:Eth1/42-DC1-BL2:Eth1/1	smf	DC1-S1:Eth1/42	2	DC1-B04-PP42:80	10	DC1-B06-PP42:80	2	DC1-B06-PP41:40	10	DC1-B08-PP42:40	2	DC1-BL2:Eth1/1
DC1-S1:Eth1/44-DC1-SL2:Eth1/1	smf	DC1-S1:Eth1/44	2	DC1-B04-PP42:81	10	DC1-B06-PP42:81	2	DC1-B06-PP41:41	10	DC1-B08-PP42:41	2	DC1-SL2:Eth1/1
DC1-S1:Eth1/46-DC1-BGW2:Eth1/1	smf	DC1-S1:Eth1/46	2	DC1-B04-PP42:82	10	DC1-B06-PP42:82	2	DC1-B06-PP41:42	10	DC1-B08-PP42:42	2	DC1-BGW2:Eth1/1
DC1-S2:Eth1/1-DC1-L1:Eth1/51	smf	DC1-S2:Eth1/1	2	DC1-B08-PP42:43	10	DC1-B06-PP41:43	2	DC1-B06-PP40:6	15	DC1-A01-PP42:6	2	DC1-L1:Eth1/51
DC1-S2:Eth1/2-DC1-L1:Eth1/52	smf	DC1-S2:Eth1/2	2	DC1-B08-PP42:44	10	DC1-B06-PP41:44	2	DC1-B06-PP40:7	15	DC1-A01-PP42:7	2	DC1-L1:Eth1/52
DC1-S2:Eth1/3-DC1-L2:Eth1/51	smf	DC1-S2:Eth1/3	2	DC1-B08-PP42:45	10	DC1-B06-PP41:45	2	DC1-B06-PP40:18	15	DC1-A02-PP42:6	2	DC1-L2:Eth1/51
DC1-S2:Eth1/4-DC1-L2:Eth1/52	smf	DC1-S2:Eth1/4	2	DC1-B08-PP42:46	10	DC1-B06-PP41:46	2	DC1-B06-PP40:19	15	DC1-A02-PP42:7	2	DC1-L2:Eth1/52
DC1-S2:Eth1/5-DC1-L3:Eth1/51	smf	DC1-S2:Eth1/5	2	DC1-B08-PP42:47	10	DC1-B06-PP41:47	2	DC1-B06-PP40:27	15	DC1-A03-PP42:3	2	DC1-L3:Eth1/51
DC1-S2:Eth1/6-DC1-L3:Eth1/52	smf	DC1-S2:Eth1/6	2	DC1-B08-PP42:48	10	DC1-B06-PP41:48	2	DC1-B06-PP40:28	15	DC1-A03-PP42:4	2	DC1-L3:Eth1/52
DC1-S2:Eth1/7-DC1-L4:Eth1/51	smf	DC1-S2:Eth1/7	2	DC1-B08-PP42:49	10	DC1-B06-PP41:49	2	DC1-B06-PP40:39	15	DC1-A04-PP42:3	2	DC1-L4:Eth1/51
DC1-S2:Eth1/8-DC1-L4:Eth1/52	smf	DC1-S2:Eth1/8	2	DC1-B08-PP42:50	10	DC1-B06-PP41:50	2	DC1-B06-PP40:40	15	DC1-A04-PP42:4	2	DC1-L4:Eth1/52

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-S2:Eth1/9-DC1-L5:Eth1/51	smf	DC1-S2:Eth1/9	2	DC1-B08-PP42:51	10	DC1-B06-PP41:51	2	DC1-B06-PP40:51	10	DC1-A05-PP42:3	2	DC1-L5:Eth1/51
DC1-S2:Eth1/10-DC1-L5:Eth1/52	smf	DC1-S2:Eth1/10	2	DC1-B08-PP42:52	10	DC1-B06-PP41:52	2	DC1-B06-PP40:52	10	DC1-A05-PP42:4	2	DC1-L5:Eth1/52
DC1-S2:Eth1/11-DC1-L6:Eth1/51	smf	DC1-S2:Eth1/11	2	DC1-B08-PP42:53	10	DC1-B06-PP41:53	2	DC1-B06-PP40:63	10	DC1-A06-PP42:3	2	DC1-L6:Eth1/51
DC1-S2:Eth1/12-DC1-L6:Eth1/52	smf	DC1-S2:Eth1/12	2	DC1-B08-PP42:54	10	DC1-B06-PP41:54	2	DC1-B06-PP40:64	10	DC1-A06-PP42:4	2	DC1-L6:Eth1/52
DC1-S2:Eth1/13-DC1-L7:Eth1/51	smf	DC1-S2:Eth1/13	2	DC1-B08-PP42:55	7	DC1-B07-PP41:55	2	DC1-B07-PP40:75	10	DC1-A07-PP42:3	2	DC1-L7:Eth1/51
DC1-S2:Eth1/14-DC1-L7:Eth1/52	smf	DC1-S2:Eth1/14	2	DC1-B08-PP42:56	7	DC1-B07-PP41:56	2	DC1-B07-PP40:76	10	DC1-A07-PP42:4	2	DC1-L7:Eth1/52
DC1-S2:Eth1/15-DC1-L8:Eth1/51	smf	DC1-S2:Eth1/15	2	DC1-B08-PP42:57	7	DC1-B07-PP41:57	2	DC1-B07-PP40:87	10	DC1-A08-PP42:3	2	DC1-L8:Eth1/51
DC1-S2:Eth1/16-DC1-L8:Eth1/52	smf	DC1-S2:Eth1/16	2	DC1-B08-PP42:58	7	DC1-B07-PP41:58	2	DC1-B07-PP40:88	10	DC1-A08-PP42:4	2	DC1-L8:Eth1/52
DC1-S2:Eth1/17-DC1-L9:Eth1/51	smf	DC1-S2:Eth1/17	2	DC1-B08-PP42:59	7	DC1-B07-PP41:59	2	DC1-B07-PP40:99	15	DC1-A09-PP42:3	2	DC1-L9:Eth1/51
DC1-S2:Eth1/18-DC1-L9:Eth1/52	smf	DC1-S2:Eth1/18	2	DC1-B08-PP42:60	7	DC1-B07-PP41:60	2	DC1-B07-PP40:100	15	DC1-A09-PP42:4	2	DC1-L9:Eth1/52
DC1-S2:Eth1/19-DC1-L10:Eth1/51	smf	DC1-S2:Eth1/19	2	DC1-B08-PP42:61	7	DC1-B07-PP41:61	2	DC1-B07-PP40:111	15	DC1-A10-PP42:3	2	DC1-L10:Eth1/51
DC1-S2:Eth1/20-DC1-L10:Eth1/52	smf	DC1-S2:Eth1/20	2	DC1-B08-PP42:62	7	DC1-B07-PP41:62	2	DC1-B07-PP40:112	15	DC1-A10-PP42:4	2	DC1-L10:Eth1/52
DC1-S2:Eth1/21-DC1-L11:Eth1/51	smf	DC1-S2:Eth1/21	2	DC1-B08-PP42:63	10	DC1-B06-PP41:63	2	DC1-B06-PP39:3	15	DC1-C01-PP42:3	2	DC1-L11:Eth1/51
DC1-S2:Eth1/22-DC1-L11:Eth1/52	smf	DC1-S2:Eth1/22	2	DC1-B08-PP42:64	10	DC1-B06-PP41:64	2	DC1-B06-PP39:4	15	DC1-C01-PP42:4	2	DC1-L11:Eth1/52
DC1-S2:Eth1/23-DC1-L12:Eth1/51	smf	DC1-S2:Eth1/23	2	DC1-B08-PP42:65	10	DC1-B06-PP41:65	2	DC1-B06-PP39:15	15	DC1-C02-PP42:3	2	DC1-L12:Eth1/51
DC1-S2:Eth1/24-DC1-L12:Eth1/52	smf	DC1-S2:Eth1/24	2	DC1-B08-PP42:66	10	DC1-B06-PP41:66	2	DC1-B06-PP39:16	15	DC1-C02-PP42:4	2	DC1-L12:Eth1/52
DC1-S2:Eth1/25-DC1-L13:Eth1/51	smf	DC1-S2:Eth1/25	2	DC1-B08-PP42:67	10	DC1-B06-PP41:67	2	DC1-B06-PP39:27	15	DC1-C03-PP42:3	2	DC1-L13:Eth1/51
DC1-S2:Eth1/26-DC1-L13:Eth1/52	smf	DC1-S2:Eth1/26	2	DC1-B08-PP42:68	10	DC1-B06-PP41:68	2	DC1-B06-PP39:28	15	DC1-C03-PP42:4	2	DC1-L13:Eth1/52
DC1-S2:Eth1/27-DC1-L14:Eth1/51	smf	DC1-S2:Eth1/27	2	DC1-B08-PP42:69	10	DC1-B06-PP41:69	2	DC1-B06-PP39:39	15	DC1-C04-PP42:3	2	DC1-L14:Eth1/51
DC1-S2:Eth1/28-DC1-L14:Eth1/52	smf	DC1-S2:Eth1/28	2	DC1-B08-PP42:70	10	DC1-B06-PP41:70	2	DC1-B06-PP39:40	15	DC1-C04-PP42:4	2	DC1-L14:Eth1/52
DC1-S2:Eth1/29-DC1-L15:Eth1/51	smf	DC1-S2:Eth1/29	2	DC1-B08-PP42:71	10	DC1-B06-PP41:71	2	DC1-B06-PP39:51	10	DC1-C05-PP42:3	2	DC1-L15:Eth1/51
DC1-S2:Eth1/30-DC1-L15:Eth1/52	smf	DC1-S2:Eth1/30	2	DC1-B08-PP42:72	10	DC1-B06-PP41:72	2	DC1-B06-PP39:52	10	DC1-C05-PP42:4	2	DC1-L15:Eth1/52
DC1-S2:Eth1/31-DC1-L16:Eth1/51	smf	DC1-S2:Eth1/31	2	DC1-B08-PP42:73	10	DC1-B06-PP41:73	2	DC1-B06-PP39:63	10	DC1-C06-PP42:3	2	DC1-L16:Eth1/51
DC1-S2:Eth1/32-DC1-L16:Eth1/52	smf	DC1-S2:Eth1/32	2	DC1-B08-PP42:74	10	DC1-B06-PP41:74	2	DC1-B06-PP39:64	10	DC1-C06-PP42:4	2	DC1-L16:Eth1/52

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC1-S2:Eth1/33-DC1-L17:Eth1/51	smf	DC1-S2:Eth1/33	2	DC1-B08-PP42:75	7	DC1-B07-PP41:75	2	DC1-B07-PP39:75	10	DC1-C07-PP42:3	2	DC1-L17:Eth1/51
DC1-S2:Eth1/34-DC1-L17:Eth1/52	smf	DC1-S2:Eth1/34	2	DC1-B08-PP42:76	7	DC1-B07-PP41:76	2	DC1-B07-PP39:76	10	DC1-C07-PP42:4	2	DC1-L17:Eth1/52
DC1-S2:Eth1/35-DC1-L18:Eth1/51	smf	DC1-S2:Eth1/35	2	DC1-B08-PP42:77	7	DC1-B07-PP41:77	2	DC1-B07-PP39:87	10	DC1-C08-PP42:3	2	DC1-L18:Eth1/51
DC1-S2:Eth1/36-DC1-L18:Eth1/52	smf	DC1-S2:Eth1/36	2	DC1-B08-PP42:78	7	DC1-B07-PP41:78	2	DC1-B07-PP39:88	10	DC1-C08-PP42:4	2	DC1-L18:Eth1/52
DC1-S2:Eth1/37-DC1-L19:Eth1/51	smf	DC1-S2:Eth1/37	2	DC1-B08-PP42:79	7	DC1-B07-PP41:79	2	DC1-B07-PP39:99	15	DC1-C09-PP42:3	2	DC1-L19:Eth1/51
DC1-S2:Eth1/38-DC1-L19:Eth1/52	smf	DC1-S2:Eth1/38	2	DC1-B08-PP42:80	7	DC1-B07-PP41:80	2	DC1-B07-PP39:100	15	DC1-C09-PP42:4	2	DC1-L19:Eth1/52
DC1-S2:Eth1/39-DC1-L20:Eth1/51	smf	DC1-S2:Eth1/39	2	DC1-B08-PP42:81	7	DC1-B07-PP41:81	2	DC1-B07-PP39:111	15	DC1-C10-PP42:3	2	DC1-L20:Eth1/51
DC1-S2:Eth1/40-DC1-L20:Eth1/52	smf	DC1-S2:Eth1/40	2	DC1-B08-PP42:82	7	DC1-B07-PP41:82	2	DC1-B07-PP39:112	15	DC1-C10-PP42:4	2	DC1-L20:Eth1/52
DC1-S2:Eth1/41-DC1-BL1:Eth1/2	smf	DC1-S2:Eth1/41	2	DC1-B08-PP42:83	10	DC1-B06-PP41:83	2	DC1-B06-PP42:83	10	DC1-B04-PP42:83	2	DC1-BL1:Eth1/2
DC1-S2:Eth1/43-DC1-SL1:Eth1/2	smf	DC1-S2:Eth1/43	2	DC1-B08-PP42:84	10	DC1-B06-PP41:84	2	DC1-B06-PP42:84	10	DC1-B04-PP42:84	2	DC1-SL1:Eth1/2
DC1-S2:Eth1/45-DC1-BGW1:Eth1/2	smf	DC1-S2:Eth1/45	2	DC1-B08-PP42:85	10	DC1-B06-PP41:85	2	DC1-B06-PP42:85	10	DC1-B04-PP42:85	2	DC1-BGW1:Eth1/2
DC1-SDWANFW1:ha1-DC1-SDWANFW2:ha1	smf	DC1-SDWANFW1:ha1	3	DC1-B04-PP42:86	10	DC1-B06-PP42:86	2	DC1-B06-PP41:86	10	DC1-B08-PP42:86	3	DC1-SDWANFW2:ha1
DC1-SDWANFW1:ha2-DC1-SDWANFW2:ha2	smf	DC1-SDWANFW1:ha2	3	DC1-B04-PP42:87	10	DC1-B06-PP42:87	2	DC1-B06-PP41:87	10	DC1-B08-PP42:87	3	DC1-SDWANFW2:ha2
DC1-SL1:Eth1/3-DC1-SL2:Eth1/3	smf	DC1-SL1:Eth1/3	2	DC1-B04-PP42:88	10	DC1-B06-PP42:88	2	DC1-B06-PP41:88	10	DC1-B08-PP42:88	2	DC1-SL2:Eth1/3
DC1-SL1:Eth1/4-DC1-SL2:Eth1/4	smf	DC1-SL1:Eth1/4	2	DC1-B04-PP42:89	10	DC1-B06-PP42:89	2	DC1-B06-PP41:89	10	DC1-B08-PP42:89	2	DC1-SL2:Eth1/4
DC1-SL1:Eth1/5-DC1-SL2:Eth1/5	smf	DC1-SL1:Eth1/5	2	DC1-B04-PP42:90	10	DC1-B06-PP42:90	2	DC1-B06-PP41:90	10	DC1-B08-PP42:90	2	DC1-SL2:Eth1/5
DC1-SL1:Eth1/6-DC1-SL2:Eth1/6	smf	DC1-SL1:Eth1/6	2	DC1-B04-PP42:91	10	DC1-B06-PP42:91	2	DC1-B06-PP41:91	10	DC1-B08-PP42:91	2	DC1-SL2:Eth1/6
DC1-SL1:Eth1/8-DC1-INTFW2:port19	smf	DC1-SL1:Eth1/8	2	DC1-B04-PP42:92	10	DC1-B06-PP42:92	2	DC1-B06-PP41:92	10	DC1-B08-PP42:92	3	DC1-INTFW2:port19
DC1-SL1:Eth1/34-DC1-SL2:Eth1/34	smf	DC1-SL1:Eth1/34	2	DC1-B04-PP42:93	10	DC1-B06-PP42:93	2	DC1-B06-PP41:93	10	DC1-B08-PP42:93	2	DC1-SL2:Eth1/34
DC1-SL2:Eth1/7-DC1-INTFW1:port20	smf	DC1-SL2:Eth1/7	2	DC1-B08-PP42:94	10	DC1-B06-PP41:94	2	DC1-B06-PP42:94	10	DC1-B04-PP42:94	3	DC1-INTFW1:port20
DC1-VPNFW1:ha1-DC1-VPNFW2:ha1	smf	DC1-VPNFW1:ha1	3	DC1-B04-PP42:95	10	DC1-B06-PP42:95	2	DC1-B06-PP41:95	10	DC1-B08-PP42:95	3	DC1-VPNFW2:ha1
DC1-VPNFW1:ha2-DC1-VPNFW2:ha2	smf	DC1-VPNFW1:ha2	3	DC1-B04-PP42:96	10	DC1-B06-PP42:96	2	DC1-B06-PP41:96	10	DC1-B08-PP42:96	3	DC1-VPNFW2:ha2

Same-rack direct cables (28)

Cable label	Media	Length	Rack
DC1-BGW1:Eth1/3-DC1-DCI1:Eth1/1	dac	2	DC1-B04
DC1-BGW2:Eth1/3-DC1-DCI2:Eth1/1	dac	2	DC1-B08
DC1-BL1:Eth1/7-DC1-INETFW1:port19	dac	3	DC1-B04
DC1-BL1:Eth1/9-DC1-SDWANFW1:port37	dac	3	DC1-B04
DC1-BL1:Eth1/11-DC1-VPNFW1:port37	dac	2	DC1-B04
DC1-BL1:Eth1/13-DC1-CLOUD1:FH0/0/0/0	dac	2	DC1-B04
DC1-BL2:Eth1/8-DC1-INETFW2:port20	dac	3	DC1-B08
DC1-BL2:Eth1/10-DC1-SDWANFW2:port38	dac	3	DC1-B08
DC1-BL2:Eth1/12-DC1-VPNFW2:port38	dac	2	DC1-B08
DC1-BL2:Eth1/14-DC1-CLOUD2:FH0/0/0/2	dac	2	DC1-B08
DC1-DMZ1:Eth1/49-DC1-INETFW1:port15	dac	2	DC1-B04
DC1-DMZ2:Eth1/50-DC1-INETFW2:port16	dac	2	DC1-B08
DC1-EDGE1:Eth1/5-DC1-ISP1:FH0/0/0/0	dac	2	DC1-B04
DC1-EDGE1:Eth1/7-DC1-INETFW1:port21	dac	3	DC1-B04
DC1-EDGE1:Eth1/9-DC1-SDWANFW1:port39	dac	2	DC1-B04
DC1-EDGE1:Eth1/11-DC1-VPNFW1:port39	dac	2	DC1-B04
DC1-EDGE2:Eth1/6-DC1-ISP2:FH0/0/0/2	dac	2	DC1-B08
DC1-EDGE2:Eth1/8-DC1-INETFW2:port22	dac	3	DC1-B08
DC1-EDGE2:Eth1/10-DC1-SDWANFW2:port40	dac	2	DC1-B08
DC1-EDGE2:Eth1/12-DC1-VPNFW2:port40	dac	2	DC1-B08
DC1-S1:Eth1/41-DC1-BL1:Eth1/1	dac	2	DC1-B04
DC1-S1:Eth1/43-DC1-SL1:Eth1/1	dac	2	DC1-B04
DC1-S1:Eth1/45-DC1-BGW1:Eth1/1	dac	2	DC1-B04
DC1-S2:Eth1/42-DC1-BL2:Eth1/2	dac	2	DC1-B08
DC1-S2:Eth1/44-DC1-SL2:Eth1/2	dac	2	DC1-B08
DC1-S2:Eth1/46-DC1-BGW2:Eth1/2	dac	2	DC1-B08
DC1-SL1:Eth1/7-DC1-INTFW1:port19	dac	3	DC1-B04
DC1-SL2:Eth1/8-DC1-INTFW2:port20	dac	3	DC1-B08

Bill of materials

Part	Length (m)	Quantity
dac direct	2	20
dac direct	3	8
smf cross-connect jumper	1	3
smf cross-connect jumper	2	136
smf jumper	2	242
smf jumper	3	36
smf trunk leg	7	36
smf trunk leg	10	188
smf trunk leg	15	54


Panel ports used per rack

Rack	Ports used	Block size
DC1-A01	7	12
DC1-A02	7	12
DC1-A03	4	12
DC1-A04	4	12
DC1-A05	4	12
DC1-A06	4	12
DC1-A07	4	12
DC1-A08	4	12
DC1-A09	4	12
DC1-A10	4	12
DC1-B04	96	144
DC1-B08	96	144
DC1-C01	4	12
DC1-C02	4	12
DC1-C03	4	12
DC1-C04	4	12
DC1-C05	4	12
DC1-C06	4	12
DC1-C07	4	12
DC1-C08	4	12
DC1-C09	4	12
DC1-C10	4	12

DC2 · Physical

Site diagrams · DC2.drawio


Physical: every cable; port at each end (short names); line width = speed

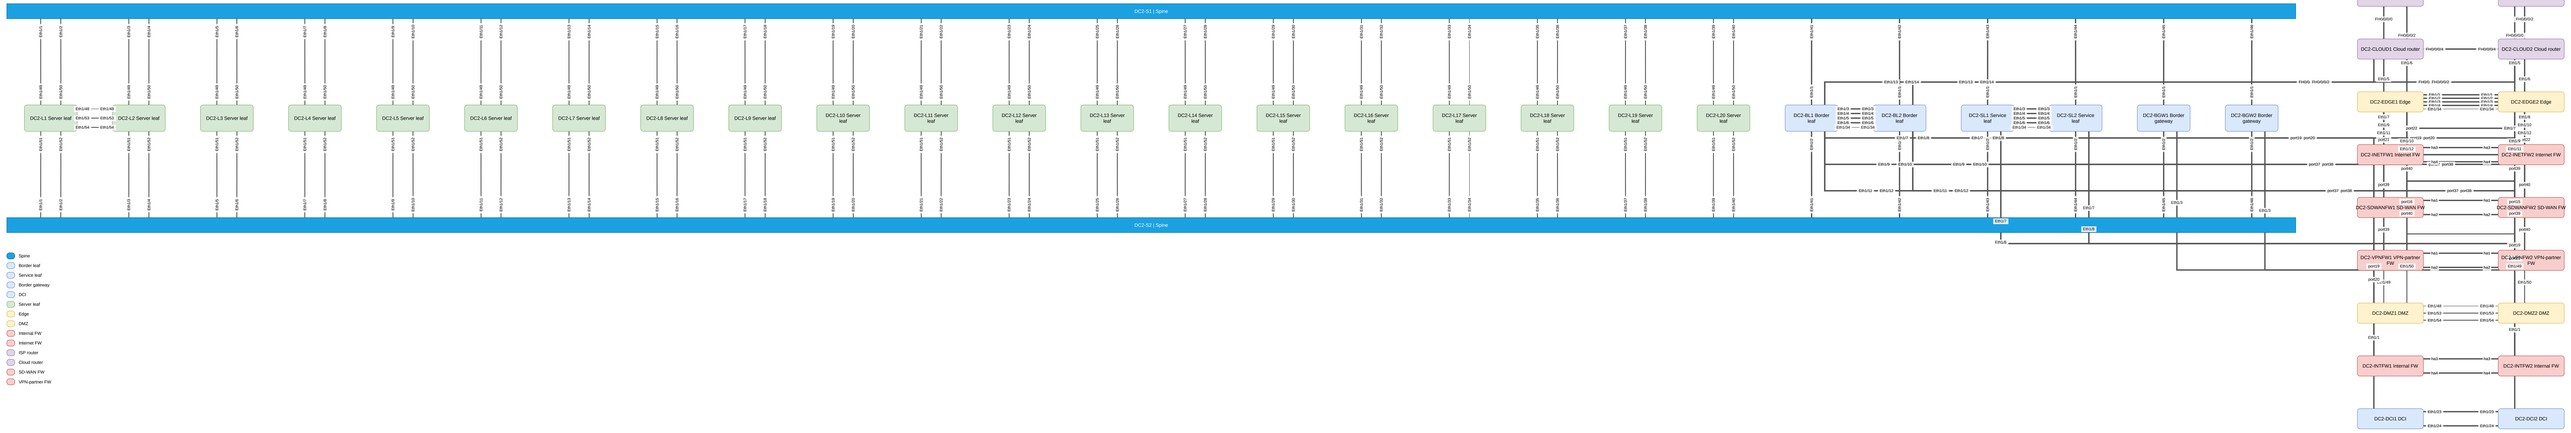

DC2 · Underlay

Site diagrams · DC2.drawio


Underlay: OSPF area 0, /31 on every routed link, loopback0 per device

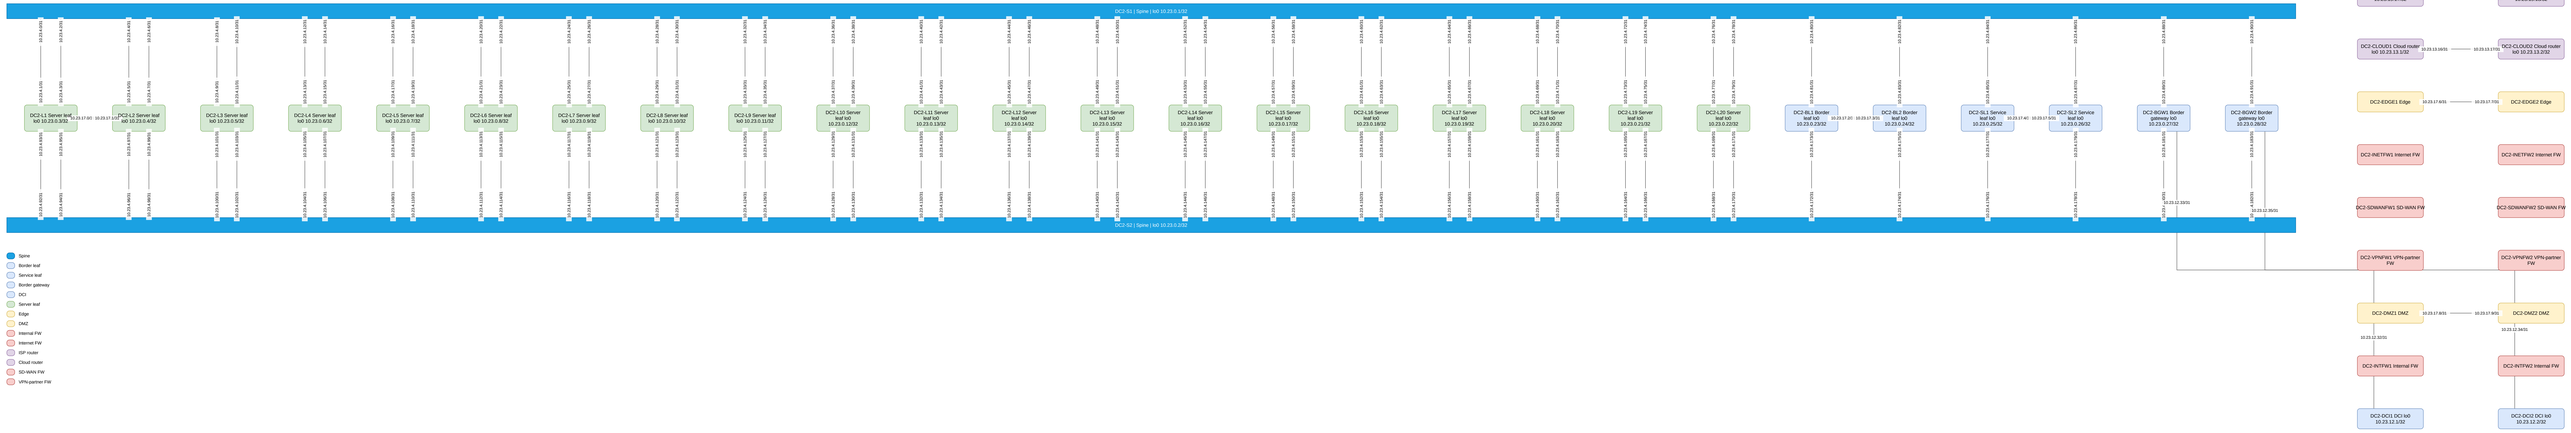

DC2 · Overlay

Site diagrams · DC2.drawio

Overlay: iBGP L2VPN EVPN to the spine route reflectors; VTEP = loopback1

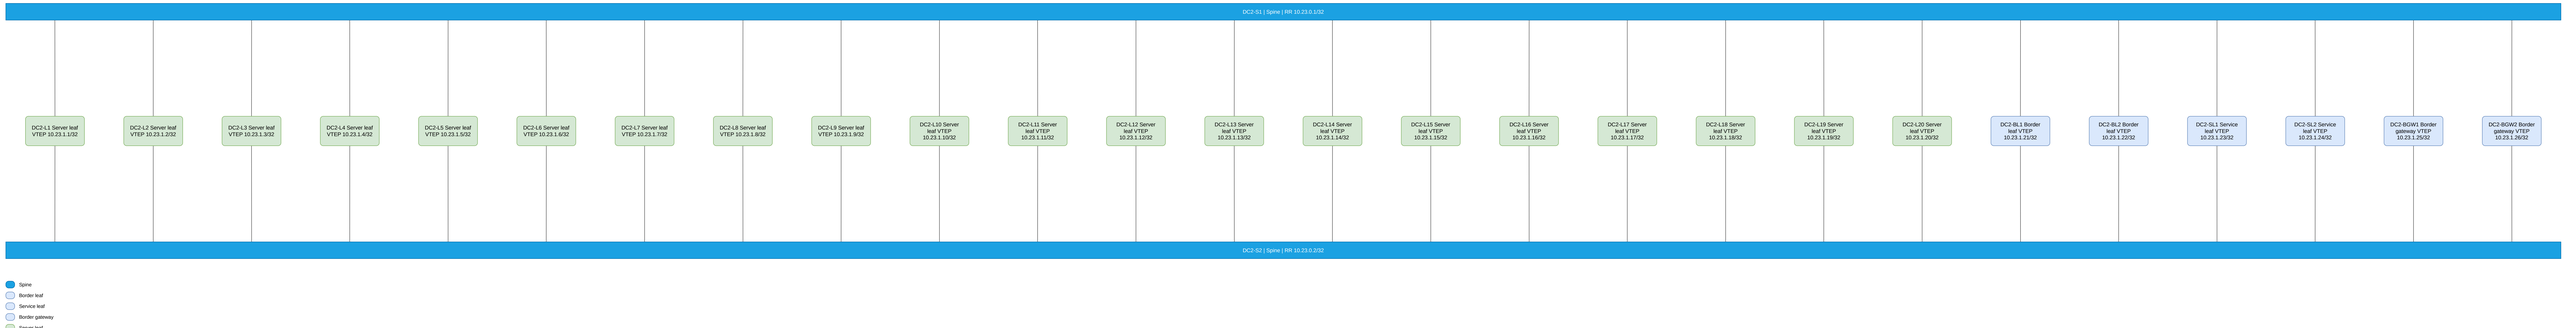

DC2 · VRF

Site diagrams · DC2.drawio

VRF: one band per VRF; attachments = leaf pair firewall pair, /29, VLAN, eBGP peer ASN

VRF TRANSIT | L3VNI 50100 | segments 0 (hub)

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210
DC2-VPC-BL1-BL2 DC2-BL1, DC2-BL2	DC2-INETFW1, DC2-INETFW2 AS 65240
DC2-VPC-BL1-BL2 DC2-BL1, DC2-BL2	DC2-CLOUD1 AS 65270
DC2-VPC-BL1-BL2 DC2-BL1, DC2-BL2	DC2-CLOUD2 AS 65270
DC2-VPC-BL1-BL2 DC2-BL1, DC2-BL2	DC2-SDWANFW1, DC2-SDWANFW2 AS 65220

VRF CITRIX | L3VNI 50022 | segments 4

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210

VRF DC2-DEV | L3VNI 50012 | segments 8

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210

VRF DC2-PROD | L3VNI 50011 | segments 8

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210

VRF DEV | L3VNI 50002 | segments 20

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210

VRF PARTNER | L3VNI 50031 | segments 0

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210
DC2-VPC-BL1-BL2 DC2-BL1, DC2-BL2	DC2-VPNFW1, DC2-VPNFW2 AS 65230

VRF PROD | L3VNI 50001 | segments 20

DC2-VPC-SL1-SL2 DC2-SL1, DC2-SL2	DC2-INTFW1, DC2-INTFW2 AS 65210


VRF REPLICATION | L3VNI 50041 | segments 2

No firewall attachment in this site (carried inside the fabric only)

DC2 · Path

Site diagrams · DC2.drawio

Internet path: carrier > ISP router > edge > Internet FW > border leaf (TRANSIT) > service leaf > Internal FW > server leaves

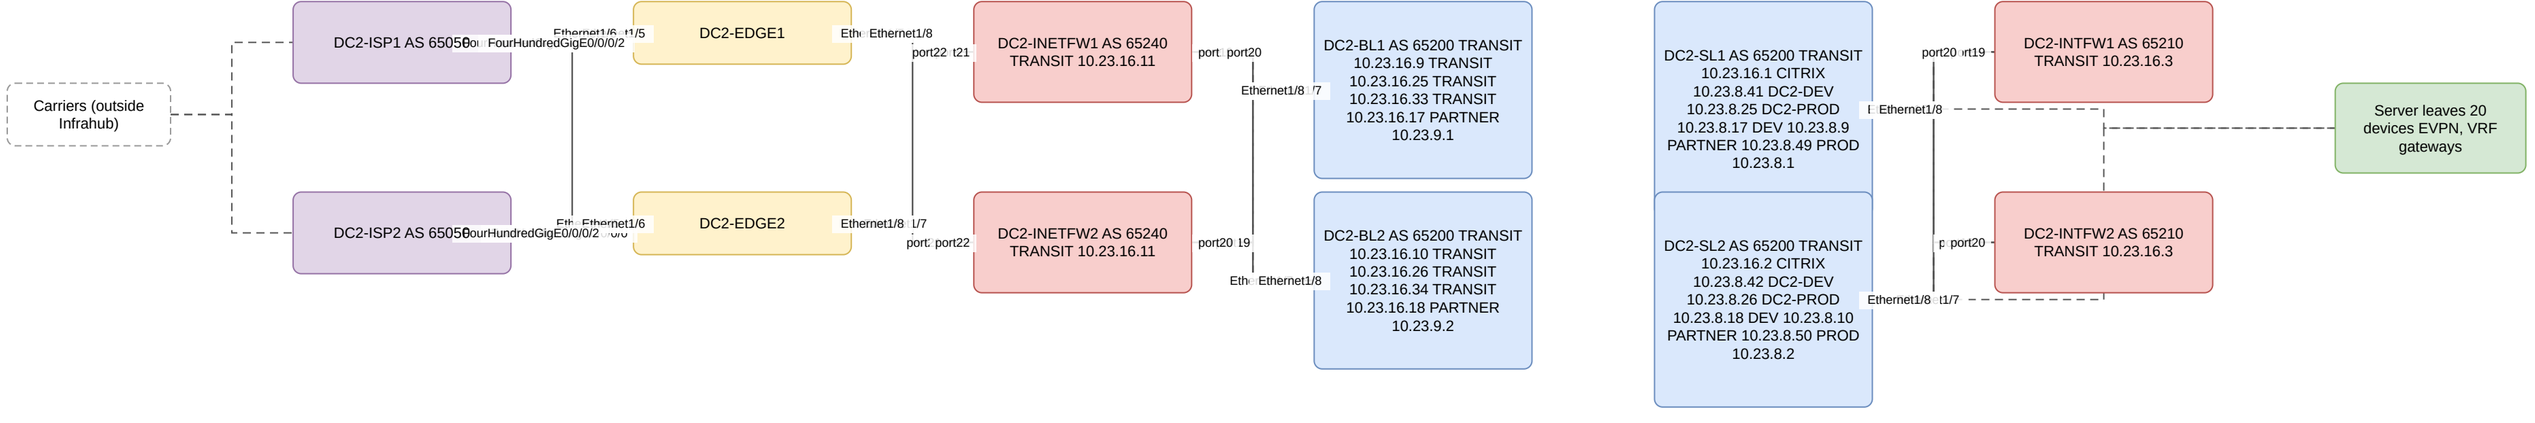

DC2 · Racks

Site diagrams · DC2.drawio

DC2 racks: front elevations; PDUs (0U, rear) listed under each rack

DC2-A01 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L1
- U40 DC2-MC1
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A02 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L2
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A03 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L3
- U40 DC2-MC2
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A04 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L4
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A05 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L5
- U40 DC2-MC3
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A06 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L6
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A07 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L7
- U40 DC2-MC4
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A08 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L8
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A09 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L9
- U40 DC2-MC5
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-A10 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L10
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-B03 (oob, 3 kW)

- U39-42 Copper panels
- U37-38 Fiber panels
- U35 DC2-OOB-SW1
- U33 DC2-CONSOLE1
- U31 DC2-OOB-GW1
- U29 OOB-FW1

PDUs: A, B

DC2-B04 (network, 25 kW)

- U39-42 Fiber panels (MPO)
- U37-38 Copper panels
- U34-35 DC2-S1
- U32 DC2-BL1
- U30 DC2-SL1
- U28 DC2-BGW1
- U26 DC2-EDGE1
- U24 DC2-DCI1
- U22 DC2-DMZ1
- U20 DC2-ISP1
- U18 DC2-EDGE3 (Phase 4)
- U15-16 Load balancer (reserved)
- U12-13 DC2-VPN1 (Phase 4)
- U9-10 DC2-SDWAN-EDGE1 (Phase 4)
- U5-7 DC2-INTFW1
- U1-3 DC2-INETFW1

PDUs: A, B

DC2-B05 (patch)

PDUs: A, B

DC2-B06 (patch)

PDUs: A, B

DC2-B07 (patch)

PDUs: A, B

DC2-B08 (network, 25 kW)

- U39-42 Fiber panels (MPO)
- U37-38 Copper panels
- U34-35 DC2-S2
- U32 DC2-BL2
- U30 DC2-SL2
- U28 DC2-BGW2
- U26 DC2-EDGE2
- U24 DC2-DCI2
- U22 DC2-DMZ2
- U20 DC2-ISP2
- U18 DC2-EDGE4 (Phase 4)
- U15-16 Load balancer (reserved)
- U12-13 DC2-VPN2 (Phase 4)
- U9-10 DC2-SDWAN-EDGE2 (Phase 4)
- U5-7 DC2-INTFW2
- U1-3 DC2-INETFW2

PDUs: A, B

DC2-B09 (oob, 3 kW)

- U39-42 Copper panels
- U37-38 Fiber panels
- U35 DC2-OOB-SW2
- U33 DC2-CONSOLE2
- U31 DC2-OOB-GW2
- U29 OOB-FW2

PDUs: A, B

DC2-B10 (growth, 25 kW)

PDUs: A, B

DC2-C01 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L11
- U40 DC2-MC6
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C02 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L12
- U40 DC2-MC7
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C03 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L13
- U40 DC2-MC8
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C04 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L14
- U40 DC2-MC9
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C05 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L15
- U40 DC2-MC10
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C06 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L16
- U40 DC2-MC11
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C07 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L17
- U40 DC2-MC12
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C08 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L18
- U40 DC2-MC13
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C09 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L19
- U40 DC2-MC14
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-C10 (server, 15 kW)

- U42 Patch panel
- U41 DC2-L20
- U40 DC2-MC15
- U38-39 SAN edge A+B (reserved)
- U1-37 Servers

PDUs: A, B

DC2-D03 (san, 10 kW)

PDUs: A, B

DC2-D04 (san, 10 kW)

PDUs: A, B

DC2-D05 (patch)

DC2-D06 (patch)

DC2-D07 (san, 10 kW)


PDUs: A, B

DC2-D08 (san, 10 kW)

PDUs: A, B

DC2 · OOB Site diagrams · DC2.drawio


Out-of-band: OOB firewalls, aggregation, access (network + BMC) and console servers; management and console home runs counted per OOB device

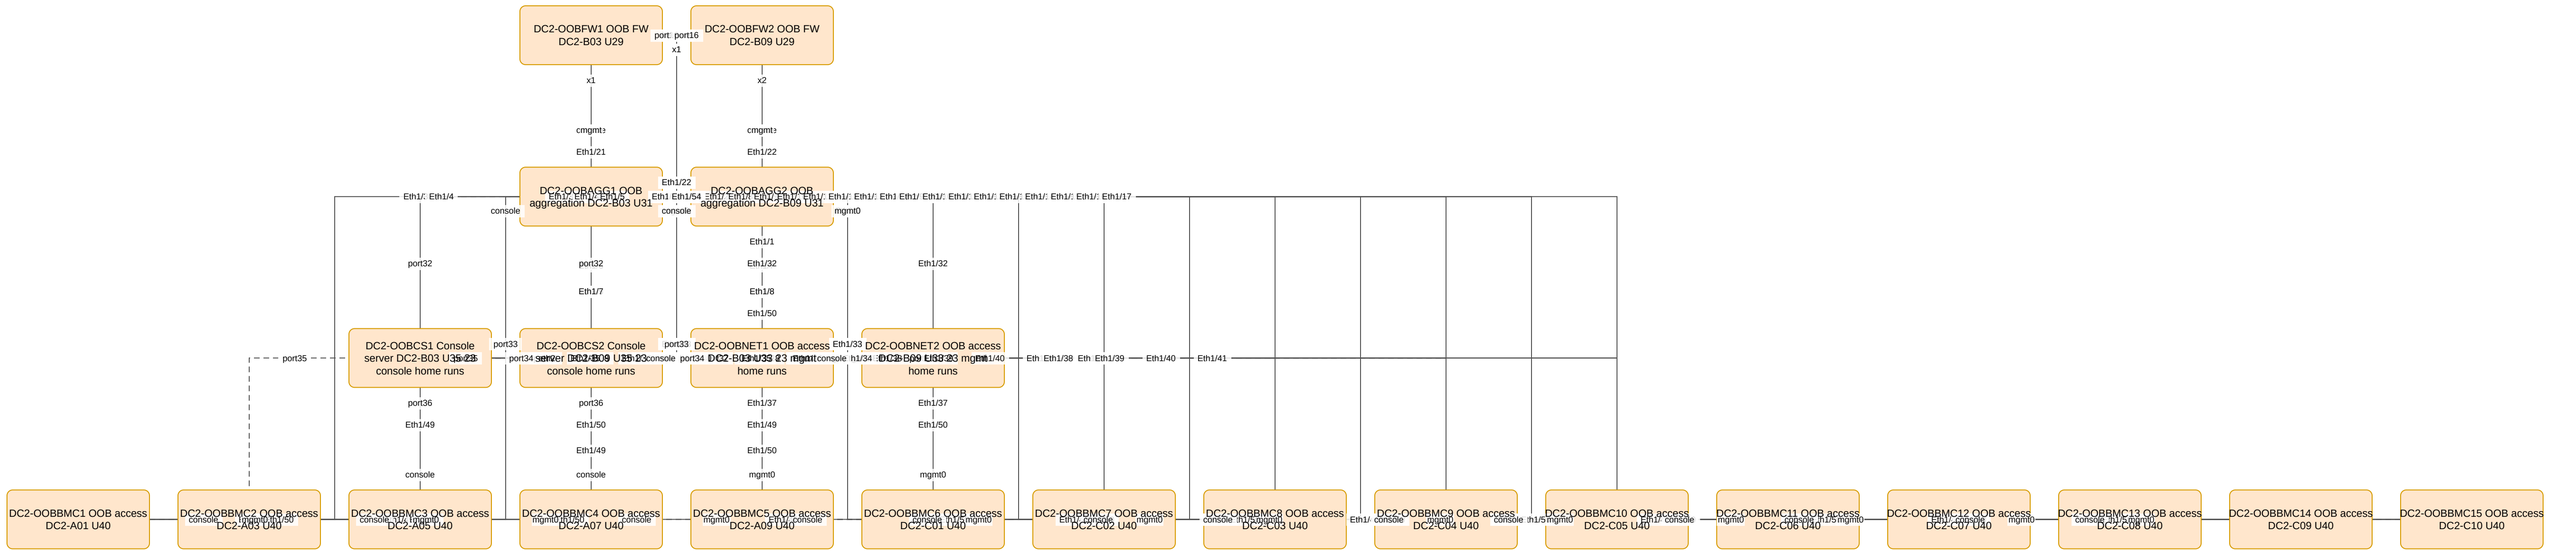

87 cables between OOB devices; 46 management and 46 console home runs from the other devices of the site


DC2 · DC2-BGW1 Port views · DC2-ports.drawio

DC2-BGW1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

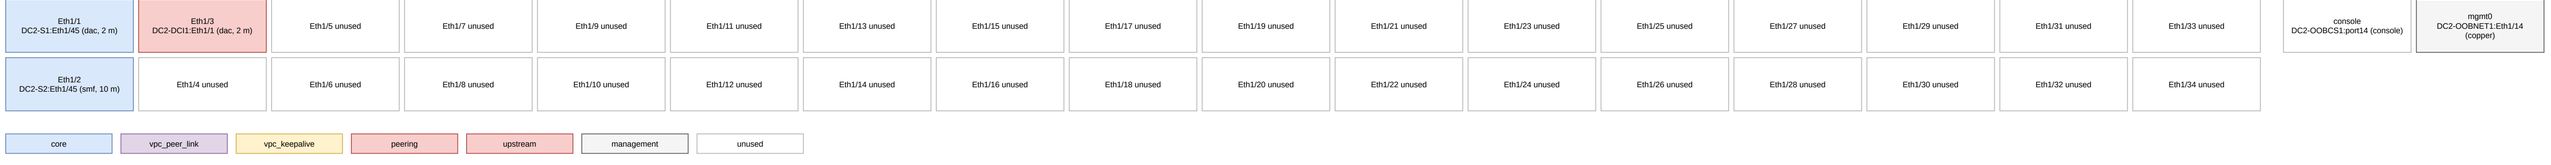


DC2 · DC2-BGW2 Port views · DC2-ports.drawio

DC2-BGW2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

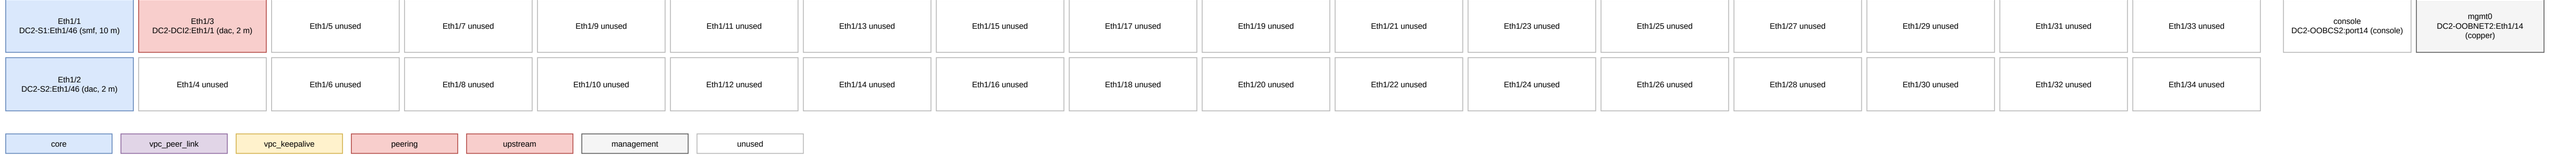

DC2 · DC2-BL1 Port views · DC2-ports.drawio

DC2-BL1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

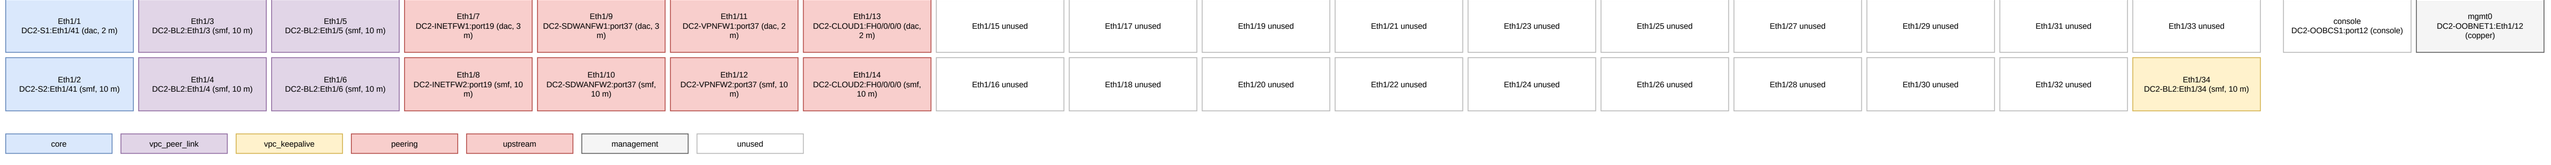


DC2 · DC2-BL2 Port views · DC2-ports.drawio

DC2-BL2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role




DC2 · DC2-DCI1 Port views · DC2-ports.drawio

DC2-DCI1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

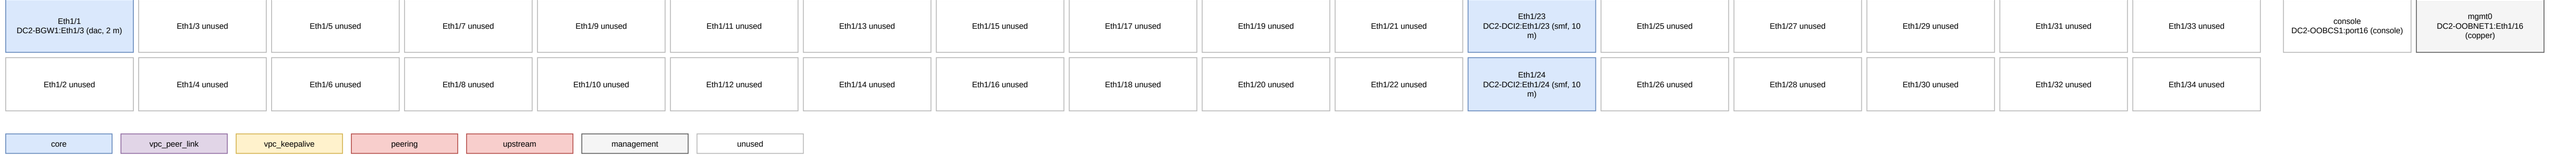

DC2 · DC2-DCI2 Port views · DC2-ports.drawio

DC2-DCI2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

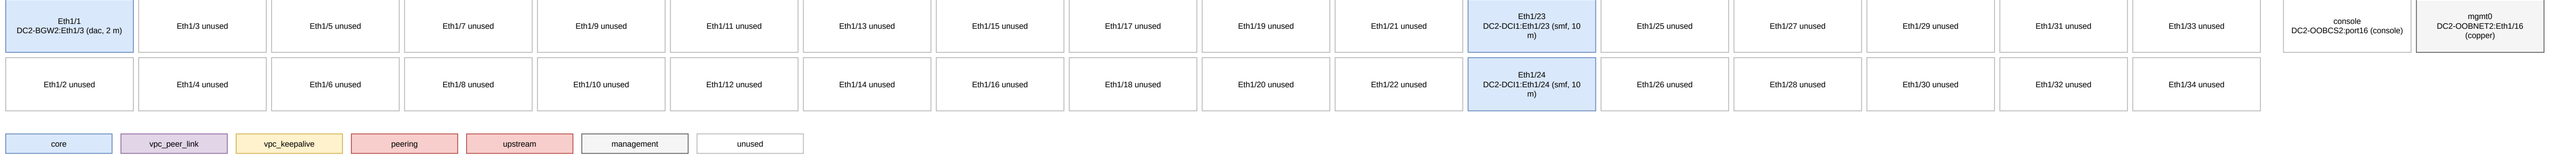

DC2 · DC2-DMZ1

Port views · DC2-ports.drawio

DC2-DMZ1 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-DMZ2


Port views · DC2-ports.drawio

DC2-DMZ2 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role




DC2 · DC2-EDGE1 Port views · DC2-ports.drawio

DC2-EDGE1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

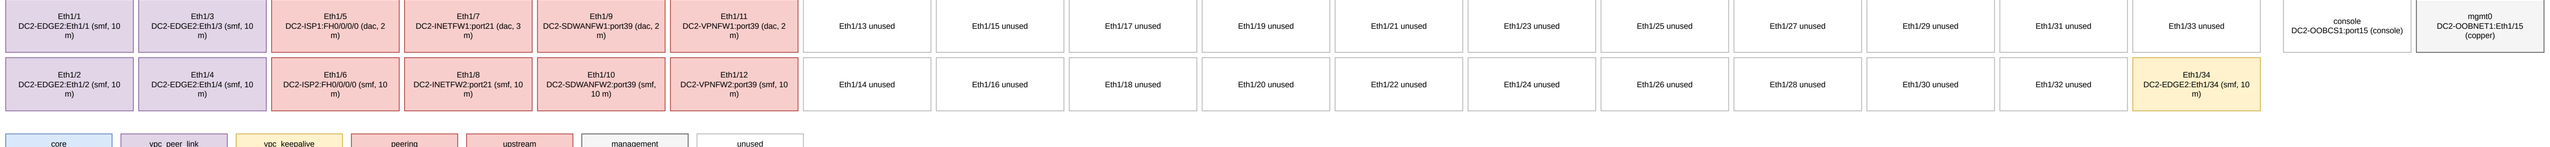

DC2 · DC2-EDGE2 Port views · DC2-ports.drawio

DC2-EDGE2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

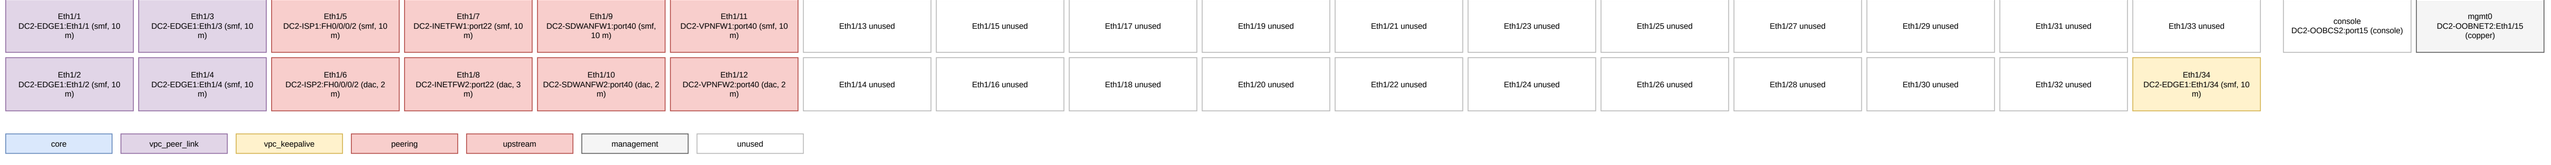

DC2 · DC2-L1

Port views · DC2-ports.drawio

DC2-L1 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L2 Port views · DC2-ports.drawio

DC2-L2 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L3 Port views · DC2-ports.drawio

DC2-L3 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L4 Port views · DC2-ports.drawio

DC2-L4 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L5 Port views · DC2-ports.drawio

DC2-L5 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L6 Port views · DC2-ports.drawio

DC2-L6 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L7 Port views · DC2-ports.drawio

DC2-L7 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L8 Port views · DC2-ports.drawio

DC2-L8 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L9 Port views · DC2-ports.drawio

DC2-L9 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L10 Port views - DC2-ports.drawio

DC2-L10 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L11 Port views · DC2-ports.drawio

DC2-L11 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L12 Port views - DC2-ports.drawio

DC2-L12 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L13 Port views - DC2-ports.drawio

DC2-L13 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L14 Port views - DC2-ports.drawio

DC2-L14 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L15 Port views - DC2-ports.drawio

DC2-L15 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L16 Port views - DC2-ports.drawio

DC2-L16 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L17 Port views - DC2-ports.drawio

DC2-L17 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L18 Port views - DC2-ports.drawio

DC2-L18 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-L19 Port views - DC2-ports.drawio

DC2-L19 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 unused	Eth1/3 unused	Eth1/5 unused	Eth1/7 unused	Eth1/9 unused	Eth1/11 unused	Eth1/13 unused	Eth1/15 unused	Eth1/17 unused	Eth1/19 unused	Eth1/21 unused	Eth1/23 unused	Eth1/25 unused	Eth1/27 unused	Eth1/29 unused	Eth1/31 unused	Eth1/33 unused	Eth1/35 unused	Eth1/37 unused	Eth1/39 unused	Eth1/41 unused	Eth1/43 unused	Eth1/45 unused	Eth1/47 unused	Eth1/49 DC2-S1:Eth1/37 (snmf, 15 m)	Eth1/51 DC2-S2:Eth1/37 (snmf, 15 m)	Eth1/53 unused	console DC2-OOBC51:port10 (console)	mgmt0 DC2-OOBNET1:Eth1/10 (copper)
Eth1/2 unused	Eth1/4 unused	Eth1/6 unused	Eth1/8 unused	Eth1/10 unused	Eth1/12 unused	Eth1/14 unused	Eth1/16 unused	Eth1/18 unused	Eth1/20 unused	Eth1/22 unused	Eth1/24 unused	Eth1/26 unused	Eth1/28 unused	Eth1/30 unused	Eth1/32 unused	Eth1/34 unused	Eth1/36 unused	Eth1/38 unused	Eth1/40 unused	Eth1/42 unused	Eth1/44 unused	Eth1/46 unused	Eth1/48 unused	Eth1/50 DC2-S1:Eth1/38 (snmf, 15 m)	Eth1/52 DC2-S2:Eth1/38 (snmf, 15 m)	Eth1/54 unused		

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused

DC2 · DC2-L20 Port views - DC2-ports.drawio

DC2-L20 | N9K-C93180YC-FX3 | 54 front-panel ports | odd top, even bottom | colour = interface role



DC2 · DC2-S1 Port views · DC2-ports.drawio

DC2-S1 | N9K-C9364D-GX2A | 64 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 DC2-L1:Eth1/49 (snf, 15 m)	Eth1/3 DC2-L2:Eth1/49 (snf, 15 m)	Eth1/5 DC2-L3:Eth1/49 (snf, 15 m)	Eth1/7 DC2-L4:Eth1/49 (snf, 15 m)	Eth1/9 DC2-L5:Eth1/49 (snf, 10 m)	Eth1/11 DC2-L6:Eth1/49 (snf, 15 m)	Eth1/13 DC2-L7:Eth1/49 (snf, 15 m)	Eth1/15 DC2-L8:Eth1/49 (snf, 15 m)	Eth1/17 DC2-L9:Eth1/49 (snf, 15 m)	Eth1/19 DC2-L10:Eth1/49 (snf, 15 m)	Eth1/21 DC2-L11:Eth1/49 (snf, 15 m)	Eth1/23 DC2-L12:Eth1/49 (snf, 15 m)	Eth1/25 DC2-L13:Eth1/49 (snf, 15 m)	Eth1/27 DC2-L14:Eth1/49 (snf, 15 m)	Eth1/29 DC2-L15:Eth1/49 (snf, 10 m)	Eth1/31 DC2-L16:Eth1/49 (snf, 15 m)	Eth1/33 DC2-L17:Eth1/49 (snf, 15 m)	Eth1/35 DC2-L18:Eth1/49 (snf, 15 m)	Eth1/37 DC2-L19:Eth1/49 (snf, 15 m)	Eth1/39 DC2-L20:Eth1/49 (snf, 15 m)	Eth1/41 DC2-BL1:Eth1/1 (dac, 2 m)	Eth1/43 DC2-BL1:Eth1/3 (dac, 2 m)	Eth1/45 DC2-BOM1:Eth1/1 (dac, 2 m)	Eth1/47 unused	Eth1/49 unused	Eth1/51 unused	Eth1/53 unused	Eth1/55 unused	Eth1/57 unused	Eth1/59 unused	Eth1/61 unused	Eth1/63 unused	console DC2-OOBCS1:port1 (console)	mgmt0 DC2-OOBNET1:Eth1/11 (support)
Eth1/2 DC2-L1:Eth1/50 (snf, 15 m)	Eth1/4 DC2-L2:Eth1/50 (snf, 15 m)	Eth1/6 DC2-L3:Eth1/50 (snf, 15 m)	Eth1/8 DC2-L4:Eth1/50 (snf, 15 m)	Eth1/10 DC2-L5:Eth1/50 (snf, 10 m)	Eth1/12 DC2-L6:Eth1/50 (snf, 15 m)	Eth1/14 DC2-L7:Eth1/50 (snf, 15 m)	Eth1/16 DC2-L8:Eth1/50 (snf, 15 m)	Eth1/18 DC2-L9:Eth1/50 (snf, 15 m)	Eth1/20 DC2-L10:Eth1/50 (snf, 15 m)	Eth1/22 DC2-L11:Eth1/50 (snf, 15 m)	Eth1/24 DC2-L12:Eth1/50 (snf, 15 m)	Eth1/26 DC2-L13:Eth1/50 (snf, 15 m)	Eth1/28 DC2-L14:Eth1/50 (snf, 15 m)	Eth1/30 DC2-L15:Eth1/50 (snf, 10 m)	Eth1/32 DC2-L16:Eth1/50 (snf, 15 m)	Eth1/34 DC2-L17:Eth1/50 (snf, 15 m)	Eth1/36 DC2-L18:Eth1/50 (snf, 15 m)	Eth1/38 DC2-L19:Eth1/50 (snf, 15 m)	Eth1/40 DC2-L20:Eth1/50 (snf, 15 m)	Eth1/42 DC2-BL2:Eth1/1 (snf, 10 m)	Eth1/44 DC2-SL2:Eth1/1 (snf, 10 m)	Eth1/46 DC2-BOM2:Eth1/1 (snf, 10 m)	Eth1/48 unused	Eth1/50 unused	Eth1/52 unused	Eth1/54 unused	Eth1/56 unused	Eth1/58 unused	Eth1/60 unused	Eth1/62 unused	Eth1/64 unused		

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused

DC2 · DC2-S2 Port views · DC2-ports.drawio


DC2-S2 | N9K-C9364D-GX2A | 64 front-panel ports | odd top, even bottom | colour = interface role

Eth1/1 DC2-L1:Eth1/51 (uset, 15 m)	Eth1/3 DC2-L2:Eth1/51 (uset, 15 m)	Eth1/5 DC2-L3:Eth1/51 (uset, 15 m)	Eth1/7 DC2-L4:Eth1/51 (uset, 15 m)	Eth1/9 DC2-L5:Eth1/51 (uset, 15 m)	Eth1/11 DC2-L6:Eth1/51 (uset, 15 m)	Eth1/13 DC2-L7:Eth1/51 (uset, 10 m)	Eth1/15 DC2-L8:Eth1/51 (uset, 15 m)	Eth1/17 DC2-L9:Eth1/51 (uset, 15 m)	Eth1/19 DC2-L10:Eth1/51 (uset, 15 m)	Eth1/21 DC2-L11:Eth1/51 (uset, 15 m)	Eth1/23 DC2-L12:Eth1/51 (uset, 15 m)	Eth1/25 DC2-L13:Eth1/51 (uset, 15 m)	Eth1/27 DC2-L14:Eth1/51 (uset, 15 m)	Eth1/29 DC2-L15:Eth1/51 (uset, 15 m)	Eth1/31 DC2-L16:Eth1/51 (uset, 15 m)	Eth1/33 DC2-L17:Eth1/51 (uset, 10 m)	Eth1/35 DC2-L18:Eth1/51 (uset, 15 m)	Eth1/37 DC2-L19:Eth1/51 (uset, 15 m)	Eth1/39 DC2-L20:Eth1/51 (uset, 15 m)	Eth1/41 DC2-BL1:Eth1/2 (uset, 10 m)	Eth1/43 DC2-SL1:Eth1/2 (uset, 10 m)	Eth1/45 DC2-BGW1:Eth1/2 (uset, 10 m)	Eth1/47 unused	Eth1/49 unused	Eth1/51 unused	Eth1/53 unused	Eth1/55 unused	Eth1/57 unused	Eth1/59 unused	Eth1/61 unused	Eth1/63 unused	console DC2-SOBCSZ:port1 (console)	mgmt0 DC2-SOBMET2:Eth1/11 (copper)
Eth1/2 DC2-L1:Eth1/52 (uset, 15 m)	Eth1/4 DC2-L2:Eth1/52 (uset, 15 m)	Eth1/6 DC2-L3:Eth1/52 (uset, 15 m)	Eth1/8 DC2-L4:Eth1/52 (uset, 15 m)	Eth1/10 DC2-L5:Eth1/52 (uset, 15 m)	Eth1/12 DC2-L6:Eth1/52 (uset, 15 m)	Eth1/14 DC2-L7:Eth1/52 (uset, 10 m)	Eth1/16 DC2-L8:Eth1/52 (uset, 15 m)	Eth1/18 DC2-L9:Eth1/52 (uset, 15 m)	Eth1/20 DC2-L10:Eth1/52 (uset, 15 m)	Eth1/22 DC2-L11:Eth1/52 (uset, 15 m)	Eth1/24 DC2-L12:Eth1/52 (uset, 15 m)	Eth1/26 DC2-L13:Eth1/52 (uset, 15 m)	Eth1/28 DC2-L14:Eth1/52 (uset, 15 m)	Eth1/30 DC2-L15:Eth1/52 (uset, 15 m)	Eth1/32 DC2-L16:Eth1/52 (uset, 15 m)	Eth1/34 DC2-L17:Eth1/52 (uset, 10 m)	Eth1/36 DC2-L18:Eth1/52 (uset, 15 m)	Eth1/38 DC2-L19:Eth1/52 (uset, 15 m)	Eth1/40 DC2-L20:Eth1/52 (uset, 15 m)	Eth1/42 DC2-BL2:Eth1/2 (dac, 2 m)	Eth1/44 DC2-SL2:Eth1/2 (dac, 2 m)	Eth1/46 DC2-BGW2:Eth1/2 (dac, 2 m)	Eth1/48 unused	Eth1/50 unused	Eth1/52 unused	Eth1/54 unused	Eth1/56 unused	Eth1/58 unused	Eth1/60 unused	Eth1/62 unused	Eth1/64 unused		

core | vpc_peer_link | vpc_keepalive | peering | upstream | management | unused


DC2 · DC2-SL1 Port views · DC2-ports.drawio

DC2-SL1 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

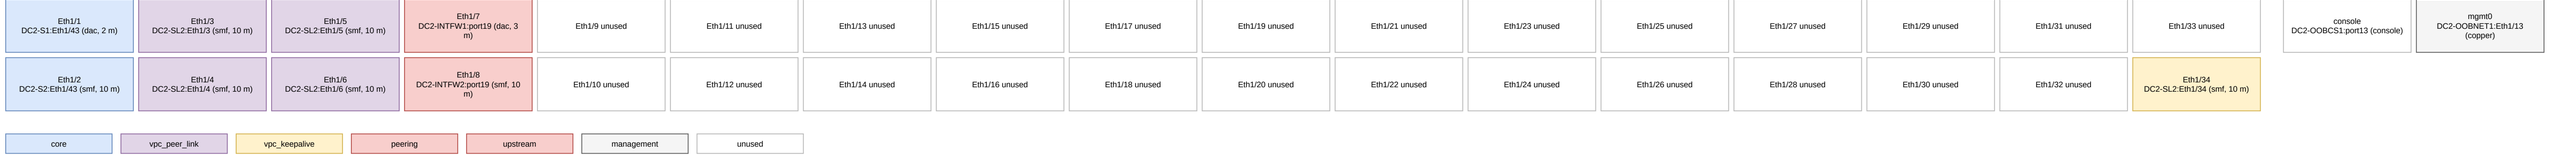

DC2 · DC2-SL2 Port views · DC2-ports.drawio

DC2-SL2 | N9K-C9332D-GX2B | 34 front-panel ports | odd top, even bottom | colour = interface role

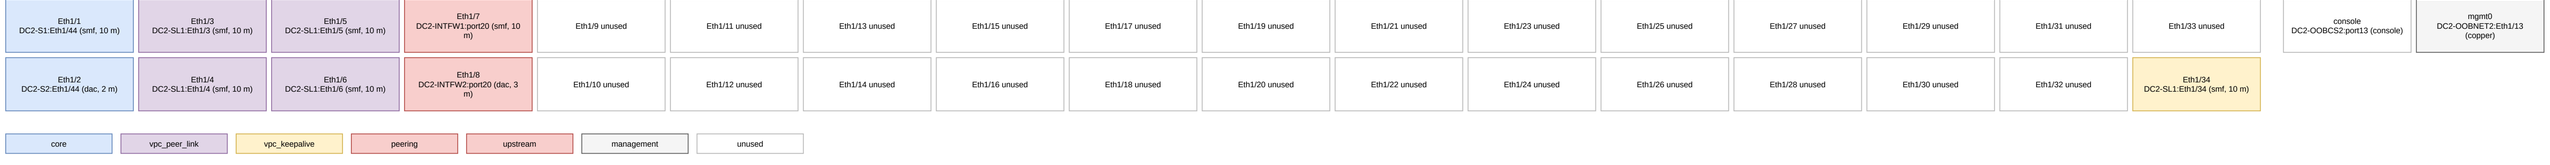

DC2: addressing, segments and BGP sessions

Generated by Infrahub (site_tables transform). Do not edit by hand.

Prefix hierarchy

Prefix	Description	Role	Member type
10.20.0.0/18	DC2-PROD VRF block		prefix
10.20.40.0/24	DC2-PROD VLAN 1240 (DC2-local)		address
10.20.41.0/24	DC2-PROD VLAN 1241 (DC2-local)		address
10.20.42.0/24	DC2-PROD VLAN 1242 (DC2-local)		address
10.20.43.0/24	DC2-PROD VLAN 1243 (DC2-local)		address
10.20.44.0/24	DC2-PROD VLAN 1244 (DC2-local)		address
10.20.45.0/24	DC2-PROD VLAN 1245 (DC2-local)		address
10.20.46.0/24	DC2-PROD VLAN 1246 (DC2-local)		address
10.20.47.0/24	DC2-PROD VLAN 1247 (DC2-local)		address
10.20.64.0/18	DC2-DEV VRF block		prefix
10.20.74.0/24	DC2-DEV VLAN 1310 (DC2-local)		address
10.20.75.0/24	DC2-DEV VLAN 1311 (DC2-local)		address
10.20.76.0/24	DC2-DEV VLAN 1312 (DC2-local)		address
10.20.77.0/24	DC2-DEV VLAN 1313 (DC2-local)		address
10.20.78.0/24	DC2-DEV VLAN 1314 (DC2-local)		address
10.20.79.0/24	DC2-DEV VLAN 1315 (DC2-local)		address
10.20.80.0/24	DC2-DEV VLAN 1316 (DC2-local)		address
10.20.81.0/24	DC2-DEV VLAN 1317 (DC2-local)		address
10.20.128.0/20	DC2 DMZ block (behind the Internet FW)		prefix
10.20.128.0/24	DC2 DMZ VLAN 1400 (LB VIPs)		address
10.20.129.0/24	DC2 DMZ VLAN 1401 (LB self IPs and SNAT)		address
10.20.130.0/24	DC2 DMZ VLAN 1402 (DMZ servers)		address
10.20.131.0/24	DC2 DMZ VLAN 1403 (DMZ servers)		address
10.20.132.0/24	DC2 DMZ VLAN 1404 (DMZ servers)		address
10.20.133.0/24	DC2 DMZ VLAN 1405 (DMZ servers)		address
10.20.134.0/24	DC2 DMZ VLAN 1406 (DMZ servers)		address
10.20.135.0/24	DC2 DMZ VLAN 1407 (DMZ servers)		address
10.20.136.0/24	DC2 DMZ VLAN 1408 (DMZ servers)		address
10.20.137.0/24	DC2 DMZ VLAN 1409 (DMZ servers)		address
10.20.138.0/24	DC2 DMZ VLAN 1410 (DMZ servers)		address
10.20.139.0/24	DC2 DMZ VLAN 1411 (DMZ servers)		address
10.20.140.0/24	DC2 DMZ VLAN 1412 (DMZ servers)		address
10.20.141.0/24	DC2 DMZ VLAN 1413 (DMZ servers)		address
10.20.142.0/24	DC2 DMZ VLAN 1414 (DMZ servers)		address
10.20.143.0/24	DC2 DMZ VLAN 1415 (DMZ servers)		address
10.20.144.0/20	CITRIX VRF block (DC2)		prefix
10.20.144.0/24	CITRIX VLAN 1500 (DC2-local)		address
10.20.145.0/24	CITRIX VLAN 1501 (DC2-local)		address
10.20.160.0/21	PARTNER VRF block, NAT /28s (DC2)		prefix

Prefix	Description	Role	Member type
10.20.160.0/28	PARTNER01 translated /28 (DC2 VPN-partner FW source NAT)		address
10.20.176.0/24	REPLICATION VLAN 1599 (DC2-local)		address
10.23.0.0/24	DC2 loopback0 (router ID, BGP peering)		address
10.23.1.0/24	DC2 loopback1 (VTEP source)		address
10.23.2.0/25	DC2 vPC anycast VTEPs (one per vPC domain with NVE)		address
10.23.2.128/25	DC2 Multi-Site VIP (anycast BGW pair)		address
10.23.3.0/24	DC2 vPC backup underlay SVI /31s	link	prefix
10.23.3.6/31	DC2-VPC-L1-L2 vPC backup underlay		address
10.23.3.8/31	DC2-VPC-BL1-BL2 vPC backup underlay		address
10.23.3.10/31	DC2-VPC-SL1-SL2 vPC backup underlay		address
10.23.4.0/22	DC2 fabric p2p /31s	link	prefix
10.23.4.0/31	DC2-S1 Ethernet1/1 link		address
10.23.4.2/31	DC2-S1 Ethernet1/2 link		address
10.23.4.4/31	DC2-S1 Ethernet1/3 link		address
10.23.4.6/31	DC2-S1 Ethernet1/4 link		address
10.23.4.8/31	DC2-S1 Ethernet1/5 link		address
10.23.4.10/31	DC2-S1 Ethernet1/6 link		address
10.23.4.12/31	DC2-S1 Ethernet1/7 link		address
10.23.4.14/31	DC2-S1 Ethernet1/8 link		address
10.23.4.16/31	DC2-S1 Ethernet1/9 link		address
10.23.4.18/31	DC2-S1 Ethernet1/10 link		address
10.23.4.20/31	DC2-S1 Ethernet1/11 link		address
10.23.4.22/31	DC2-S1 Ethernet1/12 link		address
10.23.4.24/31	DC2-S1 Ethernet1/13 link		address
10.23.4.26/31	DC2-S1 Ethernet1/14 link		address
10.23.4.28/31	DC2-S1 Ethernet1/15 link		address
10.23.4.30/31	DC2-S1 Ethernet1/16 link		address
10.23.4.32/31	DC2-S1 Ethernet1/17 link		address
10.23.4.34/31	DC2-S1 Ethernet1/18 link		address
10.23.4.36/31	DC2-S1 Ethernet1/19 link		address
10.23.4.38/31	DC2-S1 Ethernet1/20 link		address
10.23.4.40/31	DC2-S1 Ethernet1/21 link		address
10.23.4.42/31	DC2-S1 Ethernet1/22 link		address
10.23.4.44/31	DC2-S1 Ethernet1/23 link		address
10.23.4.46/31	DC2-S1 Ethernet1/24 link		address
10.23.4.48/31	DC2-S1 Ethernet1/25 link		address
10.23.4.50/31	DC2-S1 Ethernet1/26 link		address
10.23.4.52/31	DC2-S1 Ethernet1/27 link		address
10.23.4.54/31	DC2-S1 Ethernet1/28 link		address
10.23.4.56/31	DC2-S1 Ethernet1/29 link		address
10.23.4.58/31	DC2-S1 Ethernet1/30 link		address
10.23.4.60/31	DC2-S1 Ethernet1/31 link		address
10.23.4.62/31	DC2-S1 Ethernet1/32 link		address

Prefix	Description	Role	Member type
10.23.4.64/31	DC2-S1 Ethernet1/33 link		address
10.23.4.66/31	DC2-S1 Ethernet1/34 link		address
10.23.4.68/31	DC2-S1 Ethernet1/35 link		address
10.23.4.70/31	DC2-S1 Ethernet1/36 link		address
10.23.4.72/31	DC2-S1 Ethernet1/37 link		address
10.23.4.74/31	DC2-S1 Ethernet1/38 link		address
10.23.4.76/31	DC2-S1 Ethernet1/39 link		address
10.23.4.78/31	DC2-S1 Ethernet1/40 link		address
10.23.4.80/31	DC2-S1 Ethernet1/41 link		address
10.23.4.82/31	DC2-S1 Ethernet1/42 link		address
10.23.4.84/31	DC2-S1 Ethernet1/43 link		address
10.23.4.86/31	DC2-S1 Ethernet1/44 link		address
10.23.4.88/31	DC2-S1 Ethernet1/45 link		address
10.23.4.90/31	DC2-S1 Ethernet1/46 link		address
10.23.4.92/31	DC2-S2 Ethernet1/1 link		address
10.23.4.94/31	DC2-S2 Ethernet1/2 link		address
10.23.4.96/31	DC2-S2 Ethernet1/3 link		address
10.23.4.98/31	DC2-S2 Ethernet1/4 link		address
10.23.4.100/31	DC2-S2 Ethernet1/5 link		address
10.23.4.102/31	DC2-S2 Ethernet1/6 link		address
10.23.4.104/31	DC2-S2 Ethernet1/7 link		address
10.23.4.106/31	DC2-S2 Ethernet1/8 link		address
10.23.4.108/31	DC2-S2 Ethernet1/9 link		address
10.23.4.110/31	DC2-S2 Ethernet1/10 link		address
10.23.4.112/31	DC2-S2 Ethernet1/11 link		address
10.23.4.114/31	DC2-S2 Ethernet1/12 link		address
10.23.4.116/31	DC2-S2 Ethernet1/13 link		address
10.23.4.118/31	DC2-S2 Ethernet1/14 link		address
10.23.4.120/31	DC2-S2 Ethernet1/15 link		address
10.23.4.122/31	DC2-S2 Ethernet1/16 link		address
10.23.4.124/31	DC2-S2 Ethernet1/17 link		address
10.23.4.126/31	DC2-S2 Ethernet1/18 link		address
10.23.4.128/31	DC2-S2 Ethernet1/19 link		address
10.23.4.130/31	DC2-S2 Ethernet1/20 link		address
10.23.4.132/31	DC2-S2 Ethernet1/21 link		address
10.23.4.134/31	DC2-S2 Ethernet1/22 link		address
10.23.4.136/31	DC2-S2 Ethernet1/23 link		address
10.23.4.138/31	DC2-S2 Ethernet1/24 link		address
10.23.4.140/31	DC2-S2 Ethernet1/25 link		address
10.23.4.142/31	DC2-S2 Ethernet1/26 link		address
10.23.4.144/31	DC2-S2 Ethernet1/27 link		address
10.23.4.146/31	DC2-S2 Ethernet1/28 link		address
10.23.4.148/31	DC2-S2 Ethernet1/29 link		address

Prefix	Description	Role	Member type
10.23.4.150/31	DC2-S2 Ethernet1/30 link		address
10.23.4.152/31	DC2-S2 Ethernet1/31 link		address
10.23.4.154/31	DC2-S2 Ethernet1/32 link		address
10.23.4.156/31	DC2-S2 Ethernet1/33 link		address
10.23.4.158/31	DC2-S2 Ethernet1/34 link		address
10.23.4.160/31	DC2-S2 Ethernet1/35 link		address
10.23.4.162/31	DC2-S2 Ethernet1/36 link		address
10.23.4.164/31	DC2-S2 Ethernet1/37 link		address
10.23.4.166/31	DC2-S2 Ethernet1/38 link		address
10.23.4.168/31	DC2-S2 Ethernet1/39 link		address
10.23.4.170/31	DC2-S2 Ethernet1/40 link		address
10.23.4.172/31	DC2-S2 Ethernet1/41 link		address
10.23.4.174/31	DC2-S2 Ethernet1/42 link		address
10.23.4.176/31	DC2-S2 Ethernet1/43 link		address
10.23.4.178/31	DC2-S2 Ethernet1/44 link		address
10.23.4.180/31	DC2-S2 Ethernet1/45 link		address
10.23.4.182/31	DC2-S2 Ethernet1/46 link		address
10.23.8.0/22	DC2 firewall attachments for tenant VRFs	link	prefix
10.23.8.0/25	DC2 Internal FW tenant VRF /29s (fixed slot per VRF)	link	prefix
10.23.8.0/29	DC2-PROD-INTFW attachment /29 (VLAN 3100)	link	address
10.23.8.8/29	DC2-DEV-INTFW attachment /29 (VLAN 3101)	link	address
10.23.8.16/29	DC2-DC2-PROD-INTFW attachment /29 (VLAN 3102)	link	address
10.23.8.24/29	DC2-DC2-DEV-INTFW attachment /29 (VLAN 3103)	link	address
10.23.8.40/29	DC2-CITRIX-INTFW attachment /29 (VLAN 3105)	link	address
10.23.8.48/29	DC2-PARTNER-INTFW attachment /29 (VLAN 3106)	link	address
10.23.8.128/30	DC2-INTFW vlink PROD <-> TRANSIT	link	address
10.23.8.132/30	DC2-INTFW vlink DEV <-> TRANSIT	link	address
10.23.8.136/30	DC2-INTFW vlink DC2-PROD <-> TRANSIT	link	address
10.23.8.140/30	DC2-INTFW vlink DC2-DEV <-> TRANSIT	link	address
10.23.8.148/30	DC2-INTFW vlink CITRIX <-> TRANSIT	link	address
10.23.8.152/30	DC2-INTFW vlink PARTNER <-> TRANSIT	link	address
10.23.9.0/26	DC2 VPN-partner FW attachment /29s (border leaves, PARTNER)	link	prefix
10.23.9.0/29	DC2-PARTNER-VPNFW attachment /29 (VLAN 3300)	link	address
10.23.12.0/24	DC2 DCI switches: loopbacks .0/28, iBGP link .16/31, BGW<->DCI /31s from .32		prefix
10.23.12.0/28	DC2 DCI switch loopback0		address
10.23.12.16/31	DC2 DCI switch iBGP link (port-channel23)	link	address
10.23.12.32/31	DC2-BGW1 <-> DC2-DCI1 link	link	address
10.23.12.34/31	DC2-BGW2 <-> DC2-DCI2 link	link	address
10.23.13.0/24	DC2 cloud routers: loopbacks .0/28, iBGP link .16/31		prefix
10.23.13.0/28	DC2 cloud router loopback0		address
10.23.13.16/31	DC2 cloud router iBGP link	link	address
10.23.14.0/24	DC2 edge VLAN 3200: VRRP VIP, ISP routers, FW outside legs	link	address
10.23.15.0/24	DC2 ISP routers: cross-link /31, loopbacks		prefix

Prefix	Description	Role	Member type
10.23.15.0/31	DC2 ISP router iBGP cross-link	link	address
10.23.15.16/28	DC2 ISP router loopback0		address
10.23.16.0/24	DC2 TRANSIT attachment /29s (fixed slot per device)	link	prefix
10.23.16.0/29	DC2-TRANSIT-INTFW attachment /29 (VLAN 3000)	link	address
10.23.16.8/29	DC2-TRANSIT-INETFW attachment /29 (VLAN 3001)	link	address
10.23.16.16/29	DC2-TRANSIT-SDWANFW attachment /29 (VLAN 3002)	link	address
10.23.16.24/29	DC2-TRANSIT-CLOUD1 attachment /29 (VLAN 3003)	link	address
10.23.16.32/29	DC2-TRANSIT-CLOUD2 attachment /29 (VLAN 3004)	link	address
10.23.17.0/24	DC2 vPC peer-keepalive /31s	link	prefix
10.23.17.0/31	DC2-VPC-L1-L2 vPC peer-keepalive		address
10.23.17.2/31	DC2-VPC-BL1-BL2 vPC peer-keepalive		address
10.23.17.4/31	DC2-VPC-SL1-SL2 vPC peer-keepalive		address
10.23.17.6/31	DC2-VPC-EDGE1-EDGE2 vPC peer-keepalive		address
10.23.17.8/31	DC2-VPC-DMZ1-DMZ2 vPC peer-keepalive		address
10.79.8.0/21	DC2 SD-WAN overlay (ADVPN hub tunnel, row 71 B)		address
10.98.0.8/30	DC2 ExpressRoute primary private peering (DC2-CLOUD1 .9, Microsoft .10, VLAN 210)	link	address
10.98.0.12/30	DC2 ExpressRoute secondary private peering (DC2-CLOUD2 .13, Microsoft .14, VLAN 210)	link	address
10.250.16.0/20	DC2 OOB	management	prefix
10.250.16.0/24	DC2 network-device mgmt (mgmt0)	management	address
10.250.17.0/24	DC2 OOB infrastructure (console servers, OOB switches, OOB FW)	management	address
10.250.18.0/24	DC2 OOB remote-access VPN pool	management	address
10.250.19.0/24	DC2 OOB links (/31s)	link	prefix
10.250.19.0/31	DC2-OOB-VPC-OOBAGG1-OOBAGG2 vPC peer-keepalive	link	address
10.250.20.0/22	DC2 server BMCs	management	address
169.254.110.0/30	DC2 AWS private VIF 1 (DC2-CLOUD1 .2, AWS .1, VLAN 110); placeholder until AWS generates the peer IPs	link	address
169.254.111.0/30	DC2 AWS private VIF 2 (DC2-CLOUD2 .2, AWS .1, VLAN 111); placeholder until AWS generates the peer IPs	link	address
192.0.2.8/30	DC2-ISP1 <-> ISP-A handoff	link	address
192.0.2.12/30	DC2-ISP2 <-> ISP-B handoff	link	address
192.0.2.68/30	DC2-OOBFW <-> OOB-ISP handoff (placeholder)	link	address
203.0.113.0/24	DC2 public (documentation range)		prefix
203.0.113.0/25	DC2 Internet FW NAT pool		address
203.0.113.128/28	DC2 VPN-partner FW IPsec endpoints		address
203.0.113.144/28	DC2 SD-WAN FW (hub) WAN endpoints		address
203.0.113.160/27	DC2 published services (DMZ inbound)		address

VLAN -> L2VNI -> VRF (L3VNI)

VLAN	Segment	L2VNI	Prefix	VRF	L3VNI
1010	PROD-1010	11010	10.16.10.0/24	PROD	50001
1011	PROD-1011	11011	10.16.11.0/24	PROD	50001
1012	PROD-1012	11012	10.16.12.0/24	PROD	50001
1013	PROD-1013	11013	10.16.13.0/24	PROD	50001
1014	PROD-1014	11014	10.16.14.0/24	PROD	50001
1015	PROD-1015	11015	10.16.15.0/24	PROD	50001

VLAN	Segment	L2VNI	Prefix	VRF	L3VNI
1016	PROD-1016	11016	10.16.16.0/24	PROD	50001
1017	PROD-1017	11017	10.16.17.0/24	PROD	50001
1110	DEV-1110	11110	10.16.74.0/24	DEV	50002
1111	DEV-1111	11111	10.16.75.0/24	DEV	50002
1112	DEV-1112	11112	10.16.76.0/24	DEV	50002
1113	DEV-1113	11113	10.16.77.0/24	DEV	50002
1114	DEV-1114	11114	10.16.78.0/24	DEV	50002
1115	DEV-1115	11115	10.16.79.0/24	DEV	50002
1116	DEV-1116	11116	10.16.80.0/24	DEV	50002
1117	DEV-1117	11117	10.16.81.0/24	DEV	50002
1118	DEV-1118	11118	10.16.82.0/24	DEV	50002
1240	DC2-PROD-1240	11240	10.20.40.0/24	DC2-PROD	50011
1241	DC2-PROD-1241	11241	10.20.41.0/24	DC2-PROD	50011
1242	DC2-PROD-1242	11242	10.20.42.0/24	DC2-PROD	50011
1243	DC2-PROD-1243	11243	10.20.43.0/24	DC2-PROD	50011
1244	DC2-PROD-1244	11244	10.20.44.0/24	DC2-PROD	50011
1245	DC2-PROD-1245	11245	10.20.45.0/24	DC2-PROD	50011
1246	DC2-PROD-1246	11246	10.20.46.0/24	DC2-PROD	50011
1247	DC2-PROD-1247	11247	10.20.47.0/24	DC2-PROD	50011
1310	DC2-DEV-1310	11310	10.20.74.0/24	DC2-DEV	50012
1311	DC2-DEV-1311	11311	10.20.75.0/24	DC2-DEV	50012
1312	DC2-DEV-1312	11312	10.20.76.0/24	DC2-DEV	50012
1313	DC2-DEV-1313	11313	10.20.77.0/24	DC2-DEV	50012
1314	DC2-DEV-1314	11314	10.20.78.0/24	DC2-DEV	50012
1315	DC2-DEV-1315	11315	10.20.79.0/24	DC2-DEV	50012
1316	DC2-DEV-1316	11316	10.20.80.0/24	DC2-DEV	50012
1317	DC2-DEV-1317	11317	10.20.81.0/24	DC2-DEV	50012
1500	CITRIX-DC2-1500	11500	10.20.144.0/24	CITRIX	50022
1501	CITRIX-DC2-1501	11501	10.20.145.0/24	CITRIX	50022
1599	REPLICATION-DC2-1599	11599	10.20.176.0/24	REPLICATION	50041

VRF	L3VNI	L3VNI VLAN
CITRIX	50022	2522
DC2-DEV	50012	2512
DC2-PROD	50011	2511
DEV	50002	2502
PARTNER	50031	2531
PROD	50001	2501
REPLICATION	50041	2541
TRANSIT	50100	2599

BGP sessions

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-BGW1	10.23.0.27/32	65200	route-reflector client

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-BGW2	10.23.0.28/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-BL1	10.23.0.23/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-BL2	10.23.0.24/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L1	10.23.0.3/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L2	10.23.0.4/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L3	10.23.0.5/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L4	10.23.0.6/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L5	10.23.0.7/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L6	10.23.0.8/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L7	10.23.0.9/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L8	10.23.0.10/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L9	10.23.0.11/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L10	10.23.0.12/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L11	10.23.0.13/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L12	10.23.0.14/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L13	10.23.0.15/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L14	10.23.0.16/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L15	10.23.0.17/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L16	10.23.0.18/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L17	10.23.0.19/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L18	10.23.0.20/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L19	10.23.0.21/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-L20	10.23.0.22/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-SL1	10.23.0.25/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S1	10.23.0.1/32	65200	DC2-SL2	10.23.0.26/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-BGW1	10.23.0.27/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-BGW2	10.23.0.28/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-BL1	10.23.0.23/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-BL2	10.23.0.24/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L1	10.23.0.3/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L2	10.23.0.4/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L3	10.23.0.5/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L4	10.23.0.6/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L5	10.23.0.7/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L6	10.23.0.8/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L7	10.23.0.9/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L8	10.23.0.10/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L9	10.23.0.11/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L10	10.23.0.12/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L11	10.23.0.13/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L12	10.23.0.14/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L13	10.23.0.15/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L14	10.23.0.16/32	65200	route-reflector client

Type	VRF	Local	Local address	Local AS	Peer	Peer address	Peer AS	Note
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L15	10.23.0.17/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L16	10.23.0.18/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L17	10.23.0.19/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L18	10.23.0.20/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L19	10.23.0.21/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-L20	10.23.0.22/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-SL1	10.23.0.25/32	65200	route-reflector client
iBGP L2VPN EVPN	default	DC2-S2	10.23.0.2/32	65200	DC2-SL2	10.23.0.26/32	65200	route-reflector client
eBGP	TRANSIT	DC2-SL1	10.23.16.1/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.16.3/29	65210	DC2-TRANSIT-INTFW VLAN 3000 (active unit only)
eBGP	TRANSIT	DC2-SL2	10.23.16.2/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.16.3/29	65210	DC2-TRANSIT-INTFW VLAN 3000 (active unit only)
eBGP	TRANSIT	DC2-BL1	10.23.16.9/29	65200	DC2-INETFW1/DC2-INETFW2	10.23.16.11/29	65240	DC2-TRANSIT-INETFW VLAN 3001 (active unit only)
eBGP	TRANSIT	DC2-BL2	10.23.16.10/29	65200	DC2-INETFW1/DC2-INETFW2	10.23.16.11/29	65240	DC2-TRANSIT-INETFW VLAN 3001 (active unit only)
eBGP	CITRIX	DC2-SL1	10.23.8.41/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.43/29	65210	DC2-CITRIX-INTFW VLAN 3105 (active unit only)
eBGP	CITRIX	DC2-SL2	10.23.8.42/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.43/29	65210	DC2-CITRIX-INTFW VLAN 3105 (active unit only)
eBGP	DC2-DEV	DC2-SL1	10.23.8.25/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.27/29	65210	DC2-DC2-DEV-INTFW VLAN 3103 (active unit only)
eBGP	DC2-DEV	DC2-SL2	10.23.8.26/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.27/29	65210	DC2-DC2-DEV-INTFW VLAN 3103 (active unit only)
eBGP	DC2-PROD	DC2-SL1	10.23.8.17/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.19/29	65210	DC2-DC2-PROD-INTFW VLAN 3102 (active unit only)
eBGP	DC2-PROD	DC2-SL2	10.23.8.18/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.19/29	65210	DC2-DC2-PROD-INTFW VLAN 3102 (active unit only)
eBGP	DEV	DC2-SL1	10.23.8.9/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.11/29	65210	DC2-DEV-INTFW VLAN 3101 (active unit only)
eBGP	DEV	DC2-SL2	10.23.8.10/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.11/29	65210	DC2-DEV-INTFW VLAN 3101 (active unit only)
eBGP	PARTNER	DC2-SL1	10.23.8.49/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.51/29	65210	DC2-PARTNER-INTFW VLAN 3106 (active unit only)
eBGP	PARTNER	DC2-SL2	10.23.8.50/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.51/29	65210	DC2-PARTNER-INTFW VLAN 3106 (active unit only)
eBGP	PROD	DC2-SL1	10.23.8.1/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.3/29	65210	DC2-PROD-INTFW VLAN 3100 (active unit only)
eBGP	PROD	DC2-SL2	10.23.8.2/29	65200	DC2-INTFW1/DC2-INTFW2	10.23.8.3/29	65210	DC2-PROD-INTFW VLAN 3100 (active unit only)
eBGP	TRANSIT	DC2-BL1	10.23.16.25/29	65200	DC2-CLOUD1	10.23.16.27/29	65270	DC2-TRANSIT-CLOUD1 VLAN 3003 (active unit only)
eBGP	TRANSIT	DC2-BL2	10.23.16.26/29	65200	DC2-CLOUD1	10.23.16.27/29	65270	DC2-TRANSIT-CLOUD1 VLAN 3003 (active unit only)
eBGP	TRANSIT	DC2-BL1	10.23.16.33/29	65200	DC2-CLOUD2	10.23.16.35/29	65270	DC2-TRANSIT-CLOUD2 VLAN 3004 (active unit only)
eBGP	TRANSIT	DC2-BL2	10.23.16.34/29	65200	DC2-CLOUD2	10.23.16.35/29	65270	DC2-TRANSIT-CLOUD2 VLAN 3004 (active unit only)
eBGP	TRANSIT	DC2-BL1	10.23.16.17/29	65200	DC2-SDWANFW1/DC2-SDWANFW2	10.23.16.19/29	65220	DC2-TRANSIT-SDWANFW VLAN 3002 (active unit only)
eBGP	TRANSIT	DC2-BL2	10.23.16.18/29	65200	DC2-SDWANFW1/DC2-SDWANFW2	10.23.16.19/29	65220	DC2-TRANSIT-SDWANFW VLAN 3002 (active unit only)
eBGP	PARTNER	DC2-BL1	10.23.9.1/29	65200	DC2-VPNFW1/DC2-VPNFW2	10.23.9.3/29	65230	DC2-PARTNER-VPNFW VLAN 3300 (active unit only)
eBGP	PARTNER	DC2-BL2	10.23.9.2/29	65200	DC2-VPNFW1/DC2-VPNFW2	10.23.9.3/29	65230	DC2-PARTNER-VPNFW VLAN 3300 (active unit only)
iBGP	default	DC2-ISP1	10.23.15.0/31	65050	DC2-ISP2	10.23.15.1/31	65050	cross-link FourHundredGigE0/0/0/4
eBGP	default	DC2-ISP1	192.0.2.10/30	65050	carrier	192.0.2.9/30		FourHundredGigE0/0/0/6
eBGP	default	DC2-ISP2	192.0.2.14/30	65050	carrier	192.0.2.13/30		FourHundredGigE0/0/0/6

Totals: 202 prefixes, 36 segments, 79 BGP sessions.

DC2: vendor cable schedule

Generated by Infrahub (site_cable_schedule transform). Do not edit by hand. Lengths in metres.

Cross-rack cables via patch racks (139)

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-BL1:Eth1/3-DC2-BL2:Eth1/3	smf	DC2-BL1:Eth1/3	2	DC2-B04-PP42:1	10	DC2-B06-PP42:1	2	DC2-B06-PP41:1	10	DC2-B08-PP42:1	2	DC2-BL2:Eth1/3
DC2-BL1:Eth1/4-DC2-BL2:Eth1/4	smf	DC2-BL1:Eth1/4	2	DC2-B04-PP42:2	10	DC2-B06-PP42:2	2	DC2-B06-PP41:2	10	DC2-B08-PP42:2	2	DC2-BL2:Eth1/4
DC2-BL1:Eth1/5-DC2-BL2:Eth1/5	smf	DC2-BL1:Eth1/5	2	DC2-B04-PP42:3	10	DC2-B06-PP42:3	2	DC2-B06-PP41:3	10	DC2-B08-PP42:3	2	DC2-BL2:Eth1/5
DC2-BL1:Eth1/6-DC2-BL2:Eth1/6	smf	DC2-BL1:Eth1/6	2	DC2-B04-PP42:4	10	DC2-B06-PP42:4	2	DC2-B06-PP41:4	10	DC2-B08-PP42:4	2	DC2-BL2:Eth1/6
DC2-BL1:Eth1/8-DC2-INETFW2:port19	smf	DC2-BL1:Eth1/8	2	DC2-B04-PP42:5	10	DC2-B06-PP42:5	2	DC2-B06-PP41:5	10	DC2-B08-PP42:5	3	DC2-INETFW2:port19
DC2-BL1:Eth1/10-DC2-SDWANFW2:port37	smf	DC2-BL1:Eth1/10	2	DC2-B04-PP42:6	10	DC2-B06-PP42:6	2	DC2-B06-PP41:6	10	DC2-B08-PP42:6	3	DC2-SDWANFW2:port37
DC2-BL1:Eth1/12-DC2-VPNFW2:port37	smf	DC2-BL1:Eth1/12	2	DC2-B04-PP42:7	10	DC2-B06-PP42:7	2	DC2-B06-PP41:7	10	DC2-B08-PP42:7	3	DC2-VPNFW2:port37
DC2-BL1:Eth1/14-DC2-CLOUD2:FH0/0/0/0	smf	DC2-BL1:Eth1/14	2	DC2-B04-PP42:8	10	DC2-B06-PP42:8	2	DC2-B06-PP41:8	10	DC2-B08-PP42:8	3	DC2-CLOUD2:FH0/0/0/0
DC2-BL1:Eth1/34-DC2-BL2:Eth1/34	smf	DC2-BL1:Eth1/34	2	DC2-B04-PP42:9	10	DC2-B06-PP42:9	2	DC2-B06-PP41:9	10	DC2-B08-PP42:9	2	DC2-BL2:Eth1/34
DC2-BL2:Eth1/7-DC2-INETFW1:port20	smf	DC2-BL2:Eth1/7	2	DC2-B08-PP42:10	10	DC2-B06-PP41:10	2	DC2-B06-PP42:10	10	DC2-B04-PP42:10	3	DC2-INETFW1:port20
DC2-BL2:Eth1/9-DC2-SDWANFW1:port38	smf	DC2-BL2:Eth1/9	2	DC2-B08-PP42:11	10	DC2-B06-PP41:11	2	DC2-B06-PP42:11	10	DC2-B04-PP42:11	3	DC2-SDWANFW1:port38
DC2-BL2:Eth1/11-DC2-VPNFW1:port38	smf	DC2-BL2:Eth1/11	2	DC2-B08-PP42:12	10	DC2-B06-PP41:12	2	DC2-B06-PP42:12	10	DC2-B04-PP42:12	3	DC2-VPNFW1:port38
DC2-BL2:Eth1/13-DC2-CLOUD1:FH0/0/0/2	smf	DC2-BL2:Eth1/13	2	DC2-B08-PP42:13	10	DC2-B06-PP41:13	2	DC2-B06-PP42:13	10	DC2-B04-PP42:13	3	DC2-CLOUD1:FH0/0/0/2
DC2-CLOUD1:FH0/0/0/4-DC2-CLOUD2:FH0/0/0/4	smf	DC2-CLOUD1:FH0/0/0/4	3	DC2-B04-PP42:14	10	DC2-B06-PP42:14	2	DC2-B06-PP41:14	10	DC2-B08-PP42:14	3	DC2-CLOUD2:FH0/0/0/4
DC2-DCI1:Eth1/23-DC2-DCI2:Eth1/23	smf	DC2-DCI1:Eth1/23	2	DC2-B04-PP42:15	10	DC2-B06-PP42:15	2	DC2-B06-PP41:15	10	DC2-B08-PP42:15	2	DC2-DCI2:Eth1/23
DC2-DCI1:Eth1/24-DC2-DCI2:Eth1/24	smf	DC2-DCI1:Eth1/24	2	DC2-B04-PP42:16	10	DC2-B06-PP42:16	2	DC2-B06-PP41:16	10	DC2-B08-PP42:16	2	DC2-DCI2:Eth1/24
DC2-DMZ1:Eth1/48-DC2-DMZ2:Eth1/48	smf	DC2-DMZ1:Eth1/48	2	DC2-B04-PP42:17	10	DC2-B06-PP42:17	2	DC2-B06-PP41:17	10	DC2-B08-PP42:17	2	DC2-DMZ2:Eth1/48
DC2-DMZ1:Eth1/50-DC2-INETFW2:port15	smf	DC2-DMZ1:Eth1/50	2	DC2-B04-PP42:18	10	DC2-B06-PP42:18	2	DC2-B06-PP41:18	10	DC2-B08-PP42:18	3	DC2-INETFW2:port15
DC2-DMZ1:Eth1/53-DC2-DMZ2:Eth1/53	smf	DC2-DMZ1:Eth1/53	2	DC2-B04-PP42:19	10	DC2-B06-PP42:19	2	DC2-B06-PP41:19	10	DC2-B08-PP42:19	2	DC2-DMZ2:Eth1/53
DC2-DMZ1:Eth1/54-DC2-DMZ2:Eth1/54	smf	DC2-DMZ1:Eth1/54	2	DC2-B04-PP42:20	10	DC2-B06-PP42:20	2	DC2-B06-PP41:20	10	DC2-B08-PP42:20	2	DC2-DMZ2:Eth1/54
DC2-DMZ2:Eth1/49-DC2-INETFW1:port16	smf	DC2-DMZ2:Eth1/49	2	DC2-B08-PP42:21	10	DC2-B06-PP41:21	2	DC2-B06-PP42:21	10	DC2-B04-PP42:21	3	DC2-INETFW1:port16

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-EDGE1:Eth1/1-DC2-EDGE2:Eth1/1	smf	DC2-EDGE1:Eth1/1	2	DC2-B04-PP42:22	10	DC2-B06-PP42:22	2	DC2-B06-PP41:22	10	DC2-B08-PP42:22	2	DC2-EDGE2:Eth1/1
DC2-EDGE1:Eth1/2-DC2-EDGE2:Eth1/2	smf	DC2-EDGE1:Eth1/2	2	DC2-B04-PP42:23	10	DC2-B06-PP42:23	2	DC2-B06-PP41:23	10	DC2-B08-PP42:23	2	DC2-EDGE2:Eth1/2
DC2-EDGE1:Eth1/3-DC2-EDGE2:Eth1/3	smf	DC2-EDGE1:Eth1/3	2	DC2-B04-PP42:24	10	DC2-B06-PP42:24	2	DC2-B06-PP41:24	10	DC2-B08-PP42:24	2	DC2-EDGE2:Eth1/3
DC2-EDGE1:Eth1/4-DC2-EDGE2:Eth1/4	smf	DC2-EDGE1:Eth1/4	2	DC2-B04-PP42:25	10	DC2-B06-PP42:25	2	DC2-B06-PP41:25	10	DC2-B08-PP42:25	2	DC2-EDGE2:Eth1/4
DC2-EDGE1:Eth1/6-DC2-ISP2:FH0/0/0/0	smf	DC2-EDGE1:Eth1/6	2	DC2-B04-PP42:26	10	DC2-B06-PP42:26	2	DC2-B06-PP41:26	10	DC2-B08-PP42:26	2	DC2-ISP2:FH0/0/0/0
DC2-EDGE1:Eth1/8-DC2-INETFW2:port21	smf	DC2-EDGE1:Eth1/8	2	DC2-B04-PP42:27	10	DC2-B06-PP42:27	2	DC2-B06-PP41:27	10	DC2-B08-PP42:27	3	DC2-INETFW2:port21
DC2-EDGE1:Eth1/10-DC2-SDWANFW2:port39	smf	DC2-EDGE1:Eth1/10	2	DC2-B04-PP42:28	10	DC2-B06-PP42:28	2	DC2-B06-PP41:28	10	DC2-B08-PP42:28	3	DC2-SDWANFW2:port39
DC2-EDGE1:Eth1/12-DC2-VPNFW2:port39	smf	DC2-EDGE1:Eth1/12	2	DC2-B04-PP42:29	10	DC2-B06-PP42:29	2	DC2-B06-PP41:29	10	DC2-B08-PP42:29	3	DC2-VPNFW2:port39
DC2-EDGE1:Eth1/34-DC2-EDGE2:Eth1/34	smf	DC2-EDGE1:Eth1/34	2	DC2-B04-PP42:30	10	DC2-B06-PP42:30	2	DC2-B06-PP41:30	10	DC2-B08-PP42:30	2	DC2-EDGE2:Eth1/34
DC2-EDGE2:Eth1/5-DC2-ISP1:FH0/0/0/2	smf	DC2-EDGE2:Eth1/5	2	DC2-B08-PP42:31	10	DC2-B06-PP41:31	2	DC2-B06-PP42:31	10	DC2-B04-PP42:31	2	DC2-ISP1:FH0/0/0/2
DC2-EDGE2:Eth1/7-DC2-INETFW1:port22	smf	DC2-EDGE2:Eth1/7	2	DC2-B08-PP42:32	10	DC2-B06-PP41:32	2	DC2-B06-PP42:32	10	DC2-B04-PP42:32	3	DC2-INETFW1:port22
DC2-EDGE2:Eth1/9-DC2-SDWANFW1:port40	smf	DC2-EDGE2:Eth1/9	2	DC2-B08-PP42:33	10	DC2-B06-PP41:33	2	DC2-B06-PP42:33	10	DC2-B04-PP42:33	3	DC2-SDWANFW1:port40
DC2-EDGE2:Eth1/11-DC2-VPNFW1:port40	smf	DC2-EDGE2:Eth1/11	2	DC2-B08-PP42:34	10	DC2-B06-PP41:34	2	DC2-B06-PP42:34	10	DC2-B04-PP42:34	3	DC2-VPNFW1:port40
DC2-INETFW1:ha3-DC2-INETFW2:ha3	smf	DC2-INETFW1:ha3	3	DC2-B04-PP42:35	10	DC2-B06-PP42:35	2	DC2-B06-PP41:35	10	DC2-B08-PP42:35	3	DC2-INETFW2:ha3
DC2-INETFW1:ha4-DC2-INETFW2:ha4	smf	DC2-INETFW1:ha4	3	DC2-B04-PP42:36	10	DC2-B06-PP42:36	2	DC2-B06-PP41:36	10	DC2-B08-PP42:36	3	DC2-INETFW2:ha4
DC2-INTFW1:ha3-DC2-INTFW2:ha3	smf	DC2-INTFW1:ha3	3	DC2-B04-PP42:37	10	DC2-B06-PP42:37	2	DC2-B06-PP41:37	10	DC2-B08-PP42:37	3	DC2-INTFW2:ha3
DC2-INTFW1:ha4-DC2-INTFW2:ha4	smf	DC2-INTFW1:ha4	3	DC2-B04-PP42:38	10	DC2-B06-PP42:38	2	DC2-B06-PP41:38	10	DC2-B08-PP42:38	3	DC2-INTFW2:ha4
DC2-ISP1:FH0/0/0/4-DC2-ISP2:FH0/0/0/4	smf	DC2-ISP1:FH0/0/0/4	2	DC2-B04-PP42:39	10	DC2-B06-PP42:39	2	DC2-B06-PP41:39	10	DC2-B08-PP42:39	2	DC2-ISP2:FH0/0/0/4
DC2-L1:Eth1/48-DC2-L2:Eth1/48	smf	DC2-L1:Eth1/48	2	DC2-A01-PP42:1	15	DC2-B05-PP40:1	1	DC2-B05-PP40:13	15	DC2-A02-PP42:1	2	DC2-L2:Eth1/48
DC2-L1:Eth1/53-DC2-L2:Eth1/53	smf	DC2-L1:Eth1/53	2	DC2-A01-PP42:2	15	DC2-B05-PP40:2	1	DC2-B05-PP40:14	15	DC2-A02-PP42:2	2	DC2-L2:Eth1/53
DC2-L1:Eth1/54-DC2-L2:Eth1/54	smf	DC2-L1:Eth1/54	2	DC2-A01-PP42:3	15	DC2-B05-PP40:3	1	DC2-B05-PP40:15	15	DC2-A02-PP42:3	2	DC2-L2:Eth1/54
DC2-S1:Eth1/1-DC2-L1:Eth1/49	smf	DC2-S1:Eth1/1	2	DC2-B04-PP42:40	7	DC2-B05-PP42:40	2	DC2-B05-PP40:4	15	DC2-A01-PP42:4	2	DC2-L1:Eth1/49
DC2-S1:Eth1/2-DC2-L1:Eth1/50	smf	DC2-S1:Eth1/2	2	DC2-B04-PP42:41	7	DC2-B05-PP42:41	2	DC2-B05-PP40:5	15	DC2-A01-PP42:5	2	DC2-L1:Eth1/50
DC2-S1:Eth1/3-DC2-L2:Eth1/49	smf	DC2-S1:Eth1/3	2	DC2-B04-PP42:42	7	DC2-B05-PP42:42	2	DC2-B05-PP40:16	15	DC2-A02-PP42:4	2	DC2-L2:Eth1/49

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-S1:Eth1/4-DC2-L2:Eth1/50	smf	DC2-S1:Eth1/4	2	DC2-B04-PP42:43	7	DC2-B05-PP42:43	2	DC2-B05-PP40:17	15	DC2-A02-PP42:5	2	DC2-L2:Eth1/50
DC2-S1:Eth1/5-DC2-L3:Eth1/49	smf	DC2-S1:Eth1/5	2	DC2-B04-PP42:44	7	DC2-B05-PP42:44	2	DC2-B05-PP40:25	15	DC2-A03-PP42:1	2	DC2-L3:Eth1/49
DC2-S1:Eth1/6-DC2-L3:Eth1/50	smf	DC2-S1:Eth1/6	2	DC2-B04-PP42:45	7	DC2-B05-PP42:45	2	DC2-B05-PP40:26	15	DC2-A03-PP42:2	2	DC2-L3:Eth1/50
DC2-S1:Eth1/7-DC2-L4:Eth1/49	smf	DC2-S1:Eth1/7	2	DC2-B04-PP42:46	7	DC2-B05-PP42:46	2	DC2-B05-PP40:37	10	DC2-A04-PP42:1	2	DC2-L4:Eth1/49
DC2-S1:Eth1/8-DC2-L4:Eth1/50	smf	DC2-S1:Eth1/8	2	DC2-B04-PP42:47	7	DC2-B05-PP42:47	2	DC2-B05-PP40:38	10	DC2-A04-PP42:2	2	DC2-L4:Eth1/50
DC2-S1:Eth1/9-DC2-L5:Eth1/49	smf	DC2-S1:Eth1/9	2	DC2-B04-PP42:48	7	DC2-B05-PP42:48	2	DC2-B05-PP40:49	10	DC2-A05-PP42:1	2	DC2-L5:Eth1/49
DC2-S1:Eth1/10-DC2-L5:Eth1/50	smf	DC2-S1:Eth1/10	2	DC2-B04-PP42:49	7	DC2-B05-PP42:49	2	DC2-B05-PP40:50	10	DC2-A05-PP42:2	2	DC2-L5:Eth1/50
DC2-S1:Eth1/11-DC2-L6:Eth1/49	smf	DC2-S1:Eth1/11	2	DC2-B04-PP42:50	10	DC2-B06-PP42:50	2	DC2-B06-PP40:61	10	DC2-A06-PP42:1	2	DC2-L6:Eth1/49
DC2-S1:Eth1/12-DC2-L6:Eth1/50	smf	DC2-S1:Eth1/12	2	DC2-B04-PP42:51	10	DC2-B06-PP42:51	2	DC2-B06-PP40:62	10	DC2-A06-PP42:2	2	DC2-L6:Eth1/50
DC2-S1:Eth1/13-DC2-L7:Eth1/49	smf	DC2-S1:Eth1/13	2	DC2-B04-PP42:52	10	DC2-B06-PP42:52	2	DC2-B06-PP40:73	10	DC2-A07-PP42:1	2	DC2-L7:Eth1/49
DC2-S1:Eth1/14-DC2-L7:Eth1/50	smf	DC2-S1:Eth1/14	2	DC2-B04-PP42:53	10	DC2-B06-PP42:53	2	DC2-B06-PP40:74	10	DC2-A07-PP42:2	2	DC2-L7:Eth1/50
DC2-S1:Eth1/15-DC2-L8:Eth1/49	smf	DC2-S1:Eth1/15	2	DC2-B04-PP42:54	10	DC2-B06-PP42:54	2	DC2-B06-PP40:85	15	DC2-A08-PP42:1	2	DC2-L8:Eth1/49
DC2-S1:Eth1/16-DC2-L8:Eth1/50	smf	DC2-S1:Eth1/16	2	DC2-B04-PP42:55	10	DC2-B06-PP42:55	2	DC2-B06-PP40:86	15	DC2-A08-PP42:2	2	DC2-L8:Eth1/50
DC2-S1:Eth1/17-DC2-L9:Eth1/49	smf	DC2-S1:Eth1/17	2	DC2-B04-PP42:56	10	DC2-B06-PP42:56	2	DC2-B06-PP40:97	15	DC2-A09-PP42:1	2	DC2-L9:Eth1/49
DC2-S1:Eth1/18-DC2-L9:Eth1/50	smf	DC2-S1:Eth1/18	2	DC2-B04-PP42:57	10	DC2-B06-PP42:57	2	DC2-B06-PP40:98	15	DC2-A09-PP42:2	2	DC2-L9:Eth1/50
DC2-S1:Eth1/19-DC2-L10:Eth1/49	smf	DC2-S1:Eth1/19	2	DC2-B04-PP42:58	10	DC2-B06-PP42:58	2	DC2-B06-PP40:109	15	DC2-A10-PP42:1	2	DC2-L10:Eth1/49
DC2-S1:Eth1/20-DC2-L10:Eth1/50	smf	DC2-S1:Eth1/20	2	DC2-B04-PP42:59	10	DC2-B06-PP42:59	2	DC2-B06-PP40:110	15	DC2-A10-PP42:2	2	DC2-L10:Eth1/50
DC2-S1:Eth1/21-DC2-L11:Eth1/49	smf	DC2-S1:Eth1/21	2	DC2-B04-PP42:60	7	DC2-B05-PP42:60	2	DC2-B05-PP39:1	15	DC2-C01-PP42:1	2	DC2-L11:Eth1/49
DC2-S1:Eth1/22-DC2-L11:Eth1/50	smf	DC2-S1:Eth1/22	2	DC2-B04-PP42:61	7	DC2-B05-PP42:61	2	DC2-B05-PP39:2	15	DC2-C01-PP42:2	2	DC2-L11:Eth1/50
DC2-S1:Eth1/23-DC2-L12:Eth1/49	smf	DC2-S1:Eth1/23	2	DC2-B04-PP42:62	7	DC2-B05-PP42:62	2	DC2-B05-PP39:13	15	DC2-C02-PP42:1	2	DC2-L12:Eth1/49
DC2-S1:Eth1/24-DC2-L12:Eth1/50	smf	DC2-S1:Eth1/24	2	DC2-B04-PP42:63	7	DC2-B05-PP42:63	2	DC2-B05-PP39:14	15	DC2-C02-PP42:2	2	DC2-L12:Eth1/50
DC2-S1:Eth1/25-DC2-L13:Eth1/49	smf	DC2-S1:Eth1/25	2	DC2-B04-PP42:64	7	DC2-B05-PP42:64	2	DC2-B05-PP39:25	15	DC2-C03-PP42:1	2	DC2-L13:Eth1/49
DC2-S1:Eth1/26-DC2-L13:Eth1/50	smf	DC2-S1:Eth1/26	2	DC2-B04-PP42:65	7	DC2-B05-PP42:65	2	DC2-B05-PP39:26	15	DC2-C03-PP42:2	2	DC2-L13:Eth1/50
DC2-S1:Eth1/27-DC2-L14:Eth1/49	smf	DC2-S1:Eth1/27	2	DC2-B04-PP42:66	7	DC2-B05-PP42:66	2	DC2-B05-PP39:37	10	DC2-C04-PP42:1	2	DC2-L14:Eth1/49

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-S1:Eth1/28-DC2-L14:Eth1/50	smf	DC2-S1:Eth1/28	2	DC2-B04-PP42:67	7	DC2-B05-PP42:67	2	DC2-B05-PP39:38	10	DC2-C04-PP42:2	2	DC2-L14:Eth1/50
DC2-S1:Eth1/29-DC2-L15:Eth1/49	smf	DC2-S1:Eth1/29	2	DC2-B04-PP42:68	7	DC2-B05-PP42:68	2	DC2-B05-PP39:49	10	DC2-C05-PP42:1	2	DC2-L15:Eth1/49
DC2-S1:Eth1/30-DC2-L15:Eth1/50	smf	DC2-S1:Eth1/30	2	DC2-B04-PP42:69	7	DC2-B05-PP42:69	2	DC2-B05-PP39:50	10	DC2-C05-PP42:2	2	DC2-L15:Eth1/50
DC2-S1:Eth1/31-DC2-L16:Eth1/49	smf	DC2-S1:Eth1/31	2	DC2-B04-PP42:70	10	DC2-B06-PP42:70	2	DC2-B06-PP39:61	10	DC2-C06-PP42:1	2	DC2-L16:Eth1/49
DC2-S1:Eth1/32-DC2-L16:Eth1/50	smf	DC2-S1:Eth1/32	2	DC2-B04-PP42:71	10	DC2-B06-PP42:71	2	DC2-B06-PP39:62	10	DC2-C06-PP42:2	2	DC2-L16:Eth1/50
DC2-S1:Eth1/33-DC2-L17:Eth1/49	smf	DC2-S1:Eth1/33	2	DC2-B04-PP42:72	10	DC2-B06-PP42:72	2	DC2-B06-PP39:73	10	DC2-C07-PP42:1	2	DC2-L17:Eth1/49
DC2-S1:Eth1/34-DC2-L17:Eth1/50	smf	DC2-S1:Eth1/34	2	DC2-B04-PP42:73	10	DC2-B06-PP42:73	2	DC2-B06-PP39:74	10	DC2-C07-PP42:2	2	DC2-L17:Eth1/50
DC2-S1:Eth1/35-DC2-L18:Eth1/49	smf	DC2-S1:Eth1/35	2	DC2-B04-PP42:74	10	DC2-B06-PP42:74	2	DC2-B06-PP39:85	15	DC2-C08-PP42:1	2	DC2-L18:Eth1/49
DC2-S1:Eth1/36-DC2-L18:Eth1/50	smf	DC2-S1:Eth1/36	2	DC2-B04-PP42:75	10	DC2-B06-PP42:75	2	DC2-B06-PP39:86	15	DC2-C08-PP42:2	2	DC2-L18:Eth1/50
DC2-S1:Eth1/37-DC2-L19:Eth1/49	smf	DC2-S1:Eth1/37	2	DC2-B04-PP42:76	10	DC2-B06-PP42:76	2	DC2-B06-PP39:97	15	DC2-C09-PP42:1	2	DC2-L19:Eth1/49
DC2-S1:Eth1/38-DC2-L19:Eth1/50	smf	DC2-S1:Eth1/38	2	DC2-B04-PP42:77	10	DC2-B06-PP42:77	2	DC2-B06-PP39:98	15	DC2-C09-PP42:2	2	DC2-L19:Eth1/50
DC2-S1:Eth1/39-DC2-L20:Eth1/49	smf	DC2-S1:Eth1/39	2	DC2-B04-PP42:78	10	DC2-B06-PP42:78	2	DC2-B06-PP39:109	15	DC2-C10-PP42:1	2	DC2-L20:Eth1/49
DC2-S1:Eth1/40-DC2-L20:Eth1/50	smf	DC2-S1:Eth1/40	2	DC2-B04-PP42:79	10	DC2-B06-PP42:79	2	DC2-B06-PP39:110	15	DC2-C10-PP42:2	2	DC2-L20:Eth1/50
DC2-S1:Eth1/42-DC2-BL2:Eth1/1	smf	DC2-S1:Eth1/42	2	DC2-B04-PP42:80	10	DC2-B06-PP42:80	2	DC2-B06-PP41:40	10	DC2-B08-PP42:40	2	DC2-BL2:Eth1/1
DC2-S1:Eth1/44-DC2-SL2:Eth1/1	smf	DC2-S1:Eth1/44	2	DC2-B04-PP42:81	10	DC2-B06-PP42:81	2	DC2-B06-PP41:41	10	DC2-B08-PP42:41	2	DC2-SL2:Eth1/1
DC2-S1:Eth1/46-DC2-BGW2:Eth1/1	smf	DC2-S1:Eth1/46	2	DC2-B04-PP42:82	10	DC2-B06-PP42:82	2	DC2-B06-PP41:42	10	DC2-B08-PP42:42	2	DC2-BGW2:Eth1/1
DC2-S2:Eth1/1-DC2-L1:Eth1/51	smf	DC2-S2:Eth1/1	2	DC2-B08-PP42:43	10	DC2-B06-PP41:43	2	DC2-B06-PP40:6	15	DC2-A01-PP42:6	2	DC2-L1:Eth1/51
DC2-S2:Eth1/2-DC2-L1:Eth1/52	smf	DC2-S2:Eth1/2	2	DC2-B08-PP42:44	10	DC2-B06-PP41:44	2	DC2-B06-PP40:7	15	DC2-A01-PP42:7	2	DC2-L1:Eth1/52
DC2-S2:Eth1/3-DC2-L2:Eth1/51	smf	DC2-S2:Eth1/3	2	DC2-B08-PP42:45	10	DC2-B06-PP41:45	2	DC2-B06-PP40:18	15	DC2-A02-PP42:6	2	DC2-L2:Eth1/51
DC2-S2:Eth1/4-DC2-L2:Eth1/52	smf	DC2-S2:Eth1/4	2	DC2-B08-PP42:46	10	DC2-B06-PP41:46	2	DC2-B06-PP40:19	15	DC2-A02-PP42:7	2	DC2-L2:Eth1/52
DC2-S2:Eth1/5-DC2-L3:Eth1/51	smf	DC2-S2:Eth1/5	2	DC2-B08-PP42:47	10	DC2-B06-PP41:47	2	DC2-B06-PP40:27	15	DC2-A03-PP42:3	2	DC2-L3:Eth1/51
DC2-S2:Eth1/6-DC2-L3:Eth1/52	smf	DC2-S2:Eth1/6	2	DC2-B08-PP42:48	10	DC2-B06-PP41:48	2	DC2-B06-PP40:28	15	DC2-A03-PP42:4	2	DC2-L3:Eth1/52
DC2-S2:Eth1/7-DC2-L4:Eth1/51	smf	DC2-S2:Eth1/7	2	DC2-B08-PP42:49	10	DC2-B06-PP41:49	2	DC2-B06-PP40:39	15	DC2-A04-PP42:3	2	DC2-L4:Eth1/51
DC2-S2:Eth1/8-DC2-L4:Eth1/52	smf	DC2-S2:Eth1/8	2	DC2-B08-PP42:50	10	DC2-B06-PP41:50	2	DC2-B06-PP40:40	15	DC2-A04-PP42:4	2	DC2-L4:Eth1/52

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-S2:Eth1/9-DC2-L5:Eth1/51	smf	DC2-S2:Eth1/9	2	DC2-B08-PP42:51	10	DC2-B06-PP41:51	2	DC2-B06-PP40:51	10	DC2-A05-PP42:3	2	DC2-L5:Eth1/51
DC2-S2:Eth1/10-DC2-L5:Eth1/52	smf	DC2-S2:Eth1/10	2	DC2-B08-PP42:52	10	DC2-B06-PP41:52	2	DC2-B06-PP40:52	10	DC2-A05-PP42:4	2	DC2-L5:Eth1/52
DC2-S2:Eth1/11-DC2-L6:Eth1/51	smf	DC2-S2:Eth1/11	2	DC2-B08-PP42:53	10	DC2-B06-PP41:53	2	DC2-B06-PP40:63	10	DC2-A06-PP42:3	2	DC2-L6:Eth1/51
DC2-S2:Eth1/12-DC2-L6:Eth1/52	smf	DC2-S2:Eth1/12	2	DC2-B08-PP42:54	10	DC2-B06-PP41:54	2	DC2-B06-PP40:64	10	DC2-A06-PP42:4	2	DC2-L6:Eth1/52
DC2-S2:Eth1/13-DC2-L7:Eth1/51	smf	DC2-S2:Eth1/13	2	DC2-B08-PP42:55	7	DC2-B07-PP41:55	2	DC2-B07-PP40:75	10	DC2-A07-PP42:3	2	DC2-L7:Eth1/51
DC2-S2:Eth1/14-DC2-L7:Eth1/52	smf	DC2-S2:Eth1/14	2	DC2-B08-PP42:56	7	DC2-B07-PP41:56	2	DC2-B07-PP40:76	10	DC2-A07-PP42:4	2	DC2-L7:Eth1/52
DC2-S2:Eth1/15-DC2-L8:Eth1/51	smf	DC2-S2:Eth1/15	2	DC2-B08-PP42:57	7	DC2-B07-PP41:57	2	DC2-B07-PP40:87	10	DC2-A08-PP42:3	2	DC2-L8:Eth1/51
DC2-S2:Eth1/16-DC2-L8:Eth1/52	smf	DC2-S2:Eth1/16	2	DC2-B08-PP42:58	7	DC2-B07-PP41:58	2	DC2-B07-PP40:88	10	DC2-A08-PP42:4	2	DC2-L8:Eth1/52
DC2-S2:Eth1/17-DC2-L9:Eth1/51	smf	DC2-S2:Eth1/17	2	DC2-B08-PP42:59	7	DC2-B07-PP41:59	2	DC2-B07-PP40:99	15	DC2-A09-PP42:3	2	DC2-L9:Eth1/51
DC2-S2:Eth1/18-DC2-L9:Eth1/52	smf	DC2-S2:Eth1/18	2	DC2-B08-PP42:60	7	DC2-B07-PP41:60	2	DC2-B07-PP40:100	15	DC2-A09-PP42:4	2	DC2-L9:Eth1/52
DC2-S2:Eth1/19-DC2-L10:Eth1/51	smf	DC2-S2:Eth1/19	2	DC2-B08-PP42:61	7	DC2-B07-PP41:61	2	DC2-B07-PP40:111	15	DC2-A10-PP42:3	2	DC2-L10:Eth1/51
DC2-S2:Eth1/20-DC2-L10:Eth1/52	smf	DC2-S2:Eth1/20	2	DC2-B08-PP42:62	7	DC2-B07-PP41:62	2	DC2-B07-PP40:112	15	DC2-A10-PP42:4	2	DC2-L10:Eth1/52
DC2-S2:Eth1/21-DC2-L11:Eth1/51	smf	DC2-S2:Eth1/21	2	DC2-B08-PP42:63	10	DC2-B06-PP41:63	2	DC2-B06-PP39:3	15	DC2-C01-PP42:3	2	DC2-L11:Eth1/51
DC2-S2:Eth1/22-DC2-L11:Eth1/52	smf	DC2-S2:Eth1/22	2	DC2-B08-PP42:64	10	DC2-B06-PP41:64	2	DC2-B06-PP39:4	15	DC2-C01-PP42:4	2	DC2-L11:Eth1/52
DC2-S2:Eth1/23-DC2-L12:Eth1/51	smf	DC2-S2:Eth1/23	2	DC2-B08-PP42:65	10	DC2-B06-PP41:65	2	DC2-B06-PP39:15	15	DC2-C02-PP42:3	2	DC2-L12:Eth1/51
DC2-S2:Eth1/24-DC2-L12:Eth1/52	smf	DC2-S2:Eth1/24	2	DC2-B08-PP42:66	10	DC2-B06-PP41:66	2	DC2-B06-PP39:16	15	DC2-C02-PP42:4	2	DC2-L12:Eth1/52
DC2-S2:Eth1/25-DC2-L13:Eth1/51	smf	DC2-S2:Eth1/25	2	DC2-B08-PP42:67	10	DC2-B06-PP41:67	2	DC2-B06-PP39:27	15	DC2-C03-PP42:3	2	DC2-L13:Eth1/51
DC2-S2:Eth1/26-DC2-L13:Eth1/52	smf	DC2-S2:Eth1/26	2	DC2-B08-PP42:68	10	DC2-B06-PP41:68	2	DC2-B06-PP39:28	15	DC2-C03-PP42:4	2	DC2-L13:Eth1/52
DC2-S2:Eth1/27-DC2-L14:Eth1/51	smf	DC2-S2:Eth1/27	2	DC2-B08-PP42:69	10	DC2-B06-PP41:69	2	DC2-B06-PP39:39	15	DC2-C04-PP42:3	2	DC2-L14:Eth1/51
DC2-S2:Eth1/28-DC2-L14:Eth1/52	smf	DC2-S2:Eth1/28	2	DC2-B08-PP42:70	10	DC2-B06-PP41:70	2	DC2-B06-PP39:40	15	DC2-C04-PP42:4	2	DC2-L14:Eth1/52
DC2-S2:Eth1/29-DC2-L15:Eth1/51	smf	DC2-S2:Eth1/29	2	DC2-B08-PP42:71	10	DC2-B06-PP41:71	2	DC2-B06-PP39:51	10	DC2-C05-PP42:3	2	DC2-L15:Eth1/51
DC2-S2:Eth1/30-DC2-L15:Eth1/52	smf	DC2-S2:Eth1/30	2	DC2-B08-PP42:72	10	DC2-B06-PP41:72	2	DC2-B06-PP39:52	10	DC2-C05-PP42:4	2	DC2-L15:Eth1/52
DC2-S2:Eth1/31-DC2-L16:Eth1/51	smf	DC2-S2:Eth1/31	2	DC2-B08-PP42:73	10	DC2-B06-PP41:73	2	DC2-B06-PP39:63	10	DC2-C06-PP42:3	2	DC2-L16:Eth1/51
DC2-S2:Eth1/32-DC2-L16:Eth1/52	smf	DC2-S2:Eth1/32	2	DC2-B08-PP42:74	10	DC2-B06-PP41:74	2	DC2-B06-PP39:64	10	DC2-C06-PP42:4	2	DC2-L16:Eth1/52

Cable label	Media	A end	A jumper	A panel:port	Trunk A	Patch in	X-connect	Patch out	Trunk B	B panel:port	B jumper	B end
DC2-S2:Eth1/33-DC2-L17:Eth1/51	smf	DC2-S2:Eth1/33	2	DC2-B08-PP42:75	7	DC2-B07-PP41:75	2	DC2-B07-PP39:75	10	DC2-C07-PP42:3	2	DC2-L17:Eth1/51
DC2-S2:Eth1/34-DC2-L17:Eth1/52	smf	DC2-S2:Eth1/34	2	DC2-B08-PP42:76	7	DC2-B07-PP41:76	2	DC2-B07-PP39:76	10	DC2-C07-PP42:4	2	DC2-L17:Eth1/52
DC2-S2:Eth1/35-DC2-L18:Eth1/51	smf	DC2-S2:Eth1/35	2	DC2-B08-PP42:77	7	DC2-B07-PP41:77	2	DC2-B07-PP39:87	10	DC2-C08-PP42:3	2	DC2-L18:Eth1/51
DC2-S2:Eth1/36-DC2-L18:Eth1/52	smf	DC2-S2:Eth1/36	2	DC2-B08-PP42:78	7	DC2-B07-PP41:78	2	DC2-B07-PP39:88	10	DC2-C08-PP42:4	2	DC2-L18:Eth1/52
DC2-S2:Eth1/37-DC2-L19:Eth1/51	smf	DC2-S2:Eth1/37	2	DC2-B08-PP42:79	7	DC2-B07-PP41:79	2	DC2-B07-PP39:99	15	DC2-C09-PP42:3	2	DC2-L19:Eth1/51
DC2-S2:Eth1/38-DC2-L19:Eth1/52	smf	DC2-S2:Eth1/38	2	DC2-B08-PP42:80	7	DC2-B07-PP41:80	2	DC2-B07-PP39:100	15	DC2-C09-PP42:4	2	DC2-L19:Eth1/52
DC2-S2:Eth1/39-DC2-L20:Eth1/51	smf	DC2-S2:Eth1/39	2	DC2-B08-PP42:81	7	DC2-B07-PP41:81	2	DC2-B07-PP39:111	15	DC2-C10-PP42:3	2	DC2-L20:Eth1/51
DC2-S2:Eth1/40-DC2-L20:Eth1/52	smf	DC2-S2:Eth1/40	2	DC2-B08-PP42:82	7	DC2-B07-PP41:82	2	DC2-B07-PP39:112	15	DC2-C10-PP42:4	2	DC2-L20:Eth1/52
DC2-S2:Eth1/41-DC2-BL1:Eth1/2	smf	DC2-S2:Eth1/41	2	DC2-B08-PP42:83	10	DC2-B06-PP41:83	2	DC2-B06-PP42:83	10	DC2-B04-PP42:83	2	DC2-BL1:Eth1/2
DC2-S2:Eth1/43-DC2-SL1:Eth1/2	smf	DC2-S2:Eth1/43	2	DC2-B08-PP42:84	10	DC2-B06-PP41:84	2	DC2-B06-PP42:84	10	DC2-B04-PP42:84	2	DC2-SL1:Eth1/2
DC2-S2:Eth1/45-DC2-BGW1:Eth1/2	smf	DC2-S2:Eth1/45	2	DC2-B08-PP42:85	10	DC2-B06-PP41:85	2	DC2-B06-PP42:85	10	DC2-B04-PP42:85	2	DC2-BGW1:Eth1/2
DC2-SDWANFW1:ha1-DC2-SDWANFW2:ha1	smf	DC2-SDWANFW1:ha1	3	DC2-B04-PP42:86	10	DC2-B06-PP42:86	2	DC2-B06-PP41:86	10	DC2-B08-PP42:86	3	DC2-SDWANFW2:ha1
DC2-SDWANFW1:ha2-DC2-SDWANFW2:ha2	smf	DC2-SDWANFW1:ha2	3	DC2-B04-PP42:87	10	DC2-B06-PP42:87	2	DC2-B06-PP41:87	10	DC2-B08-PP42:87	3	DC2-SDWANFW2:ha2
DC2-SL1:Eth1/3-DC2-SL2:Eth1/3	smf	DC2-SL1:Eth1/3	2	DC2-B04-PP42:88	10	DC2-B06-PP42:88	2	DC2-B06-PP41:88	10	DC2-B08-PP42:88	2	DC2-SL2:Eth1/3
DC2-SL1:Eth1/4-DC2-SL2:Eth1/4	smf	DC2-SL1:Eth1/4	2	DC2-B04-PP42:89	10	DC2-B06-PP42:89	2	DC2-B06-PP41:89	10	DC2-B08-PP42:89	2	DC2-SL2:Eth1/4
DC2-SL1:Eth1/5-DC2-SL2:Eth1/5	smf	DC2-SL1:Eth1/5	2	DC2-B04-PP42:90	10	DC2-B06-PP42:90	2	DC2-B06-PP41:90	10	DC2-B08-PP42:90	2	DC2-SL2:Eth1/5
DC2-SL1:Eth1/6-DC2-SL2:Eth1/6	smf	DC2-SL1:Eth1/6	2	DC2-B04-PP42:91	10	DC2-B06-PP42:91	2	DC2-B06-PP41:91	10	DC2-B08-PP42:91	2	DC2-SL2:Eth1/6
DC2-SL1:Eth1/8-DC2-INTFW2:port19	smf	DC2-SL1:Eth1/8	2	DC2-B04-PP42:92	10	DC2-B06-PP42:92	2	DC2-B06-PP41:92	10	DC2-B08-PP42:92	3	DC2-INTFW2:port19
DC2-SL1:Eth1/34-DC2-SL2:Eth1/34	smf	DC2-SL1:Eth1/34	2	DC2-B04-PP42:93	10	DC2-B06-PP42:93	2	DC2-B06-PP41:93	10	DC2-B08-PP42:93	2	DC2-SL2:Eth1/34
DC2-SL2:Eth1/7-DC2-INTFW1:port20	smf	DC2-SL2:Eth1/7	2	DC2-B08-PP42:94	10	DC2-B06-PP41:94	2	DC2-B06-PP42:94	10	DC2-B04-PP42:94	3	DC2-INTFW1:port20
DC2-VPNFW1:ha1-DC2-VPNFW2:ha1	smf	DC2-VPNFW1:ha1	3	DC2-B04-PP42:95	10	DC2-B06-PP42:95	2	DC2-B06-PP41:95	10	DC2-B08-PP42:95	3	DC2-VPNFW2:ha1
DC2-VPNFW1:ha2-DC2-VPNFW2:ha2	smf	DC2-VPNFW1:ha2	3	DC2-B04-PP42:96	10	DC2-B06-PP42:96	2	DC2-B06-PP41:96	10	DC2-B08-PP42:96	3	DC2-VPNFW2:ha2

Same-rack direct cables (28)

Cable label	Media	Length	Rack
DC2-BGW1:Eth1/3-DC2-DCI1:Eth1/1	dac	2	DC2-B04
DC2-BGW2:Eth1/3-DC2-DCI2:Eth1/1	dac	2	DC2-B08
DC2-BL1:Eth1/7-DC2-INETFW1:port19	dac	3	DC2-B04
DC2-BL1:Eth1/9-DC2-SDWANFW1:port37	dac	3	DC2-B04
DC2-BL1:Eth1/11-DC2-VPNFW1:port37	dac	2	DC2-B04
DC2-BL1:Eth1/13-DC2-CLOUD1:FH0/0/0/0	dac	2	DC2-B04
DC2-BL2:Eth1/8-DC2-INETFW2:port20	dac	3	DC2-B08
DC2-BL2:Eth1/10-DC2-SDWANFW2:port38	dac	3	DC2-B08
DC2-BL2:Eth1/12-DC2-VPNFW2:port38	dac	2	DC2-B08
DC2-BL2:Eth1/14-DC2-CLOUD2:FH0/0/0/2	dac	2	DC2-B08
DC2-DMZ1:Eth1/49-DC2-INETFW1:port15	dac	2	DC2-B04
DC2-DMZ2:Eth1/50-DC2-INETFW2:port16	dac	2	DC2-B08
DC2-EDGE1:Eth1/5-DC2-ISP1:FH0/0/0/0	dac	2	DC2-B04
DC2-EDGE1:Eth1/7-DC2-INETFW1:port21	dac	3	DC2-B04
DC2-EDGE1:Eth1/9-DC2-SDWANFW1:port39	dac	2	DC2-B04
DC2-EDGE1:Eth1/11-DC2-VPNFW1:port39	dac	2	DC2-B04
DC2-EDGE2:Eth1/6-DC2-ISP2:FH0/0/0/2	dac	2	DC2-B08
DC2-EDGE2:Eth1/8-DC2-INETFW2:port22	dac	3	DC2-B08
DC2-EDGE2:Eth1/10-DC2-SDWANFW2:port40	dac	2	DC2-B08
DC2-EDGE2:Eth1/12-DC2-VPNFW2:port40	dac	2	DC2-B08
DC2-S1:Eth1/41-DC2-BL1:Eth1/1	dac	2	DC2-B04
DC2-S1:Eth1/43-DC2-SL1:Eth1/1	dac	2	DC2-B04
DC2-S1:Eth1/45-DC2-BGW1:Eth1/1	dac	2	DC2-B04
DC2-S2:Eth1/42-DC2-BL2:Eth1/2	dac	2	DC2-B08
DC2-S2:Eth1/44-DC2-SL2:Eth1/2	dac	2	DC2-B08
DC2-S2:Eth1/46-DC2-BGW2:Eth1/2	dac	2	DC2-B08
DC2-SL1:Eth1/7-DC2-INTFW1:port19	dac	3	DC2-B04
DC2-SL2:Eth1/8-DC2-INTFW2:port20	dac	3	DC2-B08

Bill of materials

Part	Length (m)	Quantity
dac direct	2	20
dac direct	3	8
smf cross-connect jumper	1	3
smf cross-connect jumper	2	136
smf jumper	2	242
smf jumper	3	36
smf trunk leg	7	36
smf trunk leg	10	188
smf trunk leg	15	54

Panel ports used per rack

Rack	Ports used	Block size
DC2-A01	7	12
DC2-A02	7	12
DC2-A03	4	12
DC2-A04	4	12
DC2-A05	4	12
DC2-A06	4	12
DC2-A07	4	12
DC2-A08	4	12
DC2-A09	4	12
DC2-A10	4	12
DC2-B04	96	144
DC2-B08	96	144
DC2-C01	4	12
DC2-C02	4	12
DC2-C03	4	12
DC2-C04	4	12
DC2-C05	4	12
DC2-C06	4	12
DC2-C07	4	12
DC2-C08	4	12
DC2-C09	4	12
DC2-C10	4	12