

1 Animals dataset

Figure 1 shows how the results of estimating the graph Laplacian of the **animals** dataset for different values of K . The **animals** dataset consists of binary values which are the answers to questions such as "is warm-blooded?", "has lungs?", etc. There are in total 102 such questions (features) and 33 animals (nodes).

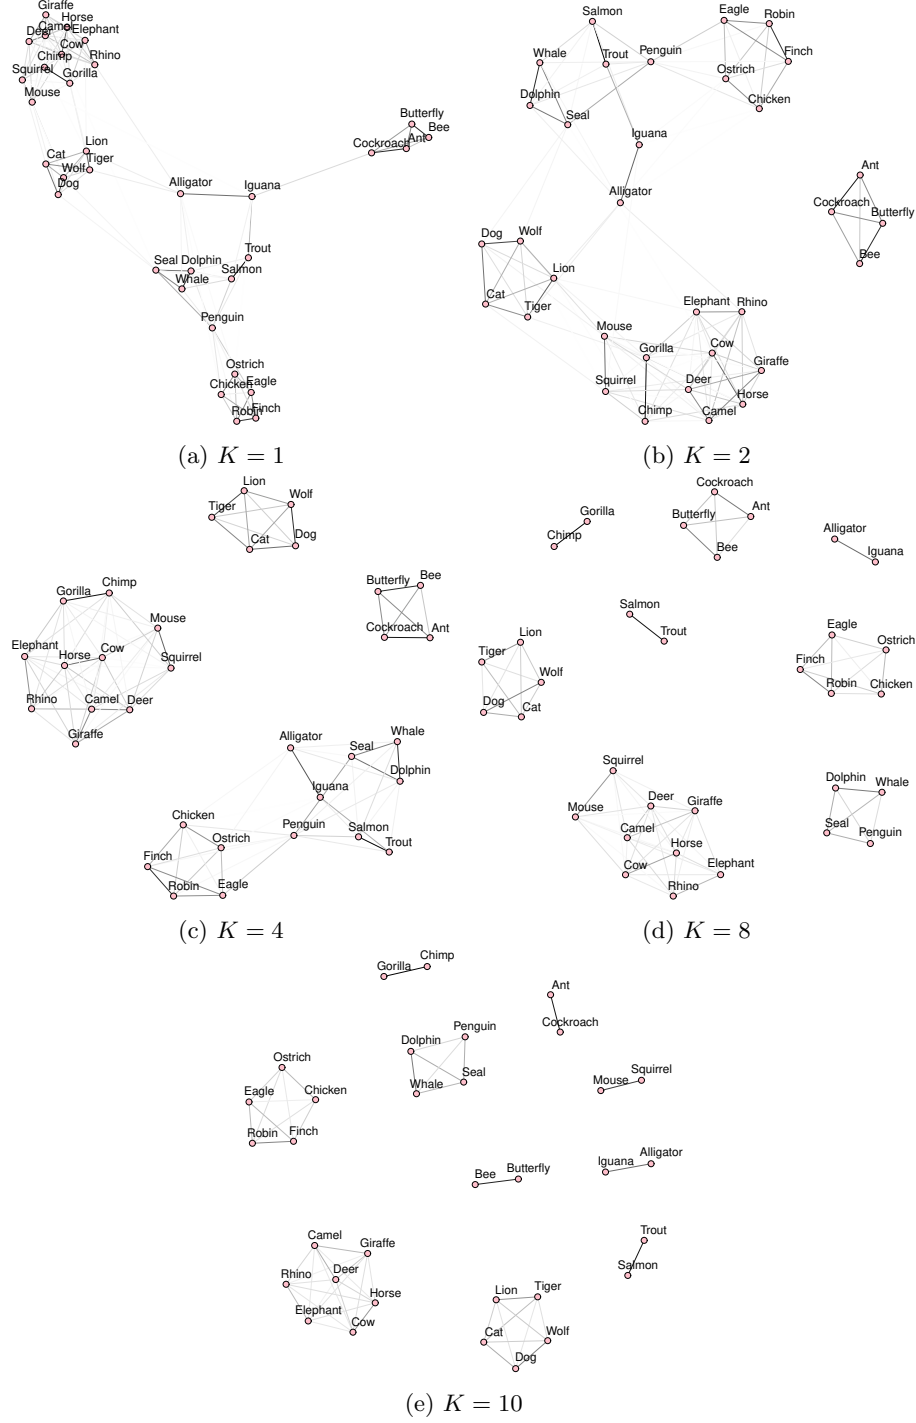


Figure 1: Graph learning in the animals dataset for different values of K .