



Guía del usuario final

Revisión del documento 1.7



Descripción general del documento

Este documento explicará cómo navegar por la aplicación HP SDS Manager para usuarios finales del Sistema:

- [Acceso](#)
- [Configuración de descubrimientos](#)
- [Opciones del menú principal](#)
- [Preferencias](#)
- [Exportación y selección de columnas de tablas](#)
- [Menús desplegables sensibles al contexto](#)
- [Gestión de activos](#)
- [Gestión de consumibles](#)
- [Administración de incidentes](#)
- [Informes](#)
- [Navegación del Panel](#)





Iniciar sesión en el sistema

Introduzca el nombre de usuario y la contraseña proporcionados.

Si ha olvidado su contraseña, póngase en contacto con su distribuidor o con el servicio de asistencia de SDS Manager, que puede restablecer la contraseña por usted.

Navegación del Panel

Menú principal que luego abrirá las selecciones del submenú.

Los **enlaces azules** se utilizan para la navegación.

- Solicitudes de consumibles.
- Alertas de tu dispositivo activo.
- Avisos de ingeniería. Sus monitores activos.
- El panel de Monitor Presence muestra estadísticas útiles de la barra de porcentaje.

The screenshot shows the HP Smart Device Services Manager dashboard. Red arrows point to the following elements:

- Portal Menu:** The left sidebar menu containing options like Customer Management, Asset Management, Consumable Management, Incident Management, Reports, Product Database, and Administration.
- Search Bar:** Located at the top right of the dashboard.
- Statistics Table:** A table at the top showing various metrics like Resellers, Customers, Monitors, and their reporting status.
- Consumable Requests:** A section showing requests for consumables, with a table for 'Today & Yesterday' and 'Total'.
- Current Alerts Summary:** A section showing a summary of alerts by class, with a table for 'Today & Yesterday' and 'Total'.
- Monitor Versions:** A section showing the status of monitors, with a table for 'Remote Application', 'Version', and 'Monitors'.
- Monitor Presence:** A section showing the presence of monitors, with a table for 'Presence' and 'Monitors'.


Cerrar sesión

Buscar:

- Serie
- Activo
- Zona

Navegación del Panel


Se puede ver un resumen de estadísticas de alto nivel desde el panel de inicio del Portal, lo que proporciona acceso rápido a datos operativos clave y métricas de rendimiento.

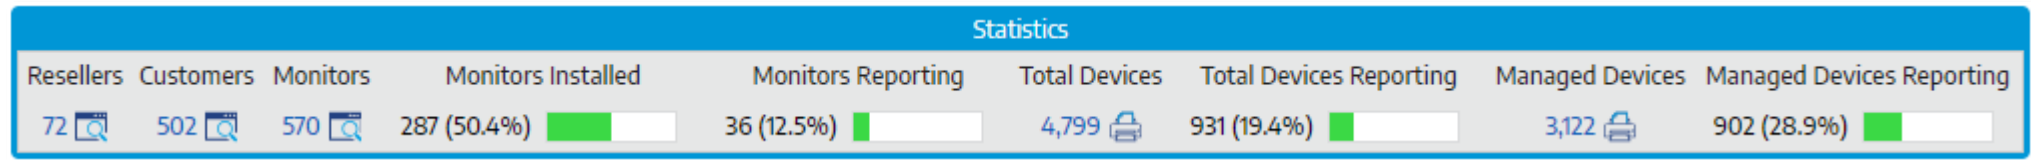

Monitors Installed	Shows the proportion of total monitors that have been installed and successfully communicated with the Portal.
Monitors Reporting	Shows the proportion of total monitors that have been in communication with the Portal within the last 7 days.
Total Devices Reporting	Shows the number and proportion of total devices that have been read within the last 7 days.
Managed Devices Reporting	Shows the number and proportion of managed devices that have been read within the last 7 days.

Opciones del Menú Principal Disponibles

- Panel de control, búsqueda y preferencias
- Gestión de clientes (consulte los monitores instalados)
 - Activos (Ver sus dispositivos)
 - Consumibles (Ver sus niveles actuales)
- Gestión de incidentes (ver alertas de dispositivos actuales)
- Informes (lista de activos, no contactables, medidores)
 - Administración del sistema (Editar usuarios)

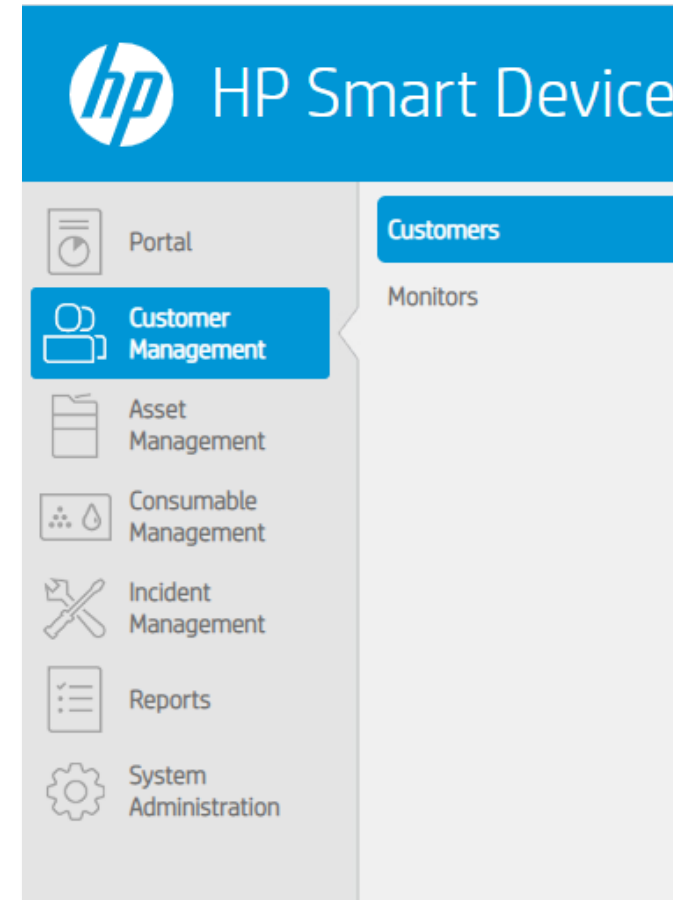

Preferencias - Seleccione su Idioma

Ve a preferencias.

Cada pestaña en la parte superior le permite seleccionar sus preferencias para las pantallas de datos.

Haga clic en cada pestaña para realizar sus selecciones.

La pestaña de [enlace](#) le permite seleccionar las secciones de la aplicación que se abren en una nueva pestaña de ventana / navegador.

Haga clic en Guardar.

The screenshot shows the HP Smart Device Services Manager - Sandbox interface. The top navigation bar includes the HP logo, the title "HP Smart Device Services Manager - Sandbox", and a user greeting "Hello, mariafilby. Log Out". A search bar is also present. The left sidebar contains a "Portal" icon and a list of menu items: Customer Management, Asset Management, Consumable Management, Incident Management, Reports, Product Database, and System Administration. The main content area displays the "Preferences" tab, which is highlighted. The "General Preferences" sub-tab is selected, showing various settings. A table of time zones is visible, with "Europe/London" selected. The bottom of the page features a footer with the HP logo, "Smart Device Services", and copyright information.

HP Smart Device Services Manager - Sandbox

General Preferences | Links | Consumable Request List Columns | Moves & Changes List Columns | Incident List Columns | Device List Columns | Customer List Columns | Monitor List Columns

Preferred device identifier: Serial Number

☒ Use sticky table headers & footers

☐ Include custom data in searches by default (slower)

☐ Show expert count meta-data in device counts page

☐ Show unfiltered change events on consumable graphs

☐ Use two-factor authentication

Consumable graph display style: Compact

Initial consumable graph period: 1 year

Consumable graph out of contact threshold (hours): 72

Language: English (United Kingdom)

Time Zone	Common Name	Current UTC Offset
☐ Europe/Guernsey	Greenwich Mean Time / British Summer Time	UTC+1:00
☐ Europe/Isle_of_Man	Greenwich Mean Time / British Summer Time	UTC+1:00
☐ Europe/Jersey	Greenwich Mean Time / British Summer Time	UTC+1:00
☐ Europe/Lisbon	Western European Standard Time / Western European Summer Time	UTC+1:00
☒ Europe/London	Greenwich Mean Time / British Summer Time	UTC+1:00
☐ Africa/Blantyre	Central Africa Time	UTC+2:00
☐ Africa/Bujumbura	Central Africa Time	UTC+2:00
☐ Africa/Cairo	Eastern European Standard Time	UTC+2:00
☐ Africa/Ceuta	Central European Standard Time / Central European Summer Time	UTC+2:00
☐ Africa/Gaborone	Central Africa Time	UTC+2:00
☐ Africa/Harare	Central Africa Time	UTC+2:00
☐ Africa/Johannesburg	South Africa Standard Time	UTC+2:00

Save

Hide Menu

Smart Device Services
EKM Insight Portal Web Server v.5.21.1.36. Copyright © EKM Global Limited. All rights reserved.
To review HP's privacy statement please click this link. By using this software you agree to the terms of the licence agreement.

Preferencias - Seleccione su Idioma

Ve a preferencias.

Seleccione su idioma en el menú desplegable.

Haga clic en Guardar.

The screenshot shows the HP Smart Device Services Manager interface. The top navigation bar is blue with the HP logo and the text "HP Smart Device Services Manager". On the right, it says "Hello, mariafilbyreseller. Log Out" and has a search bar. The left sidebar contains a "Portal" menu with options: Customer Management, Asset Management, Consumable Management, Incident Management, Reports, and System Administration. The main content area is titled "Preferences" and includes a search bar, "Change Password", and "About EKM Insight". The "General Preferences" tab is active, showing various settings. The "Language" dropdown menu is open, displaying a list of languages and time zones. The "English (United Kingdom)" option is highlighted. The "Time Zone" dropdown menu is also open, showing a list of time zones. The "UTC" option is selected. The "Save" button is visible at the bottom right of the preferences section.

Language	Time Zone	Current UTC Offset
English (United Kingdom)	UTC	UTC+0:00
English (United States)	UTC	UTC+0:00
français (France)	UTC	UTC+0:00
italiano (Italia)	UTC	UTC+0:00
Deutsch (Deutschland)	UTC	UTC+0:00
español (España)	UTC	UTC+0:00
português (Brasil)	UTC	UTC+0:00
čeština (Česká republika)	UTC	UTC+0:00
polski (Polska)	UTC	UTC+0:00
magyar (Magyarország)	UTC	UTC+0:00
русский (Россия)	UTC	UTC+1:00
Türkçe (Türkiye)	UTC	UTC+1:00
Bahasa Indonesia	UTC	UTC+1:00
한국어	UTC	UTC+1:00
中文 (中国)	UTC	UTC+1:00
中文 (台灣)	UTC	UTC+1:00
ไทย	UTC	UTC+1:00
Tiếng Việt	UTC	UTC+1:00
	Western African Time	UTC+1:00

Preferencias: Seleccione Columnas de Datos y su Orden

Marque las columnas o elementos que desea mostrar.

Cambie el orden de visualización **seleccionando y arrastrando** los nombres de los encabezados.

Haga clic en **Guardar**.

Los encabezados seleccionados se guardarán y se cambiará el orden.

HP Smart Device Services Manager

Dashboard

Search

Preferences

Change Password

About EKM Insight

General Preferences | Links | Consumable Request List Columns | Moves & Changes List Columns | Incident List Columns | Device List Columns | Customer List Columns | Monitor List Columns

Reseller

Customer

Serial Number

Asset Number

Hostname

IP Address

Sticker Number

Zone

Delivery Location

Manufacturer

Model

Monthly Lease/Rental

Color Cost Per Page

Color Target Volume

Quarterly Lease/Rental

Request Threshold Override

Mono Target Volume

Mono Cost Per Page

Device Details

Customer Details

Consumable Details

Request Details

Page Counts

Save

Exportación y Selección de Columnas de Tablas

- La mayoría de las listas se pueden copiar usando el portapapeles
- Los encabezados de campo de tabla se pueden mover, agregar, eliminar

10 row(s)

Customer	Device ID	Serial Number	Asset Number	Hostname	IP Address	Sticker Number	Manufacturer	Model	MIB Description	Zone	Monitor Status	Engine Cycles	30 Day Usage	Last Updated	HP SDS Status	Select
EKM	1	1484B1DQA00327E	?	8380	192.168.1.80	?	Samsung	CLX-8380ND *	Samsung CLX-8380 Series	Development	Disabled	8506	0	30-Aug-2017 15:15:03	Not an HP device	☐
EKM	2	LWGC4706687	?	KM3F8CDD	192.168.1.88	?	Kyocera	ECOSYS M6026cdn *	ECOSYS M6026cdn	Development	Disabled	6153	0	30-Aug-2017 15:15:05	Not an HP device	☐
EKM	3	3M21B1BL200013Y	?		192.168.1.101	?	Samsung	CLP-600N *	Samsung CLP-600 Series	Development	Disabled	22239	0	10-May-2017 09:15:16	Not an HP device	☐
EKM	4	4221B1ASA00043N	?	SEC001599479684	192.168.1.98	?	Samsung	ML-4050N *	Samsung ML-4050 Series	Development	Disabled	5454	0	14-Mar-2017 22:19:45	Not an HP device	☐
EKM	5	41FF408	?		Unknown	?	Lexmark	Optra T 614 N *	Lexmark Optra T614	Top Floor	Disabled	128464	0	14-Mar-2017 22:19:46	Not an HP device	☐
EKM	6	MY56TG702W0406	?	HP000D9D23BC5F	Unknown	?	HP	Officejet 7210 All in one	Officejet 7200 series	Development	Disabled	2293	0	14-Mar-2017 22:19:47	Genuine HP consumables	☐
EKM	7	CN8GR00581	?	HP30001ST	192.168.1.109	?	HP	Color Laserjet 3000 *	HP Color Laserjet 3000	Development	Disabled	17010	0	30-Aug-2017 15:15:06	Genuine HP consumables	☐
EKM	8	CN8VH85138	?	NPIAFB8EA	192.168.1.102	?	HP	Color Laserjet Managed Flow MFP M577cm *	HP Color Laserjet FlowMFP M577	Development	Disabled	5585	0	30-Aug-2017 14:15:08	Genuine HP consumables	☐
EKM	9	XMKG6800146	?		192.168.1.103	?	Kyocera	FS-6950DN *	FS-6950DN	Top Floor	Disabled	131037	0	30-Aug-2017 15:15:06	Not an HP device	☐
EKM	10	MXCCDD513	?	NPI06A6BF	192.168.1.107	?	HP	Laserjet Enterprise 700 color MFP M775z *	HP Laserjet 700 color MFP M775	Top Floor	Disabled	4274	0	30-Aug-2017 15:15:09	Unknown	☐

Email Delete Edit Set model HP SDS Actions

Campos seleccionados y orden en que aparecen:

- Marque para seleccionar
- Arrastrar para reordenar

General Preferences | Links | Consumable Request List Columns | Consumable Sales Opportunity List Columns | Moves & Changes List Columns | Incident List Columns | Device List Columns | Customer List Columns | Monitor List Columns

Device ID
Serial Number
Asset Number
Hostname
IP Address
Sticker Number
Manufacturer
Model
MIB Description
Zone
Monitor Status
Engine Cycles
30 Day Usage
Last Updated
HP SDS Status

☐ Device Identifiers
☐ Monitor
☒ Device ID
☒ Serial Number
☒ Asset Number
☒ Hostname
☒ IP Address
☒ Sticker Number
☐ MAC Address

☐ Device Attributes
☒ Zone
☒ Manufacturer
☒ Model
☒ MIB Description
☒ Monitor Status
☒ Engine Cycles
☒ 30 Day Usage
☒ Last Updated
☐ Discovery Date
☐ Delivery Location
☒ HP SDS Status

☐ Custom Data
☐ Monthly lease/rental
☐ HP Contract End
☐ Meter ID 1
☐ Meter ID 2
☐ Request Threshold Override
☐ Device Notes
☐ Color Cost Per Page
☐ Quarterly lease/rental
☐ Mono Cost Per Page
☐ Mono Target Volume
☐ Lastbilleddate
☐ Device Location
☐ Colour Target Volume



HP SDS Manager: menús desplegables sensibles al contexto

Seleccione el destino del [enlace](#) y esto lo llevará a la página de clientes.

HP Smart Device Services Manager

Hello, mariafilby. [Log Out](#)

Search

Portal

- Customer Management
- Asset Management
- Consumable Management
- Incident Management
- Reports
- Product Database
- System Administration

Dashboard

Search

Preferences

Change Password

About EKM Insight

Statistics

Resellers	Customers	Monitors	Monitors Installed	Monitors Reporting	Total Devices	Total Devices Reporting	Managed Devices	Managed Devices Reporting
72	502	570	287 (50.4%)	36 (12.5%)	4,799	931 (19.4%)	3,122	902 (28.9%)

Devices Pending Registration

Discovered Today & Yesterday	Total
1	2,698

Moves & Changes

Today & Yesterday	Total
23	2,003

Consumable Requests

Today & Yesterday	Total		
New Requests	Queried Requests	New Requests	Queried Requests
10	0	3,655	3

Current Alerts Summary by Alert Class

Consumable Out	Consumable Low	System Warning	User Action	Jam	Media Out	Media Low	User Problem	Information	Subunit Low	Subunit Out	Open	Other	Availability	Total
20	22	16	3	11	30	13	2	3	4	89	2	42	197	454

HP SDS Engineering Advisories

Today & Yesterday	Total		
High	Medium	High	Medium
1	1	69	380

HP SDS Report A Problem Notifications

✓ No outstanding report a problem notifications.

Monitor Versions

Remote Application	Version	Monitors
DCA	7.20.2.28	21
DCA	7.20.2.27	25
DCA	7.20.2.26	19
DCA	7.20.2.25	22
DCA	7.20.2.24	10

Monitor Presence

Presence	Monitors
Online	13
Offline	556

Smart Device Services

EKM Insight Portal Web Server v.5.21.1.36. Copyright © EKM Global Limited. All rights reserved.
To review HP's privacy statement please click this link. By using this software you agree to the terms of the licence agreement.



HP SDS Manager: menús desplegables sensibles al contexto

Cuando el destino del [enlace](#) tiene varias opciones de pestaña, aparece un menú desplegable sensible al contexto 

Desplácese hacia abajo hasta la pestaña deseada y haga clic.

En este caso, los datos del cliente. Esto lo llevará directamente a la página de detalles del cliente.

 HP Smart Device Services Manager -

 Portal

 Customer Management

 Asset Management

 Consumable Management

 Incident Management

 Reports

Dashboard

Search

Preferences

Change Password

About EKM Insight

HP DK - Demo

HP Dubai Cust

HP Finland - de

HP Inc Office

HP Inc Polska

HP Inc. Showro

HP Japan CWC

HP Japan Demo

HP Moscow

HP Netherlands demo room

HP Nigeria Computing and Printing Limited

HP Norway - demo room

HP Romania Demo



Copy

Customer details

Devices

Consumable requests

Alerts

Zones

Delivery locations

People

HP Smart Device Services

0	49	
0	11	
0	3	
0	5	
0	2	
0	6	
0	3	
0	46	
0	11	
0	46	
0	1	
0	18	
0	7	

Gestión de Activos - Dispositivos

- Seleccione Gestión de activos y, a continuación, Dispositivos.
- Introduzca los criterios de búsqueda o pulse Buscar para mostrar todos los dispositivos.
- Utilice encabezados de tabla para ordenar y buscar según sea necesario.
- Haga clic en el número de serie para mostrar los detalles del dispositivo.
- Desplácese junto a un número de serie para mostrar un menú desplegable contextual.

HP Smart Device Services Manager

Hello, mariafilby. Log Out

Search

Devices

Asset Registration
Moves & Changes
Models
Bulk HP SDS Actions
Deleted Devices
Manage Security Policies
View Security Assessments

Resellers
Filter
The Zoo

Customers
Filter
Banco Nacional
Zoo Office

Monitors
Filter
banconacional
mv-dca-sandbox1
zoostest2

Monitor Status
Fully enabled
Consumables only
Reports only
Disabled

Device Filter
Add condition for Zone
Custom Data Field Filter
Add condition for Color Cost Per Page

Maximum results to show: 200

Search

Customer	Device ID	Serial Number	Asset Number	Hostname	IP Address	Sticker Number	Manufacturer	Model	MIB Description	Zone	Monitor Status	Engine Cycles	30 Day Usage	Last Updated	HP SDS Status	Select
Zoo Office	1	432181CP800026A	?	CLP660	192.168.1.86	?	Samsung	CLP-660N *	Samsung CLP-660 Series	EKM New Office	Fully enabled	12067	0	17 Jul 2019, 15:39:12	Not an HP device	
Zoo Office	2	CNBVH85138	?	NPIAFB8EA	192.168.1.91	?	HP	Color Laserjet Managed Flow MFP M577cm	HP Color Laserjet FlowMFP M577	EKM New Office	Fully enabled	5706	0	17 Jul 2019, 15:39:20	Genuine HP consumables	
Zoo Office	3	MX3CK7511Y	?	NPI6F9213	192.168.1.105	?	HP	PageWide Enterprise Color Flow MFP 785f	HP PageWide Color Flow MFP 785	EKM New Office	Fully enabled	132	0	5 Jul 2019, 15:29:54	Genuine HP consumables	
Zoo Office	4	MXCCDD513	?	NPI06A6BF	192.168.1.107	?	HP	Laserjet Enterprise 700 color MFP M775z *	HP Laserjet 700 color MFP M775	EKM New Office	Fully enabled	4355	0	5 Jul 2019, 15:29:55	Genuine HP consumables	
Zoo Office	1	CNBVH85138	G121	NPIAFB8EA	192.168.1.92	?	HP	Color Laserjet Managed Flow MFP M577cm	HP Color Laserjet FlowMFP M577	New Devices	Fully enabled	5720	0	3 Aug 2022, 14:06:52	Genuine HP consumables	
Zoo Office	2	CNBGR00581		015T	Unknown	?	HP	Color Laserjet 3000 n *	HP Color Laserjet 3000	192.168.11-254	Disabled	17010	0	13 Dec 2017, 11:10:37	Genuine HP consumables	
Zoo Office	3	MY56TG702V		D9D23BC5F	Unknown	?	HP	Officejet 7210 All in one *	Officejet 7200 series	192.168.11-254	Disabled	2293	0	10 May 2017, 10:10:04	Unknown	
Zoo	4	MXCCDD513		66BF	192.168.1.118	?	HP	Laserjet Enterprise	HP Laserjet 700	192.168.11-	Fully	4358	0	3 Aug 2022,	Genuine HP	

Hide Menu

Smart Device Services
EKM Insight Portal Web S
If you would like to discuss HP Smart Device Services, submit a privacy request. We will review your request and contact you for subsequent information required.
To review HP's privacy statement please click this link. By using this software you agree to the terms of the licence agreement.

Tenga en cuenta la última marca de fecha / hora actualizada

Gestión de Activos: Descripción General del Dispositivo

- Pestañas detalladas para recuentos, consumibles, alertas, medios y HP Smart Device Services
- Detalles de los activos
- Campos de datos personalizados (si están presentes)
- Últimos recuentos de páginas
- Últimas lecturas de consumibles

The screenshot displays the HP Smart Device Services Manager interface. The 'Devices' tab is selected, showing a list of devices. The details for a specific device (CN8CIDK015) are shown, including a device ID, discovery date, serial number, IP address, hostname, MAC address, asset number, sticker number, manufacturer, model, SKU, MIB description, monitor status, zone, delivery location, consumable key user, and comment. The interface also includes sections for 'Custom Data', 'Latest Page Counts', 'Current Alerts', and 'Current Consumables'.

Device Details:

Field	Value
Device ID	1
Discovery Date	07-Jun-2019 11:52:55
Serial Number	CN8CIDK015
IP Address	192.168.0.60
Hostname	IMP_E58650_K015
MAC Address	E4E7495E9E11
Asset Number	En Contrato 2019
Sticker Number	?
Manufacturer	HP
Model	PageWide Managed Color MFP E58650dn
SKU	L3U42A
MIB Description	HP PageWide Color MFP E58650
Monitor Status	Fully enabled (managed consumables)
Zone	Miraflores
Delivery Location	[As per zone]
Consumable Key User	[As per zone]
Comment	

Custom Data:

Field	Value
Color Cost Per Page	
Color Target Volume	
Mono Cost Per Page	
Mono Target Volume	
Monthly Lease/Rental	
Quarterly Lease/Rental	
Request Threshold Override	

Latest Page Counts:

Category	Count
Mono Small	5,249
Colour Small	3,192
Total Small	8,441
Mono (A4-equivalent)	5,249
Colour (A4-equivalent)	3,192
Total (A4-equivalent)	8,441
Mono Pages	5,634
Colour Pages	3,207
Total Pages	8,841
Engine Cycles	8,841
Last Updated	10-Jul-2020 02:10:57

Current Alerts:

There are no current alerts for this device.

Current Consumables:

Description	Type	Colour	Current Level	Est. Days Left	Est. Pages Left	Last Updated
Cartucho negro 981YC HP L0R20YC	Ink	Black	77%	766	10,559	10-Jul-2020 02:11:57
Cartucho cian 981 SETUP HP J3M64A	Toner	Cyan	36%	224	4,811	10-Jul-2020 02:11:57
Cartucho magenta 981 SETUP HP J3M65A	Toner	Magenta	38%	244	5,242	10-Jul-2020 02:11:57
Cartucho amarillo 981 SETUP HP J3M66A	Toner	Yellow	45%	326	6,997	10-Jul-2020 02:11:57
Unidad recogida tinta HP BSL09A	Unknown	Unknown	69%	2,117	45,396	10-Jul-2020 02:11:57
Kit alimentador documentos HP BSL52A	Unknown	Unknown	97%	12,901	276,547	10-Jul-2020 02:11:57
Limpia rodillos alimentador doc. HP None	Unknown	Unknown	95%	7,581	162,507	10-Jul-2020 02:11:58

Gestión de Activos – Detalles de los Activos

- Datos de activos del dispositivo que se han recopilado del dispositivo.
- Número de activo: generalmente el número de activo del distribuidor.
- Número de etiqueta: generalmente su número de activo.
- Fabricante y modelo de dispositivo y SKU.
- Estado de supervisión del dispositivo.
- Zona (ubicación): es posible que no esté vinculada a la zona de entrega.
- Ubicación de entrega si está configurada.

Device Details	
Device ID	24
Discovery Date	08-Nov-2021 11:51:08
Last Updated	✓ 02-Aug-2022 16:09:39
Serial Number	CN983DK0QF
IP Address	10.87.48.50
Hostname	PANGLCF50
MAC Address	F8B46A0B1ABA
Asset Number	?
Sticker Number	?jk,jk,,hjkhk
MIB Description	HP PageWide Color MFP E58650
Firmware	2410028_055014
Location	CE - Piso 3
Manufacturer	HP
Model	PageWide Managed Color MFP E58650dn (Auto-set)
SKU	L3U42A
Monitor Status	Fully enabled (managed consumables)
Zone	CIDADE FINANCEIRA 3-PISO
Delivery Location	[As per zone]
Consumable Key User	[As per zone]
Comment	

Gestión de Activos: Pestaña Recuentos


Los recuentos RAW son todos los recuentos que produce un dispositivo, incluidos los recuentos de MI que no se utilizan para la facturación.

Los recuentos detallados se pueden utilizar para la facturación.

Los últimos recuentos de páginas son recuentos de facturación con copia / impresión agregada.

A4-Equivalente es cuando se ha hecho clic en una página A3 como 2 x A4.

El historial de recuento muestra TODOS los datos de recuento detallados entre 2 fechas. Se recomienda que, para ver los recuentos entre 2 fechas, se utilice el informe de uso (consulte la explicación posterior).

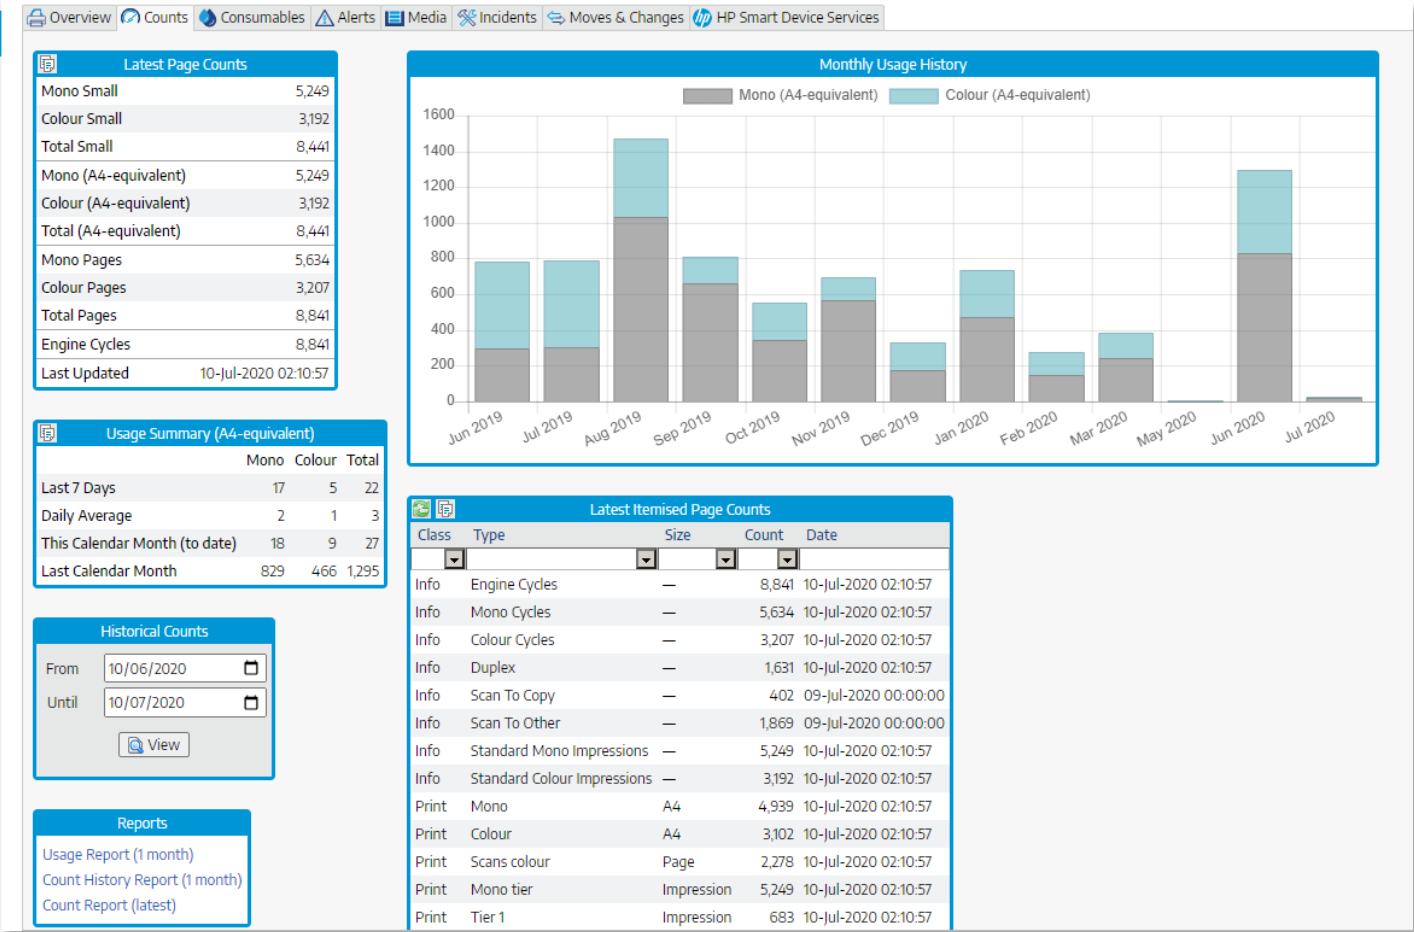


Gestión de Activos - Pestaña Consumibles

Nota: % nivel, días restantes, última actualización y recuento total de páginas

Solicitud de consumible
s realizada
por HP SDS
Manager

Consumible
reemplazad
o en el
dispositivo

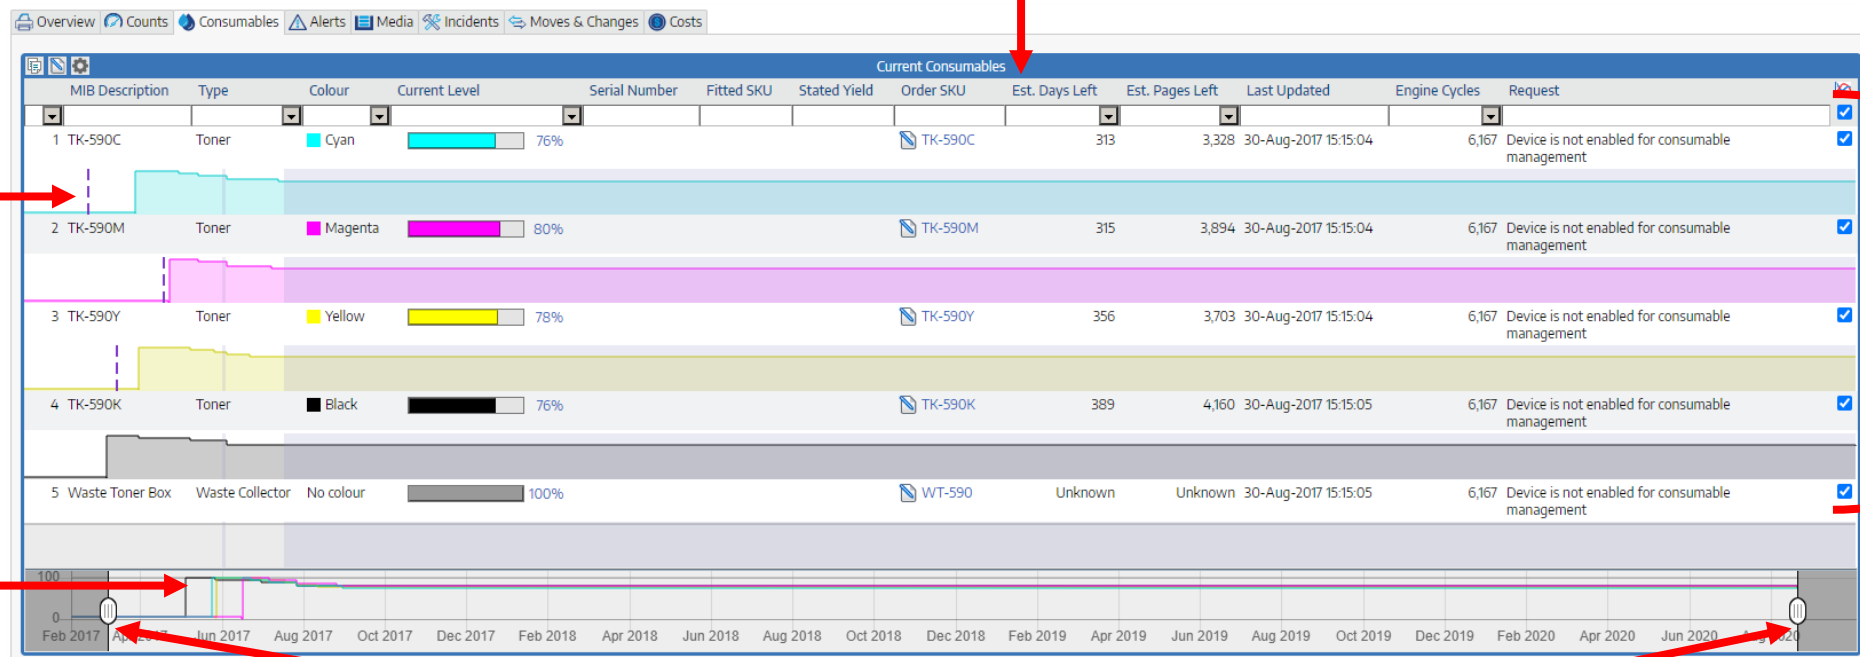

Permite que
ciertos
gráficos
se muestren
u oculten
según sea
necesario

Modifica el período mostrado por gráficos

Gestión de Activos - Pestaña Alertas

Las alertas se extraen del dispositivo en lugar de enviarse.

Esto muestra las alertas activas en el dispositivo y la hora en que se produjo la alerta.

Overview Counts Consumables Alerts Media Incidents Moves & Changes HP Smart Device Services

Current Alerts

Date	Engine Cycles	Alert Class	Severity	Training	Reason
09-Jul-2020 09:20:58	22,833	Other	Critical	Untrained	Bandeja estndar lleno
09-Jul-2020 09:20:58	22,833	System Warning	Critical	Untrained	En pausa

Alert Frequency (Last 14 days)

Alert Class	Count
System Warning	2
Other	2

Historical Alerts July 2020 (4)

Date	Engine Cycles	Alert Class	Severity	Training	Reason	Cleared	Duration	Create Incident
09-Jul-2020 09:20:58	22,833	System Warning	Critical	Untrained	En pausa			
09-Jul-2020 09:20:58	22,833	Other	Critical	Untrained	Bandeja estndar lleno			
09-Jul-2020 09:18:07	22,833	System Warning	Critical	Untrained	Subunit Offline	09-Jul-2020 09:20:58	2m 51s	
09-Jul-2020 09:18:07	22,833	Other	Critical	Untrained	Other	09-Jul-2020 09:20:58	2m 51s	


Permite la revisión de alertas históricas por mes a mes.

Esto es cuando se leyó la alerta desde el dispositivo.

Gestión de Activos: Pestaña Medios

La pestaña Medios muestra los niveles de papel y las bandejas actuales disponibles.

Nota: Actualmente, esta ficha es solo para fines informativos.

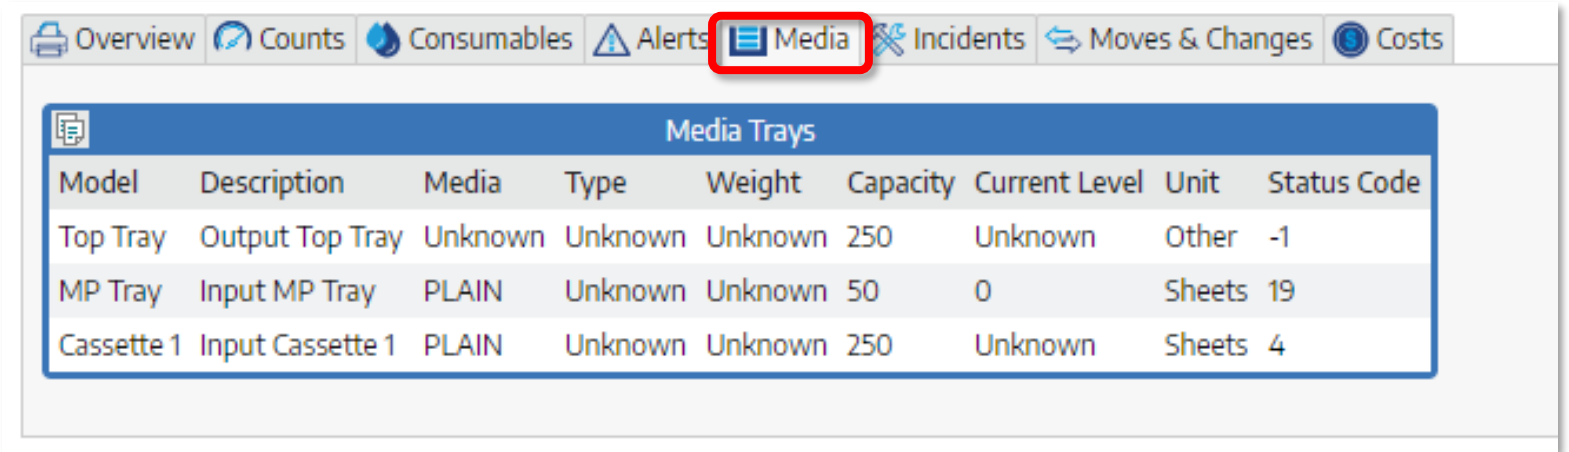


Media Trays								
Model	Description	Media	Type	Weight	Capacity	Current Level	Unit	Status Code
Top Tray	Output Top Tray	Unknown	Unknown	Unknown	250	Unknown	Other	-1
MP Tray	Input MP Tray	PLAIN	Unknown	Unknown	50	0	Sheets	19
Cassette 1	Input Cassette 1	PLAIN	Unknown	Unknown	250	Unknown	Sheets	4

Gestión de Activos – Pestaña Incidentes

La pestaña de incidentes registra todos los incidentes registrados para un dispositivo.

Aquí también se puede crear un nuevo incidente.

Haga clic en **Crear Incidente** y complete la información.

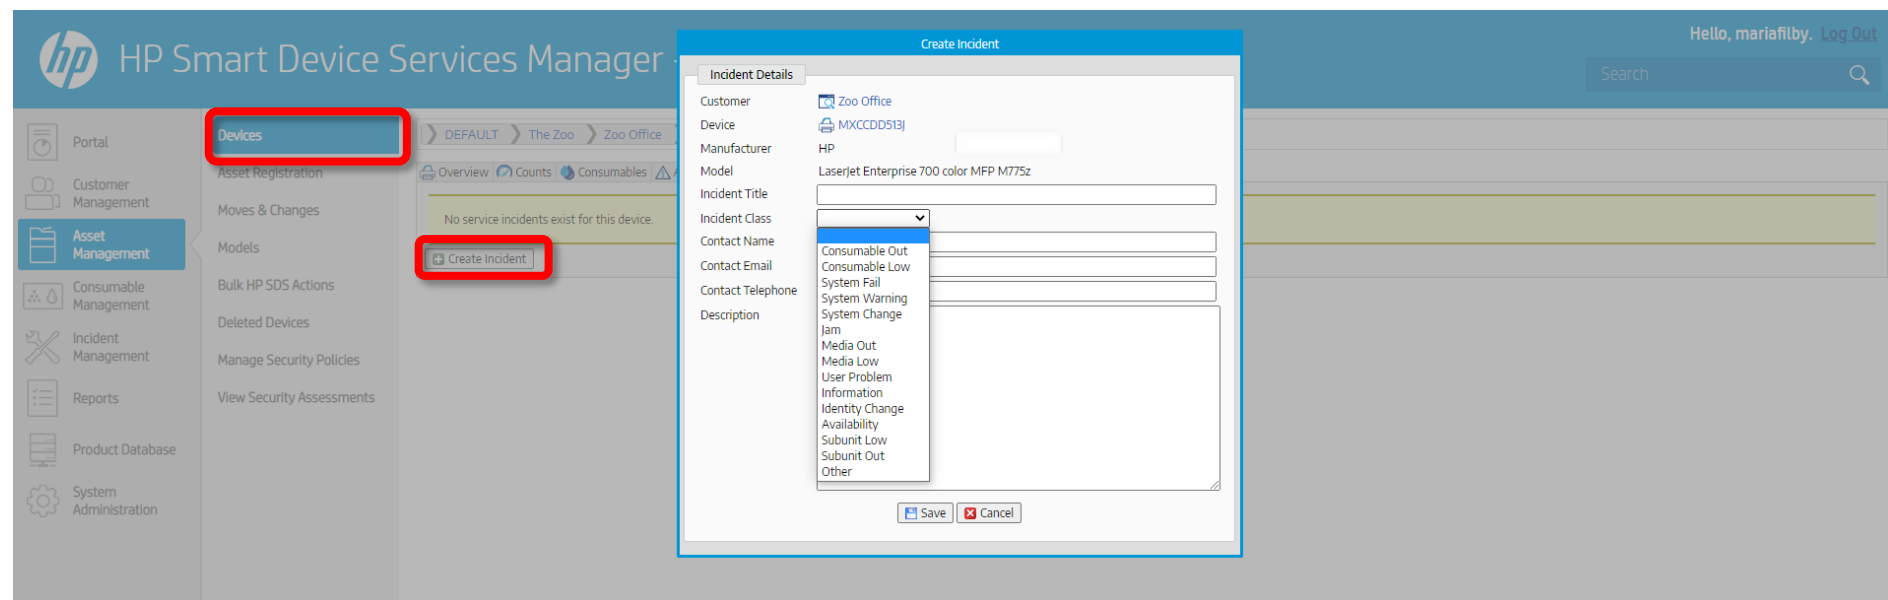

Gestión de Activos: Pestaña HP SDS

- Muestra el estado de HP SDS, incluye el estado de consumibles y la revisión del firmware.
- Operaciones realizadas en el dispositivo.
- Registros de eventos, estos se pueden mostrar y revisar.

Notice: This information is supplied by HP Smart Device Services.

Status	
HP Customer ID	500904
HP Connector ID	✓ 598649
HP Device ID	153990840
Model	HP LASERJET MFP E82650
SKU	5QK09A
IP Address	10.130.222.38
Hostname	NPIFAC21F.HPPRINTBCN.COM
Last Update from HP	18 Oct 2023, 12:57:23
Last Contact	✓ 18 Oct 2023, 12:45:57
MSKU State	Present
Activation Status	Active
Has Genuine HP Cartridges	✓ [GenuineHP]
Firmware	2507052_043281 (23 Sep 2023)
Firmware Name	FutureSmart Bundle 5.7
HP Managed Device Authorization	✓ (16 Nov 2023)
Enhanced Access Authorization	✓ (16 Nov 2023)
Enhanced Telemetry Data	✓ (16 Nov 2023)
Enhanced Service Messaging	✓ (16 Nov 2023)

Actions

- View Model SDS Capabilities
- Refresh HP Data Cache
- Update HP JAMC Device Credentials
- Restart Device
- Update Firmware
- Configure Device
- Configure Device Message
- Remote Device EWS Access
- Configure Report A Problem App
- Print Quality Diagnostics
- View Advanced Support Information

Recent Activity

There are no recent operations for this device. The last operation was submitted on 9 Oct 2023. [Show Details](#)

There are no engineering advisories for this device.

Event Logs and Training-on-Demand

Starting from: 18/09/2023

Event Level: Information, Warning, and Error

[View](#)

Cualquier actividad reciente

Gestión de Activos: Registros de Eventos de HP SDS

HP SDS Manager permite ver los registros de eventos de dispositivos HP SDS y proporciona acceso con un solo clic a la base de conocimientos de HP SDS como parte de la gestión diaria de servicios.

Esto incluye videos, instrucciones y listas de piezas para dispositivos y problemas específicos.

Con los potentes perfiles de seguridad y control de acceso de HP SDS Manager, los usuarios pueden tener acceso a esta información desde cualquier parte del mundo de forma segura.

Event Logs and Training-on-Demand					
Event Type	Event Code	Event Date	Total Impressions	Firmware Version	Help
Info	32.08.A3	21-Aug-2020 00:45:58	0	2411097_060472	An event related to starting the printer.
Info	33.01.03	21-Aug-2020 00:45:51	0	2411097_060472	A save or restore process has occurred.
Info	40.08.00	21-Aug-2020 00:45:49	0	2411097_060472	The USB storage accessory has been removed.
Info	99.07.20	21-Aug-2020 00:45:47	0	2411097_060472	A message of this form indicates a firmware installation error.
Info	99.07.20	21-Aug-2020 00:45:45	0	2411097_060472	A message of this form indicates a firmware installation error.
Info	99.02.01	21-Aug-2020 00:45:05	0	2411097_060472	Firmware installation was successful.
Info	99.02.01	21-Aug-2020 00:44:42	0	2411097_060472	Firmware installation was successful.
Info	99.02.01	21-Aug-2020 00:43:39	0	2411097_060472	Firmware installation was successful.
Info	32.08.A2	20-Aug-2020 05:41:14	0	2308974_579780	An event related to starting the printer.
Info	99.00.01	20-Aug-2020 05:41:08	0	2308974_579780	A remote firmware upgrade (RFU) was not performed.
Info	32.1C.40	20-Aug-2020 05:24:14	0	2308974_579780	The backup operation completed successfully (informational).
Info	44.01.23	20-Aug-2020 05:24:08	0	2308974_579780	A digital send error has occurred.
Info	44.01.26	20-Aug-2020 05:24:08	0	2308974_579780	A digital send error has occurred.

44.01.xx Error Event log message

A digital send error has occurred.

Recommended action

1. No action necessary. This error message should automatically clear.
2. Try to send the job again.
3. If the error does not clear or it returns:
 - a. Use optimal resolution and image quality settings.
 - b. Wait until all the digital send jobs have been processed.
 - c. Turn the printer off, and then on. Retry the job.
 - d. Verify if there is an attachment limit on the email.
 - e. Verify network connectivity, SMTP gateways, access to folder share.

Gestión de Consumibles

- Seleccione Gestión de consumibles y, a continuación, busque consumibles actuales.
- Introduzca criterios de búsqueda o pulse buscar para mostrar todos los consumibles.
- Utilice encabezados de tabla para ordenar y buscar según sea necesario.
- Haga clic en el número de serie para mostrar un dispositivo.

The screenshot shows the HP Smart Device Services Manager interface. The sidebar on the left includes options like Portal, Customer Management, Asset Management, **Consumable Management** (highlighted with a red box), Incident Management, Reports, Product Database, and System Administration. The top navigation bar shows 'HP Smart Device Services Manager' and a user profile 'Hello, mariafilby. Log Out'. The main content area has a 'Search Current Consumables' button (highlighted with a red box) and several filter panels: Resellers, Customers, Monitors, Consumable Type, Colour, and Device Filter. Below these filters is a table of consumables with columns: Customer, Device, Manufacturer, Model, Position, MIB Description, Consumable Type, Colour, Serial Number, Fitted SKU, Stated Yield, Order SKU, Current Level, Est. Days Left, Est. Pages Left, Requested, and Select. The table lists various HP consumables like toners, fuser kits, and waste collector units. A red arrow points to the 'Search' button in the table header, and another red arrow points to the 'Copy' icon in the top left of the table area.

Nota: puede copiar esta lista al portapapeles utilizando el icono de copia superior izquierda.

Administración de Incidentes

- Seleccione Gestión de incidentes y, a continuación, Alertas de dispositivos actuales.
- Introduzca los criterios de búsqueda o pulse Buscar para mostrar todos los dispositivos.
- Utilice encabezados de tabla para ordenar y buscar según sea necesario.
- Haga clic en el número de serie para mostrar un dispositivo.

HP Smart Device Services Manager -

Current Device Alerts

Global Device Alert Handling

Incidents

Create Incident

HP SDS Engineering Advisories

HP SDS Report A Problem

Alert Filter

Add condition for Reason

Device Filter

Add condition for Zone

Search

Customer	Zone	Device	Manufacturer	Model	Date	Engine Cycles	Alert Class	Severity	Training	MIB Code	Reason
	1	CN65EDY0ZZ	HP	PageWide Managed MFP P57750dw	18 Oct 2023, 15:08:33		Availability	[Not set]	[Not set]		Device busy/unavailable for over 24 hours (actual=25 hrs)
	New Devices	Moonstone1	HP	LaserJet Managed MFP E826dn	18 Oct 2023, 12:49:03		Availability	[Not set]	[Not set]		Device busy/unavailable for over 24 hours (actual=25 hrs)
	10.130.222.1-254	CNBBQ7N1VN	HP	Color LaserJet Managed MFP E877z	18 Oct 2023, 12:09:48	1,035	System Warning	Other	No Intervention	22	Please wait. Checking printer...
	192.168.0.1-254	28SX81BG7000RR	Samsung	SL-X4250LX	18 Oct 2023, 08:06:22	183,621	Consumable Out	Warning (Event)	Management	1101	C1-3150 The machine has determined that the magenta toner cartridge has reached its end-of-life cycle. Immediate user intervention is required to replace the cartridge. Printing can still continue, all other machine services (if installed) are unaffected.
	192.168.0.1-254	28SX81BG7000RR	Samsung	SL-X4250LX	18 Oct 2023, 08:06:22	183,621	Consumable Out	Warning (Event)	Management	1101	C1-5150 The machine has determined that the black toner cartridge has reached its end-of-life cycle. Immediate user intervention is required to replace the cartridge. Printing can still continue, all other machine services (if installed) are unaffected.
	192.168.0.1-254	28SX81BG7000RR	Samsung	SL-X4250LX	18 Oct 2023, 08:06:22	183,621	Media Low	Warning (Event)	Untrained	807	M1-5111 The paper supply of tray 1 is low. User intervention is required to add paper to tray 1. Printing can continue, all other machine services (if installed) are unaffected.
	Ipiales 474218	CNBBCHDK06G	HP	LaserJet Managed M605xm	18 Oct 2023, 07:46:12	552,212	Other	Critical	Untrained	1	Cargue Bandeja 1: Normal, Legal

Nota: puede copiar esta lista al portapapeles utilizando el icono de copia superior izquierda



Informes

Hay 9 tipos de informes que se pueden ejecutar.

- Informe de activos
- Dispositivos no contactables
- Historial de recuento
- Uso
- Solicitudes de consumibles
- Solicitudes de consumibles accionadas
- Historial de alertas
- Informes personalizados
- Informes configurados

Columnas y el orden se puede seleccionar / cambiar.

Los informes se pueden configurar para mostrar datos entre 2 fechas y también se aplican filtros avanzados.

The screenshot displays the 'Report Options' and 'Report Columns' sections of the HP Smart Device Services Manager interface. A red arrow points to the 'Report Columns' section, which lists various data fields categorized by report type. Another red arrow points to the 'Report Period' section, which allows users to specify a date range for the report.

Report Options:

- Monitor:** Serial Number, Asset Number, Zone, Start Date, End Date, Engine Cycles, Mono (A4-equivalent), Colour (A4-equivalent).
- Customer Details:** Reseller, Customer, Contact Email, Reseller HQ Country, Reseller Address, Reseller Contact name, Contact Phone No., Account Manager, Contract Number, OPGReference, Monitor Sent, Monitor Online, Monitor Creation Date.
- Device Details:** Device ID, Serial Number, Asset Number, Hostname, IP Address, MAC Address, Sticker Number, Manufacturer, Model, MIB Description, Zone, Monthly lease/rental, Color Cost Per Page, Device Location, Colour Target Volume, Mono Target Volume, Meter ID 2, Quarterly lease/rental, Lastbilleddate, Request Threshold Override, Device Notes, HP Contract End, Meter ID 1, Mono Cost Per Page.
- Billing Details:** Start Date, End Date, Start Reading Date, End Reading Date, Billing Model.
- MI Counts:** Engine Cycles, Total Impressions, Simplex, Duplex, Copies, Incoming Faxes, Scans, Non-copy Scans.
- Totals:** Mono (A4-equivalent), Colour (A4-equivalent), Total (A4-equivalent), Mono Pages, Colour Pages, Total Pages.
- Pages:** Mono Small, Mono Large, Colour Small, Colour Large.
- Tiered Colour:** Mono Tier, Colour Tier 1, Colour Tier 2, Colour Tier 3.
- HP Blank Duplex:** HP Blank Duplex Mono Small, HP Blank Duplex Colour Small, HP Blank Duplex Mono Large, HP Blank Duplex Colour Large.
- Xerox Tiers:** Xerox Tier 1, Xerox Tier 2, Xerox Tier 3.

Report Columns:

- Resellers:** zoo, The Zoo.
- Customers:** Filter, Pandas, Prachy Creations.
- Monitors:** Filter, pandas, prachycreations.
- Report Period:** From: 03/07/2022, Until: 03/08/2022.
- Device Filter:** Add condition for Zone, Asset Number, Serial Number, Sticker Number, IP Address, Hostname, MAC Address, Device ID, MIB Description, Discovery Date, Manufacturer, Model, Firmware, Location, SKU, Monitor Status, Comment, Last Updated.

Buttons: Run Report, Save as CSV, Save as XLSX, Save as Configured Report.

Table Headers: Customer, Manufacturer, Model, Serial Number, Device Location, Asset Number, Total Impressions, Total Impressions, Total Impressions, Total Pages, Total Pages, Total Pages, Mono Small, Mono Large, Mono Large, Colour Small, Colour Small.

Informes: Uso Detallado del Medidor

Para ejecutar un informe de uso del medidor entre 2 fechas, el período de informe debe tener las fechas de inicio y finalización ingresadas. Tenga en cuenta que la fecha de finalización es exclusiva, por lo que del 1 al 1 se mostrará un mes calendario.

Seleccione las columnas del informe en las columnas del informe. Reordene las columnas según sea necesario.

Seleccione Ejecutar informe, Guardar como CSV o Programar informe.

Report Period

From: 18/07/2020
Until: 18/08/2020

Device Filter

Add condition for Zone + Add
Exclude Start & End columns

Report Options

- ☐ Customer Details
- ☐ Device Details
- ☐ Billing Details
- ☐ MI Counts
- ☐ Totals
- ☐ Pages
- ☐ Tiered Colour

Report Columns

- ☐ Monitor
- ☐ Serial Number
- ☐ Asset Number
- ☐ Zone
- ☐ Start Date
- ☐ End Date
- ☐ Engine Cycles
- ☐ Mono (A4-equivalent)
- ☐ Colour (A4-equivalent)

Run Report **Save as CSV** **Save as Configured Report**

Monitor	Serial Number	Asset Number	Zone	Start Date	End Date	Engine Cycles Start	Engine Cycles End	Engine Cycles Usage	Mono (A4-equivalent) Start	Mono (A4-equivalent) End	Mono (A4-equivalent) Usage	Colour (A4-equivalent) Start	Colour (A4-equivalent) End	Colour (A4-equivalent) Usage
dca_hayden	NLCDJ03354	?	Systemat	18/07/20	18/08/20	196,435	196,435	0	196,435	196,435	0	0	0	0
dca_hayden	9455RHZ	?	Systemat	18/07/20	18/08/20	288	288	0	20	20	0	265	265	0
dca_hayden	793TNM8	?	Systemat	18/07/20	18/08/20	573,683	573,683	0	573,621	573,621	0	0	0	0
dca_hayden	7558100470434	?	Systemat	18/07/20	18/08/20	978,255	978,255	0	729,040	729,040	0	253,241	253,241	0
dca_hayden	7558100454220	?	Systemat	18/07/20	18/08/20	532,165	532,165	0	422,692	422,692	0	112,421	112,421	0

Informes Programados

Los informes programados tienen las mismas 2 pestañas de configuración que un informe normal, pero tienen configuraciones adicionales para crear la programación.

Los informes se pueden programar


- Días
 - Más de una vez al día, en varios momentos específicos
- Diarios de la semana
 - Horarios fijos en días seleccionados
- Semanalmente
- Quincenal
- Mensual
- Bimensual
- Trimestral

- Para informes más grandes, se recomienda la opción (zip).
- El texto personalizado se puede colocar en el campo de asunto y mensaje del correo electrónico.
- La dirección de correo electrónico "Responder a" se puede especificar para los informes de programación enviados por correo electrónico (si no se proporciona, se utilizará la dirección de correo electrónico del propietario).

Informes Programados

Los informes programados también pueden estar disponibles para los compañeros de trabajo.

Al crear/editar un informe configurado, la opción **Solo accesible para el creador** controla si es privado para el usuario creador:

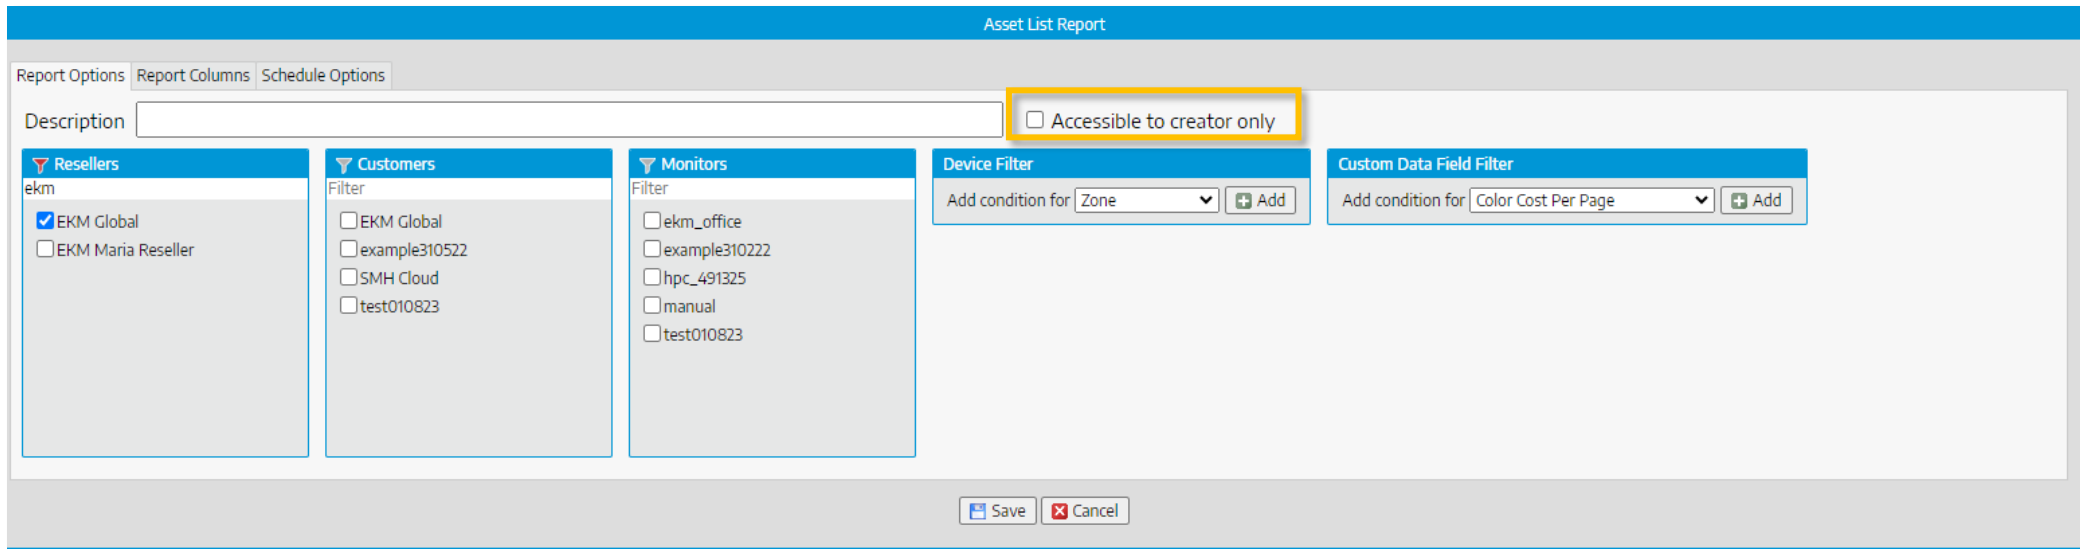

The screenshot shows the 'Asset List Report' configuration window. At the top, there are tabs for 'Report Options', 'Report Columns', and 'Schedule Options'. Below these is a 'Description' field. To the right of the description field is a checkbox labeled 'Accessible to creator only', which is highlighted with a yellow box. Below the description field are three filter sections: 'Resellers' (with 'ekm' selected and 'EKM Global' checked), 'Customers' (with 'Filter' selected and 'EKM Global' checked), and 'Monitors' (with 'Filter' selected and 'ekm_office' checked). To the right of these filter sections are two more filter sections: 'Device Filter' (with 'Add condition for' set to 'Zone' and an 'Add' button) and 'Custom Data Field Filter' (with 'Add condition for' set to 'Color Cost Per Page' and an 'Add' button). At the bottom of the window are 'Save' and 'Cancel' buttons.

Si la opción **Solo accesible para creadores** no está marcada, los usuarios del mismo grupo de acceso que el propietario del informe podrán ver y ejecutar el informe. Sólo el usuario que creó el informe (o un administrador del sistema) puede modificar las propiedades y la configuración guardadas.

Configuración de Discoveries (si está autorizado)

Seleccione Gestión de clientes, luego Monitores y, a continuación, seleccione el monitor donde desea configurar o editar las IP o rangos de descubrimiento.

Seleccione la pestaña Rangos de detección para mostrar los descubrimientos actuales (esto puede estar vacío).

Para agregar un descubrimiento, presione Agregar o importar.

Utilice el menú desplegable para proporcionar un nombre de zona predefinido o introduzca la ubicación de los dispositivos.

Introduzca el rango como x.x.x. y <start ip="" octet=""> , a continuación, proporcione el <end ip="" octet=""> y pulse crear.

Si la primera y la última dirección IP son las mismas, solo se escaneará esa dirección IP.</end></start>

Zone	First IP Address	Last IP Address	IP Addresses	Total Devices	Status	Select
192.168.1.1-254	192.168.1.1	192.168.1.254	254	12	Disabled	☐
Dublin	60.60.60.1	60.60.60.65	65	0	Disabled	☐
New Devices	10.10.10.1	10.10.10.254	254	0	Disabled	☐
London	20.20.10.1	20.20.10.50	50	0	Disabled	☐
USA	10.10.87.1	10.10.87.254	254	0	Disabled	☐
Bristol	100.98.88.76	100.98.88.76	1	0	Disabled	☐
London	20.20.20.1	20.20.20.254	254	0	Disabled	☐
Boise_HQ_Reception	192.168.1.1	192.168.1.254	254	12	Disabled	☐
192.168.1.1-254	192.168.1.70	192.168.1.130	61	12	Enabled	☐

Import Discovery Ranges for Monitor maria1

Upload discovery range list: No file chosen

Zone Name*	First IP Address	Last IP Address
Technical	192.168.10.1	192.168.10.254
Development	10.10.23.145	10.10.23.145

*Zone names cannot be blank and can only contain letters, numbers, spaces or any of the following characters: _ / + & | # ~ = * % \$ @ : . ! - [] ()

Configuración de Descubrimientos - Importar

Un archivo de una dirección IP o rangos se pueden importar utilizando las siguientes reglas:

The file must be a UTF-8-encoded CSV list of discovery ranges, with each row in the following format:

Zone Name*, First IP Address, Fourth Octet of Last IP Address

For example, the following row would create a discovery range from 192.168.1.10 - 192.168.1.20 in a zone called "New Devices":

New Devices, 192.168.1.10, 20

*Zone names cannot be blank and can only contain letters, numbers, spaces or any of the following characters: _ / + & | # ~ = * % \$ @ : . ! -

Elija archivo' y luego presione 'Cargar'. Presione 'Crear rangos de descubrimiento' una vez cargado en la pantalla.

Por ejemplo

- | | |
|---------------------------|-------------------------------------|
| Zona1, 192.168.0.1,254 | (Buscar rango completo (1-254)) |
| Zona2, 192.168.10.1,100 | (Buscar rango parcial (1-100)) |
| Zona2, 192.168.10.200,200 | (Agregar dispositivo único al .200) |

Import Discovery Ranges for Monitor manager1

Upload discovery range list: No file chosen

Zone Name*	First IP Address	Last IP Address
Technical	192 . 168 . 10 . 1	192 . 168 . 10 . 254
Development	10 . 10 . 23 . 145	10 . 10 . 23 . 145

*Zone names cannot be blank and can only contain letters, numbers, spaces or any of the following characters: _ / + & | # ~ = * % \$ @ : . ! - [] ()

Configuración de Descubrimientos: Administrar

Los descubrimientos se pueden administrar seleccionando uno o más de los descubrimientos que se muestran en la lista y, a continuación, seleccionando una de las opciones enumeradas:

- Habilitar - activa la detección y permite que se ejecute
- Deshabilitar - desactiva la detección
- Editar - cambiar parámetros
- Eliminar - eliminar descubrimiento

Recuerde que estos descubrimientos SOLO usan SNMP.

NO lo hacen, ping, multicast o broadcast.

1 discovery range(s) were imported.

Monitor Details Technical Contact Details Custom Data Discovery Ranges IMIL

10 row(s)

Zone	First IP Address	Last IP Address	IP Addresses	Total Devices	Status	Select
						☒
192.168.1.1-254	192.168.1.1	192.168.1.254	254	12	Disabled	☒
Dublin	60.60.60.1	60.60.60.65	65	0	Disabled	☒
New Devices	10.10.10.1	10.10.10.254	254	0	Disabled	☒
London	20.20.10.1	20.20.10.50	50	0	Disabled	☒
USA	10.10.87.1	10.10.87.254	254	0	Disabled	☒
Bristol	100.98.88.76	100.98.88.76	1	0	Disabled	☒
London	20.20.20.1	20.20.20.254	254	0	Disabled	☒
Boise_HQ_Reception	192.168.1.1	192.168.1.254	254	12	Disabled	☒
192.168.1.1-254	192.168.1.70	192.168.1.130	61	12	Enabled	☒
New Devices	192.155.11.1	192.155.11.254	254	0	Enabled	☒

☒ Add/Import ☒ Enable ☐ Disable ☐ Edit ☐ Delete



Ayuda y apoyo

Póngase en contacto con su administrador de cuentas para obtener más ayuda y asistencia en HP SDS o póngase en contacto con nosotros en hpsds@ekmglobal.com

Muchas Gracias

