



Step1: Establish connection by logging into localhost admin:

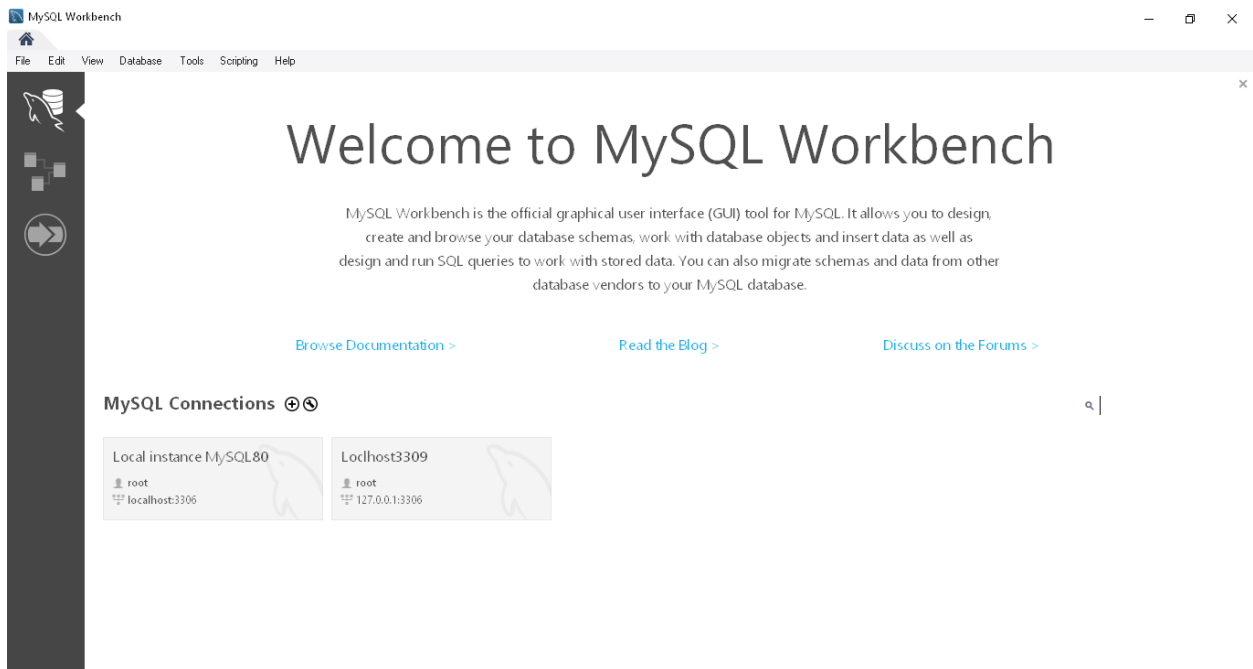

Create Table:

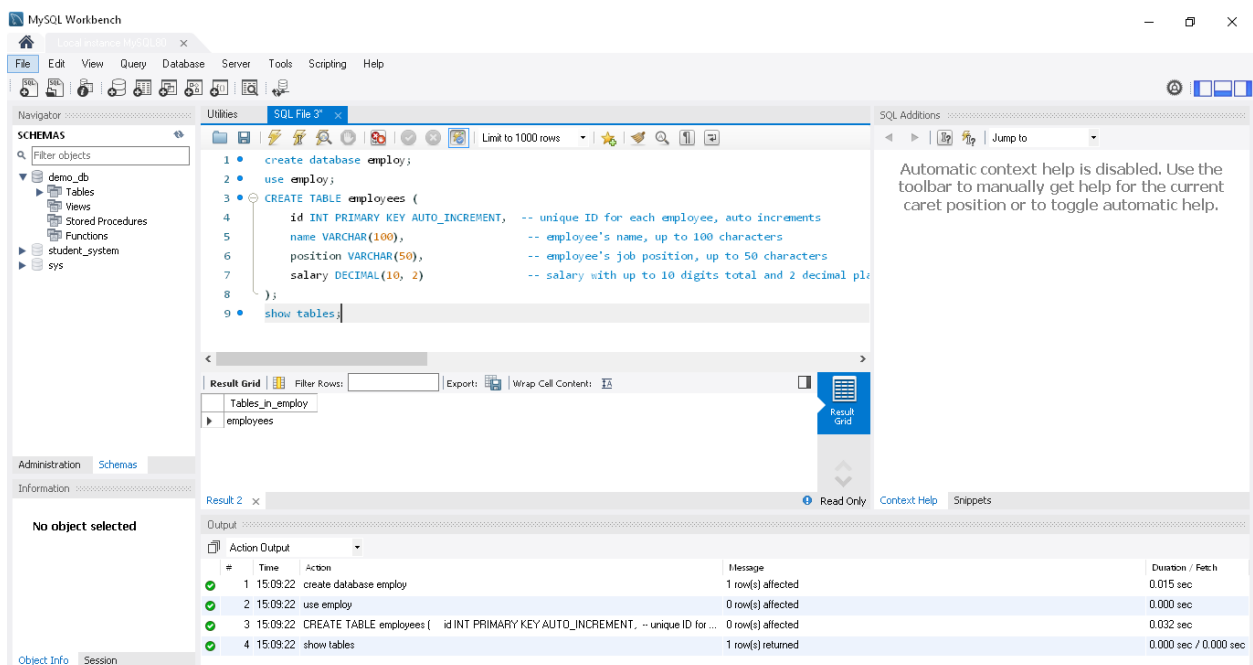

Insert data:

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following query:

```
1
2 INSERT INTO employees (name, position, salary)
3 VALUES ('Alice', 'Manager', 70000.00);
4
5 SELECT * FROM employees;
6
```

The SQL editor toolbar shows a limit of 1000 rows. The SQL Additions panel on the right contains the text: "Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help."

The Output panel shows the execution results:

#	Time	Action	Message	Duration / Fetch
1	15:11:46	INSERT INTO employees (name, position, salary) VALUES ('Alice', 'Manager', 70000.00)	1 row(s) affected	0.016 sec
2	15:11:46	SELECT * FROM employees LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

The Result Grid shows the data returned by the SELECT query:

id	name	position	salary
1	Alice	Manager	70000.00

Update data:

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following query:

```
1
2 SELECT * FROM employees;
3
4 UPDATE employees
5 SET salary = 60000.00
6 WHERE id = 3; -- Assuming Alice's id is 3
7
8 SELECT * FROM employees;
```

The SQL Additions panel on the right contains the text: "Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help."

The Output panel shows the execution results:

#	Time	Action	Message	Duration / Fetch
1	15:16:23	SELECT * FROM employees LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
2	15:16:23	UPDATE employees SET salary = 60000.00 WHERE id = 3	0 row(s) affected Rows matched: 0 Changed: 0 Warnings: 0	0.000 sec
3	15:16:23	SELECT * FROM employees LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

The Result Grid shows the data returned by the SELECT queries:

id	name	position	salary
1	Alice	Manager	70000.00

Delete data:

The screenshot shows the MySQL Workbench interface. The SQL Editor window contains the following SQL script:

```
1
2 • SELECT * FROM employees;
3
4 • DELETE FROM employees WHERE id = 1;
5
6 • SELECT * FROM employees;
```

The Results window shows the output of the queries:

#	Time	Action	Message	Duration / Fetch
3	15:19:57	SELECT * FROM employees LIMIT 0, 1000	1 row(s) returned	0.015 sec / 0.000 sec
4	15:20:14	SELECT * FROM employees LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
5	15:20:14	DELETE FROM employees WHERE id = 1	1 row(s) affected	0.000 sec
6	15:20:14	SELECT * FROM employees LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec

The Output window shows the results of the queries. The first query returned 1 row, the second query returned 1 row, the third query affected 1 row, and the fourth query returned 0 rows.