

Stream Catcher Pro Software



Software User Guide

Compliance Statements

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Compliance Statements	i
Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols ..	i
Requirements	1
Supported Operating Systems:.....	1
Minimum Requirements.....	1
Recommended Hardware:	1
Operation	2
Interface	2
Settings Panel.....	4
Source Settings.....	4
Screenshot Settings	7
Record Settings.....	9
Stream Settings	13
System Settings	16
Limitation of Liability	20

Requirements

Supported Operating Systems:

- Windows® 10 (32/64), 8/8.1 (32/64), 7 (32/64)

Minimum Requirements

- GPU: Intel HD or NVIDIA GeForce GTX 600 series graphics (or better)
- CPU: 4th generation Quad-Core Intel Core i5 CPU (i5-4xxx or comparable)
- RAM: 8GB Dual-Channel

Recommended Hardware:

- GPU: NVIDIA GeForce GTX 10xx (or better)
- CPU: 6th generation Intel Core i7 CPU (i7-6xxx)/AMD Ryzen 7 (or better)
- RAM: 8GB Dual-Channel

Operation Interface



1. **Video Preview Window:** View the capture device's video signal. Double-click for full-screen view. Double-click again for a minimized small window view featuring picture-in-picture view. Double-click a third time to return the preview window and to the main screen.
2. **Volume Indicator:** View volume levels.
3. **Settings Panel:** Select the corresponding buttons to view and/or edit the following options.
Source/Capture/Record/Stream/System


4. **Function Panels:**

- **Output:** View video signal information.
- **Screenshot:** Select to capture a screenshot. The **Screenshot** button will appear **Yellow** when selected.
- **Record:** Select to start/stop recording audio/video. The **Record** button will appear **Red** when selected.
- **Stream:** Select to start/stop streaming to the desired streaming service. The **Stream** button will appear **Blue** when selected.
- **Volume:** Select or select and hold the **Volume Slider** to adjust the volume of the audio. Click the **Speaker Icon** to mute the audio.

5. **Channel Preview:** Video preview each capture device connected to the computer. Select the desired **Preview Window** to view the corresponding capture device.


Settings Panel

Source Settings

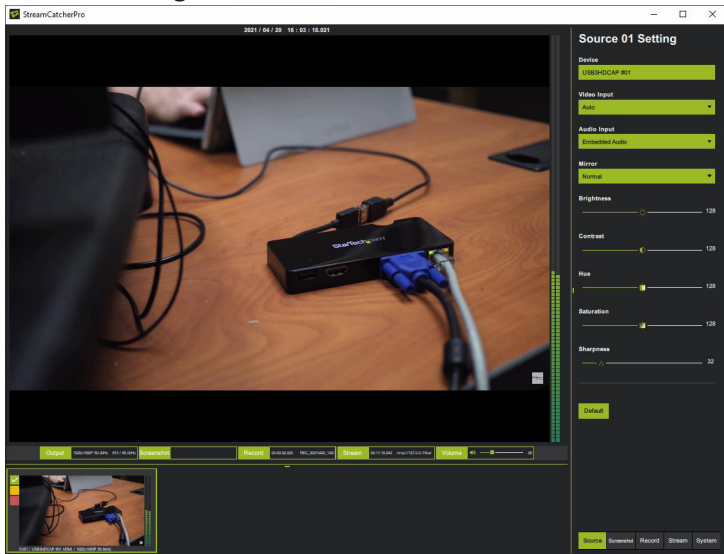


- **Device:** View the name of the connected capture device.

- **Video Input:** Select the capture device's video signal type.

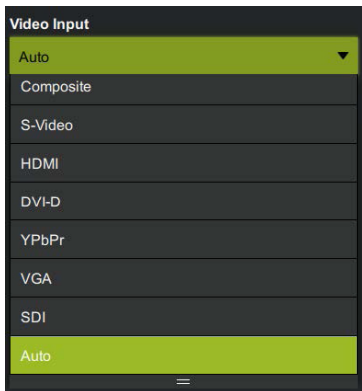

- **Audio Input:** Select the capture device's audio signal type.

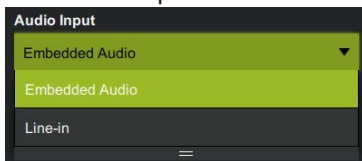


- **Mirror:** Preview, record, or take screenshots with a mirrored view. Mirroring options include **Vertical**, **Horizontal**, or **Vertical + Horizontal**.


- **Brightness/Contrast/Hue/Saturation/Sharpness:** Adjust image settings.



Screenshot Settings

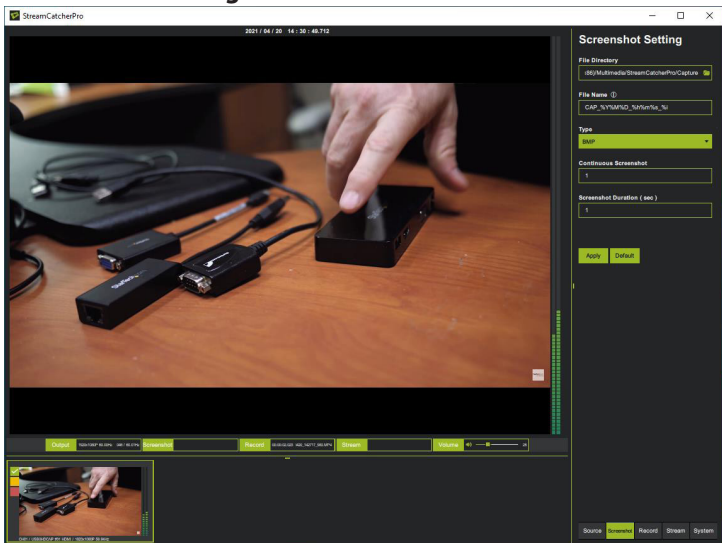


- **File Directory:** Select the **Destination Folder** for the screenshots.
- **File Name:** Create/edit the **File Name** to be saved. The date and time are added to the file name by default.

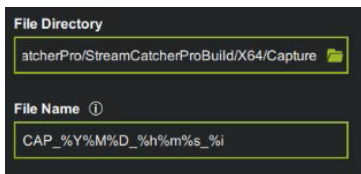

To view manuals, videos, drivers, downloads, technical drawings, and more visit www.startech.com/support


- **Type:** Select **BMP** or **JPG** for the screenshot file **Type**.

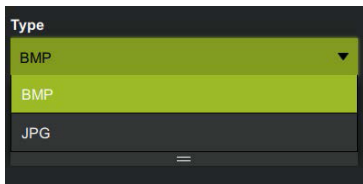

The image shows a dark-themed interface with a dropdown menu labeled 'Type'. The menu is open, showing two options: 'BMP' and 'JPG'. The 'BMP' option is highlighted in a light blue color, and a small downward arrow is visible to its right. Below the 'JPG' option, there is a horizontal line and a small equals sign (=).


- **Number of Screenshots / Time Between Screenshots:** Set the desired **Number of Screenshots** and **Time Between Screenshots** (e.g. if the **Number of Screenshots** is set to 50 and the **Time Between Screenshots (sec)** is set to 20 seconds, the result will be 50 screenshots with each one taken 20 seconds apart. The sequence will stop once the desired **Number of Screenshots** has been reached. The maximum **Number of Screenshots** is **999** and the maximum **Time Between Screenshots** is **86400 seconds (24 hours)**.

Note: The default **File Name** must be used for this feature.

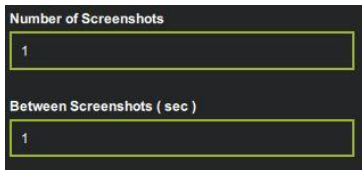


The image shows a dark-themed interface with two input fields. The first field is labeled 'Number of Screenshots' and contains the value '1'. The second field is labeled 'Between Screenshots (sec)' and also contains the value '1'. Both fields have a light blue border and a small blue arrow on the right side.

- Select the **Apply** button to save and apply the setting changes.




The image shows two buttons side-by-side. The left button is labeled 'Apply' and the right button is labeled 'Default'. Both buttons are light blue with a dark blue border.

Record Settings

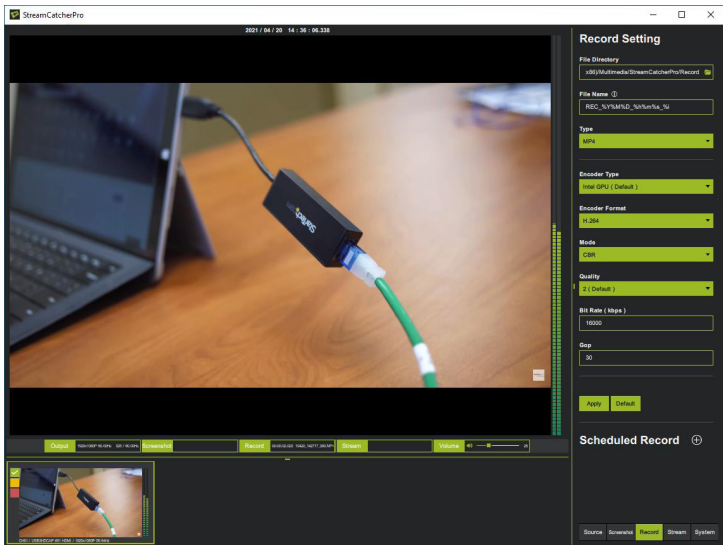


- Select the **Destination Folder** and **File Name** for the recorded video files.

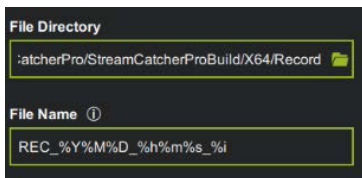


To view manuals, videos, drivers, downloads, technical drawings, and more visit www.startech.com/support

- **Type:** Select the desired file type for the video recording. The default video **Type** is **MP4**.

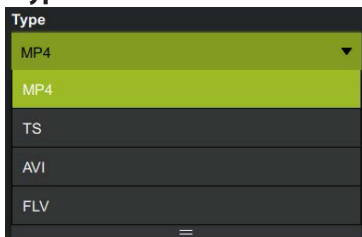

- **Encoder Type:** Select the hardware that will be used to perform the video encoding. Selecting the Computer's **GPU** is recommended.

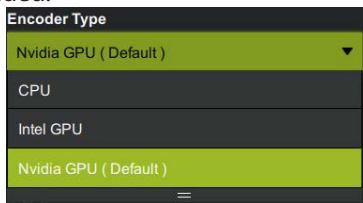

- **Encoder Format:** Displays the video encoding type. The **Encoder Format** defaults to **H.264**.




- **Mode:** Select between either a **Constant Bit Rate (CBR)** or **Variable Bit Rate (VBR)**.




A screenshot of a software interface showing a dropdown menu labeled "Mode". The menu is open, and the option "CBR" is selected and highlighted in a light blue color. A small downward arrow is visible on the right side of the menu.

- **Quality:** Select the desired level (**0 to 4**) of video compression. Choose a lower number for slower network connections. The default **Quality** is set to 2.

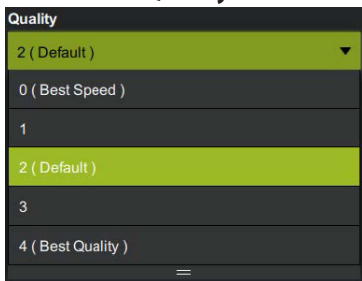


A screenshot of a software interface showing a dropdown menu labeled "Quality". The menu is open, and the option "2 (Default)" is selected and highlighted in a light blue color. Other visible options include "0 (Best Speed)", "1", "3", and "4 (Best Quality)". A small downward arrow is visible on the right side of the menu.

- **Bit Rate (Kbps):** Select the desired **Bit Rate (Kbps)**.
- **GOP:** Set the desired number of pictures (frames) between 2 intra-coded pictures (I frames). Video editing will be simplified if a lower **GOP** value is selected. However, a lower **GOP** value will result in a larger file size.

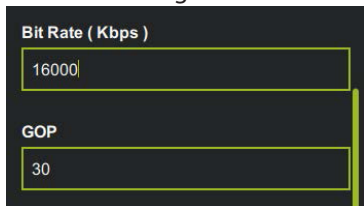


A screenshot of a software interface showing two input fields. The first field is labeled "Bit Rate (Kbps)" and contains the value "16000". The second field is labeled "GOP" and contains the value "30". Both fields are outlined in a light blue border.

- Select the **Apply** button to save and apply the setting changes.



- **Scheduled Record:**

Select the "⊕" button to schedule a recording. Multiple recordings can be scheduled.

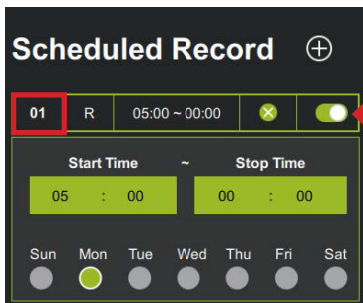

- Select the **Recording Number** (number highlighted in red in the above image) to display a drop-down menu.
- Select a **Start Time**, **Stop Time**, and **Day(s) of the Week** (i.e. **Sun**, **Mon**, **Tues**, etc.).
- Toggle the **Switch** (see the arrow in the above image) to apply the settings.
- Scheduled recordings can be deleted by pressing the "x" button on the selected **Scheduled Recording**.


Stream Settings

The screenshot shows the StreamCatcherPro application window. The main video area displays a StarTech.com USB capture device being plugged into a computer. The right-hand panel, titled 'Stream Setting 01', contains the following settings:

- Stream Setting:** RTMP (dropdown menu)
- Stream URL:** <http://192.168.1.100:1935/live-video.net>
- Stream Key:** [Empty field with a lock icon]
- Encoder Type:** Intel GPU (Default) (dropdown menu)
- Encoder Format:** H.264 (dropdown menu)
- Mode:** VBR (dropdown menu)
- Quality:** 2 (Default) (dropdown menu)
- Bit Rate (Mbps):** 1000 (input field)
- Gap:** 30 (input field)
- Buttons:** Apply, Default

Below the main video area is a status bar with tabs for Output, Record, Stream, and Volume. The bottom right corner features a 'Profile' section with a dropdown menu and a 'Stream' button.

- **Stream Setting:** Select the desired streaming protocol. The **Stream Setting** options are **RTSP**, **RTMP**, or **HLS**.

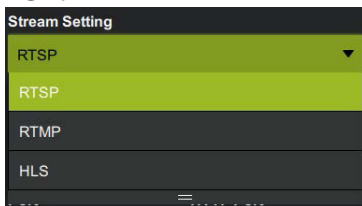

To view manuals, videos, drivers, downloads, technical drawings, and more visit www.startech.com/support

- Various settings display based upon the selected **Stream Setting** protocol.

Stream Setting

RTSP

Stream URL

rtsp://@127.0.0.1:554/session0.mpg

Port

554

HTTP Port

0

Enable Authentication

☒

Account

Password

Stream Setting

RTMP

Stream URL

rtmp://yte.contribute.live-video.net

Stream Key

.....

Stream Setting

HLS

Stream URL

http://127.0.0.1/hls/session0.m3u8

Server Root Directory

C:\AppServ\www\hls

- **Encoder Type:** Select the hardware that will be used to perform the video encoding. Selecting the Computer's **GPU** is recommended.

Encoder Type

Nvidia GPU (Default)

CPU

Intel GPU

Nvidia GPU (Default)

- **Encoder Format:** Displays the video encoding type. The **Encoder Format** defaults to **H.264**.

Encoder Format

H.264


H.264

- **Mode:** Select between either a **Constant Bit Rate (CBR)** or **Variable Bit Rate (VBR)**.




A screenshot of a software interface showing a dropdown menu for 'Mode'. The menu is open, displaying three options: 'VBR' (highlighted in blue), 'CBR', and 'VBR' (highlighted in blue). The dropdown is set against a dark background.

- **Quality:** Select the desired level (**0 to 4**) of video compression. Choose a lower number for slower network connections. The default **Quality** is set to 2.

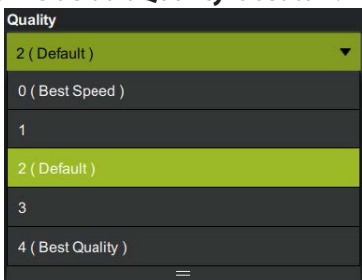


A screenshot of a software interface showing a dropdown menu for 'Quality'. The menu is open, displaying six options: '2 (Default)' (highlighted in blue), '0 (Best Speed)', '1', '2 (Default)' (highlighted in blue), '3', and '4 (Best Quality)'. The dropdown is set against a dark background.

- **Bit Rate (Kbps) / GOP:** Select the desired **Bit Rate (Kbps)** and **Group of Pictures (GOP)**.

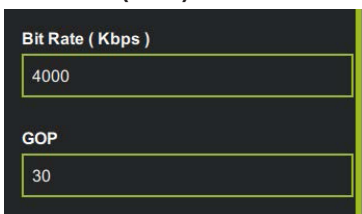

A screenshot of a software interface showing two input fields. The first field is labeled 'Bit Rate (Kbps)' and contains the value '4000'. The second field is labeled 'GOP' and contains the value '30'. Both fields are highlighted with a blue border.

- Select the **Apply** button to save and apply the setting changes.



System Settings

The screenshot displays the StreamCatcherPro application window. The main area shows a video feed of a hand typing on a laptop keyboard, with a StarTech USB capture device connected. The top status bar indicates the date and time: 2021 / 04 / 20 14 : 54 : 01.660.

On the right side, the 'Output Setting' panel is visible, showing:

- Resolution (Width): 1920
- Resolution (Height): 1080
- Frame Rate: 60 (selected from a dropdown)
- Buttons: Apply, Default

Below this is the 'System' section:

- Window on Top: Normal (selected from a dropdown)
- Language: English (selected from a dropdown)
- Version: Stream Catcher Pro 5.1.0.192.2.1

At the bottom right is the 'Hot Key' section with a list of keyboard shortcuts:

- Ctrl + F11: Full Screen
- Ctrl + F1: Start Recording
- Ctrl + F2: Screenshot
- Ctrl + F3: Start / Stop Streaming
- Ctrl + F4: Stop Recording
- Ctrl + F5: Mute
- Ctrl + F6: Change Channel
- Ctrl + F7: Reduce Volume
- Ctrl + F8: 60% Volume
- Ctrl + F9: Increase Volume

At the bottom of the window, there is a control bar with buttons for Default, Record, Stream, and System, along with a small thumbnail of the video feed.


To view manuals, videos, drivers, downloads, technical drawings, and more visit www.startech.com/support

- **Resolution (Width/Height):** Enter the desired values for the **Resolution (Width)** and **Resolution (Height)**. The default resolution is 1920x1080.




The image shows two input fields for resolution. The first field is labeled "Resolution (Width)" and contains the value "1920". The second field is labeled "Resolution (Height)" and contains the value "1080". Both fields are outlined in yellow.

- **Frame rate:** Select the desired frame rate.

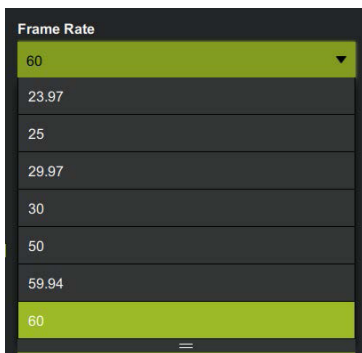


The image shows a dropdown menu for "Frame Rate". The menu is open, displaying a list of frame rates: 60, 23.97, 25, 29.97, 30, 50, 59.94, and 60. The top "60" option is highlighted in green. At the bottom of the menu, there is a green bar with the text "60" and a small icon.

- Select the **Apply** button to save and apply the setting changes.



The image shows two buttons: "Apply" and "Default". Both buttons are green with black text.

- **Window on Top:** Select the drop-down menu then select
 - **Always on Top: Stream Catcher Pro** appears on top of all other expanded windows.
 - **Normal: Stream Catcher Pro** will operate like any other program window and can be covered by other expanded windows.

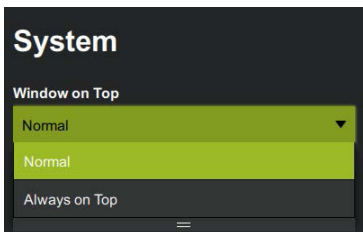

- **Language:** Defaults to **English**.



- The installed **Stream Catcher Pro Version** and **Hot Keys** (keyboard shortcuts) can be seen below.

Version

Stream Catcher Pro 1.1.0.193.3.0.1

Hot Key

Ctrl + F11	Full Screen
Ctrl + 1	Start Recording
Ctrl + 2	Screenshot
Ctrl + 3	Start / Stop Streaming
Ctrl + 4	Stop Recording
Ctrl + 5	Mute
Ctrl + 6	Change Channel
Ctrl + 7	Reduce Volume
Ctrl + 8	60% Volume
Ctrl + 9	Increase Volume

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product.

Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

Reviews

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.

StarTech.com Ltd.

45 Artisans
Crescent
London, Ontario
N5V 5E9
Canada

StarTech.com LLP

4490 South
Hamilton Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15
Gowerton Road
Brackmills,
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.

Siriusdreef 17-27
2132 WT
Hoofddorp
The Netherlands

FR: fr.startech.com

DE: de.startech.com

ES: es.startech.com

NL: nl.startech.com

IT: it.startech.com

JP: jp.startech.com