

# Cucumber Report

Apr 1, 2024, 9:09:22 PM

Start : Apr 01, 9:09:05.675 PM

End : Apr 01, 9:09:22.031 PM

Duration : 16.356 s

Features

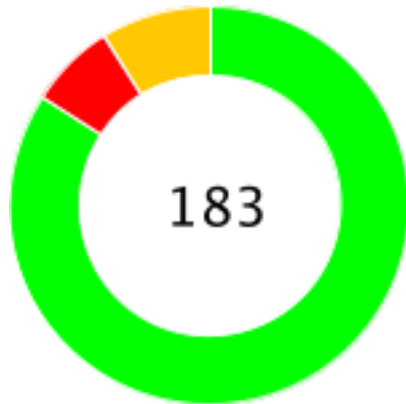
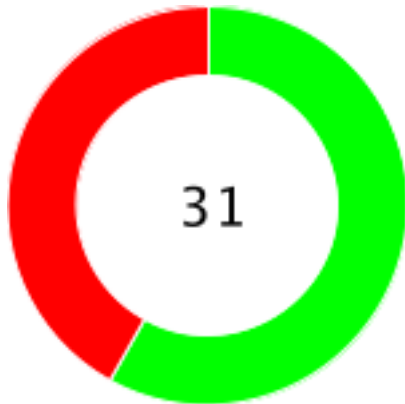
Scenarios

Steps

PASSED - 4  
FAILED - 2  
SKIPPED - 0

PASSED - 18  
FAILED - 13  
SKIPPED - 0

PASSED - 154  
FAILED - 13  
SKIPPED - 16

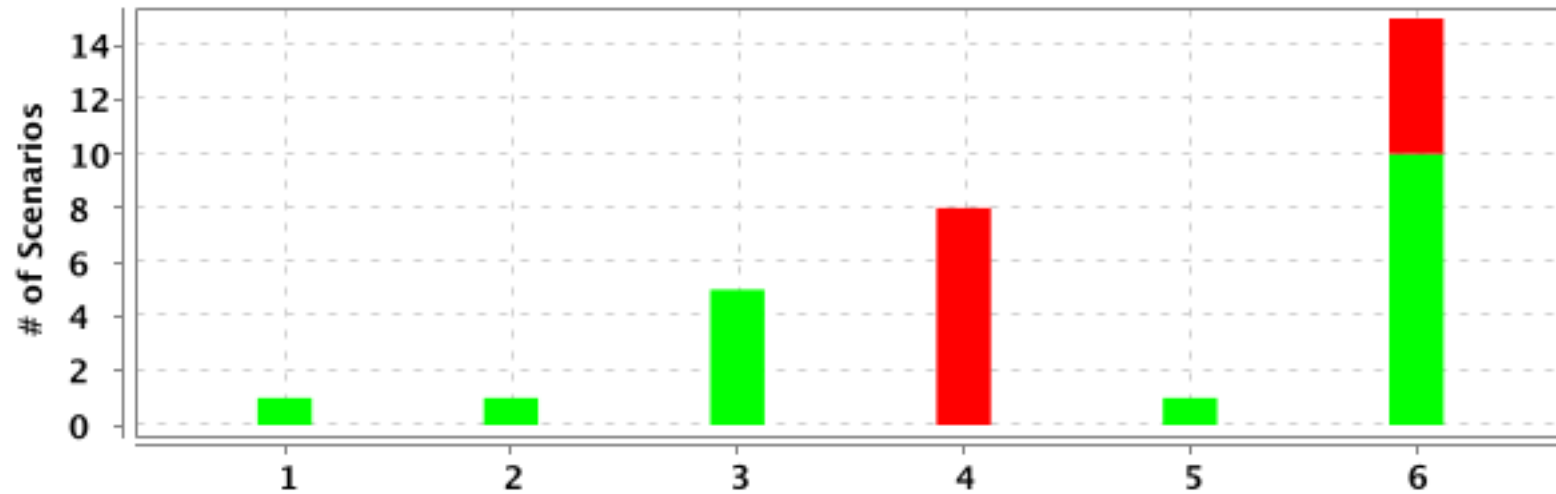


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Validating user login</u>	0.870 s	1	1	0	0	3	3	0	0
<u>ProgramController Module Test with Invalid Data</u>	0.610 s	1	1	0	0	6	6	0	0
<u>ProgramController Module Test with Valid Data</u>	2.713 s	5	5	0	0	30	30	0	0
<u>Batch Module</u>	2.356 s	8	0	8	0	48	24	8	16
<u>Check Post request of user controller module.</u>	0.776 s	1	1	0	0	6	6	0	0
<u>Validating Get request for User API's</u>	8.955 s	15	10	5	0	90	85	5	0

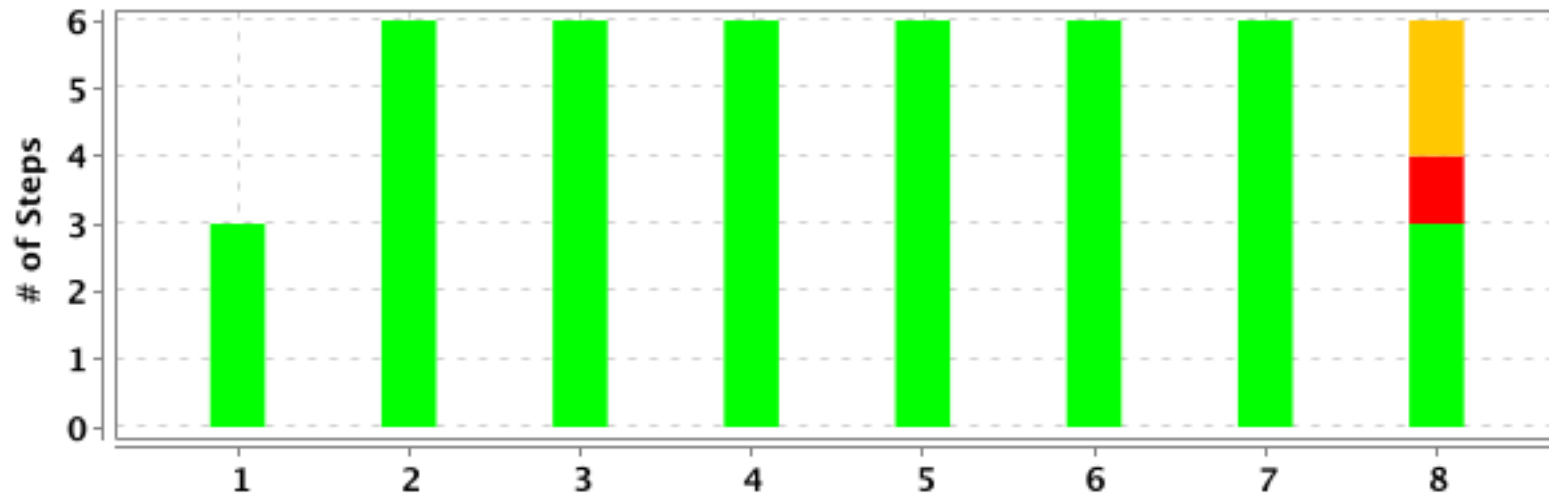
#	Feature Name	Scenario Name
1	<u>Batch Module</u>	<u>Check if admin able to create a Batch with valid endpoint and request body</u>
2		<u>Check if admin able to retrieve a batch with valid Batch ID</u>
3		<u>Check if admin able to retrieve a batch with valid BATCH NAME</u>
4		<u>Check if admin able to retrieve a batch with valid Program ID</u>
5		<u>Check if admin able to create a batch with missing additional fields</u>
6		<u>Check if admin able to retrieve all batches with valid LMS API</u>
7		<u>Check if admin able to retrieve all batches with search string</u>
8		<u>Check if admin able to update a Batch with valid batchID and mandatory fields in request body</u>
9	<u>Validating Get request for User API's</u>	<u>Admin is able to assign update user role program batch</u>
10		<u>Admin is able to get admin by program batchId</u>
11		<u>Admin is able to get admin by programId</u>
12		<u>Admin is able to update user login status</u>

#	Feature Name	Scenario Name
13	<u>Validating Get request for User API's</u>	<u>Admin is able to update user roleId</u>

<b>TAG</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>
@login-Valid	1	1	0	0	1	1	0	0
@login	1	1	0	0	1	1	0	0
@CreateNewBatch	1	0	1	0	1	0	1	0
@GetBatchByBatchId	1	0	1	0	1	0	1	0
@GetBatchbyBatchName	1	0	1	0	1	0	1	0
@GetBatchByValidPgmlId	1	0	1	0	1	0	1	0
@CreateBatchMandatoryField	1	0	1	0	1	0	1	0
@GetAllBatches	1	0	1	0	1	0	1	0
@GetAllBatchesSearchString	1	0	1	0	1	0	1	0
@UpdateBatchValid	1	0	1	0	1	0	1	0
@01UserModule-PostValid	1	1	0	0	1	1	0	0
@UserModule	1	1	0	0	1	1	0	0
@user	15	10	5	0	1	0	1	0
@updateuser	5	2	3	0	1	0	1	0



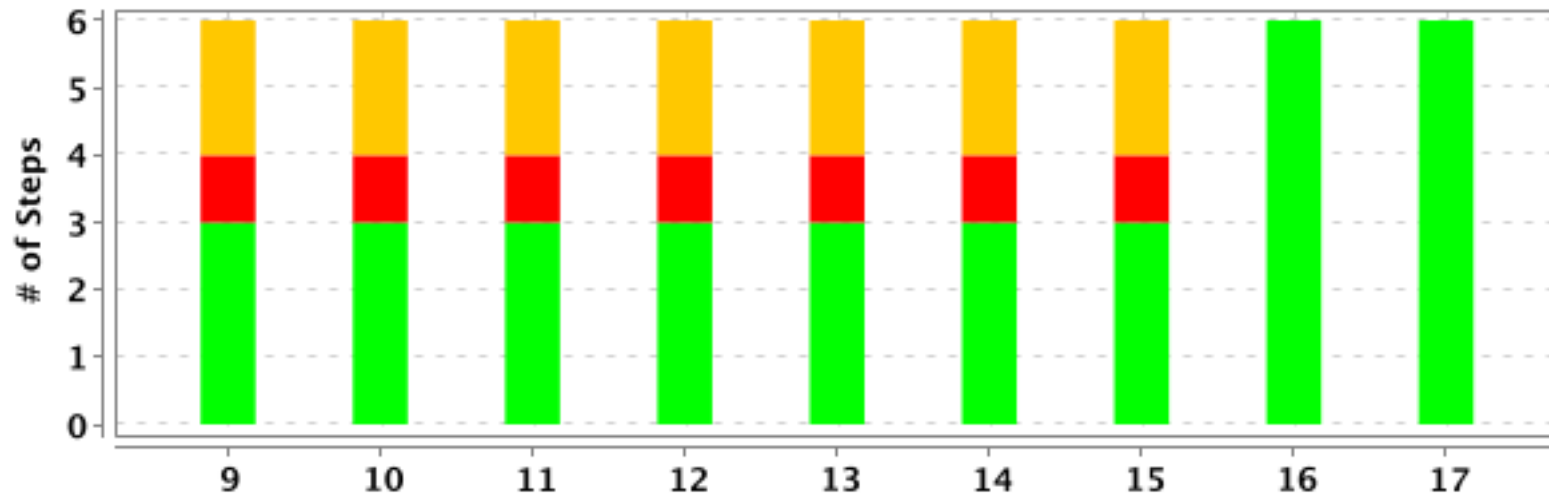
#	Feature Name	T	P	F	S	Duration
1	<u>Validating user login</u>	1	1	0	0	0.870 s
2	<u>ProgramController Module Test with Invalid Data</u>	1	1	0	0	0.610 s
3	<u>ProgramController Module Test with Valid Data</u>	5	5	0	0	2.713 s
4	<u>Batch Module</u>	8	0	8	0	2.356 s
5	<u>Check Post request of user controller module.</u>	1	1	0	0	0.776 s
6	<u>Validating Get request for User API's</u>	15	10	5	0	8.955 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Validating user login</u>	<u>Check if user able to login with token and valid credential</u>	3	3	0	0	0.869 s
2	<u>ProgramController Module Test with Invalid Data</u>	<u>Check if Admin able to create a program with valid endpoint and request body with Authorization</u>	6	6	0	0	0.610 s
3	<u>ProgramController Module Test with Valid Data</u>	<u>Check if Admin able to retrieve all programs with valid Endpoint</u>	6	6	0	0	0.626 s
4		<u>Check if Admin able to retrieve a program with valid program ID</u>	6	6	0	0	0.460 s
5		<u>Check if Admin able to retrieve all programs with valid Endpoint</u>	6	6	0	0	0.665 s
6		<u>Check if Admin able to update a program with Valid program Name and request body</u>	6	6	0	0	0.445 s
7		<u>Check if Admin able to update a program with valid programID endpoint and valid request body</u>	6	6	0	0	0.482 s

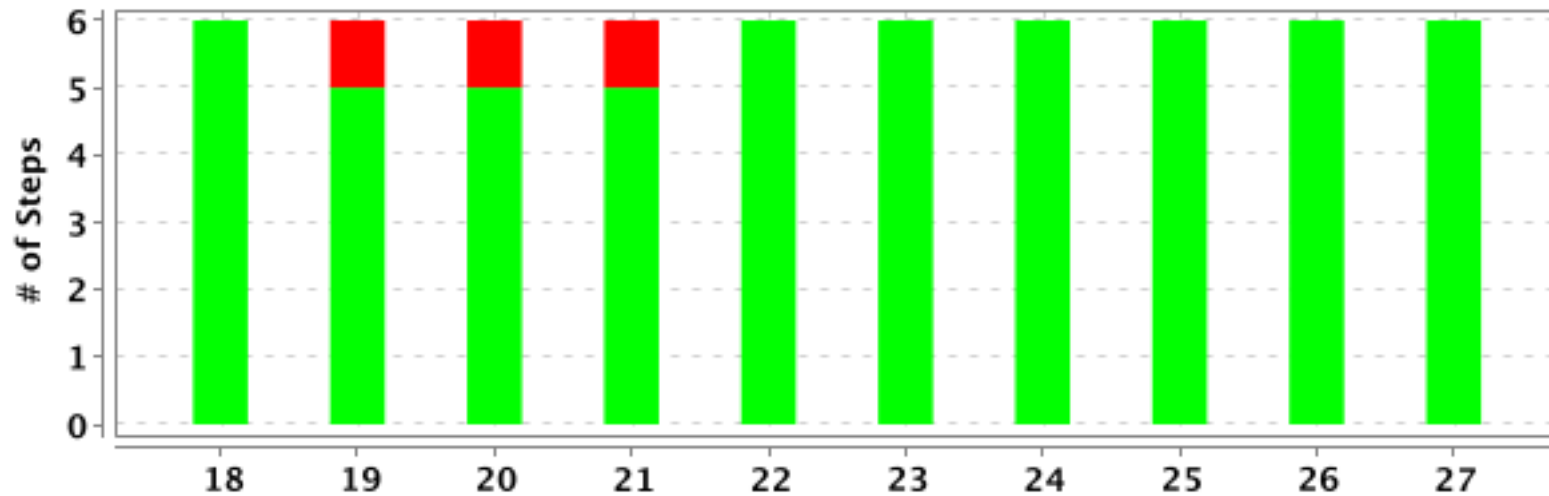
#	Feature Name	Scenario Name	T	P	F	S	Duration
8	<u>Batch Module</u>	<u>Check if admin able to create a Batch with valid endpoint and request body</u>	6	3	1	2	0.292 s



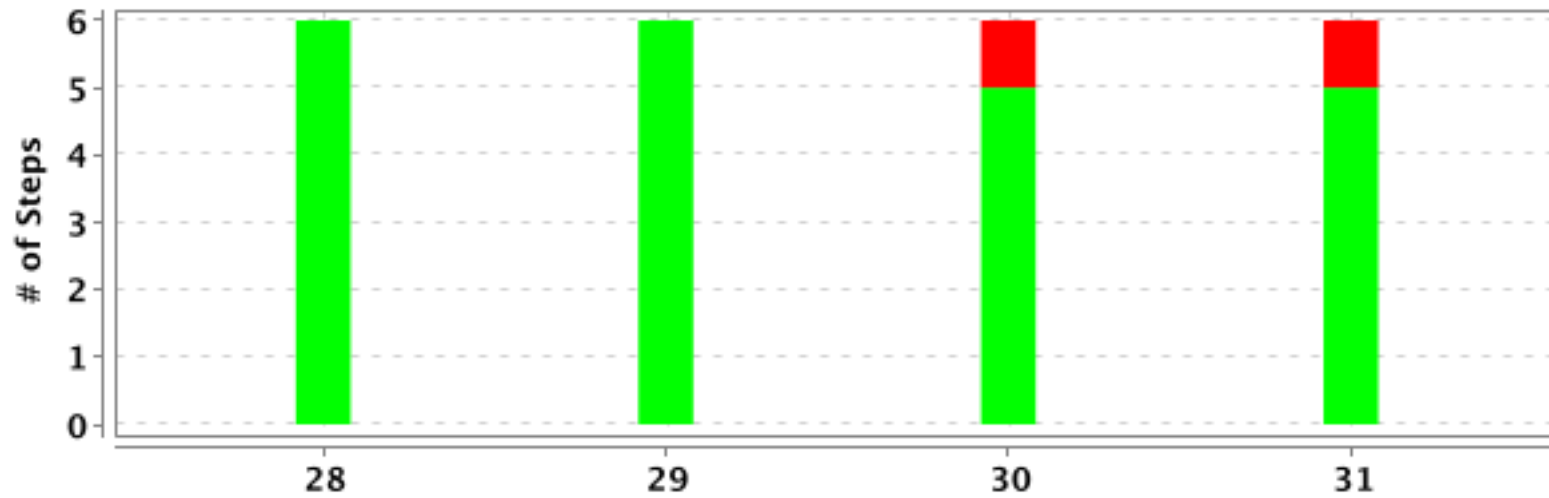


#	Feature Name	Scenario Name	T	P	F	S	Duration
9	<u>Batch Module</u>	<u>Check if admin able to retrieve a batch with valid Batch ID</u>	6	3	1	2	0.281 s
10		<u>Check if admin able to retrieve a batch with valid BATCH NAME</u>	6	3	1	2	0.305 s
11		<u>Check if admin able to retrieve a batch with valid Program ID</u>	6	3	1	2	0.296 s
12		<u>Check if admin able to create a batch with missing additional fields</u>	6	3	1	2	0.293 s
13		<u>Check if admin able to retrieve all batches with valid LMS API</u>	6	3	1	2	0.289 s
14		<u>Check if admin able to retrieve all batches with search string</u>	6	3	1	2	0.277 s
15		<u>Check if admin able to update a Batch with valid batchID and mandatory fields in request body</u>	6	3	1	2	0.267 s
16	<u>Check Post request of user controller module.</u>	<u>Authorized admin is able to create a new user with valid url and request body with mandatory fields.</u>	6	6	0	0	0.776 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
17	<u>Validating Get request for User API's</u>	<u>Admin is able to get count of active and in active admins</u>	6	6	0	0	0.448 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
18	<u>Validating Get request for User API's</u>	<u>Admin is able to get all active users</u>	6	6	0	0	0.469 s
19		<u>Admin is able to assign update user role program batch</u>	6	5	1	0	0.489 s
20		<u>Admin is able to get admin by program batchId</u>	6	5	1	0	0.453 s
21		<u>Admin is able to get admin by programId</u>	6	5	1	0	0.434 s
22		<u>Admin is able to get admin by roleId</u>	6	6	0	0	0.600 s
23		<u>Admin is able to get all users</u>	6	6	0	0	1.038 s
24		<u>Admin is able to get all roles</u>	6	6	0	0	0.450 s
25		<u>Admin is able to get user by userId</u>	6	6	0	0	1.091 s
26		<u>Admin is able to get all users with roles</u>	6	6	0	0	0.439 s
27		<u>Admin is able to get users by roleId V2</u>	6	6	0	0	1.106 s

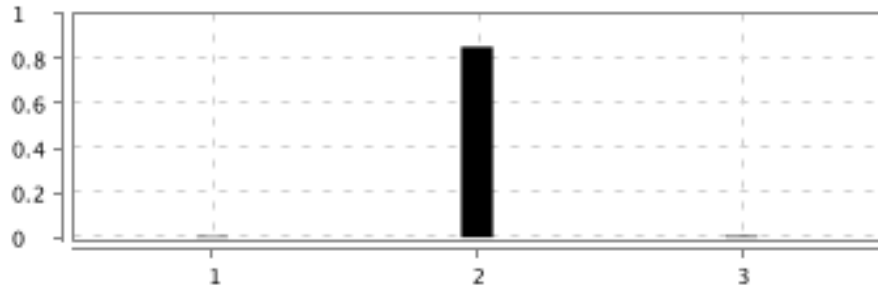



#	Feature Name	Scenario Name	T	P	F	S	Duration
28	<u>Validating Get request for User API's</u>	<u>Admin is able to update user by userId</u>	6	6	0	0	0.446 s
29		<u>Admin is able to update user role status</u>	6	6	0	0	0.444 s
30		<u>Admin is able to update user login status</u>	6	5	1	0	0.457 s
31		<u>Admin is able to update user roleId</u>	6	5	1	0	0.450 s

## Validating user login



<b>PASSED</b>	DURATION - 0.870 s	Scenarios		Steps	
/ 9:09:05.675 PM // 9:09:06.545 PM /		Total - 1		Total - 3	
		Pass - 1		Pass - 3	
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	

## Check if user able to login with token and valid credential

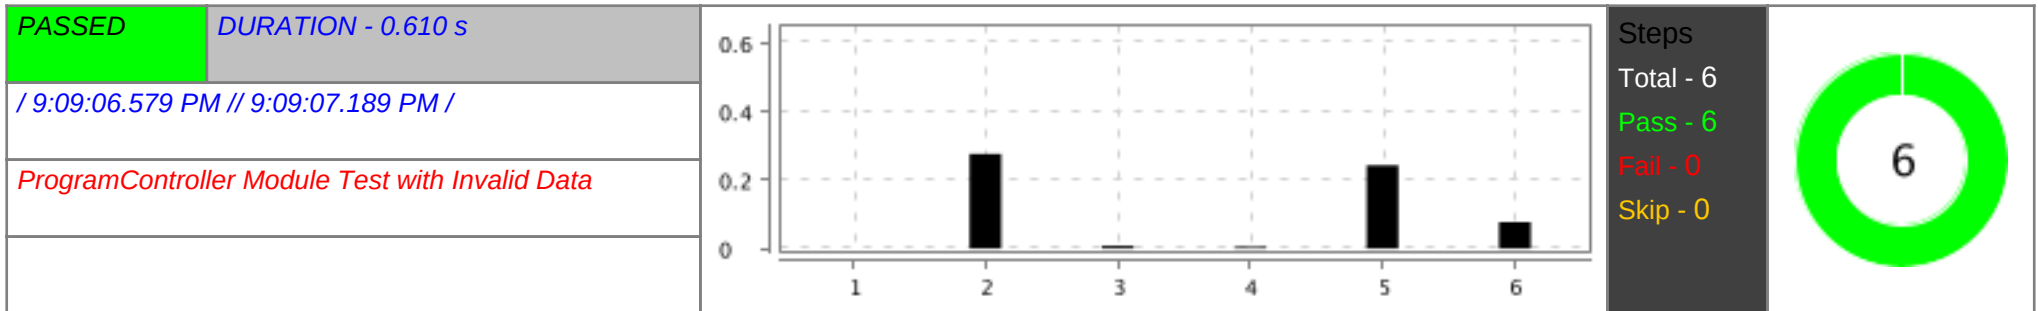
<div>PASSED</div> <div>DURATION - 0.869 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:09:05.676 PM // 9:09:06.545 PM /</div>			
<div>Validating user login</div>			
<div>@login-Valid @login</div>			

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.004 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.853 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s

## ProgramController Module Test with Invalid Data

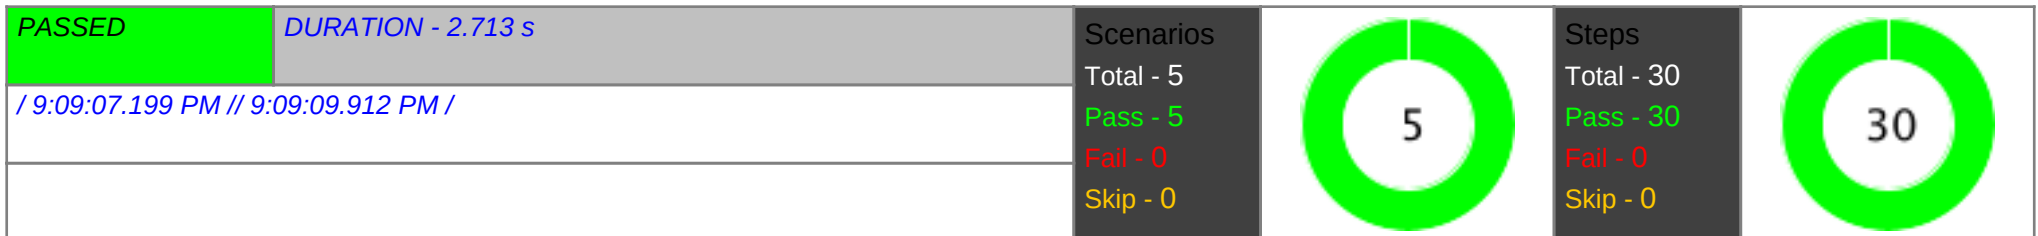
<b>PASSED</b>	DURATION - 0.610 s	Scenarios		Steps	
/ 9:09:06.579 PM // 9:09:07.189 PM /		Total - 1		Total - 6	
		Pass - 1		Pass - 6	
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	

## Check if Admin able to create a program with valid endpoint and request body with Authorization

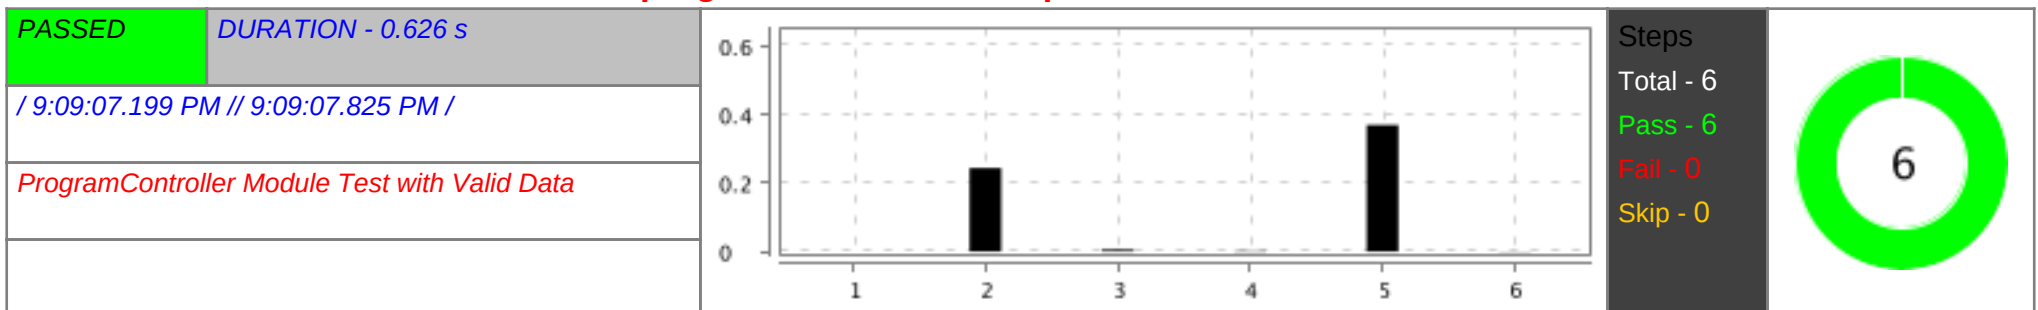


#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.276 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.008 s
4	Given Admins creates POST Request for the LMS with request body	PASSED	0.005 s
5	When Admins sends HTTPS Request and request Body with endpoint	PASSED	0.243 s
6	Then Admins receives 201 Created Status with response body	PASSED	0.077 s

### ProgramController Module Test with Valid Data

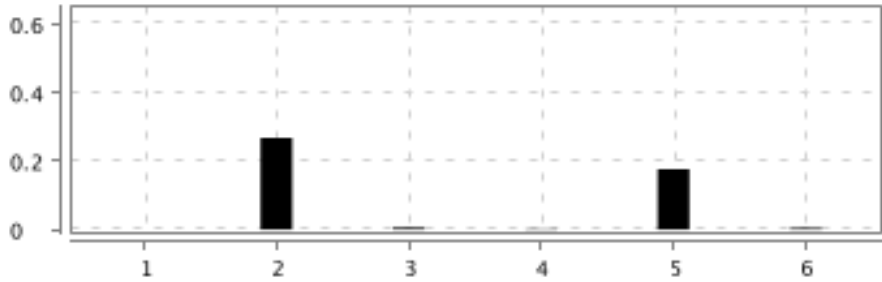



### Check if Admin able to retrieve all programs with valid Endpoint



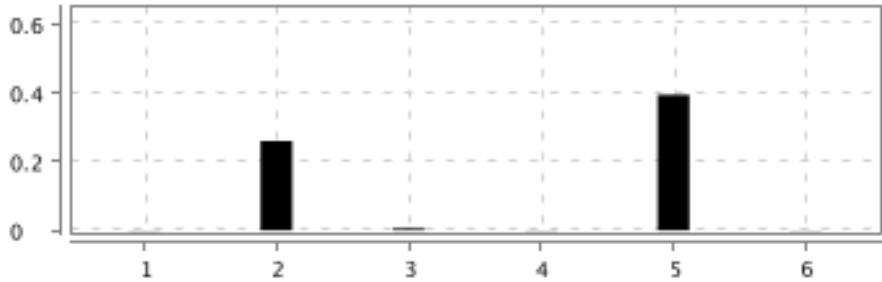

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.244 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Admins creates GET Request for the LMS API	PASSED	0.002 s
5	When Admins sends HTTPS Request with endpoint	PASSED	0.370 s
6	Then Admins receives 200 OK Status with response body.	PASSED	0.001 s

### Check if Admin able to retrieve a program with valid program ID

PASSED	DURATION - 0.460 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:07.832 PM // 9:09:08.292 PM /				
ProgramController Module Test with Valid Data				

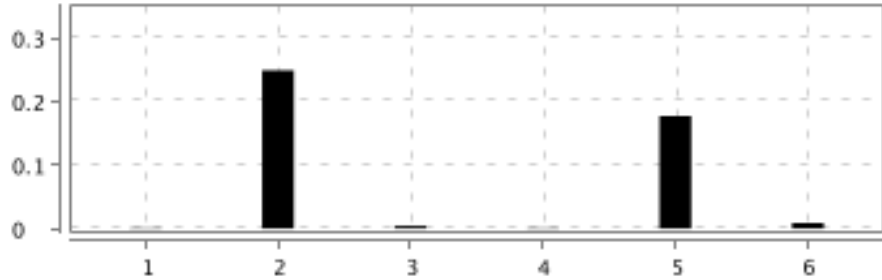

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.268 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Admins create GET Request for LMS API	PASSED	0.002 s
5	When Admins send HTTPS Request with the endpoint	PASSED	0.176 s
6	Then Admins receives 200 OK Status with response body	PASSED	0.005 s

### Check if Admin able to retrieve all programs with valid Endpoint

PASSED	DURATION - 0.665 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:08.301 PM // 9:09:08.966 PM /				
ProgramController Module Test with Valid Data				

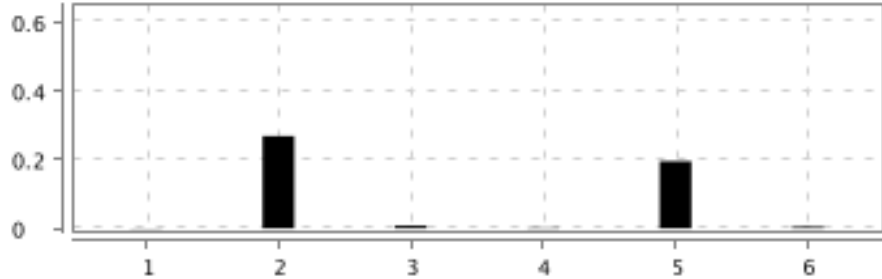

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.260 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Admins create the GET Request for LMS API	PASSED	0.001 s
5	When Admins sends the HTTPS Request with endpoint	PASSED	0.395 s
6	Then Admins receive 200 OK Status with the response body	PASSED	0.001 s

### Check if Admin able to update a program with Valid program Name and request body

PASSED	DURATION - 0.445 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:08.973 PM // 9:09:09.418 PM /				
ProgramController Module Test with Valid Data				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.249 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.004 s
4	Given Admins creates PUT Request for the LMS API endpoint with the valid request Body with mandatory , additional fields.	PASSED	0.001 s
5	When Admins sends HTTPS Request with the valid endpoint	PASSED	0.177 s
6	Then Admins receives 200 OK Status with updated value in response body.	PASSED	0.009 s



### Check if Admin able to update a program with valid programID endpoint and valid request body

PASSED	DURATION - 0.482 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:09.430 PM // 9:09:09.912 PM /				
ProgramController Module Test with Valid Data				

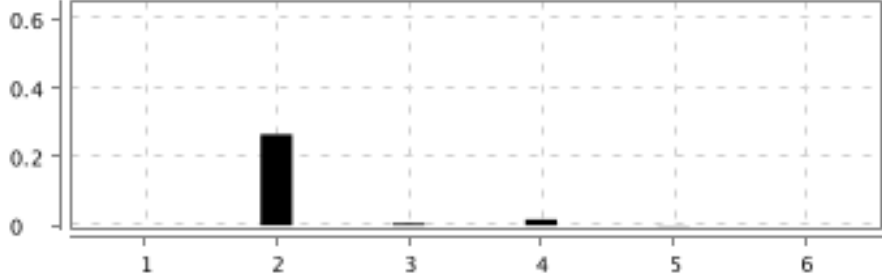



#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.269 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.008 s
4	Given Admins creates PUT Request for the LMS API endpoint with request Body with mandatory , additional fields	PASSED	0.002 s
5	When Admins sends HTTPS Request with valid endpoint	PASSED	0.195 s
6	Then Admins receives 200 OK Status with updated value in response body	PASSED	0.005 s

## Batch Module

<b>FAILED</b>	DURATION - 2.356 s	Scenarios		Steps	
/ 9:09:09.923 PM // 9:09:12.279 PM /		Total - 8		Total - 48	
		Pass - 0		Pass - 24	
		Fail - 8		Fail - 8	
		Skip - 0		Skip - 16	

## Check if admin able to create a Batch with valid endpoint and request body

<b>FAILED</b>	DURATION - 0.292 s		Steps	
/ 9:09:09.923 PM // 9:09:10.215 PM /			Total - 6	
Batch Module			Pass - 3	
@CreateNewBatch			Fail - 1	
			Skip - 2	

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.265 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given User creates request for the LMS API endpoint "Create New Batch".	FAILED	0.017 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 60 more Caused by: java.lang.StackOverflowError at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) </pre>		

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]





[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	<pre> at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) </pre>		
5	When User sends HTTPS post request for batch and request body with mandatory and additional fields.	SKIPPED	0.001 s
6	Then User receives 201 created status for batch.	SKIPPED	0.000 s

### Check if admin able to retrieve a batch with valid Batch ID

FAILED	DURATION - 0.281 s		<div>Steps</div> <div>Total - 6</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 9:09:10.227 PM // 9:09:10.508 PM /				
Batch Module				
@GetBatchByBatchId				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.257 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.005 s
4	Given Admin creates GET Request with valid Batch ID.  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)	FAILED	0.016 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 60 more Caused by: java.lang.StackOverflowError at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) </pre>		

[illegible]

[illegible]











































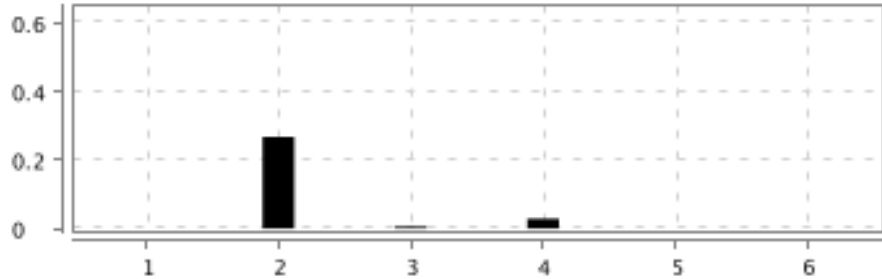









### Check if admin able to retrieve a batch with valid BATCH NAME

<div><div>FAILED</div><div>DURATION - 0.305 s</div></div>		<div></div>	<div><div>Steps</div><div>Total - 6</div><div>Pass - 3</div><div>Fail - 1</div><div>Skip - 2</div></div>	<div></div>
/ 9:09:10.517 PM // 9:09:10.822 PM /				
Batch Module				
@GetBatchbyBatchName				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.268 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Admin creates GET Request with valid Batch Name.  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)	FAILED	0.029 s



#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		



















































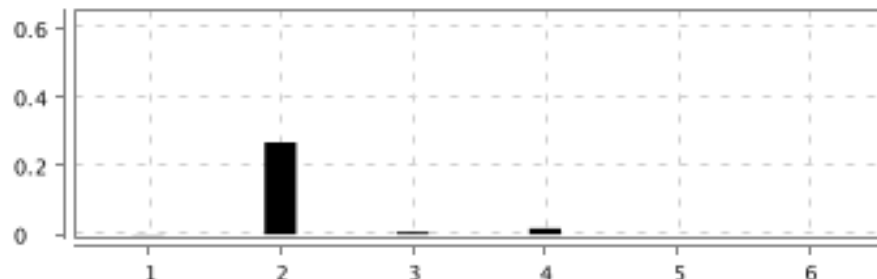



[illegible]



#	Step / Hook Details	Status	Duration
	at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36)		
5	When Admin sends HTTPS Request with endpoint batchName.	SKIPPED	0.000 s
6	Then Admin receives 200 OK Status with the response body for batch.	SKIPPED	0.000 s

### Check if admin able to retrieve a batch with valid Program ID

<div>FAILED</div> <div>DURATION - 0.296 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 9:09:10.829 PM // 9:09:11.125 PM /				
Batch Module				
@GetBatchByValidPgmlId				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.268 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Admin creates GET Request with the program id.  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)	FAILED	0.017 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100)		











[illegible]

[illegible]

[illegible]

[illegible]

[illegible]









[illegible]



[illegible]













[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36)		
5	When Admin sends HTTPS Request with the endpoint for programId.	SKIPPED	0.000 s
6	Then Admin receives 200 OK Status with response body.	SKIPPED	0.000 s

### Check if admin able to create a batch with missing additional fields

<b>FAILED</b>	<b>DURATION - 0.293 s</b>		<b>Steps</b> Total - 6 Pass - 3 Fail - 1 Skip - 2	
/ 9:09:11.135 PM // 9:09:11.428 PM /				
Batch Module				
@CreateBatchMandatoryField				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.267 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Admin creates POST Request with missing additional fields Create New Batch Missing Field.	FAILED	0.016 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169)		

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]





#	Step / Hook Details	Status	Duration
3	Then Admin receives 200 created with auto generated token	PASSED	0.005 s
4	Given Admin creates GET Request.  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 60 more Caused by: java.lang.StackOverflowError at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.&lt;init&gt;(Batch_SD.java:36) at com.api.models.UserStatus.&lt;init&gt;(UserStatus.java:7) </pre>		

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



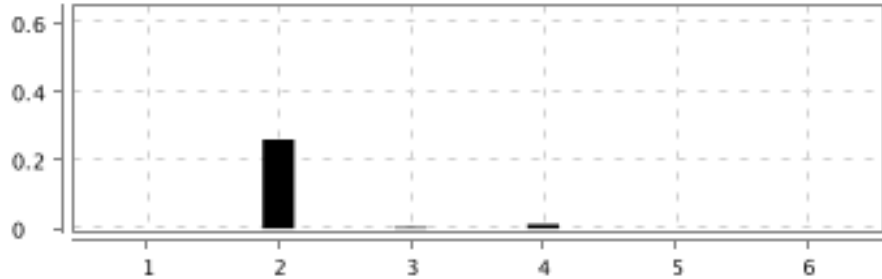

[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7)		
5	When Admin sends "HTTPS Request" with endpoint.	SKIPPED	0.000 s
6	Then Admin receives 200 OK Status with response body.	SKIPPED	0.001 s

## Check if admin able to retrieve all batches with search string

<div>FAILED</div> <div>DURATION - 0.277 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 9:09:11.730 PM // 9:09:12.007 PM /				
Batch Module				
@GetAllBatchesSearchString				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.260 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.004 s
4	Given Admin creates GET Request with search string.  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36)		
5	When Admin sends "HTTPS Request" with endpoint.	SKIPPED	0.000 s
6	Then Admin receives 200 Ok status with response body.	SKIPPED	0.000 s

### Check if admin able to update a Batch with valid batchID and mandatory fields in request body

<b>FAILED</b> DURATION - 0.267 s / 9:09:12.012 PM // 9:09:12.279 PM / Batch Module @UpdateBatchValid		Steps Total - 6 Pass - 3 Fail - 1 Skip - 2	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.251 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.003 s
4	Given Admin creates PUT Request with auth, valid BatchId and Update Valid Data. io.cucumber.core.exception.CucumberException: Failed to instantiate class com.api.stepdefinition.Batch_SD at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)	FAILED	0.012 s



#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at org.junit.runner.JUnitCore.run(JUnitCore.java:115) at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:42) at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:80) at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:72) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:198) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:169) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:93) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:58) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:141) at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:57) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:103) at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:94) at org.junit.platform.launcher.core.DelegatingLauncher.execute(DelegatingLauncher.java:52) at org.junit.platform.launcher.core.SessionPerRequestLauncher.execute(SessionPerRequestLauncher.java:70) at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:100)		

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]





[illegible]

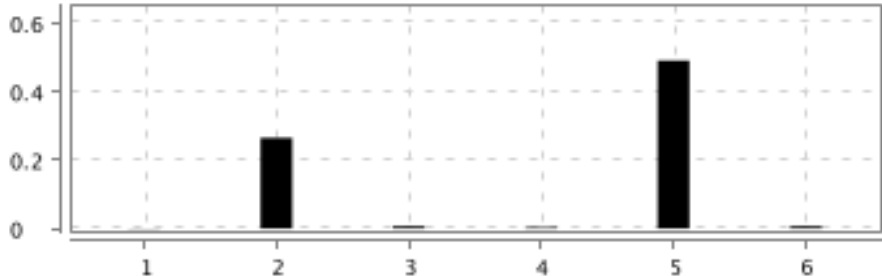

[illegible]

#	Step / Hook Details	Status	Duration
	at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36) at com.api.models.UserStatus.<init>(UserStatus.java:7) at com.api.stepdefinition.Batch_SD.<init>(Batch_SD.java:36)		
5	When Admin sends HTTPS Request with update endpoint.	SKIPPED	0.000 s
6	Then Admin receives 200 OK Status with updated value in response body.	SKIPPED	0.000 s

### Check Post request of user controller module.

<b>PASSED</b>	DURATION - 0.776 s	Scenarios		Steps	
/ 9:09:12.286 PM // 9:09:13.062 PM /		Total - 1		Total - 6	
		Pass - 1		Pass - 6	
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	



### Authorized admin is able to create a new user with valid url and request body with mandatory fields.

<b>PASSED</b>	DURATION - 0.776 s			Steps	
/ 9:09:12.286 PM // 9:09:13.062 PM /				Total - 6	
Check Post request of user controller module.				Pass - 6	
				Fail - 0	
@01UserModule-PostValid @UserModule				Skip - 0	

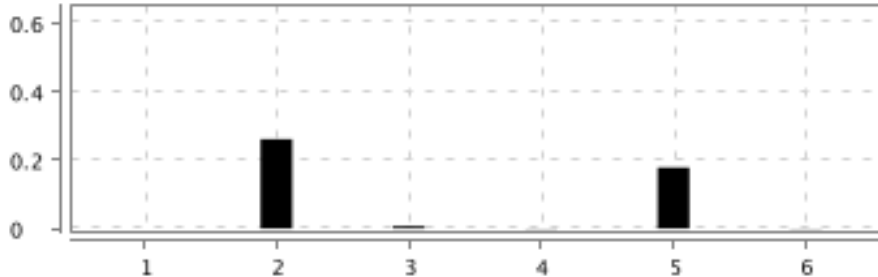

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s

#	Step / Hook Details	Status	Duration
2	When Admin calls Post Https method with valid endpoint	PASSED	0.265 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Authorized Admin creates POST request with valid request body.	PASSED	0.004 s
5	When Authorized admin send valid post api request	PASSED	0.491 s
6	Then Authorized admin receive 201 status with response body	PASSED	0.007 s

### Validating Get request for User API's

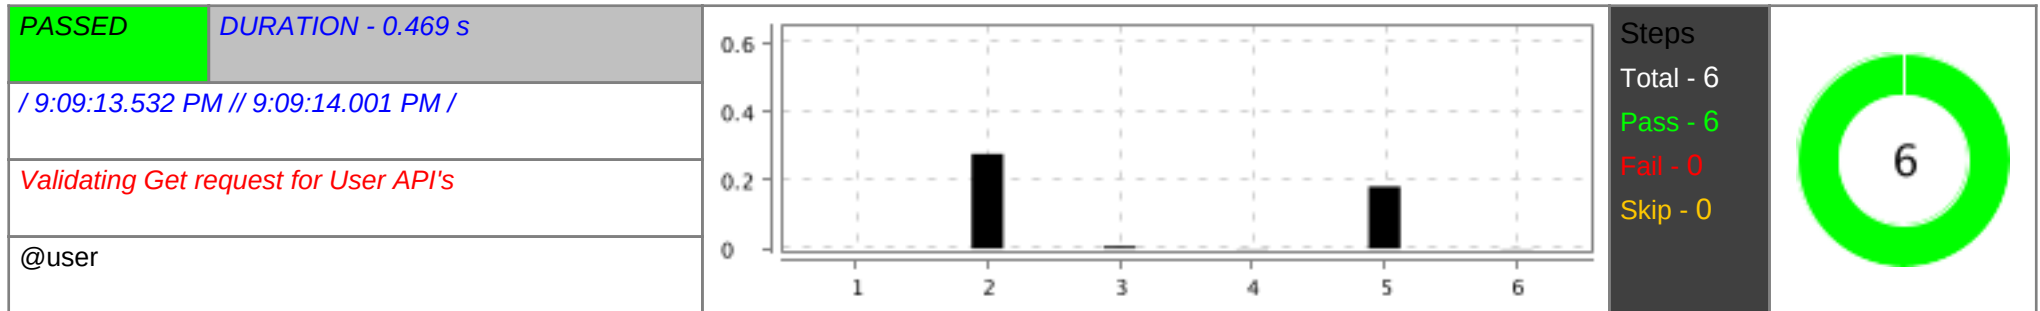
FAILED	DURATION - 8.955 s	Scenarios Total - 15 Pass - 10 Fail - 5 Skip - 0		Steps Total - 90 Pass - 85 Fail - 5 Skip - 0	
/ 9:09:13.076 PM // 9:09:22.031 PM /					

### Admin is able to get count of active and in active admins

PASSED	DURATION - 0.448 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:13.076 PM // 9:09:13.524 PM /				
Validating Get request for User API's				
@user				

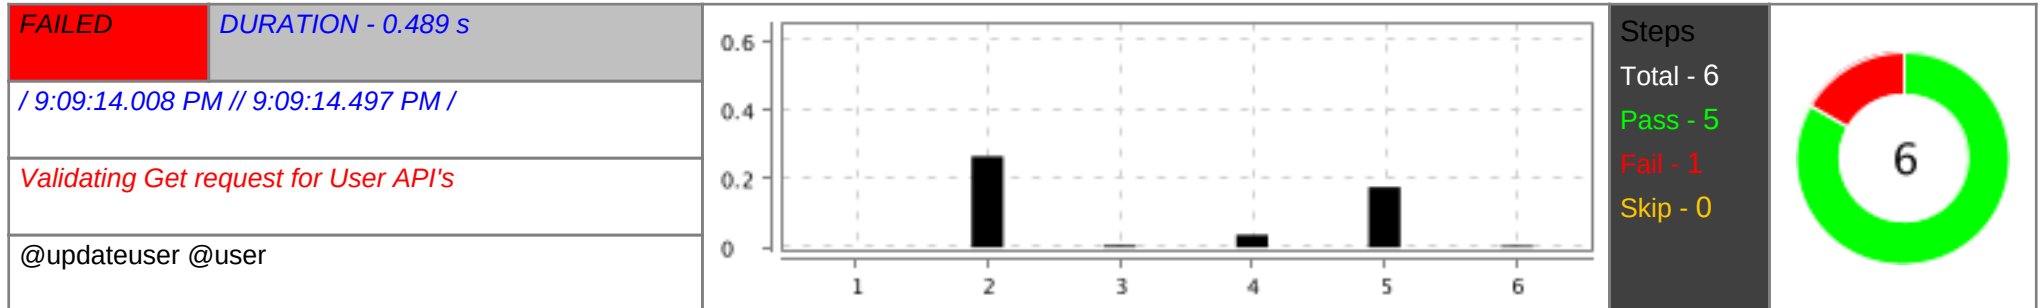
#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.261 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getcountofactiveandinactive"	PASSED	0.178 s
6	Then Users receives 200 ok.	PASSED	0.001 s

### Admin is able to get all active users



#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.276 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getallactiveusers"	PASSED	0.181 s
6	Then Users receives 200 ok.	PASSED	0.001 s

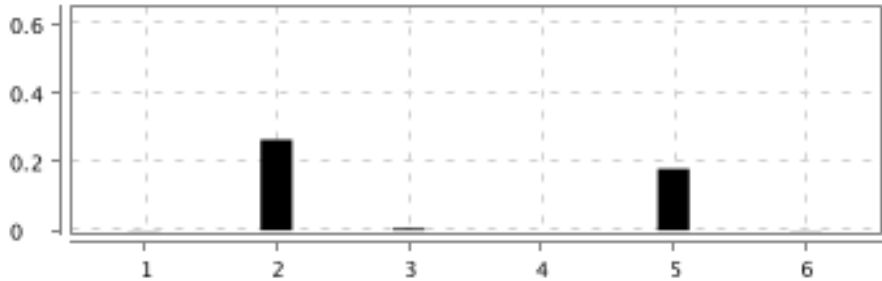

### Admin is able to assign update user role program batch



#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.265 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates request with valid response body UserRoleProgramBatch.	PASSED	0.036 s
5	When Users sends https put request with assignupdateuserroleprogrambatch	PASSED	0.175 s
6	Then users receives the 200 ok.	FAILED	0.005 s
	org.opentest4j.AssertionFailedError: expected: <200> but was: <400>		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:545) at com.api.stepdefinition.UC_UpdateUser.admins_receives_ok(UC_UpdateUser.java:92) at ?.users receives the 200 ok.(file:///Users/amreennaziasyed/eclipse-workspace/DSALGO/Team03_APIAutomators_March2024/src/test/ resources/feature/06_UserController.feature:24) * Not displayable characters are replaced by '?'. </pre>		

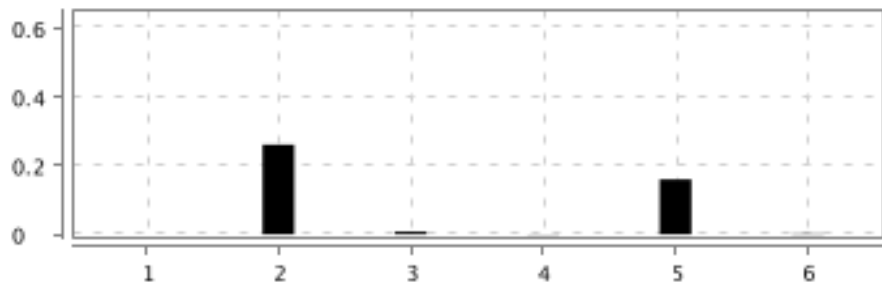

### Admin is able to get admin by program batchId

<b>FAILED</b>	<b>DURATION - 0.453 s</b>		<b>Steps</b> Total - 6 Pass - 5 Fail - 1 Skip - 0	
/ 9:09:14.506 PM // 9:09:14.959 PM /				
Validating Get request for User API's				
@user				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.264 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates Get user request	PASSED	0.000 s
5	When Users sends https request with getadminbyprogrambatchId	PASSED	0.179 s
6	Then Users receives 200 ok. <pre> org.opentest4j.AssertionFailedError: expected: &lt;200&gt; but was: &lt;404&gt; at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:545) at com.api.stepdefinition.UC_GetUsers.user_receives_ok(UC_GetUsers.java:52) at ?.Users receives 200 ok.(file:///Users/amreennaziasyed/eclipse-workspace/DSALGO/Team03_APIAutomators_March2024/src/test/ </pre>	FAILED	0.001 s

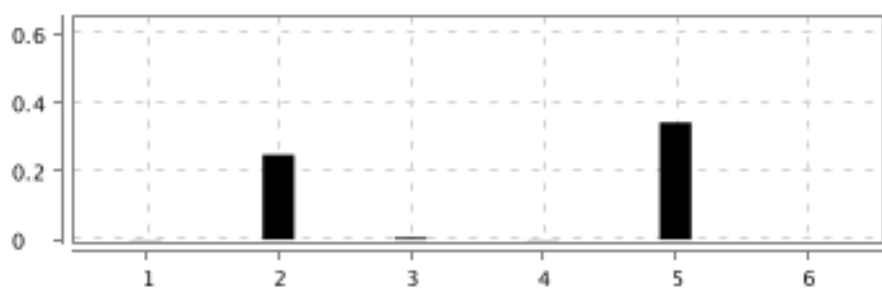

#	Step / Hook Details	Status	Duration
	resources/feature/06_UserController.feature:29) * Not displayable characters are replaced by '?'. 		

### Admin is able to get admin by programId

<div>FAILED</div> <div>DURATION - 0.434 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 5</div> <div>Fail - 1</div> <div>Skip - 0</div>	
/ 9:09:14.974 PM // 9:09:15.408 PM /				
Validating Get request for User API's				
@user				

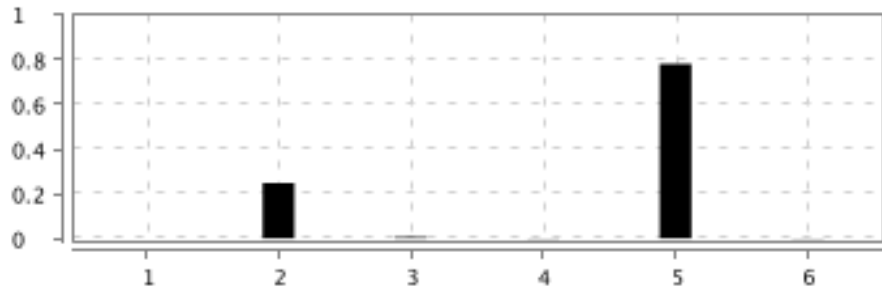

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.261 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.008 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with getadminbyprogramId	PASSED	0.160 s
6	Then Users receives 200 ok. org.opentest4j.AssertionFailedError: expected: <200> but was: <404> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:545) at com.api.stepdefinition.UC_GetUsers.user_receives_ok(UC_GetUsers.java:52) at ?.Users receives 200 ok.(file:///Users/amreennaziasyed/eclipse-workspace/DSALGO/Team03_APIAutomators_March2024/src/test/resources/feature/06_UserController.feature:34) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s

### Admin is able to get admin by roleId

<b>PASSED</b>	DURATION - 0.600 s		<b>Steps</b> Total - 6 Pass - 6 Fail - 0 Skip - 0				
/ 9:09:15.418 PM // 9:09:16.018 PM /							
Validating Get request for User API's							
@user							

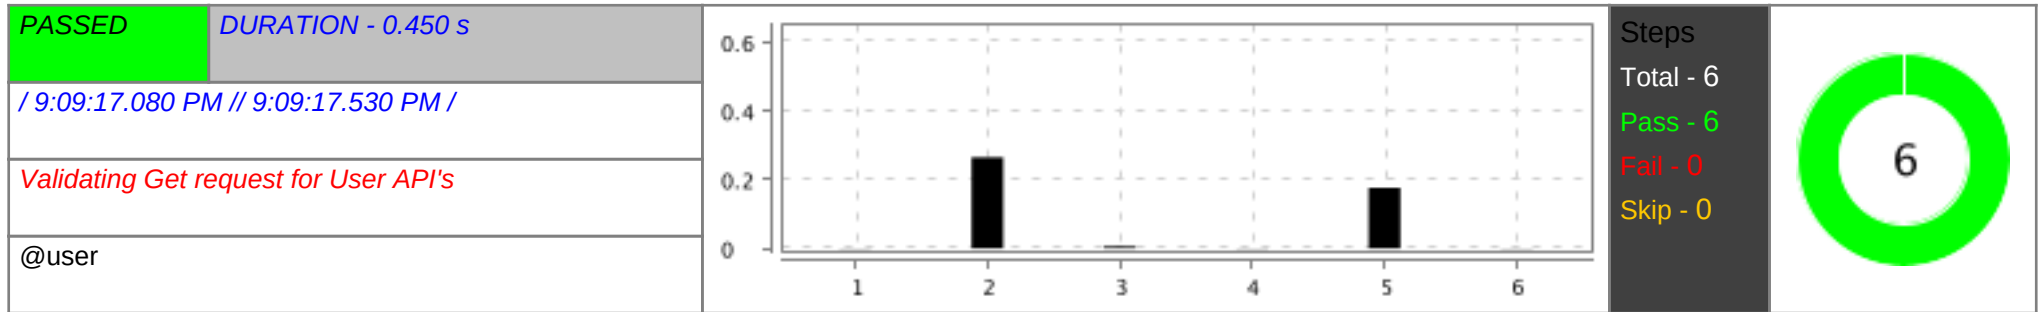
#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.248 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getadminbyroleId"	PASSED	0.342 s
6	Then Users receives 200 ok.	PASSED	0.000 s

### Admin is able to get all users

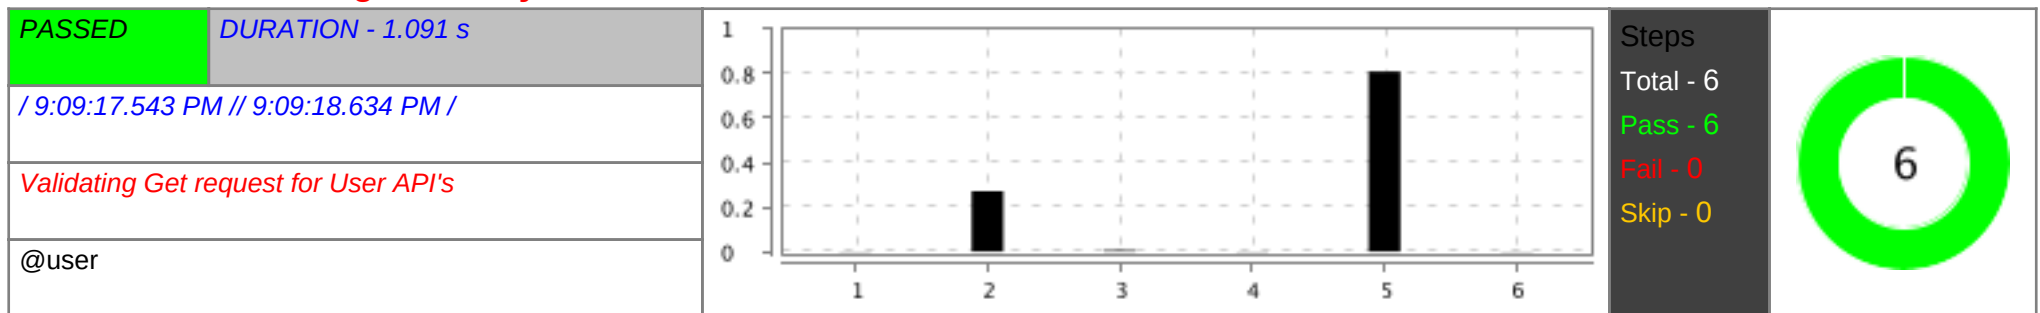
<div>PASSED</div>	<div>DURATION - 1.038 s</div>	<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 6</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:09:16.031 PM // 9:09:17.069 PM /</div>				
<div>Validating Get request for User API's</div>				
<div>@user</div>				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.248 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getallusers"	PASSED	0.782 s
6	Then Users receives 200 ok.	PASSED	0.001 s



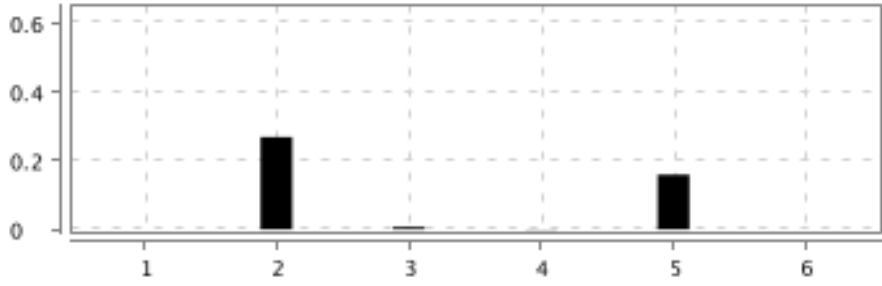

**Admin is able to get all roles**

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.265 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getallroles"	PASSED	0.176 s
6	Then Users receives 200 ok.	PASSED	0.001 s

**Admin is able to get user by userId**

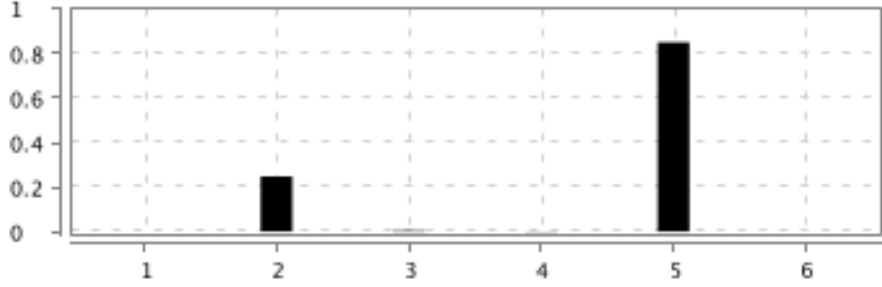

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.001 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.271 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getuserbyuserId"	PASSED	0.809 s
6	Then Users receives 200 ok.	PASSED	0.001 s

**Admin is able to get all users with roles**

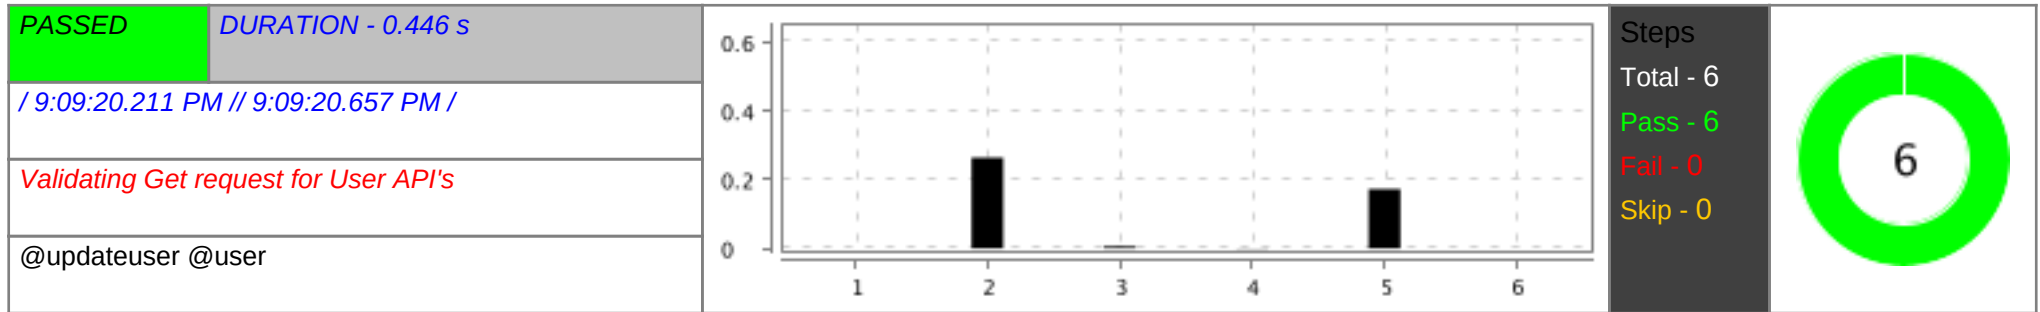
<b>PASSED</b>	DURATION - 0.439 s		<b>Steps</b> Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:18.644 PM // 9:09:19.083 PM /				
Validating Get request for User API's				
@user				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.269 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getalluserswithroles"	PASSED	0.159 s
6	Then Users receives 200 ok.	PASSED	0.000 s

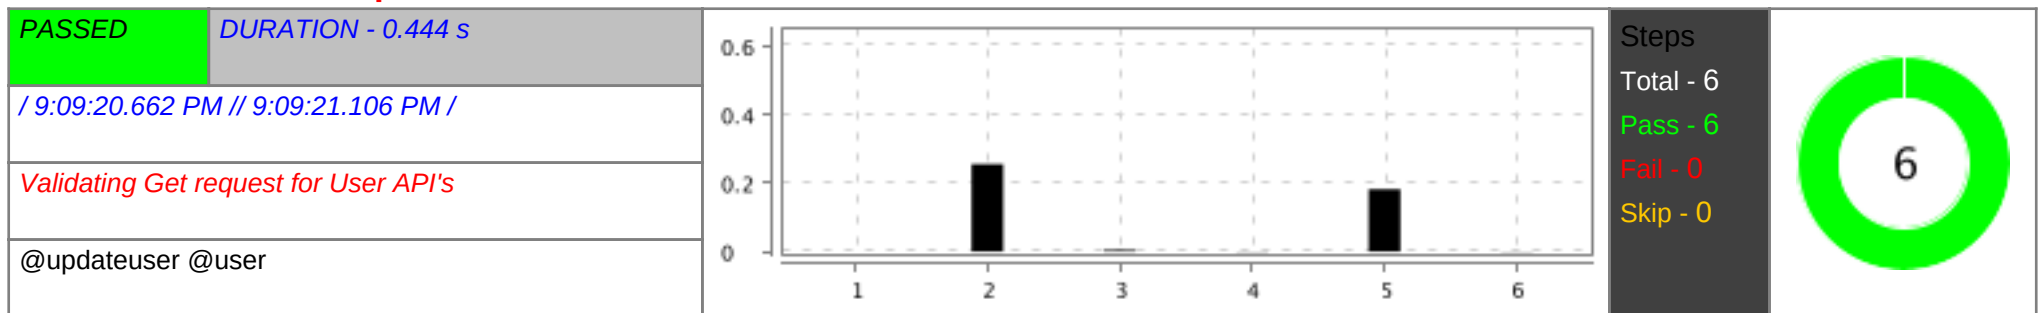
**Admin is able to get users by roleId V2**

<b>PASSED</b>	DURATION - 1.106 s		<b>Steps</b> Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:09:19.094 PM // 9:09:20.200 PM /				
Validating Get request for User API's				
@user				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.248 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.005 s
4	Given Users creates Get user request	PASSED	0.001 s
5	When Users sends https request with "getusersbyroleIdV2"	PASSED	0.850 s
6	Then Users receives 200 ok.	PASSED	0.000 s

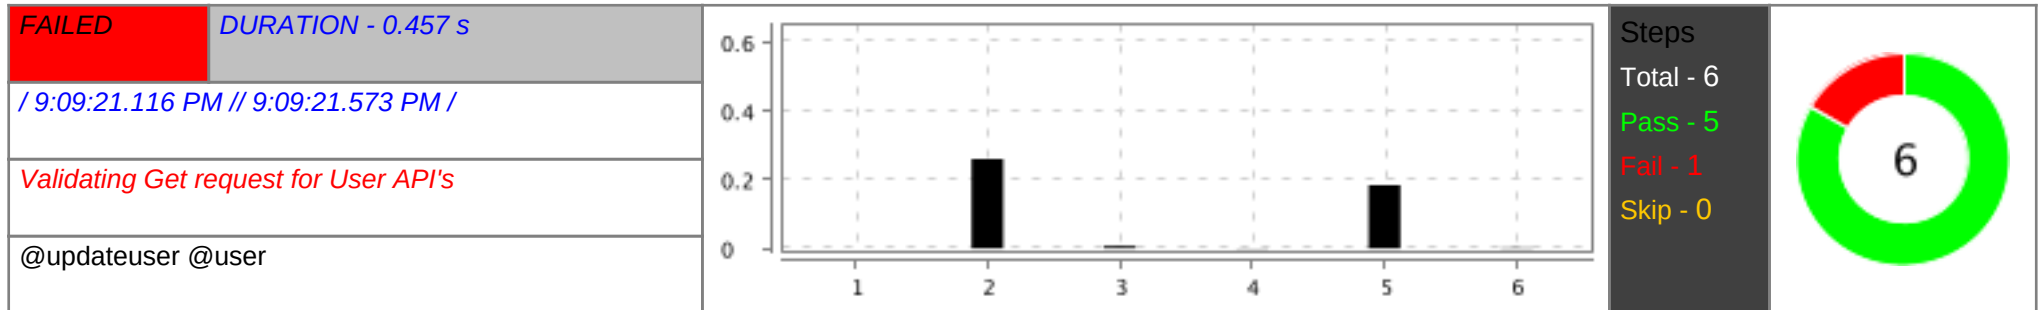
**Admin is able to update user by userId**

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.264 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.006 s
4	Given Users creates request with valid response body "UpdateUser"	PASSED	0.001 s
5	When Users sends https put request with updateuser	PASSED	0.173 s
6	Then users receives the 200 ok.	PASSED	0.000 s

**Admin is able to update user role status**

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.255 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.005 s
4	Given Users creates request with valid response body "UpdateUserRoleStatus"	PASSED	0.001 s
5	When Users sends https put request with updateuserrolestatus	PASSED	0.182 s
6	Then users receives the 200 ok.	PASSED	0.001 s

## Admin is able to update user login status



#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.260 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.007 s
4	Given Users creates request with valid response body "UpdateUserLoginStatus"	PASSED	0.001 s
5	When Users sends https put request with updateuserloginstatus	PASSED	0.184 s
6	Then users receives the 200 ok.  org.opentest4j.AssertionFailedError: expected: <200> but was: <400> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:545) at com.api.stepdefinition.UC_UpdateUser.admins_receives_ok(UC_UpdateUser.java:92) at ?.users receives the 200 ok.(file:///Users/amreennaziasyed/eclipse-workspace/DSALGO/Team03_APIAutomators_March2024/src/test/resources/feature/06_UserController.feature:83) * Not displayable characters are replaced by '?'.	FAILED	0.002 s

## Admin is able to update user roleId

<b>FAILED</b>	<b>DURATION - 0.450 s</b>		<b>Steps</b> Total - 6 Pass - 5 Fail - 1 Skip - 0	
/ 9:09:21.581 PM // 9:09:22.031 PM /				
Validating Get request for User API's				
@updateuser @user				

#	Step / Hook Details	Status	Duration
1	Given Admin creates request with valid credentials	PASSED	0.000 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.267 s
3	Then Admin receives 200 created with auto generated token	PASSED	0.027 s
4	Given Users creates request with valid response body "UpdateUserRoleId"	PASSED	0.001 s
5	When Users sends https put request with updateuserroleId	PASSED	0.153 s
6	Then users receives the 200 ok.	FAILED	0.001 s

org.opentest4j.AssertionFailedError: expected: <200> but was: <400>

at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151)

at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132)

at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197)

at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182)

at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177)

at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:545)

at com.api.stepdefinition.UC\_UpdateUser.admins\_receives\_ok(UC\_UpdateUser.java:92)

at ?.users receives the 200 ok.(file:///Users/amreennaziasyed/eclipse-workspace/DSALGO/Team03\_APIAutomators\_March2024/src/test/resources/feature/06\_UserController.feature:89)

\* Not displayable characters are replaced by '?'.