

[SEARCH](#)

Software Testing Help

[Home](#) [Resources](#) [FREE EBooks](#) [QA Testing](#) ▾ [Courses](#) ▾ [Automation](#) ▾

[Types Of Testing](#) ▾ [Tutorials](#) ▾

Top 90 SQL Interview Questions And Answers (LATEST)

Last Updated: February 18, 2021

Data Scientist Experience: 5-10 Years	Apply Now
Python ML Developers Experience: 4-9 Years	Apply Now
Data Scientist (Bank) Experience: 4-10 Years	Apply Now
Data Science/Scientist Experience: 0-5 Years	Apply Now
Data Scientist Experience: 0-1 Years	

=

monster®
Find Better.™



90 most popular SQL Interview Questions and Answers:

These are the most common and useful SQL interview questions for freshers as well as experienced candidates. Basics to advanced concepts of SQL are covered in this article.

Refer to these questions for a quick revision of major SQL concepts before appearing for an interview.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)


Skip Ad ►

A large question mark icon is positioned above the word "SQL" in a large, orange, bold font. Below this, a white rectangular box contains the text "TOP INTERVIEW QUESTIONS AND ANSWERS". At the bottom of the banner, the copyright information "© www.SoftwareTestingHelp.com" is displayed.

FEATURED VIDEOS



NOW
PLAYING

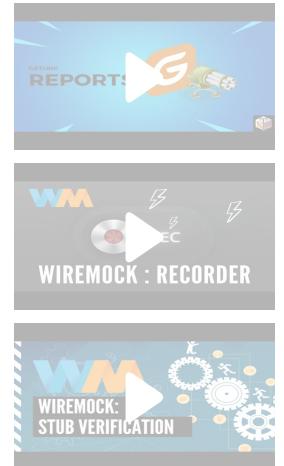

Best SQL Interview Question

Let's start.

Q #1) What is SQL?

Answer: Structured Query Language SQL is a language used to interact with the database to support software applications.

A cartoon illustration of a person with green hair sitting at a desk, working on a computer. The monitor shows a gear icon. To the left, there's a shelf with books and a small screen. A blue coffee cup sits on the desk. In the bottom right corner, there's an advertisement for GoDaddy website hosting.

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)


Skip Ad ▶

Q #2) What are tables in SQL?

Answer: The table is a collection of record and its information at a single view.

Q #3) What are the different types of statements supported by SQL?

Answer:

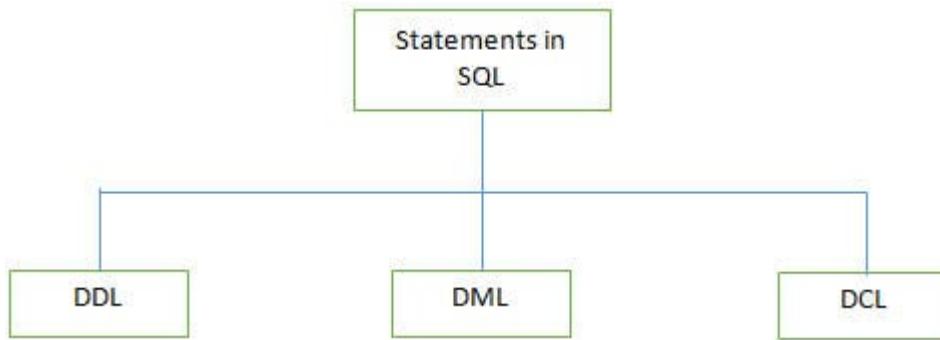

There are 3 types of SQL statements:

a) DDL (Data Definition Language): It is used to define the database structure such as tables. It includes three statements such as CREATE, ALTER, and DROP.

Also read => MySQL Create Table Tutorial

Some of the DDL Commands are listed below:

CREATE: It is used for creating the table.

```
CREATE TABLE table_name
column_name1 data_type(size),
column_name2 data_type(size),
column_name3 data_type(size),
```

ALTER: The ALTER table is used for modifying the existing table object in the database.


```
ALTER TABLE table_name
ADD column_name datatype
```

OR

```
ALTER TABLE table_name
DROP COLUMN column_name
```

b) DML (Data Manipulation Language): The records. Commonly used DML statements

The SELECT statement is used as a partial records in the table.

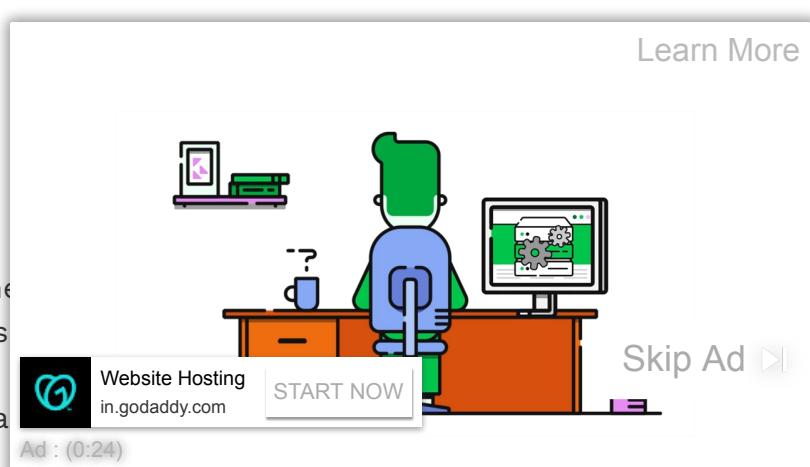

c) DCL (Data Control Language): These statements are used to set privileges such as GRANT and REVOKE database access permission to the specific user.

Q #4) How do we use the DISTINCT statement? What is its use?


Answer: The DISTINCT statement is used with the SELECT statement. If the record contains duplicate values then the DISTINCT statement is used to select different values among duplicate records.

Syntax:

```
SELECT DISTINCT column_name(s)
  FROM table_name;
```

Q #5) What are the different Clauses used in SQL?

Answer:

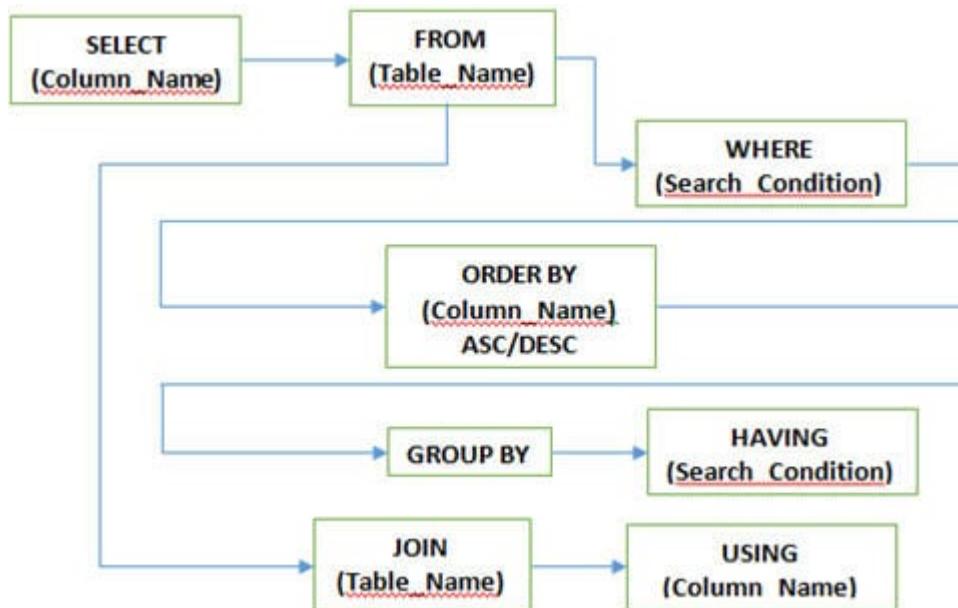


WHERE Clause: This clause is used to define the condition, extract and display only those records which fulfill the given condition.

Syntax:

```
SELECT column_name(s)
  FROM table_name
 WHERE condition;
```

GROUP BY Clause: It is used with SELECT query using the value specified in it. It mainly groups the end result accordingly.

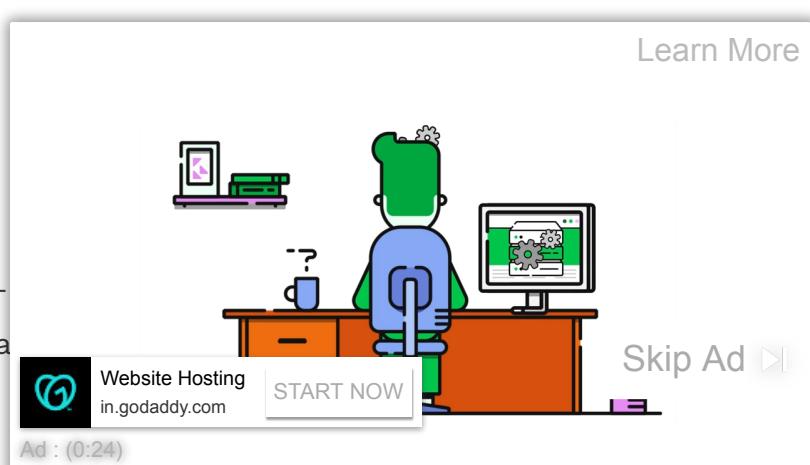

Further reading => MySQL Group By Tutorial

Syntax:

```
SELECT column_name(s)
  FROM table_name
 GROUP BY column_name;
```

HAVING clause: This clause is used in association with the GROUP BY clause. It is applied to each group of results or the entire result as a single group. It is much similar as WHERE clause but the only difference is you cannot use it without GROUP BY clause

Syntax:

```
SELECT column_name(s)
  FROM table_name
 GROUP BY column_name
 HAVING condition;
```

ORDER BY clause: This clause is used to define the order of the query output either in ascending (ASC) or in descending (DESC). Ascending (ASC) is set as the default one but descending (DESC) is set explicitly.

Syntax:

```
SELECT column_name(s)
  FROM table_name
 WHERE condition
 ORDER BY column_name ASC|DESC;
```

USING clause: USING clause comes in use while working with SQL JOIN. It is used to check equality based on columns when tables are joined. It can be used instead of the ON clause in JOIN.

Syntax:

```
SELECT column_name(s)
  FROM table_name
 JOIN table_name
 USING (column_name);
```

Q #6) Why do we use SQL constraints? What are the types of constraints in database in SQL?

Answer: Constraints are used to set the rules for the database. If the rule gets violated then it can abort the action that is being performed.

Constraints are defined while creating the table or even after the table is created once with the help of ALTER TABLE command.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)


Skip Ad ▶

There are 5 major constraints are used in SQL, such as

- **NOT NULL:** That indicates that the column must have some value and cannot be left NULL.
- **UNIQUE:** This constraint is used to ensure that each row and column has a unique value and no value is being repeated in any other row or column.
- **PRIMARY KEY:** This constraint is used in association with NOT NULL and UNIQUE constraints such as on one or the combination of more than one column to identify the particular record with a unique identity.
- **FOREIGN KEY:** It is used to ensure the referential integrity of data in the table. It matches the value in one table with another using the PRIMARY KEY.
- **CHECK:** It ensures whether the value in columns fulfills the specified condition.

Q #7) What are different JOINS used in SQL?

Answer:

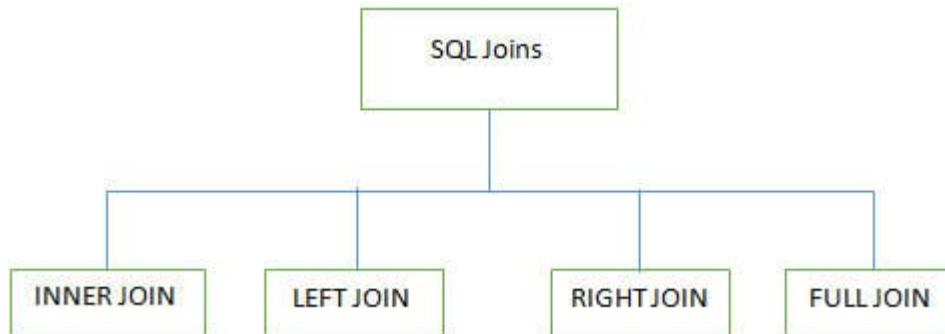

4 major types of Joins are used while working on multiple tables in SQL databases:


INNER JOIN: It is also known as SIMPLE JOIN which returns all rows from BOTH tables when it has at least one matching column.

Syntax:

```
SELECT column_name(s)
  FROM table_name1&nbsp;
INNER JOIN table_name2
  ON column_name1=column_name2;
```

For Example,

In this example, we have a table **Employee**

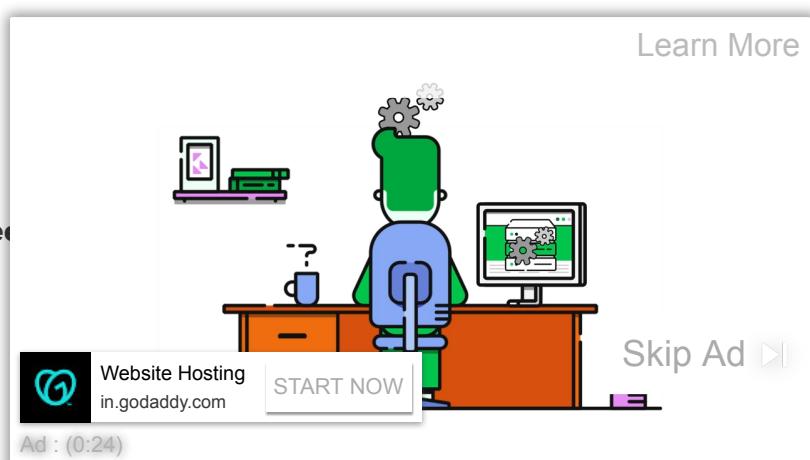

Emp_Id	Last_Name	First_Name	Job_Role
E0011	Verma	Akhil	Administration
E0012	Samson	Nikita	Asst. Manager
E0013	Jordan	Nil	In charge
E0014	Smith	Joe	Technician

The second table's name is **Joining**.

Emp_Id	Last_Name	First_Name	Joining_Date
E0012	Verma	Akhil	2016/04/18
E0013	Samson	Nikita	2016/04/19
E0014	Jordan	Nil	2016/05/01

Enter the following SQL statement:

```
SELECT Employee.Emp_id, Joining.Joining_Date
  FROM Employee
 INNER JOIN Joining
    ON Employee.Emp_id = Joining.Emp_id
 ORDER BY Employee.Emp_id;
```

There will be 4 records selected. **Results are:**

Emp_Id	Joining_Date
E0012	2016/04/18
E0013	2016/04/19
E0014	2016/05/01

Employee and **Orders** tables have a matching *customer_id* value.

LEFT JOIN (LEFT OUTER JOIN): This join returns all rows from a LEFT table.

Syntax:

```
SELECT column_name(s)
  FROM table_name1
 LEFT JOIN table_name2
    ON column_name1=column_name2;
```

For Example,

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

In this example, we have a table **Employee** with the following data:

Emp_Id	Last_Name	First_Name	Job_Role
E0011	Verma	Akhil	Administration
E0012	Samson	Nikita	Asst. Manager
E0013	Jordan	Nil	In charge
E0014	Smith	Joe	Technician

The second table's name is **Joining**.

Emp_Id	Last_Name	First_Name	Joining_Date
E0012	Verma	Akhil	2016/04/18
E0013	Samson	Nikita	2016/04/19
E0014	Jordan	Nil	2016/05/01
NULL	NULL	NULL	2016/03/01

Enter the following SQL statement:

```
SELECT Employee.Emp_id, Joining.Joining_Date
FROM Employee
LEFT OUTER JOIN Joining
ON Employee.Emp_id = Joining.Emp_id
ORDER BY Employee.Emp_id;
```

There will be 4 records selected. You will see the following results:

Emp_Id	Joining_Date
NULL	NULL
E0012	2016/04/18
E0013	2016/04/19
E0014	2016/05/01

RIGHT JOIN (RIGHT OUTER JOIN): This join retrieves all the matched rows from the LEFT table.

Syntax:

```
SELECT column_name(s)
FROM table_name1
RIGHT JOIN table_name2
ON column_name1=column_name2;
```

Learn More


Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

For Example,

In this example, we have a table **Employee** with the following data:

Emp_Id	Last_Name	First_Name	Job_Role
E0011	Verma	Akhil	Administration
E0012	Samson	Nikita	Asst. Manager
E0013	Jordan	Nil	In charge
E0014	Smith	Joe	Technician

The second table's name is **Joining**.

Emp_Id	Last_Name	First_Name	Joining_Date
E0012	Verma	Akhil	2016/04/18
E0013	Samson	Nikita	2016/04/19
E0014	Jordan	Nil	2016/05/01
NULL	NULL	NULL	2016/03/01

Enter the following SQL statement:

```
SELECT Employee.Emp_id, Joining.Joining_Date FROM Employee
RIGHT JOIN Joining
ON Employee.Emp_id = Joining.Emp_id
ORDER BY Employee.Emp_id;
```


Output:

Emp_id	Joining_Date
E0012	2016/04/18
E0013	2016/04/19
E0014	2016/05/01

FULL JOIN (FULL OUTER JOIN): This joins the RIGHT table or in the LEFT table.

Syntax:

```
SELECT column_name(s)
FROM table_name1
FULL OUTER JOIN table_name2
ON column_name1=column_name2;
```

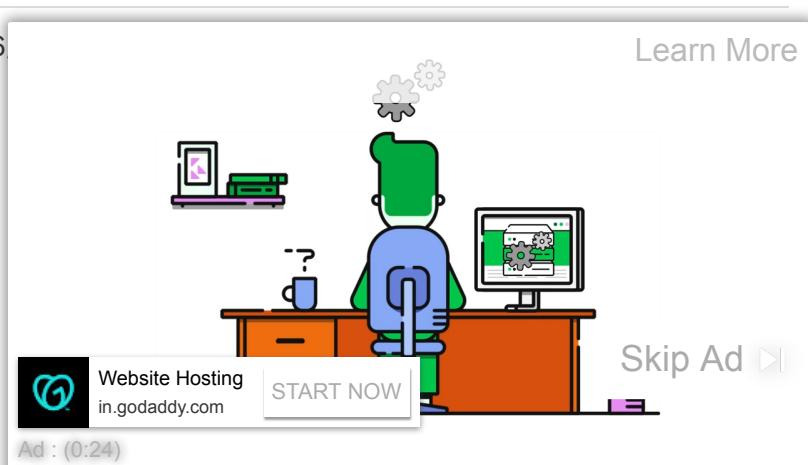

For Example,

In this example, we have a table **Employee** with the following data:

Emp_Id	Last_Name	First_Name	Job_Role
E0011	Verma	Akhil	Administration
E0012	Samson	Nikita	Asst. Manager
E0013	Jordan	Nil	In charge
E0014	Smith	Joe	Technician

The second table's name is **Joining**.


Emp_Id	Last_Name	First_Name	Joining_Date
E0012	Verma	Akhil	2016/04/18
E0013	Samson	Nikita	2016/04/19
E0014	Jordan	Nil	2016/05/01
NULL	NULL	NULL	2016/03/01

Enter the following SQL statement:

```
SELECT Employee.Emp_id, Joining.Joining_Date
FROM Employee
FULL OUTER JOIN Joining
ON Employee.Emp_id = Joining.Emp_id
ORDER BY Employee.Emp_id;
```

There will be 8 records selected. **These are the results that you should see.**

Emp_Id	Joining_Date
NULL	NULL
E0012	2016/04/18
E0013	2016/04/19
E0014	2016/05/01
NULL	2016/03/01
E0012	2016/04/18
E0013	2016/04/19
E0014	2016/05/01

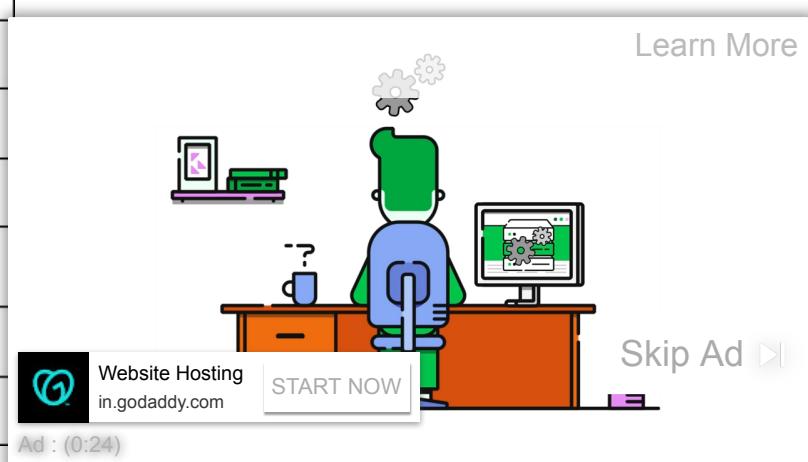

Also Read => MySQL Join Tutorial

Q #8) What are transactions and their controls?

Answer: A transaction can be defined as the sequence task that is performed on databases in a logical manner to gain certain results. Operations like Creating, updating, deleting records performed in the database come from transactions.

In simple words, we can say that a transaction means a group of SQL queries executed on database records.

There are 4 transaction controls such as

- **COMMIT:** It is used to save all changes made through the transaction.
- **ROLLBACK:** It is used to roll back the transaction. All changes made by the transaction are reverted back and the database remains as before.
- **SET TRANSACTION:** Set the name of the transaction.
- **SAVEPOINT:** It is used to set the point where the transaction is to be rolled back.

Q #9) What are the properties of the transaction?

Answer: Properties of the transaction are known as ACID properties. These are:

- **Atomicity:** Ensures the completeness of all transactions performed. Checks whether every transaction is completed successfully or not. If not, then the transaction is aborted at the failure point and the previous transaction is rolled back to its initial state as changes are undone.
- **Consistency:** Ensures that all changes made through successful transactions are reflected properly on the database.
- **Isolation:** Ensures that all transactions are performed independently and changes made by one transaction are not reflected on others.
- **Durability:** Ensures that the changes made in the database with committed transactions persist as it is even after a system failure.

Q #10) How many Aggregate functions are there?

Answer: SQL Aggregate functions determine a single summary value for a table and return a single value.

There are 7 aggregate functions in SQL:

- **AVG():** Returns the average value from a column.
- **COUNT():** Returns number of table rows.
- **MAX():** Returns the largest value among the values in a column.

Learn More

Website Hosting
in.godaddy.com

START NOW

Skip Ad ▶

Ad : (0:24)

- **MIN()**: Returns smallest value among the records.
- **SUM()**: Returns the sum of specified column values.
- **FIRST()**: Returns the first value.
- **LAST()**: Returns last value.

Q #11) What are Scalar functions in SQL?

Answer: Scalar functions are used to return a single value based on the input values.

Scalar Functions are as follows:

- **UCASE()**: Converts the specified field in the upper case.
- **LCASE()**: Converts the specified field in lower case.
- **MID()**: Extracts and returns character from the text field.
- **FORMAT()**: Specifies the display format.
- **LEN()**: Specifies the length of the text field.
- **ROUND()**: Rounds up the decimal field value to a number.

Q #12) What are triggers?

Answer: Triggers in SQL is kind of stored procedures used to create a response to a specific action performed on the table such as INSERT, UPDATE or DELETE. You can invoke triggers explicitly on the table in the database.

Action and Event are two main components of SQL triggers. When certain actions are performed, the event occurs in response to that action.

Syntax:

```
CREATE TRIGGER name {BEFORE|AFTER} (event [OR..])
ON table_name [FOR [EACH] {ROW|STATEMENT}]
EXECUTE PROCEDURE functionname {arguments}
```


Q #13) What is View in SQL?

Answer: A View can be defined as a virtual table which is created from one or more tables.

Syntax:

```
CREATE VIEW view_name AS
SELECT column_name(s)
FROM table_name
WHERE condition
```

Q #14) How we can update the view?

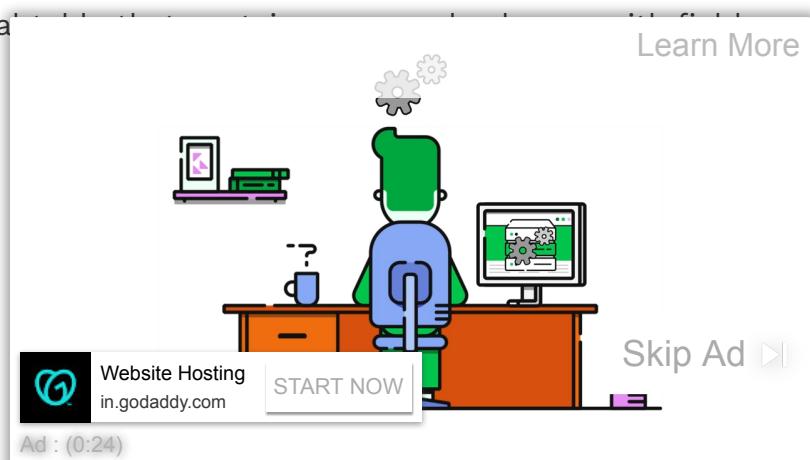

Answer: SQL CREATE and REPLACE can be used for updating the view.

Execute the below query to update the created view.

Syntax:

```
CREATE OR REPLACE VIEW view_name AS
SELECT column_name(s)
FROM table_name
WHERE condition
```

Q #15) Explain the working of SQL Privileges?

Answer: SQL GRANT and REVOKE commands are used to implement privileges in SQL multiple user environments. The administrator of the database can grant or revoke privileges to or from users of database objects by using commands like SELECT, INSERT, UPDATE, DELETE, ALL, etc.

GRANT Command: This command is used to provide database access to users other than the administrator.

Syntax:

```
GRANT privilege_name
ON object_name
TO {user_name|PUBLIC|role_name}
[WITH GRANT OPTION];
```

In the above syntax, the GRANT option indicates that the user can grant access to another user too.

REVOKE command: This command is used to provide database deny or remove access to database objects.


Syntax:

```
REVOKE privilege_name
ON object_name
FROM {user_name|PUBLIC|role_name};
```

Q #16) How many types of Privileges are available in SQL?

Answer: There are two types of privileges

- **System privilege:** System privilege defines the rights of a user to perform administrative tasks, ALTER, CREATE/ALTER/DELETE TABLE, CREATE

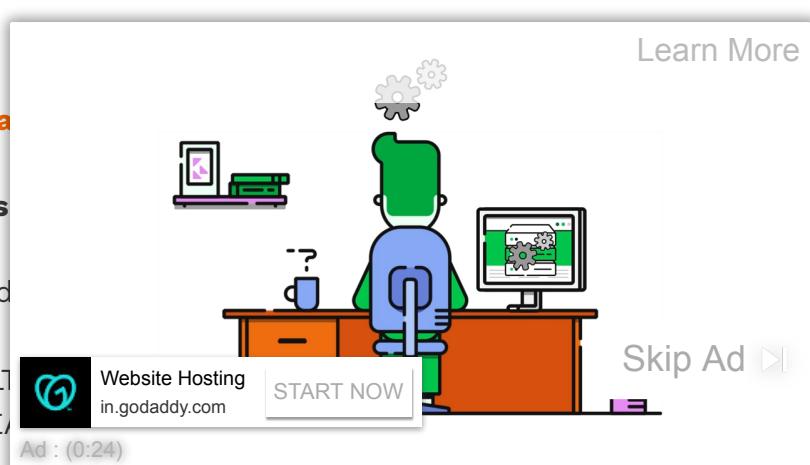

- **Object privilege:** This allows to perform actions on an object or object of another user(s) viz. table, view, indexes etc. Some of the object privileges are EXECUTE, INSERT, UPDATE, DELETE, SELECT, FLUSH, LOAD, INDEX, REFERENCES etc.

Q #17) What is SQL Injection?

Answer: SQL Injection is a type of database attack technique where malicious SQL statements are inserted into an entry field of database in a way that once it is executed, the database is exposed to an attacker for the attack. This technique is usually used for attacking data-driven applications to have access to sensitive data and perform administrative tasks on databases.

For Example,

```
SELECT column_name(s) FROM table_name WHERE condition;
```

Q #18) What is SQL Sandbox in SQL Server?

Answer: SQL Sandbox is a safe place in the SQL server environment where untrusted scripts are executed. There are 3 types of SQL sandbox:

- **Safe Access Sandbox:** Here a user can perform SQL operations such as creating stored procedures, triggers etc. but cannot have access to the memory as well as cannot create files.
- **External Access Sandbox:** Users can access files without having the right to manipulate the memory allocation.
- **Unsafe Access Sandbox:** This contains untrusted codes where a user can have access to memory.

Q #19) What is the difference between SQL and PL/SQL?

Answer: SQL is a Structured Query Language to create and access databases whereas PL/SQL comes with procedural concepts of programming languages.

Q #20) What is the difference between SQL and MySQL?

Answer: SQL is a Structured Query Language which is a standard language for relational database. On the other hand, MySQL is a database management system which is the standard database language.

Q #21) What is the use of the NVL function?

Answer: NVL function is used to convert the null values into some other value.

Q #22) What is the Cartesian product of two tables?

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

Answer: The output of Cross Join is called a Cartesian product. It returns rows combining each row from the first table with each row of the second table. **For Example**, if we join two tables having 15 and 20 columns the Cartesian product of two tables will be $15 \times 20 = 300$ rows.

Q #23) What do you mean by Subquery?

Answer: Query within another query is called as Subquery. A subquery is called inner query which returns output that is to be used by another query.

Q #24) How many row comparison operators are used while working with a subquery?

Answer: There are 3-row comparison operators that are used in subqueries such as IN, ANY and ALL.

Q #25) What is the difference between clustered and non-clustered indexes?

Answer: The differences between the two are as follows:

- One table can have only one clustered index but multiple non-clustered indexes.
- Clustered indexes can be read rapidly rather than non-clustered indexes.
- Clustered indexes store data physically in the table or view whereas, non-clustered indexes do not store data in the table as it has separate structure from the data row.

Q #26) What is the difference between DELETE and TRUNCATE?

Answer: The differences are:

- The basic difference in both is DELETE command is DML command and the TRUNCATE command is DDL.
- DELETE command is used to delete a specific row from the table whereas the TRUNCATE command is used to remove all rows from the table.
- We can use the DELETE command with WHERE clause but cannot use the TRUNCATE command with it.

Q #27) What is the difference between DR

Answer: TRUNCATE removes all rows from the table but does not remove the entire table from the database.

Q #28) How to write a query to show the name start with K?

Answer: Query:

```
SELECT * FROM Student WHERE Student_Na
```

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

Here 'like' operator is used to perform pattern matching.

Q #29) What is the difference between Nested Subquery and Correlated Subquery?

Answer: Subquery within another subquery is called Nested Subquery. If the output of a subquery depends on column values of the parent query table then the query is called Correlated Subquery.

```
SELECT adminid(SELEC Firstname+ ' ' +Lastname&nbsp;&nbsp;FROM Employee WHERE empid=emp. adminid)AS EmpAdminId FROM Employee;
```

The result of the query is the details of an employee from the Employee table.

Q #30) What is Normalization? How many Normalization forms are there?

Answer: Normalization is used to organize the data in such a manner that data redundancy will never occur in the database and avoid insert, update and delete anomalies.

There are 5 forms of Normalization:

- **First Normal Form (1NF):** It removes all duplicate columns from the table. It creates a table for related data and identifies unique column values.
- **First Normal Form (2NF):** Follows 1NF and creates and places data subsets in an individual table and defines the relationship between tables using the primary key.
- **Third Normal Form (3NF):** Follows 2NF and removes those columns which are not related through the primary key.
- **Fourth Normal Form (4NF):** Follows 3NF and does not define multi-valued dependencies. 4NF is also known as BCNF.

Q #31) What is a Relationship? How many types of Relationships are there?

Answer: The relationship can be defined as the connection between more than one table in the database.

There are 4 types of relationships:

- One to One Relationship
- Many to One Relationship
- Many to Many Relationship
- One to Many Relationship

Q #32) What do you mean by Stored Procedure?

Answer: A stored procedure is a collection of SQL statements stored in the database to access the database. We can create the stored procedures in any programming language.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

execute them wherever required by applying some conditional logic to it. Stored procedures are also used to reduce network traffic and improve performance.

Syntax:

```
CREATE Procedure Procedure_Name
(
//Parameters
)
AS
BEGIN
SQL statements in stored procedures to update/retrieve records
END
```

Q #33) State some properties of Relational databases?

Answer: Properties are as follows:

- In relational databases, each column should have a unique name.
- The sequence of rows and columns in relational databases is insignificant.
- All values are atomic and each row is unique.

Q #34) What are Nested Triggers?

Answer: Triggers may implement data modification logic by using INSERT, UPDATE, and DELETE statements. These triggers that contain data modification logic and find other triggers for data modification are called Nested Triggers.

Q #35) What is a Cursor?


Answer: A cursor is a database object which is used to manipulate data in a row-to-row manner.

Cursor follows steps as given below:

- Declare Cursor
- Open Cursor
- Retrieve row from the Cursor
- Process the row
- Close Cursor
- Deallocate Cursor

Q #36) What is Collation?

Answer: Collation is a set of rules that character data is stored using correct character and accent.

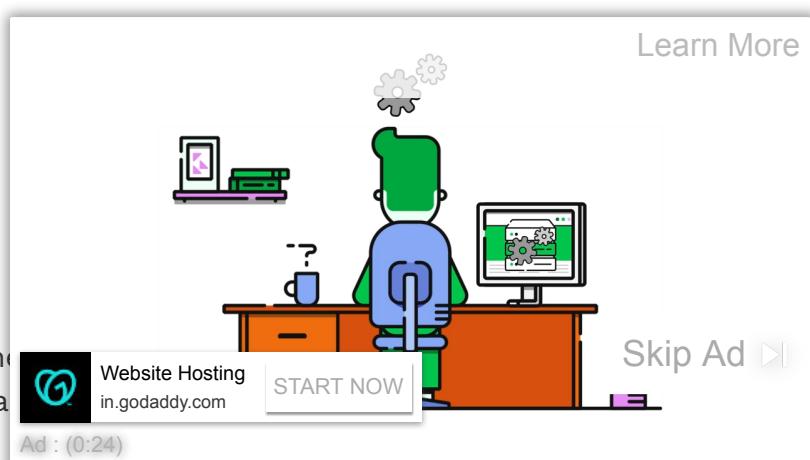

Q #37) What do we need to check in Database Testing?

Answer: In Database testing, the following thing is required to be tested:

- Database connectivity
- Constraint check
- Required application field and its size
- Data Retrieval and processing with DML operations
- Stored Procedures
- Functional flow

Q #38) What is Database White Box Testing?

Answer: Database White Box testing involves:

- Database Consistency and ACID properties
- Database triggers and logical views
- Decision Coverage, Condition Coverage, and Statement Coverage
- Database Tables, Data Model, and Database Schema
- Referential integrity rules

Q #39) What is Database Black Box Testing?

Answer: Database Black Box testing involves:

- Data Mapping
- Data stored and retrieved
- Use of Black Box testing techniques such as Equivalence Partitioning and Boundary Value Analysis (BVA)

Q #40) What are Indexes in SQL?


Answer: The index can be defined as the way to retrieve the data more quickly. We can define indexes using CREATE statements.

Syntax:

```
CREATE INDEX index_name
ON table_name (column_name)
```

Further, we can also create a Unique Index

```
CREATE UNIQUE INDEX index_name
ON table_name (column_name)
```

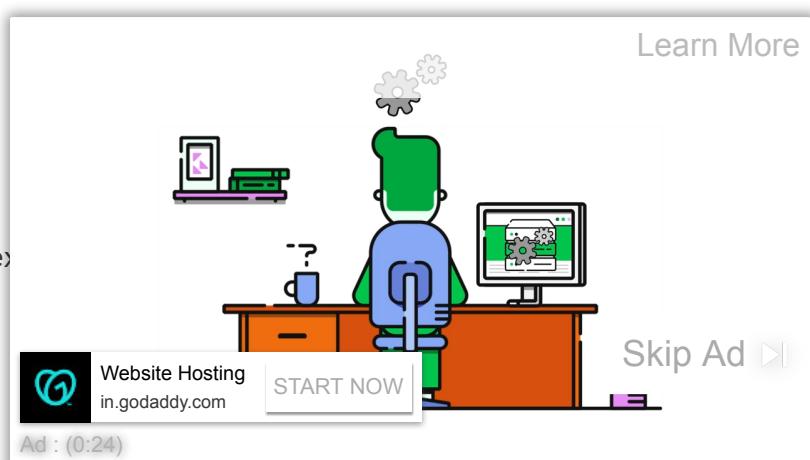

UPDATE: We have added few more short questions for practice.

Q #41) What does SQL stand for?

Answer: SQL stands for Structured Query Language.

Q #42) How to select all records from the table?

Answer: To select all the records from the table we need to use the following syntax:

```
Select * from table_name;
```

Q #43) Define join and name different types of joins?

Answer: Join keyword is used to fetch data from two or more related tables. It returns rows where there is at least one match in both the tables included in the join. [Read more here](#).

Type of joins are:

1. Right join
2. Outer join
3. Full join
4. Cross join
5. Self join.

Q #44) What is the syntax to add a record to a table?

Answer: To add a record in a table INSERT syntax is used.

For Example,

```
INSERT into table_name VALUES (value1, value2..);
```

Q #45) How do you add a column to a table?

Answer: To add another column in the table, use the following command:

```
ALTER TABLE table_name ADD (column_name)
```

Recommended reading => How to add a column to a table

Q #46) Define the SQL DELETE statement

Answer: DELETE is used to delete a row or multiple rows from a table based on a condition.

The basic syntax is as follows:

```
DELETE FROM table_name
```

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad

WHERE <Condition>

Q #47) Define COMMIT?

Answer: COMMIT saves all changes made by DML statements.

Q #48) What is the Primary key?

Answer: A Primary key is a column whose values uniquely identify every row in a table. Primary key values can never be reused.

Q #49) What are Foreign keys?

Answer: When a table's primary key field is added to related tables in order to create the common field which relates the two tables, it called a foreign key in other tables. Foreign key constraints enforce referential integrity.

Q #50) What is CHECK Constraint?

Answer: A CHECK constraint is used to limit the values or type of data that can be stored in a column. They are used to enforce domain integrity.

Q #51) Is it possible for a table to have more than one foreign key?

Answer: Yes, a table can have many foreign keys but only one primary key.

Q #52) What are the possible values for the BOOLEAN data field?

Answer: For a BOOLEAN data field, two values are possible: -1(true) and 0(false).

Q #53) What is a stored procedure?

Answer: A stored procedure is a set of SQL queries that can take input and send back output.

Q #54) What is identity in SQL?

Answer: An identity column in where SQL define a start and increment value of the

Q #55) What is Normalization?

Answer: The process of table design to m
We need to divide a database into two or
them.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

Q #56) What is a Trigger?

Answer: The Trigger allows us to execute a batch of SQL code when table event occurs (INSERT, UPDATE or DELETE commands are executed against a specific table).

Q #57) How to select random rows from a table?

Answer: Using a SAMPLE clause we can select random rows.

For Example,

```
SELECT * FROM table_name SAMPLE(10);
```

Q #58) Which TCP/IP port does SQL Server run?

Answer: By default SQL Server runs on port 1433.

Q #59) Write a SQL SELECT query that only returns each name only once from a table?

Answer: To get the result as each name only once, we need to use the DISTINCT keyword.

```
SELECT DISTINCT name FROM table_name;
```

Q #60) Explain DML and DDL?

Answer: DML stands for Data Manipulation Language. INSERT, UPDATE and DELETE are DML statements.

DDL stands for Data Definition Language. CREATE, ALTER, DROP, RENAME are DDL statements.

Q #61) Can we rename a column in the output of the SQL query?

Answer: Yes, using the following syntax we can do this.

```
SELECT column_name AS new_name FROM table_name;
```

Q #62) Give the order of SQL SELECT?

Answer: Order of SQL SELECT clauses is:
BY. Only the SELECT and FROM clauses are required.

Q #63) Suppose a Student column has two marks. How to get the marks of the top three students?

Answer: SELECT Name, Marks FROM Students
Students s2 WHERE s1.marks = s2.marks)

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

Q #64) What is SQL comments?

Answer: SQL comments can be inserted by adding two consecutive hyphens (-).

Q #65) Difference between TRUNCATE, DELETE and DROP commands?

Answer:

- **DELETE** removes some or all rows from a table based on the condition. It can be rolled back.
- **TRUNCATE** removes ALL rows from a table by de-allocating the memory pages. The operation cannot be rolled back
- **DROP** command removes a table from the database completely.

Q #66) What are the properties of a transaction?

Answer: Generally, these properties are referred to as ACID properties. They are:

1. Atomicity
2. Consistency
3. Isolation
4. Durability.

Q #67) What do you mean by ROWID?

Answer: It's an 18 character long pseudo column attached with each row of a table.

Q #68) Define UNION, MINUS, UNION ALL, INTERSECT?

Answer:

- **MINUS** – returns all distinct rows selected by the first query but not by the second.
- **UNION** – returns all distinct rows selected by either query
- **UNION ALL** – returns all rows selected by either query, including all duplicates.
- **INTERSECT** – returns all distinct rows selected by both queries.

Q #69) What is a transaction?

Answer: A transaction is a sequence of commands that change the state of a database from one consistent state to another.

Q #70) What is the difference between UNION and UNION ALL?

Answer: The differences are as follows:

- A table can have only one PRIMARY key.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

- The primary key cannot contain Null values whereas the Unique key can contain Null values.

Q #71) What is a composite primary key?

Answer: The primary key created on more than one column is called composite primary key.

Q #72) What is an Index?

Answer: An Index is a special structure associated with a table to speed up the performance of queries. The index can be created on one or more columns of a table.

Q #73) What is the Subquery?

Answer: A Subquery is a subset of select statements whose return values are used in filtering conditions of the main query.

Q #74) What do you mean by query optimization?

Answer: Query optimization is a process in which a database system compares different query strategies and select the query with the least cost.

Q #75) What is Collation?

Answer: Set of rules that define how data is stored, how case-sensitivity and Kana character can be treated etc.

Q #76) What is Referential Integrity?

Answer: Set of rules that restrict the values of one or more columns of the tables based on the values of the primary key or unique key of the referenced table.

Q #77) What is the Case function?

Answer: Case facilitates if-then-else type logic. It takes multiple conditions and returns one of the multiple possible results.

Q #78) Define a temp table?

Answer: A temp table is a temporary storage for data.

Q #79) How can we avoid duplicating records?

Answer: By using the DISTINCT keyword, we can avoid duplicating records.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

Q #80) Explain the difference between Rename and Alias?

Answer: Rename is a permanent name given to a table or column whereas Alias is a temporary name given to a table or column.

Q #81) What is a View?

Answer: A view is a virtual table that contains data from one or more tables. Views restrict data access of the table by selecting only required values and make complex queries easy.

Q #82) What are the advantages of Views?

Answer: Advantages of Views are:

- Views restrict access to the data because the view can display selective columns from the table.
- Views can be used to make simple queries to retrieve the results of complicated queries. **For Example,** views can be used to query information from multiple tables without the user knowing.

Q #83) List the various privileges that a user can grant to another user?

Answer: SELECT, CONNECT, RESOURCES.

Q #84) What is schema?

Answer: A schema is a collection of database objects of a User.

Q #85) What is a Table?

Answer: A table is the basic unit of data storage in the database management system. Table data is stored in rows and columns.

Q #86) Does View contain Data?

Answer: No, Views are virtual structures.

Q #87) Can a View based on another View?

Answer: Yes, A View is based on another View.

Q #88) What is the difference between the WHERE and HAVING clause?

Answer: Both specify a search condition but WHERE clause is used with SELECT statement and typically used with GROUP BY clause.

Learn More

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶

If GROUP BY clause is not used then Having behaved like WHERE clause only.

Q #89) What is the difference between Local and Global temporary tables?

Answer: If defined inside a compound statement a local temporary table exists only for the duration of that statement but a global temporary table exists permanently in the DB but its rows disappear when the connection is closed.

Q #90) What is CTE?

Answer: A CTE or common table expression is an expression that contains temporary result set which is defined in a SQL statement.

Conclusion

SQL is an essential component of the database system. Having well-verses knowledge of database along with SQL concepts will definitely be beneficial to crack the interview for the concerned profile.


Apart from some major concepts, there are some hidden facts that remain unseen and affect your performance in the interview. In this tutorial, I have tried to recollect some of those concepts which seem small but should not be neglected.

Hope in this article, you will find answers to most frequently asked SQL interview questions. The knowledge of SQL is a must for any tester and this article will help you in preparing the interview.

Further Reading => All about Database Testing

Recommended Reading

- Interview Questions and Answers
- Top Oracle Interview Questions: Oracle Basic, SQL, PL/SQL Questions
- 30 Most Important PL/SQL Interview Questions and Answers In 2021
- ETL Testing Interview Questions and Answers
- Top Teradata Interview Questions and Answers
- Some Tricky Manual Testing Questions
- 25 Best Agile Testing Interview Questions and Answers
- Spock Interview Questions with Answers

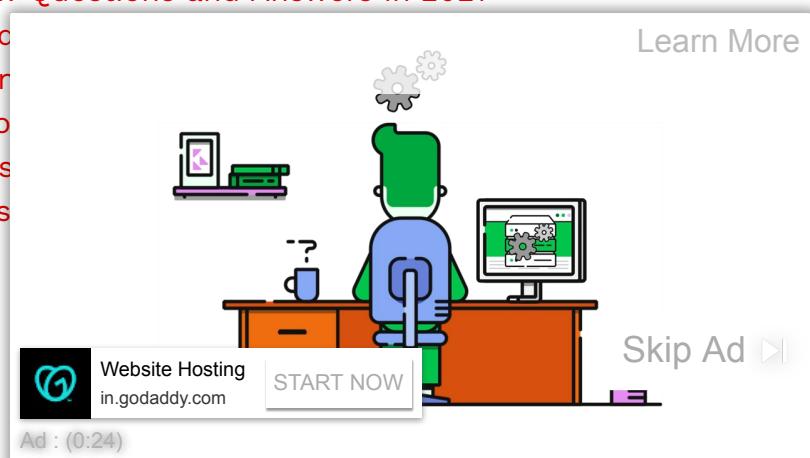

About SoftwareTestingHelp

Helping our community since 2006! Most popular portal for Software professionals with **100 million+ visits and 300,000+ followers!** You will absolutely love our tutorials on QA Testing, Development, Software Tools and Services Reviews and more!

Data Scientist

Experience: 5-10 Years
Bengaluru / Bangalore

[Apply Now](#)

Python ML Developers

Experience: 4-9 Years
Bengaluru / Bangalore, Pune

[Apply Now](#)

Data Scientist (Bank)

Experience: 4-10 Years
Bengaluru / Bangalore

[Apply Now](#)

Data Science/Scientist

Experience: 0-5 Years
Bengaluru / Bangalore, Chennai

[Apply Now](#)

Data Scientist

Experience: 0-1 Years
Bengaluru / Bangalore

[Apply Now](#)

Data Scientist


Experience: 5-10 Years
Hyderabad / Secunderabad,
Bengaluru / Bangalore

[Apply Now](#)

monster
Find Better.™

[Learn More](#)

Join Our Team!

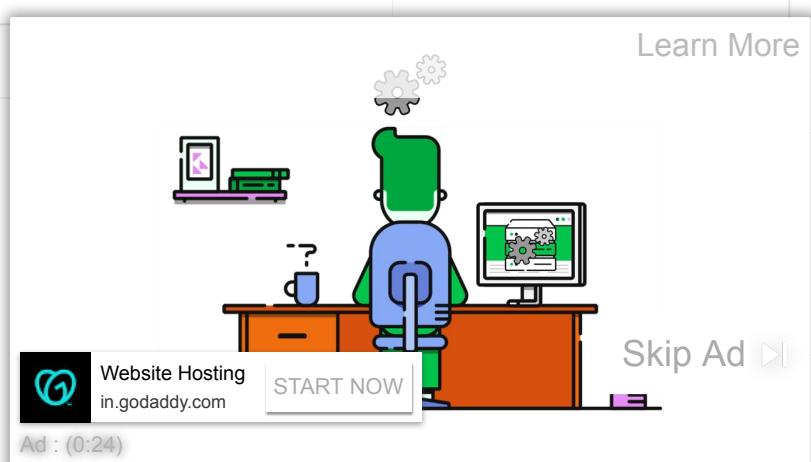



Recommended Reading

[Interview Questions and Answers](#)

[Top Oracle Interview Questions: Oracle Basic, SQL, PL/SQL Questions](#)

[30 Most Important PL/SQL Interview Questions and Answers In 2021](#)


[ETL Testing Interview Questions and Answers](#)

[Top Teradata Interview Questions and Answers](#)

[Some Tricky Manual Testing Questions & Answers](#)

[25 Best Agile Testing Interview Questions and Answers](#)

[Spock Interview Questions with Answers \(Most Popular\)](#)

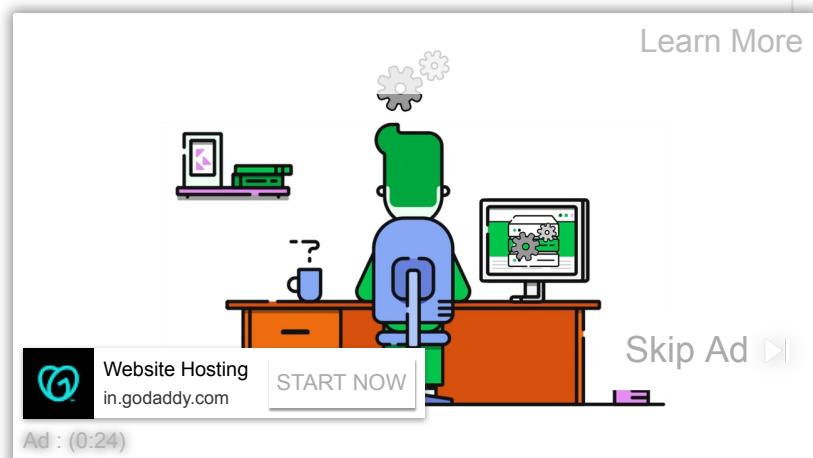

Data Scientist

Experience: 5-10 Years
Bengaluru / Bangalore

[Apply Now](#)
Python ML Developers

Experience: 4-9 Years
Bengaluru / Bangalore, Pune

[Apply Now](#)
Data Scientist (Bank)

Experience: 4-10 Years
Bengaluru / Bangalore

[Apply Now](#)
Data Scientist

Experience: 2-4 Years
Bengaluru / Bangalore

[Apply Now](#)
Data Scientist

Experience: 4-7 Years
Bengaluru / Bangalore

[Apply Now](#)

[ABOUT US](#) | [CONTACT US](#) | [ADVERTISE](#) | [TESTING SERVICES](#)

ALL ARTICLES ARE COPYRIGHTED AND CAN NOT BE REPRODUCED WITHOUT PERMISSION.

© COPYRIGHT SOFTWARETESTINGHELP 2021 — READ OUR [COPYRIGHT POLICY](#) | [PRIVACY POLICY](#) | [TERMS](#) | [COOKIE POLICY](#) | [AFFILIATE DISCLAIMER](#) | [LINK TO US](#)
Experience: 5-10 Years
Hyderabad / Secunderabad,
Bengaluru / Bangalore

monstei
Find Better.™



[Learn More](#)

Website Hosting
in.godaddy.com

START NOW

Ad : (0:24)

Skip Ad ▶