



STACK


HEAP

CODE

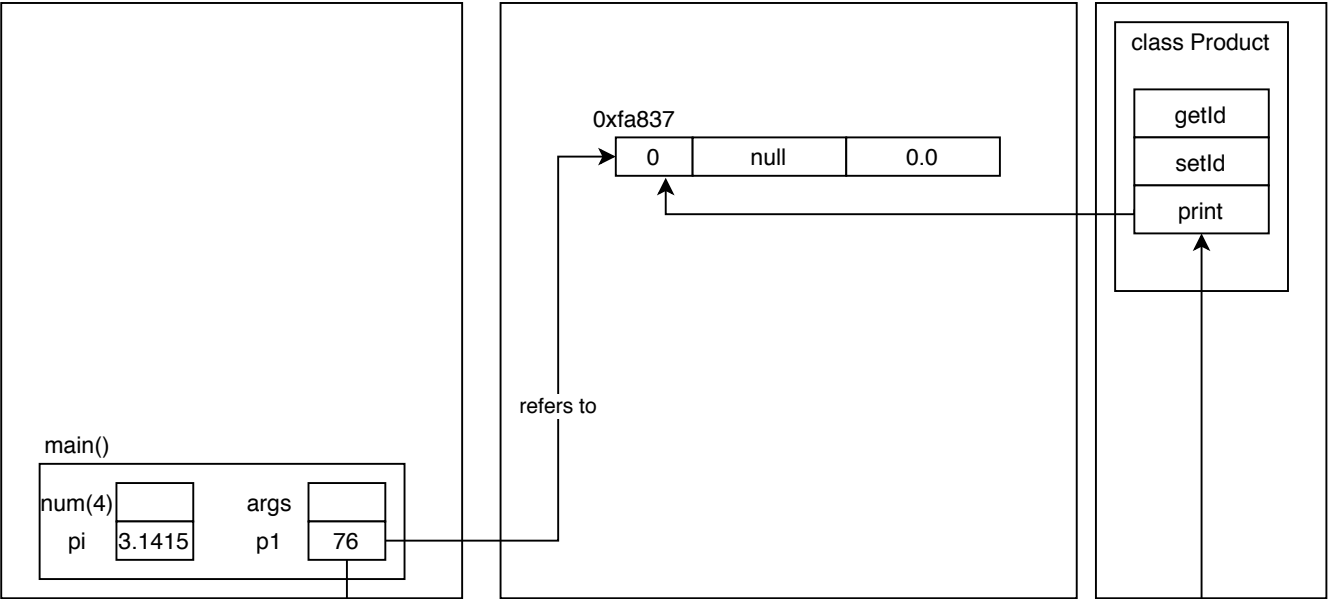

ref#	addr	data type
76	0xfa837	c.t.p.e.Product
77		
78		

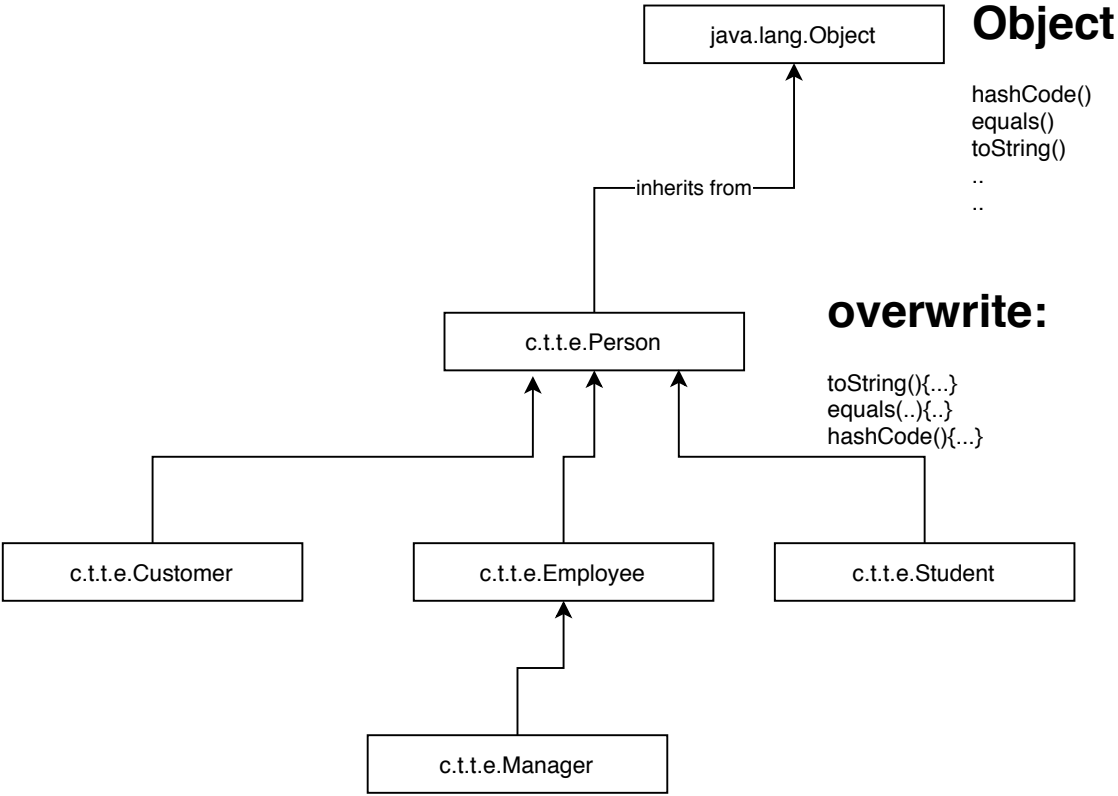

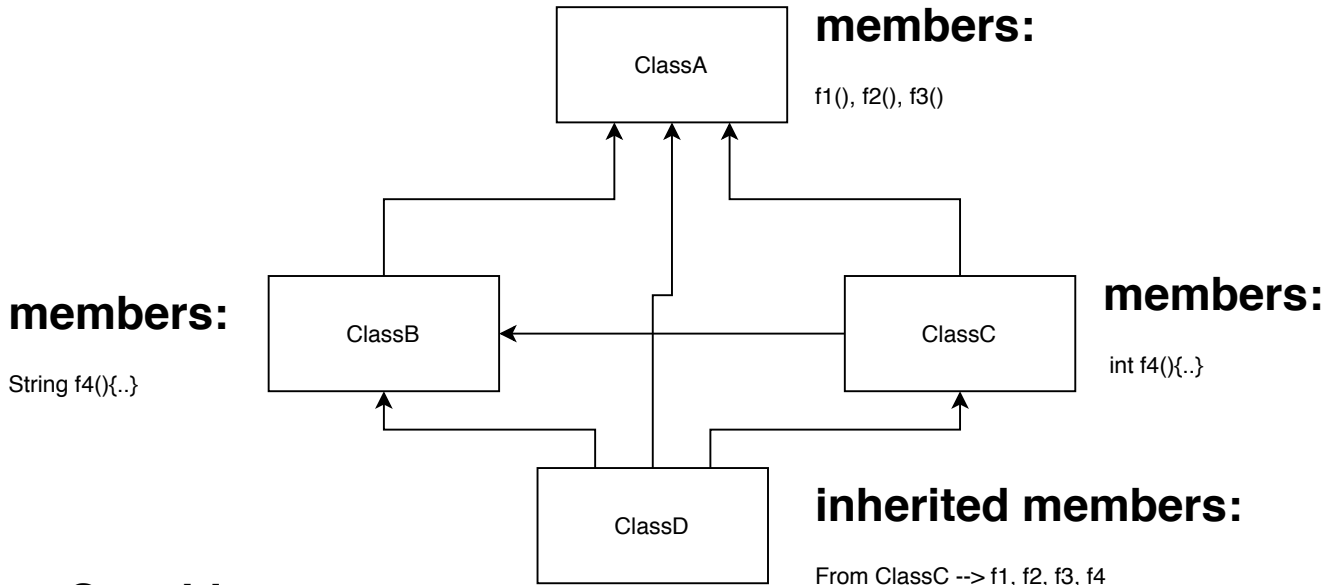

Consider...

```

ClassC cc = new ClassC();
cc.f1(); // invokes f1() from ClassA
cc.f4(); // invokes f4() from ClassC
  
```

```

ClassD cd = new ClassD();
cd.f1(); // invokes f1 coming from ClassC
String s = cd.f4();
// available from ClassB and ClassC with
different signature. Which one you think should
be invoked???
  
```

From ClassC --> f1, f2, f3, f4
 From ClassA --> f1, f2, f3
 From ClassB --> f1, f2, f3

Own members:
None

