

menu_beta


Architecture & Workflows

How the SignCollect gloss-management interface works end to end: the browser SPA, the PHP REST API, the MySQL database, the Signbank synchronisation layer, and the satellite tools reachable from the menu.

02	System overview	all tiers on one map	08	Workflow: adding glosses	single + batch
03	Menu & tool ecosystem	every nav-drawer entry	09	Workflow: editing & auto-sync	inline edits, phonology
04	Frontend modules	js/ responsibilities & boot	10	Workflow: video recording	zelfopname pipeline
05	Backend endpoint reference	php_api/ & signbank_sync/	11	Workflow: Signbank lifecycle	broadcast, compare, pull
06	Database map	tables, columns, relations	12	Auth, sessions & datasets	access control model
07	Workflow: list & filter	boot + search pipeline			

● Frontend (browser) ● PHP API ● Signbank sync layer ● MySQL ● File / video storage ● External service

SignCollect menu_beta is a **single-page app** (no framework, vanilla JS modules) talking JSON to a **flat-file PHP REST layer**. All gloss data lives in MySQL database `admin_gebarenoverleg`. Glosses can be linked to **Global Signbank** (`signbank.cls.ru.nl`); once linked, edits and video uploads auto-propagate. Satellite tools at the site root share the same database and session cookie.

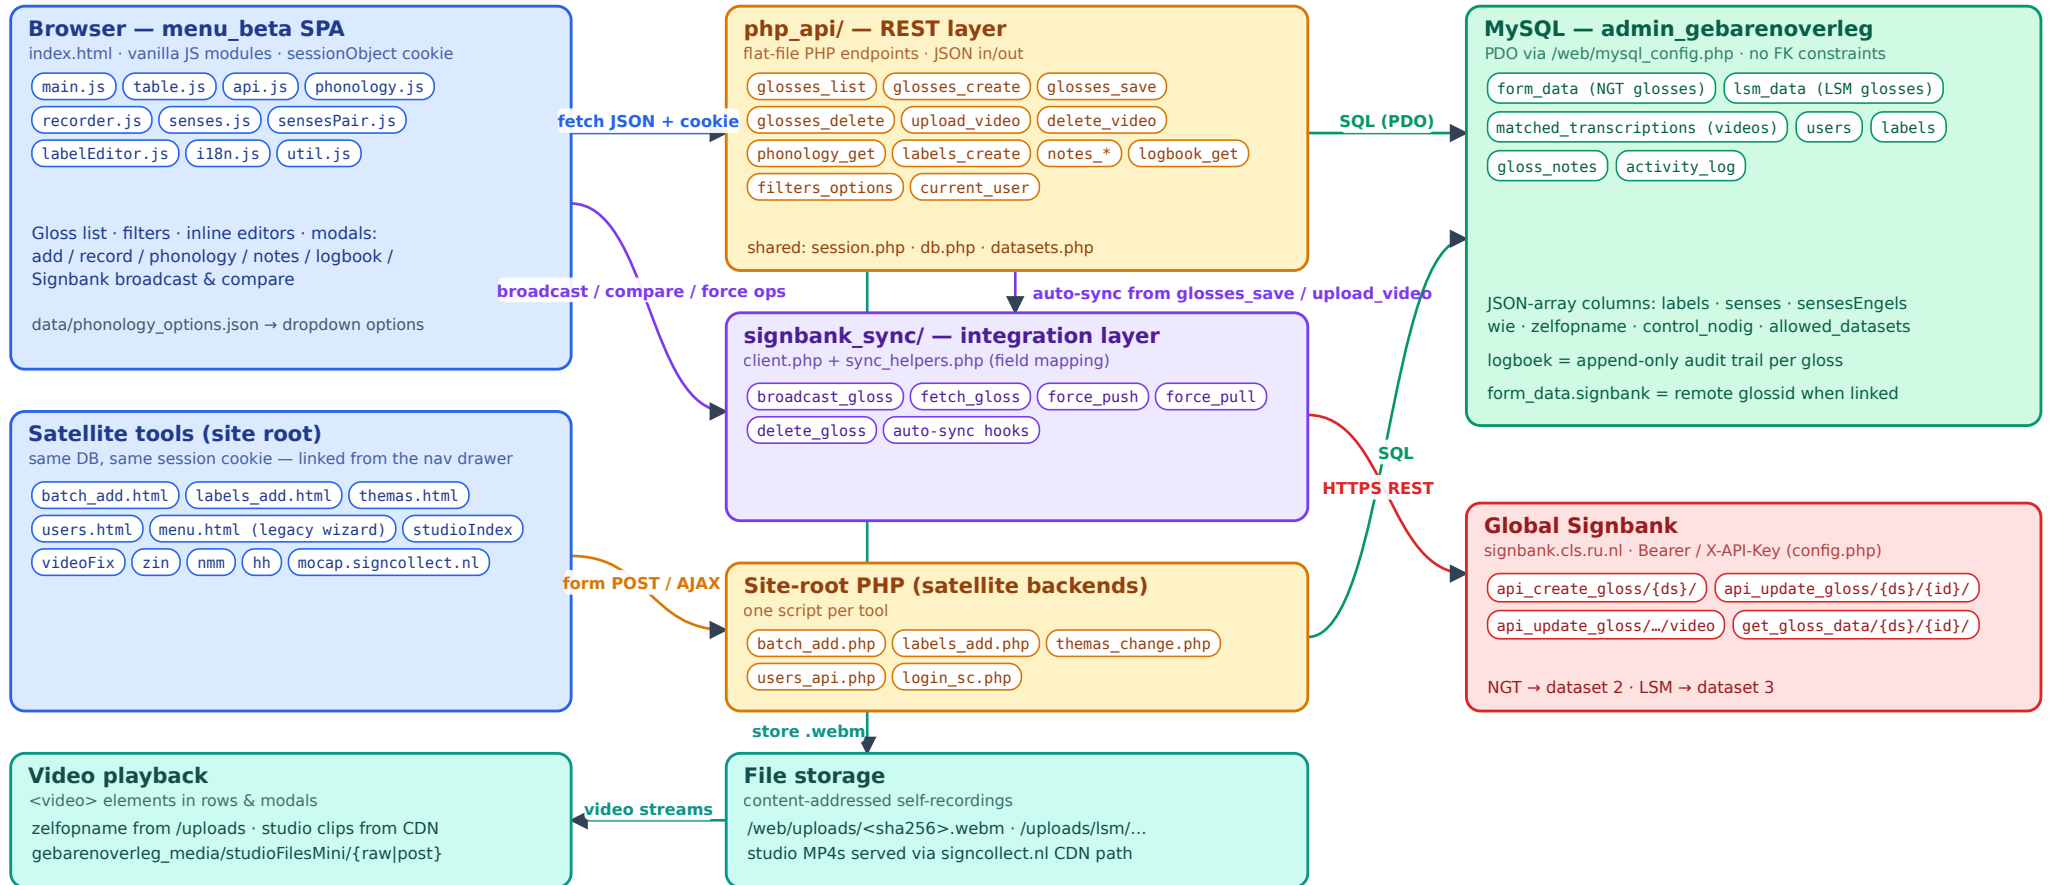

The hamburger menu in `index.html` is the hub of the SignCollect suite. **menu_beta itself** is the gloss list/editor; the other entries link to standalone tools at the `signcollect.nl` root that share the database and the `session0bject` cookie.

Core — this app

- **Gloss list & editor (menu_beta)**

`/menu_beta/index.html` — search, filter, paginate glosses; inline editing, senses, labels, phonology, notes, logbook, video recording, Signbank sync. Backend: `php_api/` + `signbank_sync/` → `form_data` / `lsm_data`.

Manage section

- **Batch toevoegen — batch glosses**

`/batch_add.html` → `batch_add.php`. Paste a word list; parses it and INSERTs new glosses into `form_data` (optionally linking Signbank IDs and merging labels into existing rows).

- **Labels toevoegen — label manager**

`/labels_add.html` → `labels_add.php`. Create / rename / recolour / delete labels in the `labels` table; renames cascade into the `form_data.labels` JSON arrays.

- **Themas aanpassen — theme editor**

`/themas.html` → `themas_change.php`. Renames a thema category by UPDATE-ing every matching `form_data.thema` value.

Admin & stats (role-gated)

- **Gebruikers beheren (admin only)**

`/users.html` → `users_api.php`. Add / edit / block / delete accounts in `users`; reads visit history from `activity_log`.

- **Gebruikersactiviteit (gomer only)**

`/stats/` — usage statistics dashboard fed by `activity_log`.

Main section — sibling tools

- **Glos Wizard (legacy editor)**

`/menu.html` — the original 248 KB monolithic gloss interface that menu_beta is replacing. Same `form_data` CRUD via its own inline AJAX endpoints.

- **Video tooling**

Video Crop fix `/videoFix/` · **Studio Videos** `/studioIndex/` (browses `matched_transcriptions`) · **Video Downloader** `/downloadVideos/downloadThemaVideo.html`.

- **Capture & research interfaces**


Motion Capture `mocap.signcollect.nl` · **Zinnen** `/zin/zinnen.html` · **NMM** `/nmm/fastView.html` · **Health Holland** `/hh/index.html`.

Account

- **Login / logout**

`/login.html` → `login_sc.php` validates against `users` and sets the `session0bject` cookie. Both logout buttons route through `/logout.html` (confirmation + cookie clear).

Orientation tip: if a tool is reachable from the menu but is *not* under `/web/menu_beta/`, it is a site-root tool with its own PHP backend — but it still reads/writes the **same MySQL tables**, so changes there appear in menu_beta immediately.

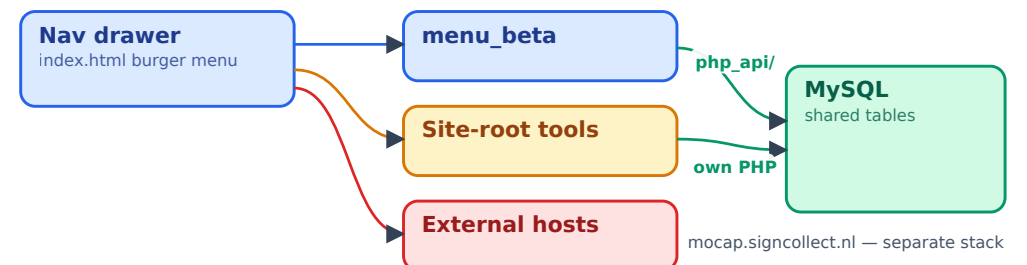

`index.html` contains all markup (filter bar, list container, every modal); the JS modules wire it up. State (active dataset, context, filters, page) lives in `main.js`. Every server call goes through **api.js**, the single fetch wrapper that attaches the dataset parameter and handles 401 → login redirect.

● **main.js — orchestrator**

Boot sequence, global state, filter bar listeners (search debounce 300 ms), pagination, all modal controllers (add, record, notes, logbook, Signbank broadcast/compare), dataset & context switching, nav drawer.

● **api.js — API client**

One function per endpoint (`list`, `create`, `save`, `uploadVideo`, `notesList`, `broadcastToSignbank`, ...). JSON POST/GET with `credentials: 'same-origin'`; central error → toast handling.

● **table.js — row renderer**

Renders each gloss row: thumbnail column (lazy video previews, FIFO queue, max 4 concurrent loads), main column (gloss + senses inline editors), meta column (labels / thema / owner pills), actions column (record, notes, logbook, phonology, Signbank buttons).

● **recorder.js — VideoRecorder**

Wraps `getUserMedia` + `MediaRecorder`; captures WebM (VP9/VP8) blobs for the zelfopname upload pipeline (page 10).

● **phonology.js — phonology editor**

Modal with 19 fields: 14 dropdowns + 5 free-text, options loaded from `data/phonology_options.json`. Every change auto-saves through `glosses_save.php` (machine_value stored locally, human label pushed to Signbank).

● **senses.js / sensesPair.js**

Editors for the `senses` / `sensesEngels` JSON arrays — add/remove/reorder sense rows, side-by-side NL↔EN pairing.

● **labelEditor.js**

Inline label picker with colour pills; can create a new dataset-scoped label on the fly via `labels_create.php`.


● **i18n.js & util.js**

`i18n.js`: NL/EN UI strings keyed by the user's `lang` preference. `util.js`: DOM helpers, debounce, toasts.

● **css/**

`theme.css` layout & nav · `filters.css` filter bar · `table.css` rows & thumbnails · `modals.css` dialogs · `video.css` players.

Boot sequence

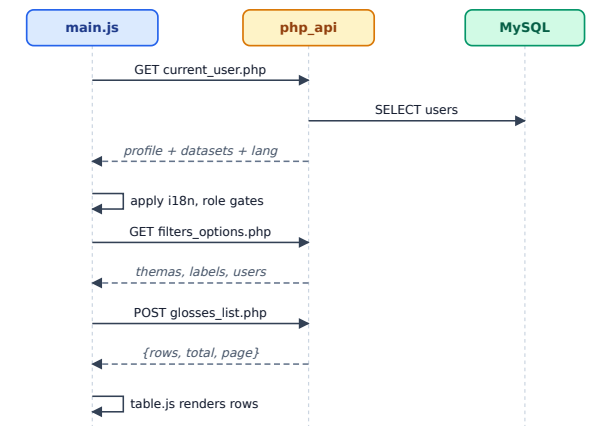

Convention: after any mutation the frontend either re-renders the single row from the snapshot returned by `glosses_save.php`, or calls `refresh()` to re-run `glosses_list.php` with the current filter state.

php_api/ — core REST endpoints

ENDPOINT		PURPOSE	TOUCHES
current_user.php	GET	Profile of logged-in user: role, language, allowed + active dataset, default context	users
filters_options.php	GET	Dropdown data for the filter bar: themas, labels (id/label/colour), users	form/lsm_data, labels, users
glosses_list.php	POST	Paginated gloss list — search, thema, labels, statuses, owner, context, sort, page	form/lsm_data, matched_transcriptions
glosses_create.php	POST	Create gloss (gloss NL/EN, thema, labels, senses); writes logboek entry	form/lsm_data INSERT
glosses_save.php	POST	Save changed fields, diff old→new into logboek; auto-syncs to Signbank if linked	form/lsm_data UPDATE + Signbank
glosses_delete.php	POST	Hard-delete a gloss row	form/lsm_data DELETE
upload_video.php	POST	Multipart WebM upload → SHA-256 filename; appends to zelfopname; pushes to Signbank if linked	/web/uploads, form/lsm_data, Signbank
delete_video.php	POST	Remove a filename from the zelfopname JSON array	form/lsm_data
studio_video_delete.php	POST	Soft-delete a studio recording (sets added='DELETE')	matched_transcriptions
phonology_get.php	GET	Fetch the 19 phonology fields + fase flags for the editor modal	form/lsm_data
labels_create.php	POST	Create a dataset-scoped label (idempotent), with colour	labels INSERT
notes_add.php / notes_list.php	P/G	Chat-style comment thread per gloss	gloss_notes
logboek_get.php	GET	Parse the logboek column into a structured edit history	form/lsm_data

Shared infrastructure (not endpoints): session.php — cookie auth, require_session() → 401 · db.php — PDO singleton, json_response(), logboek_entry() timestamping · datasets.php — dataset registry, require_dataset() → 403.

signbank_sync/ — Signbank integration

ENDPOINT	PURPOSE
broadcast_gloss.php	Create the gloss on Signbank, store the returned glossid in form_data.signbank, then auto-push phonology + video
fetch_gloss.php	Fetch the remote version and compute a field-by-field local↔remote diff for the compare modal
force_push.php	Overwrite Signbank with local values (all or selected fields)
force_pull.php	Overwrite local fields with the Signbank version
delete_gloss.php	Disconnect: NULL out form_data.signbank
push_gloss.php	Legacy single-gloss push (superseded by broadcast + auto-sync)
client.php	(library) HTTP client — base URL, Bearer / X-API-Key auth from config.php (gitignored)
sync_helpers.php	(library) field-name mapping, phonology machine_value→label translation, signbank_auto_sync_fields(), signbank_upload_video_for()


Signbank API surface used

CALL	USED BY
POST /dictionary/api_create_gloss/{ds}/	broadcast
POST /dictionary/api_update_gloss/{ds}/{id}/	auto-sync, force_push
POST /dictionary/api_update_gloss/{ds}/{id}/video	video push
GET /dictionary/get_gloss_data/{ds}/{id}/	fetch/compare, force_pull


Site-root backends (satellite tools)

batch_add.php	batch INSERT/UPDATE into form_data
labels_add.php	labels CRUD + cascade into form_data.labels
themas_change.php	bulk rename form_data.thema
users_api.php	users CRUD + activity_log
login_sc.php	auth → sessionObject cookie


One row in `form_data` (NGT) or `lsm_data` (LSM, identical structure) **is** a gloss. Multi-value fields are JSON arrays in TEXT columns — there are **no foreign-key constraints**; relations below are by convention. The `logboek` column is an append-only audit trail ([YYYY-MM-DD HH:MM] -prefixed lines).

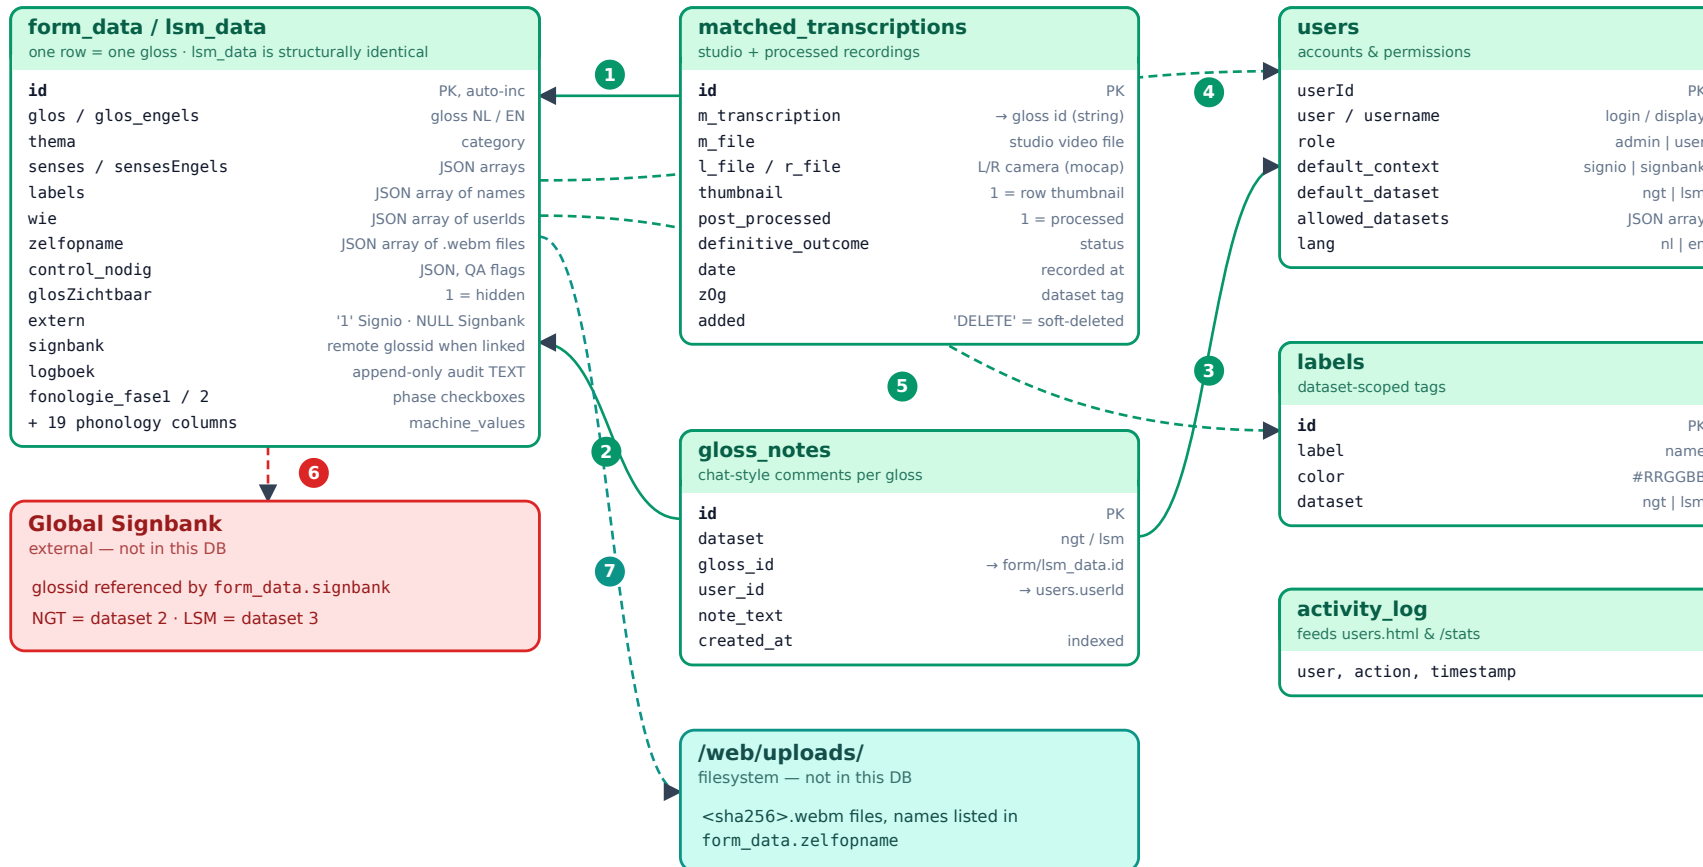

On load the SPA fetches the user profile and filter options, then every filter interaction funnels into one call: `glosses_list.php`. The response rows already include joined video metadata, the thumbnail choice, and duplicate-gloss warnings.

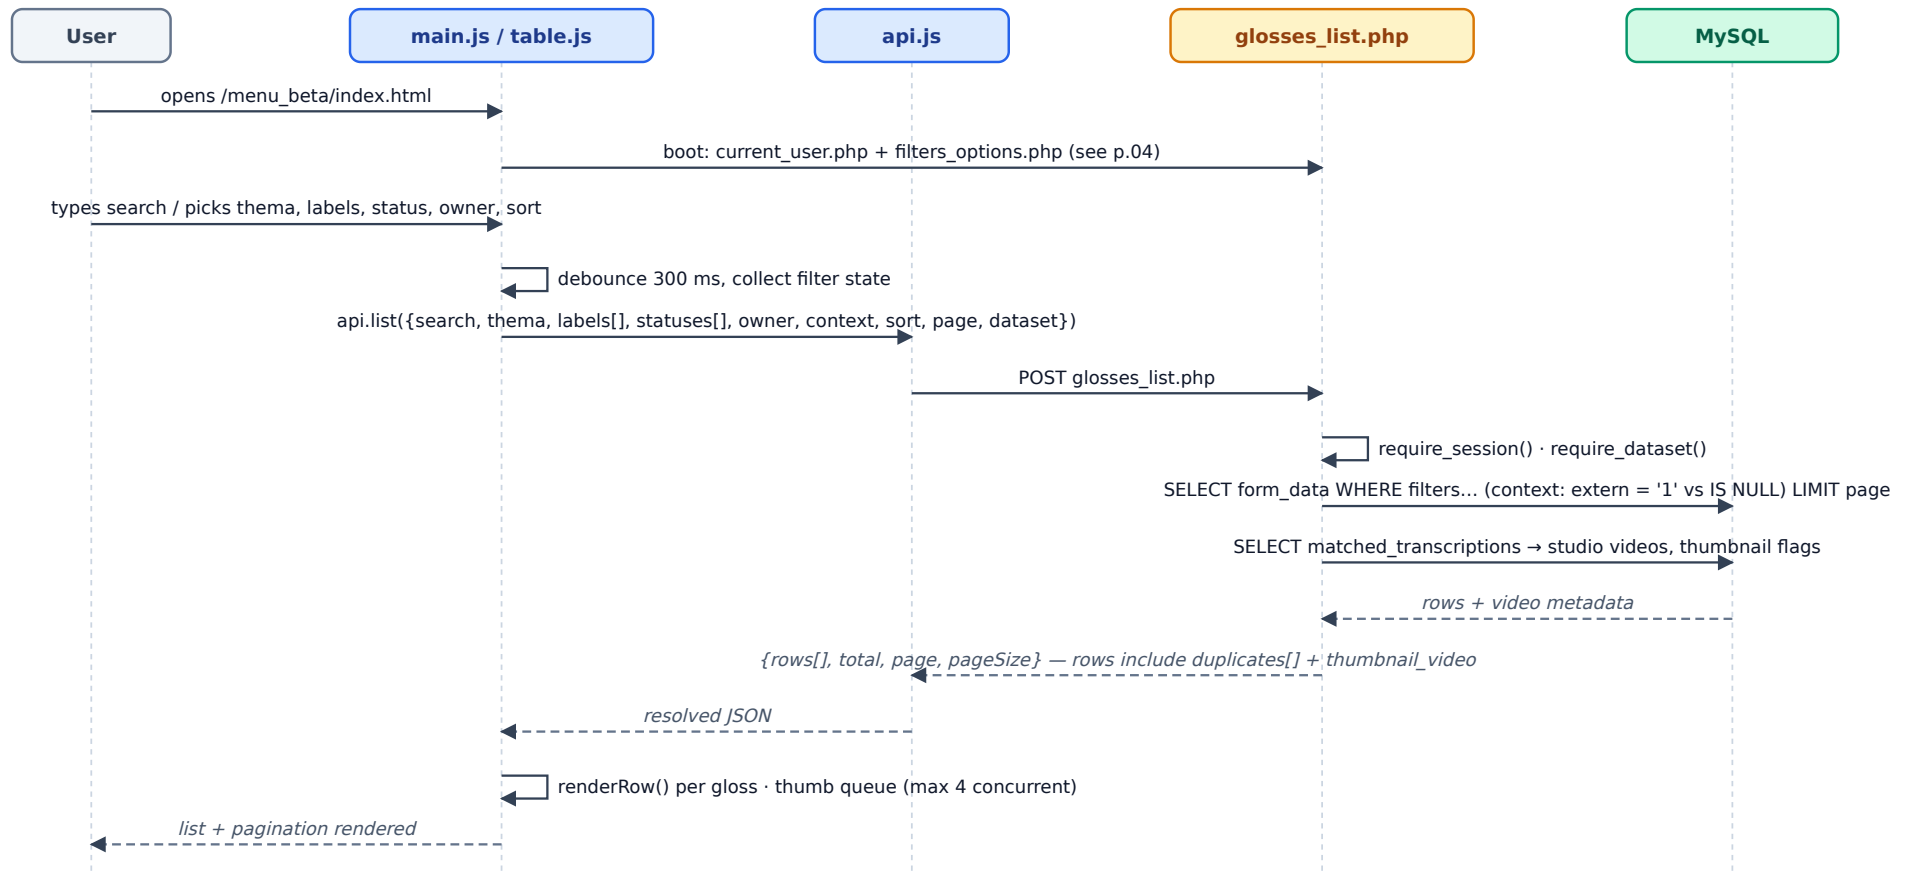

Single gloss — “Nieuwe glos” modal

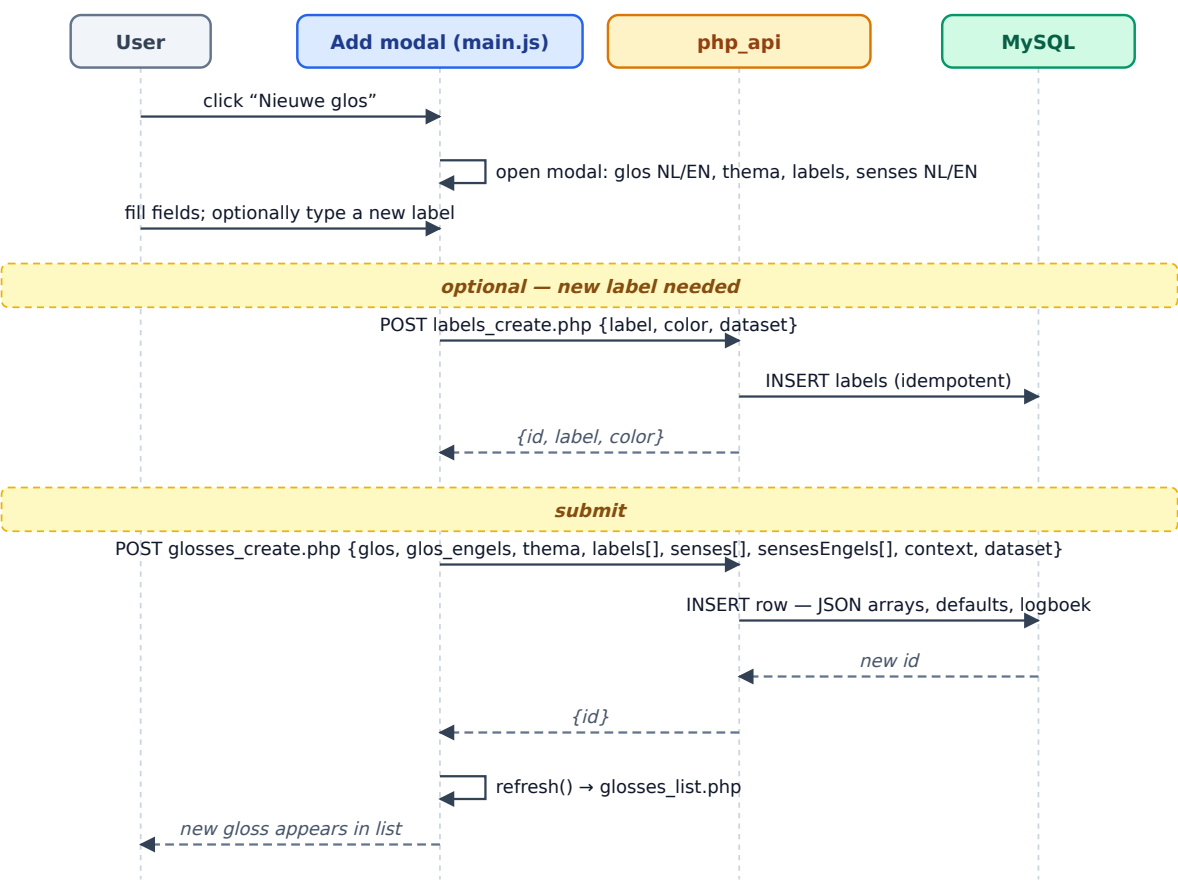

Batch glosses — batch_add.html

● **Flow**


1. User pastes a word list into the textarea at `/batch_add.html` and picks thema / labels / optional Signbank IDs.
2. The page parses the list client-side and POSTs to `batch_add.php`.
3. PHP INSERTs a `form_data` row per new word; for words that already exist it **merges labels** into the existing JSON array instead of duplicating.

● **Defaults on insert (both paths)**

`glosZichtbaar = 0` (visible) · `extern = '1'` when created in Signio context, `NULL` for Signbank context · `wie = [creatorUserId]` · `logboek` gets a creation entry with timestamp + username.

Duplicate guard: `glosses_list.php` returns a `duplicates` array per row (other glosses with the same name), which `table.js` renders as a warning — batch adds are the most common source of these.


All editors — inline gloss/senses/labels/thema, and every field of the phonology modal — call the same endpoint: `glosses_save.php`. It diffs old vs new, writes the audit trail, and transparently mirrors the change to Signbank when the gloss is linked (`form_data.signbank` holds a glossid).

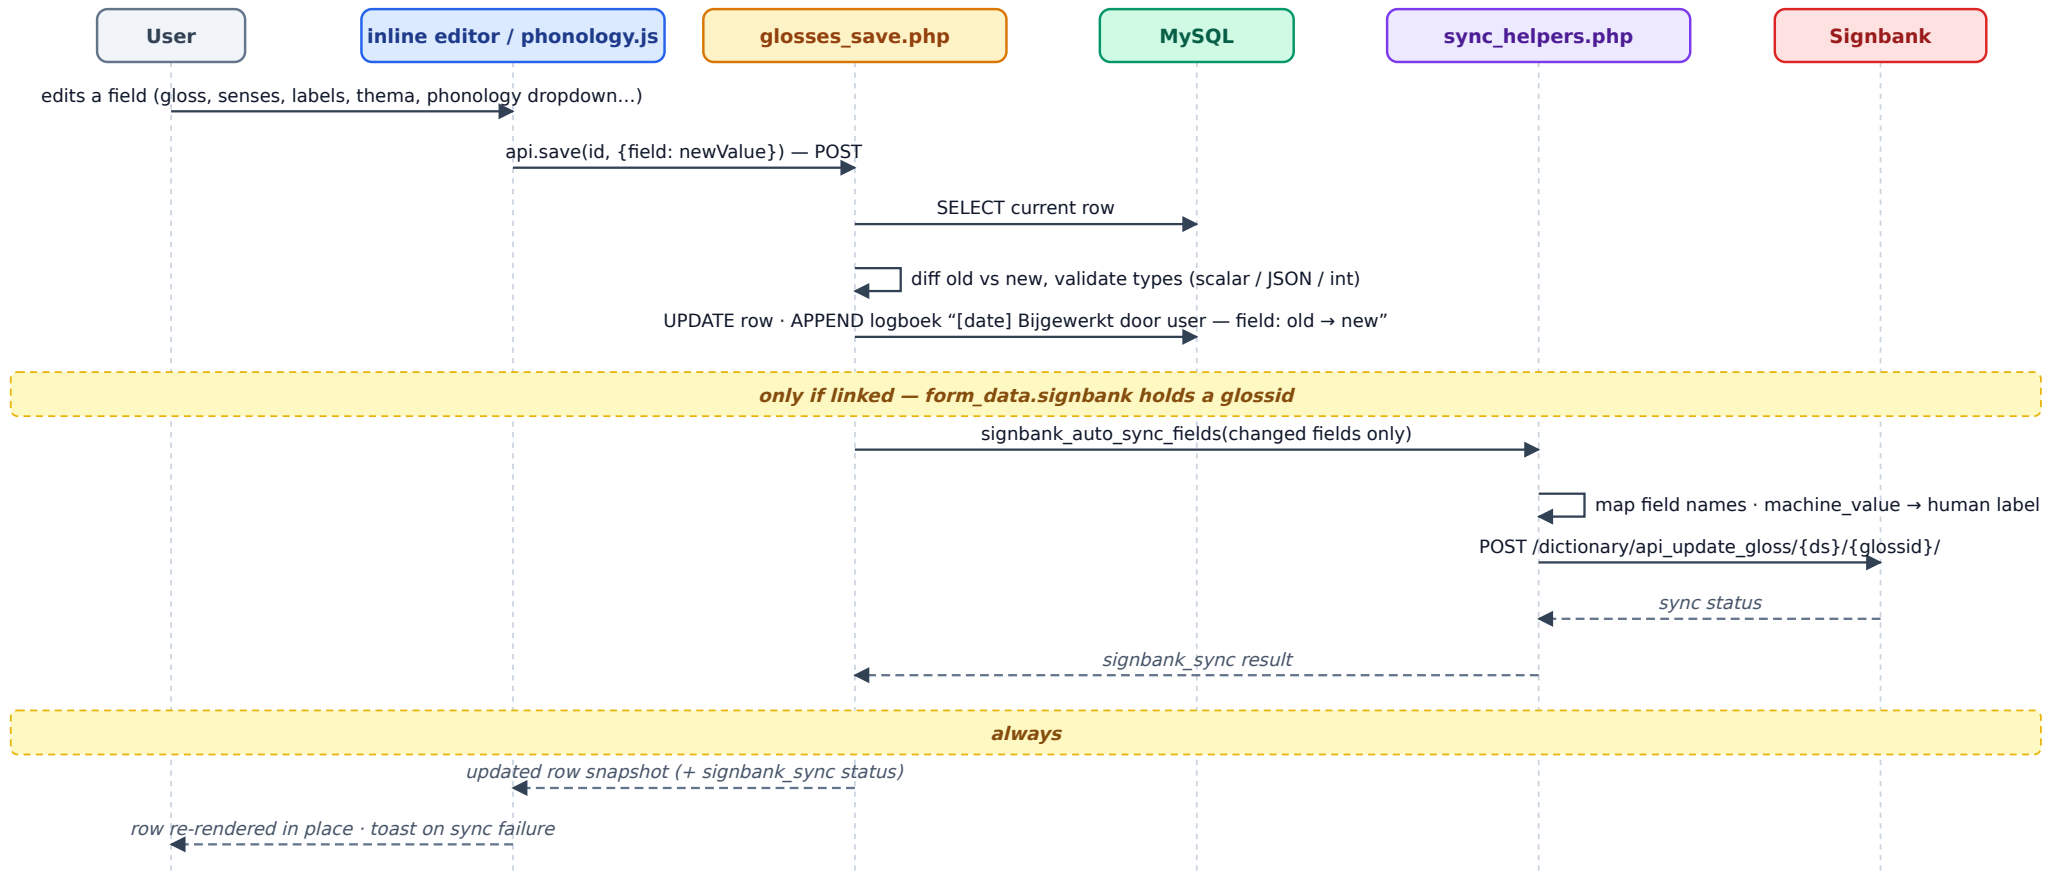


Workflow — video recording (zelfopname)

10 · CAMERA → CONTENT-ADDRESSED STORAGE → OPTIONAL SIGNBANK PUSH

Self-recordings are captured in the browser and stored **content-addressed**: the file name is the SHA-256 of the blob, which makes re-uploads of identical videos naturally idempotent. Studio recordings follow a separate path (the studio pipeline writes `matched_transcriptions` ; menu_beta only reads and soft-deletes those).

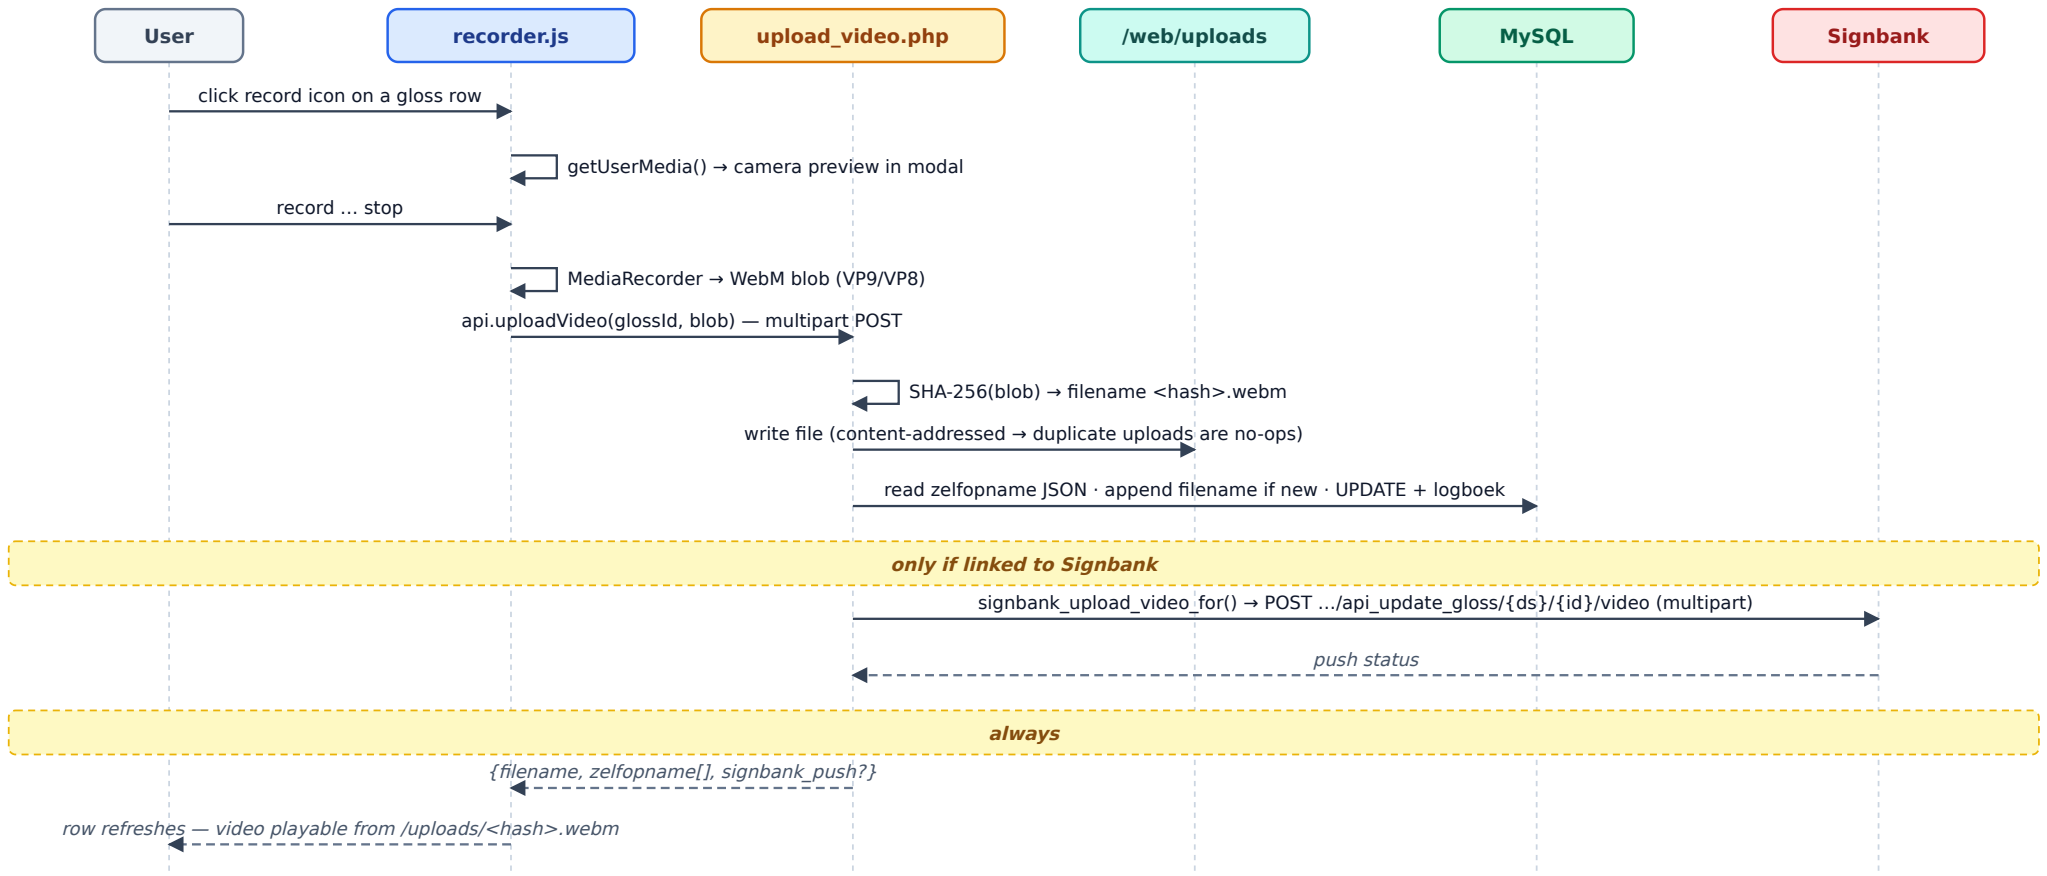

Broadcast — linking a gloss to Signbank

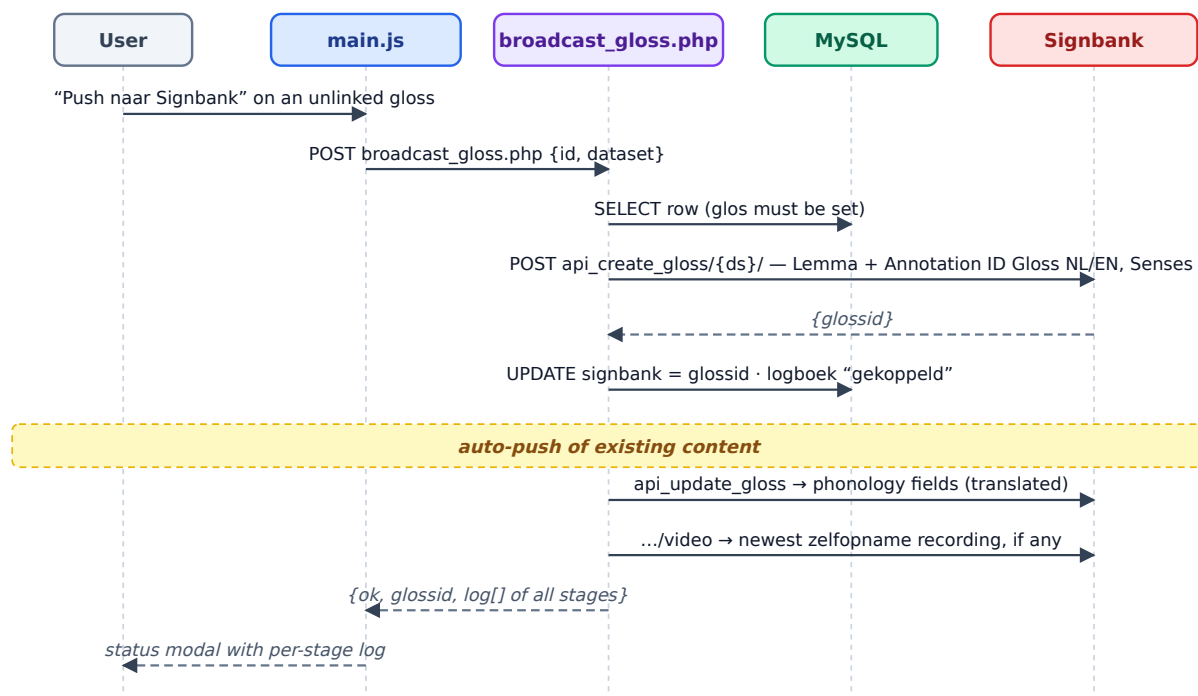

Once linked — the other operations

● Compare (fetch_gloss.php)

GETs `get_gloss_data` from Signbank, builds a side-by-side field diff against the local row, and offers three resolutions in the modal: push the diff, force push, or force pull.

● Force push / force pull

`force_push.php` overwrites Signbank with local values (optionally only selected fields). `force_pull.php` overwrites the local row with Signbank's version. Both log to logboek.

● Auto-sync (passive)

Not a button: every `glosses_save.php` and `upload_video.php` on a linked gloss pushes the *changed fields only* — see pages 09–10.

● Disconnect (delete_gloss.php)

NULLs `form_data.signbank`. The gloss stays on Signbank; only the link is severed, so auto-sync stops.

Field translation happens in `sync_helpers.php`: local column names map to Signbank field names (`glos` → "Annotation ID Gloss (Dutch)"), and phonology machine_values (e.g. "2") are translated to human labels via `data/phonology_options.json` before pushing.

● Configuration

`signbank_sync/config.php` (gitignored; see `config.example.php`): `base_url`, `api_key`, auth scheme (Bearer or X-API-Key), timeout. Dataset mapping: NGT → Signbank dataset 2, LSM → dataset 3.

Session model

- **sessionObject cookie**
Login at `/login.html` → `login_sc.php` validates against `users` and sets a JSON cookie: `{userId, username, role, expiresAt}`. All fetches send it (`credentials:'same-origin'`).
- **require_session()**
Every endpoint starts with this guard (`php_api/session.php`). Missing/expired cookie → **401**, and `api.js` redirects to `/login.html?redirect=<current page>`. Logout routes through `/logout.html` (confirm + clear cookie).

Role-gated UI

- **admin** — sees “Gebruikers beheren” (`users.html`) in the drawer.
- **gomer (hardcoded)** — sees the “Statistieken” section.
- everyone else — Main + Manage + Account sections only.

Dataset registry (`php_api/datasets.php`)

	NGT	LSM
MySQL table	form_data	lsm_data
Signbank dataset	2 (acronym NGT)	3 (acronym LSM)
Context subview	yes — Signio / Signbank	no
Video uploads	/web/uploads/<sha>.webm	/uploads/lsm/...

- **require_dataset()**
Each request names its dataset; the guard checks it against `users.allowed_datasets` (JSON array) → **403** if not permitted. This is what keeps LSM-only users out of NGT data. The resolved entry supplies the table name and Signbank IDs to all downstream code.
- **Switchers in the header**
Dataset switcher (NGT ↔ LSM): swaps `state.dataset`; every subsequent request carries it. **Context toggle** (Signio ↔ Signbank, NGT only): filters on `extern='1'` vs `extern IS NULL`.

Request lifecycle (every API call)

