


KOOLERTRON MYKB-KEYBOARD

MULTI-FUNCTION MECHANICAL KEYBOARD

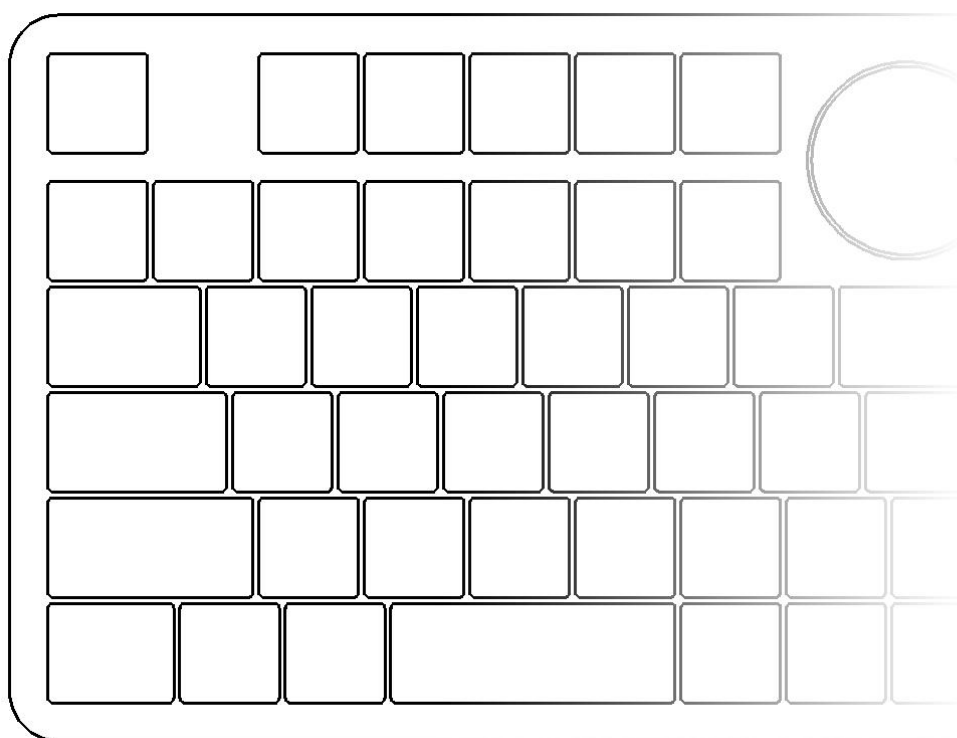

USER GUIDE

KOOLERTRON

Reliable Supplier of Made in China, Good Product Image of Made in China.

FOREWORD

Thank you very much for purchasing this pad. Please read this manual thoroughly before using it and use it correctly.

- This keypad is a powerful macro keyboard. It is recommended to program the keyboard through software before use.
- Please download the keyboard's configuration software according to the URL:
- Windows https://product_manual.s3.us-east-1.amazonaws.com/MYKB.zip
- Mac OS https://product_manual.s3.us-east-1.amazonaws.com/MYKB_For_MacOS.zip

Usage Notes

- We are not responsible for any data loss, loss of opportunity, damage or breakage occurred while using this product. Please be forewarned.

Safety Notes

- Do not damage or pull the cable or put heavy objects on it. It may cause fire or electric shock.
- When plugging / unplugging the cable, be sure to hold the plug. Pulling the cord may cause fire, electric shock, or malfunction.
- Do not touch it with water or touch with wet hands. It may cause fire, electric shock, or malfunction.
- When the product is damaged, stop using it immediately and do not touch the internal parts. If it is used as it is, it may cause injury or electric shock.
- Do not drop it from a high place, do not apply too much force on it such as throwing it.
- Do not stick solvents or chemicals such as benzene, thinner, or alcohol. It may cause alteration or deterioration of the exterior

1. Specifications:

Keyboard switch: OEM Outemu switches

Shell material: High-quality plexiglass

4-layer profiles stored onboard

Keyboard Interface: USB Type-C

Rating: DC 5V, <500mA


1.5M detachable USB cable

Compatible with Windows XP,7,8,10,11, Mac OS

KOOLERTRON

Reliable Supplier of Made in China, Good Product Image of Made in China.

2. Software Interface Introduction

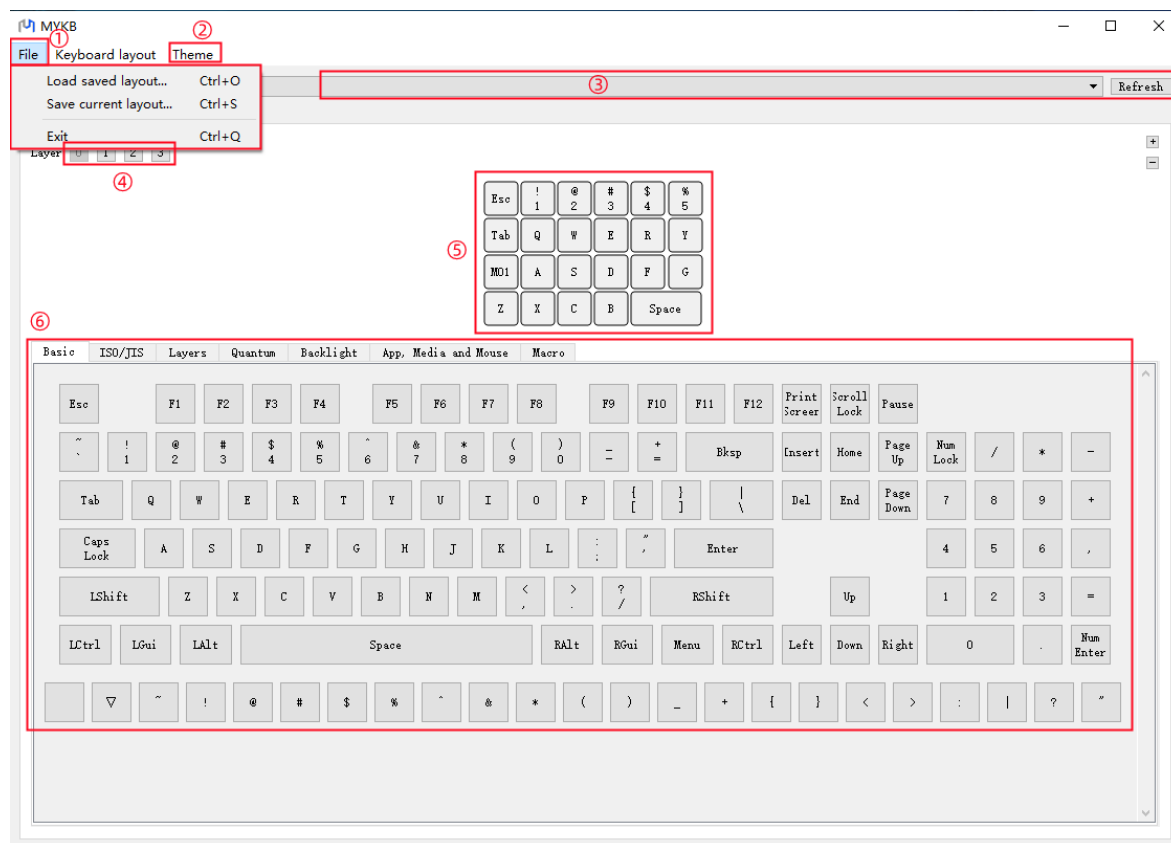


- ①. Save your keyboard configuration to your computer's hard drive, you can read the archive at any time to restore the configuration
- ②. Change the color of the software theme
- ③. If you have more than one MYKB keyboard, you can select the keyboard you want to modify the setting. If the software does not recognize the keyboard, click Refresh
- ④. The keyboard can be preset with 4 sets of key Settings, display and set the functions of each layer of the keyboard here.
- ⑤. The current setting parameters for your keyboard
- ⑥. All configurable functions are here

3. Key Mapper (Step)


- a). Connect the keyboard to computer
- b). Open the software "MYKB.exe" or "MYKB.app"
- c). Use the left mouse button to click on the button you want to modify, for example, if I want to modify this button, click on it and it will become blue.

KOOLERTRON


Reliable Supplier of Made in China, Good Product Image of Made in China.

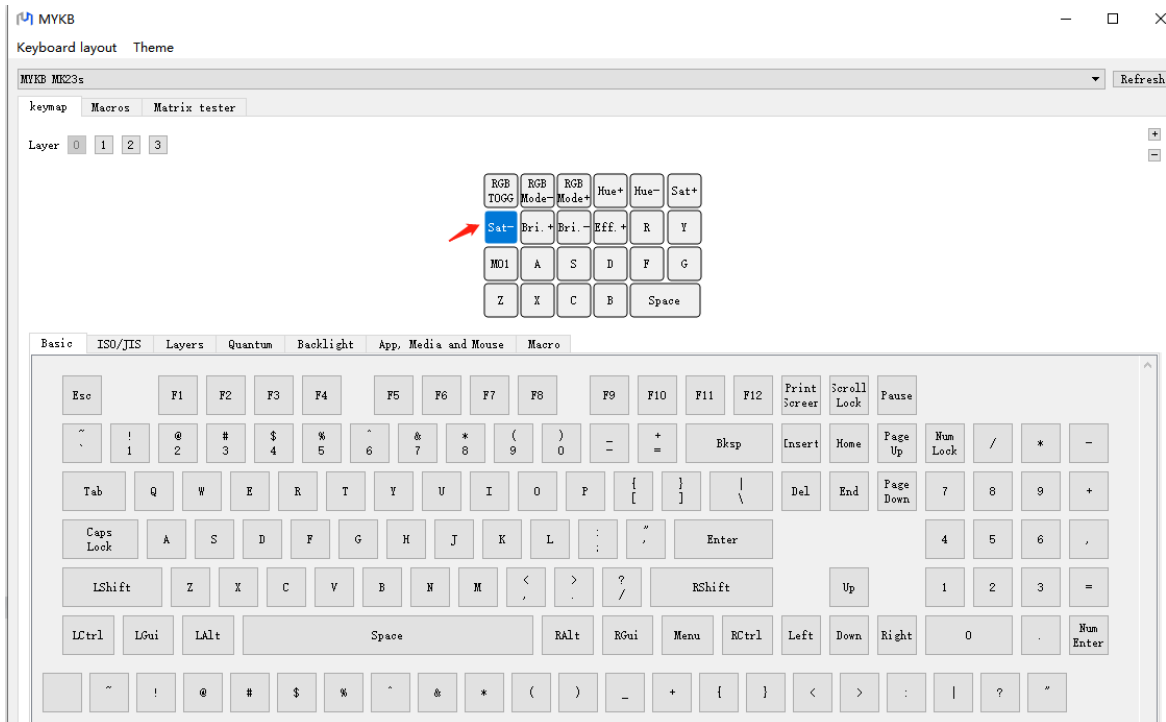


d).Then, use the left mouse button to click on the key function we want to get

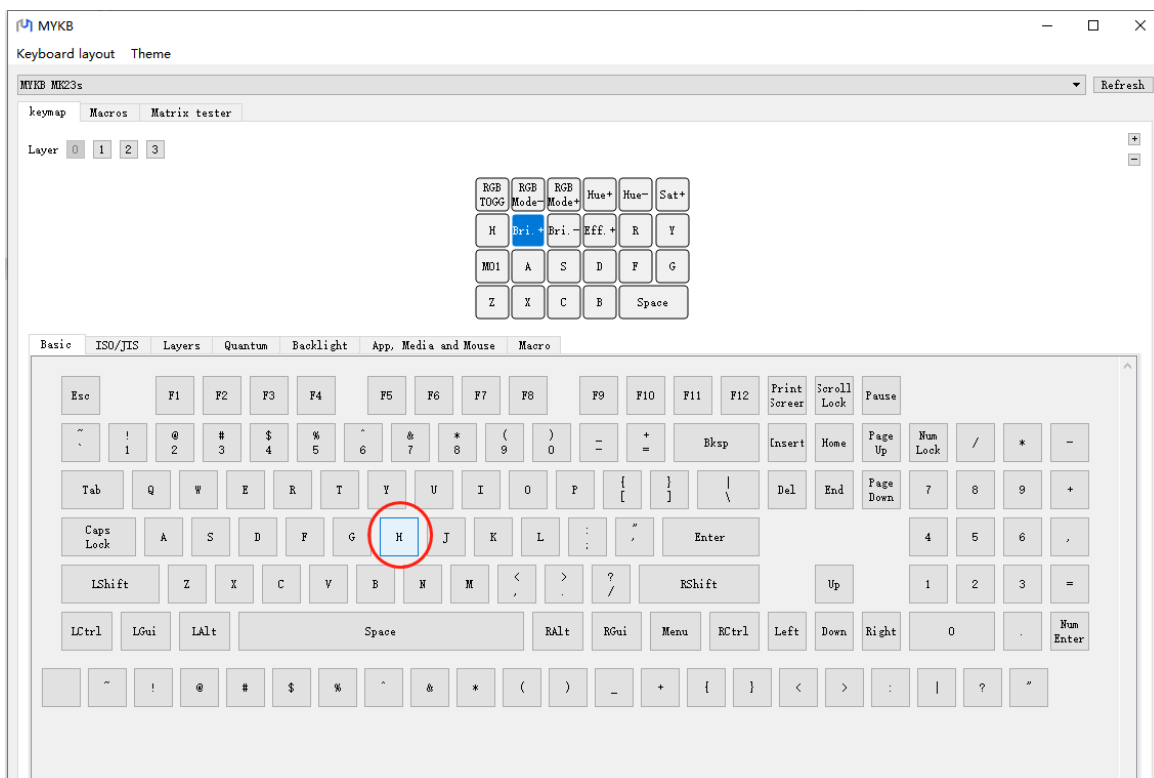

e). The key will be programmed as "H"

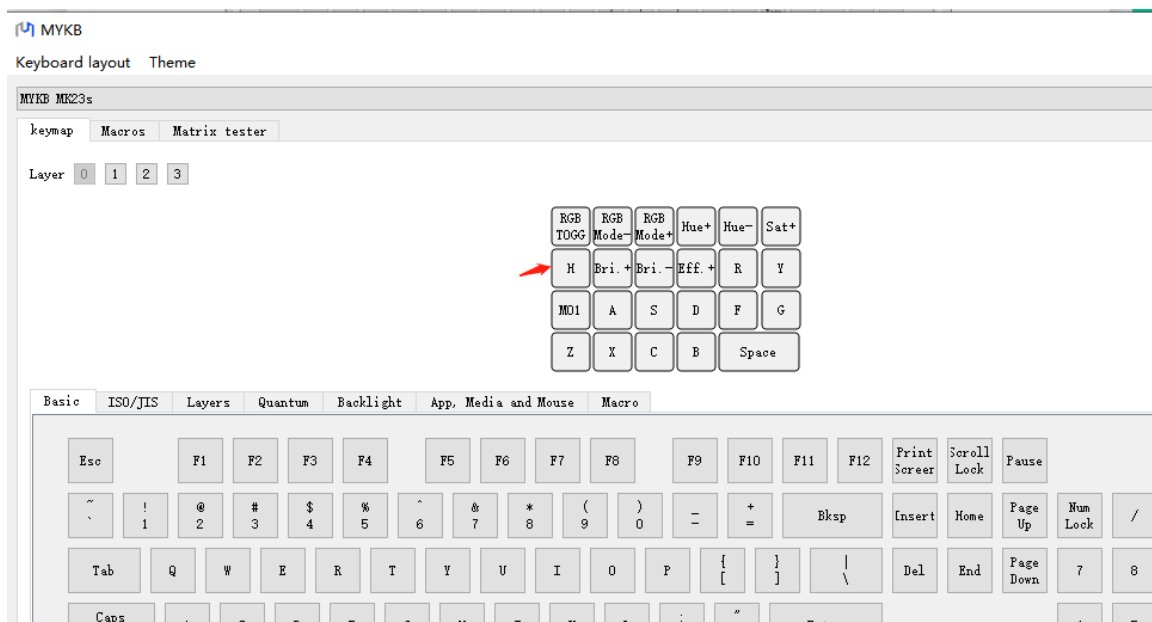

f). The other keys can also be programmed in the same way. If you need to use a macro, you need to program a key as “M0” or “M1” --“M15” and so on

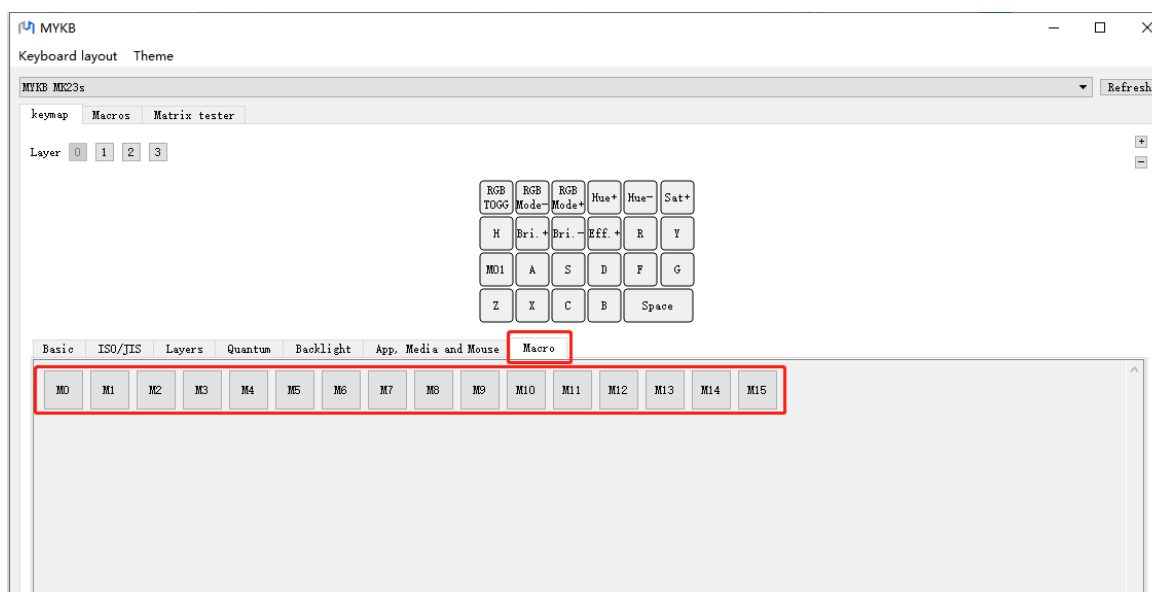

g).All changes to the button Settings screen are effective in real time


4. Macros

4.1 Set a custom macro step:


a). Select the macro you want to modify, M0 is used here as an example, Click “Connect”

KOOLERTRON

Reliable Supplier of Made in China, Good Product Image of Made in China.

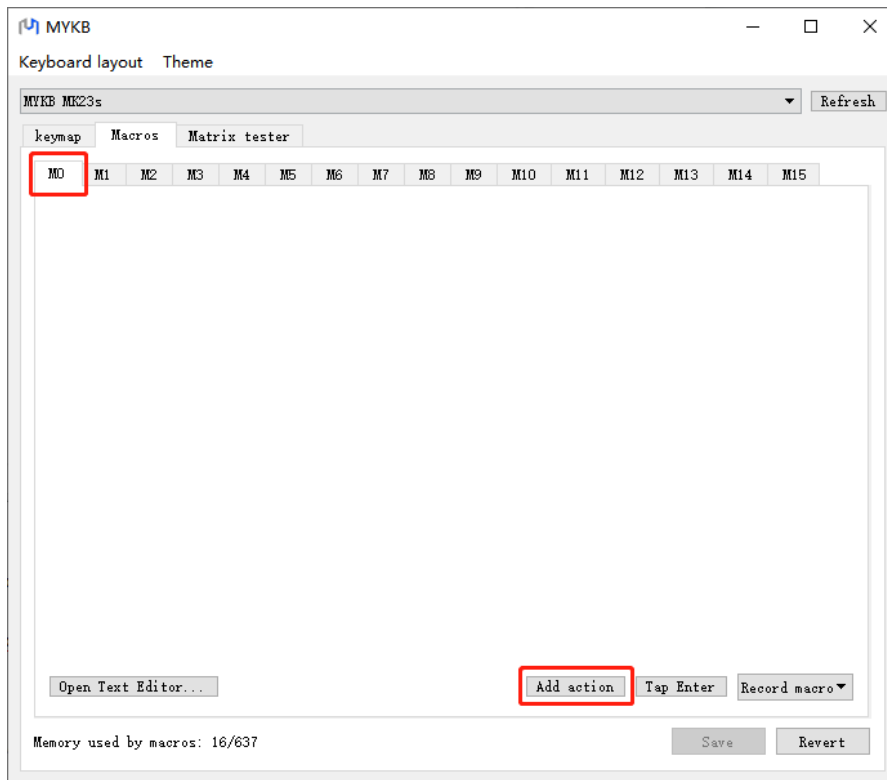

- b). Text: For example, 12345
 Down: Button press
 Up: Button up
 Tap: Press down first and then release
 Delay: Delay after pressing

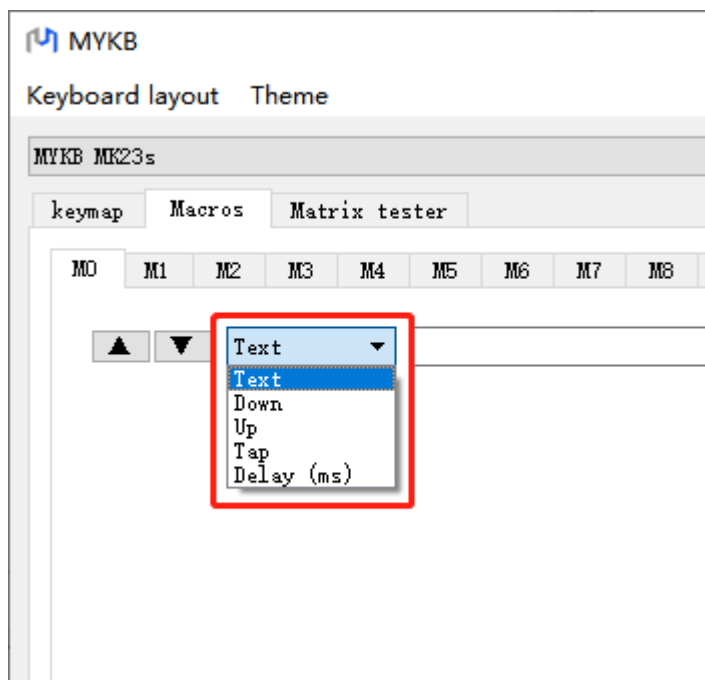

- c). Add the button content you want, for example, text 12345, press Shift, tap A,B,C, then release Shift , wait 50ms and press Enter.

KOOLERTRON

Reliable Supplier of Made in China, Good Product Image of Made in China.

MYKB MK23s

keymap Macros Matrix tester

MO* M1 M2 M3 M4 M5 M6 M7 M8 M9 M10 M11 M12 M13 M14 M15

▲ ▼ Text 12345

▲ ▼ Down Shift +

▲ ▼ Tap A B C +

▲ ▼ Up Shift +

▲ ▼ Delay (ms) 50

▲ ▼ Tap Enter +

d). Click "Save" to save

MYKB

Keyboard layout Theme

MYKB MK23s Refresh

keymap Macros Matrix tester

MO* M1 M2 M3 M4 M5 M6 M7 M8 M9 M10 M11 M12 M13 M14 M15

▲ ▼ Text 12345 ×

▲ ▼ Down Shift + ×

▲ ▼ Tap A B C + ×

▲ ▼ Up Shift + ×

▲ ▼ Delay (ms) 50 ×

▲ ▼ Tap Enter + ×

Open Text Editor... Add action

Memory used by macros: 43/637

Save Revert

5. Guarantee Terms

The warranty period for this product is one year from the date of purchase.

1. Only within the warranty period of one year from the date of purchase, only when a malfunction has occurred in accordance with the instruction manual and other precautionary instructions, let us provide free repair or exchange service based on the provisions of this document

If you provide an alternative item by repair or replacement, the product you sent will be owned by our company unless there is a special offer.

2. Even within the warranty period, it will be repaired for a fee in the following cases.

2.1 When not used according to the instruction manual or other notes.

2.2 Breakdown or damage caused by unauthorized repair or remodeling made without our permission.

2.3 Breakdown or breakage due to movement, falling, moving, transportation after purchase.

2.4 Failure or damage due to fire, earthquake, wind and flood damage, and other natural disaster lands.

2.5 In the case of consumable replacement.

2.6 If you are not the person you purchased (assignment etc.)

3. We are not responsible for any incidental damage caused by the use or failure of this product (the cost required to use this product) or any request from a third party.

4. If you do not know the repair after the warranty period has elapsed, please contact the dealer you purchased or customer support.

Customer support e-mail: service@koolertron.com

KOOLERTRON

Reliable Supplier of Made in China, Good Product Image of Made in China.