

AmuseGameSDK Installation

(iOS)

| Name | Date | version | remark |
|---------|------------|---------|---------------------|
| Yuanjun | 2021.09.28 | 2.0.0 | sdk rename & xsolla |
| Yuanjun | 2021.09.30 | 2.0.1 | improvements |


1. Register and create app

1.1 Apple Developer

- Log in to the Apple Developer Website and enter your developer account.

<https://developer.apple.com/>

- Add your app identifier here.

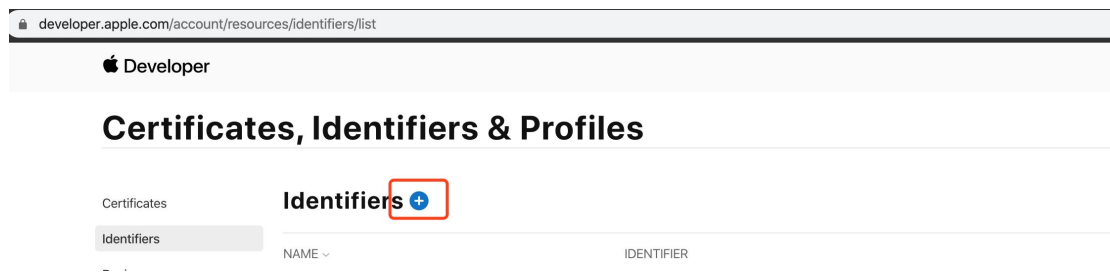

- Select Create App IDs

developer.apple.com/account/resources/identifiers/add/bundleid

Apple Developer

Certificates, Identifiers & Profiles

[← All Identifiers](#)

Register a New Identifier

☒ **App IDs**
 Register an App ID to enable your app to access available services and identify your app in a provisioning profile. You can enable app services when you create an App ID or modify these settings later.

☐ **Services IDs**
 For each website that uses Sign in with Apple, register a services identifier (Services ID), configure your domain and return URL, and create an associated private key.

☐ **Pass Type IDs**
 Register a pass type identifier (Pass Type ID) for each kind of pass you create (i.e. gift cards). Registering your Pass Type IDs lets you generate Apple-issued certificates which are used to digitally sign and send updates to your passes, and allow your passes to be recognized by Wallet.

☐ **Website Push IDs**
 Register a Website Push Identifier (Website Push ID). Registering your Website Push IDs lets you generate Apple-issued certificates which are used to digitally sign and send push notifications from your website to macOS.

☐ **iCloud Containers**
 Registering your iCloud Container lets you use the iCloud Storage APIs to enable your apps to store data and documents in iCloud, keeping your apps up to date automatically.

- Create the App's Bundle ID and record it, both 1.2 and 1.3 will be used.

Certificates, Identifiers & Profiles

[← All Identifiers](#)

Register an App ID

Platform
 iOS, macOS, tvOS, watchOS

App ID Prefix
 (Team ID)

Description
 You cannot use special characters such as @, &, *, ' , "

Bundle ID ☒ Explicit ☐ Wildcard
 We recommend using a reverse-domain name style string (i.e., com.domainname.appname). It cannot contain an asterisk (*).

Back

Continue

- Finally, don't forget to set up Capabilities.(4.1.1 for details)

1.2 TTKGame

Register a new app in TTKGame platform


Get application information such as appld, appsecret, gameid.

1.3 Facebook


If you use Facebook related functions, you need to register with the Facebook development platform to create an application.

<https://developers.facebook.com/apps/>

- First create your app here.

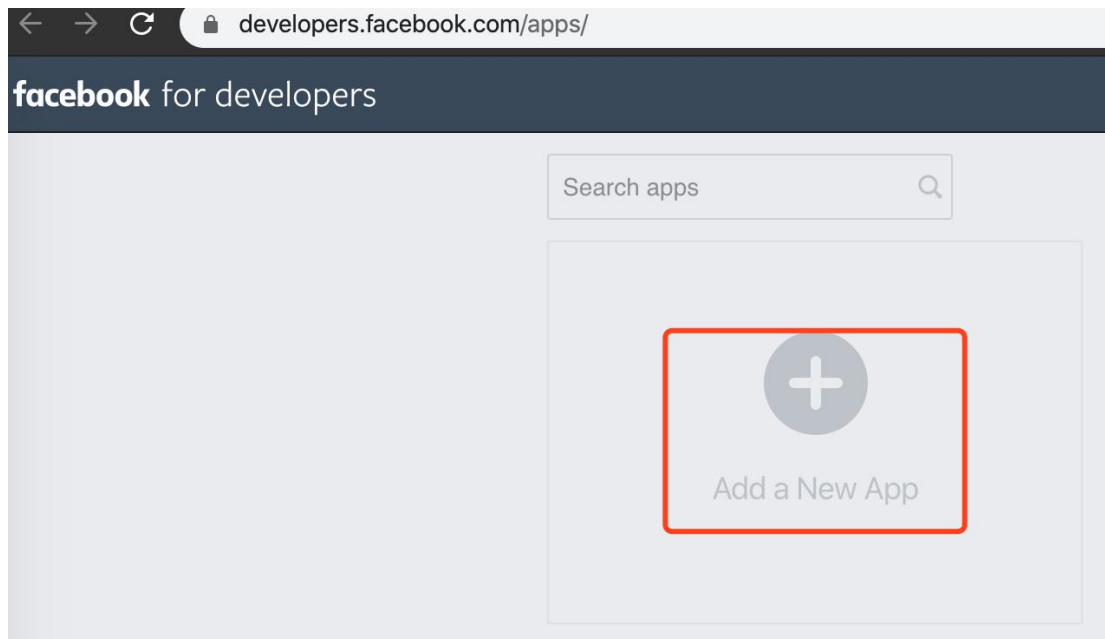

- Remember your App ID and App Secret, which may be used during 1.2 and 4.1.

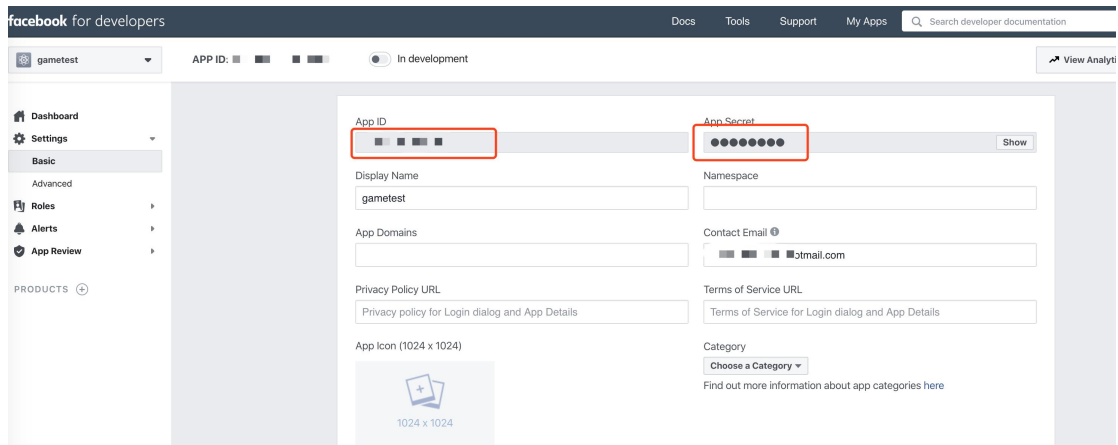


1.4 Firebase

1.4.1 Firebase project

- Create a Firebase project

<https://console.firebase.google.com/>


Before you can add Firebase to your iOS app, you need to create a Firebase project to connect to your iOS app.

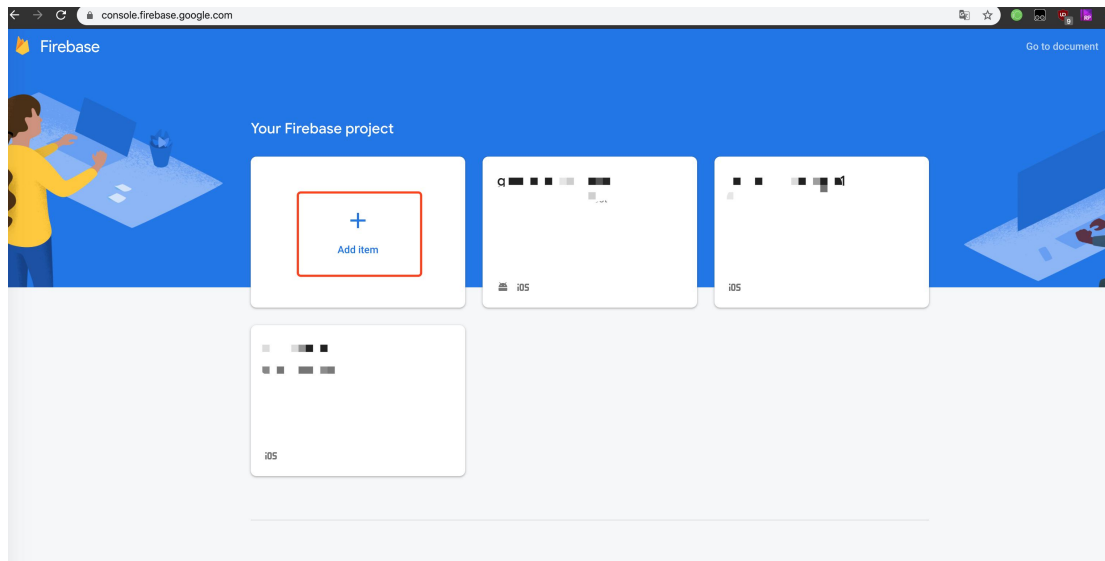

- Register your app with Firebase


After you have a Firebase project, you can add your iOS app to it.

In the center of the project overview page, click the **iOS** icon to launch the setup workflow.

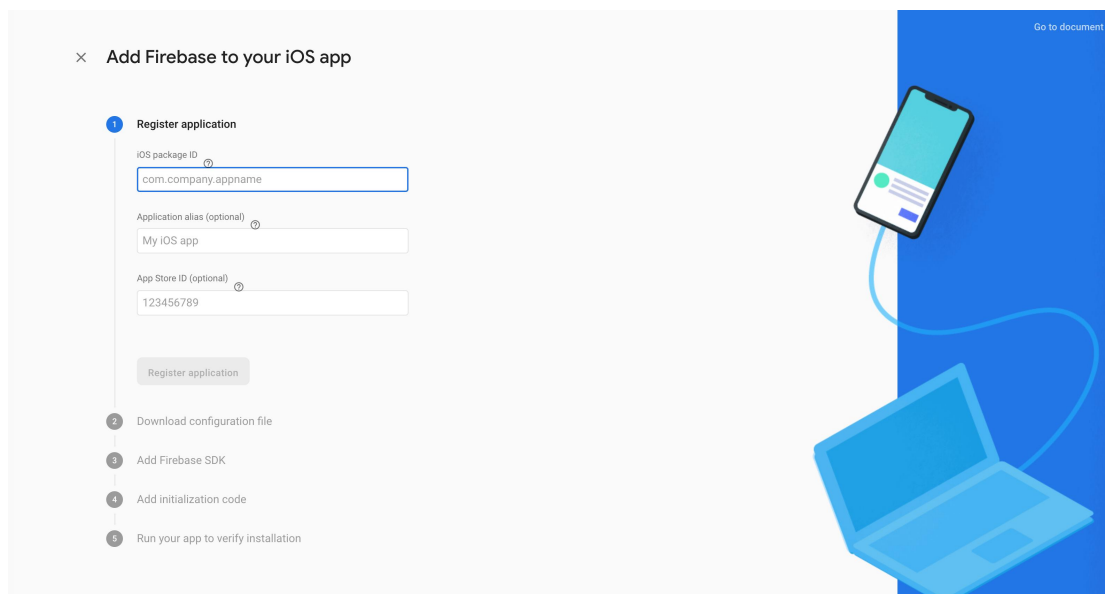


- Add a Firebase configuration file


Click **Download GoogleService-Info.plist** to obtain your Firebase iOS config file. Move your config file into the root of your Xcode project. If prompted, select to add the config file to all targets.

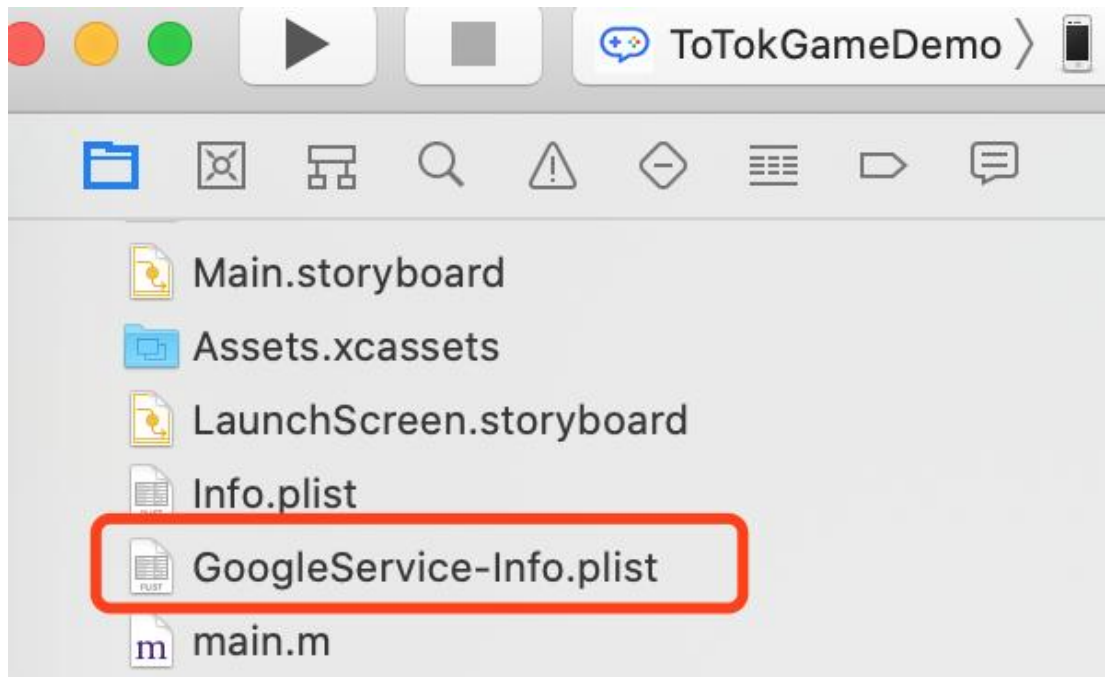

If you have multiple bundle IDs in your project, you must associate each bundle ID with a registered app in the Firebase console so that each app can have its own `GoogleService-Info.plist` file.

1.4.2 Dynamic link

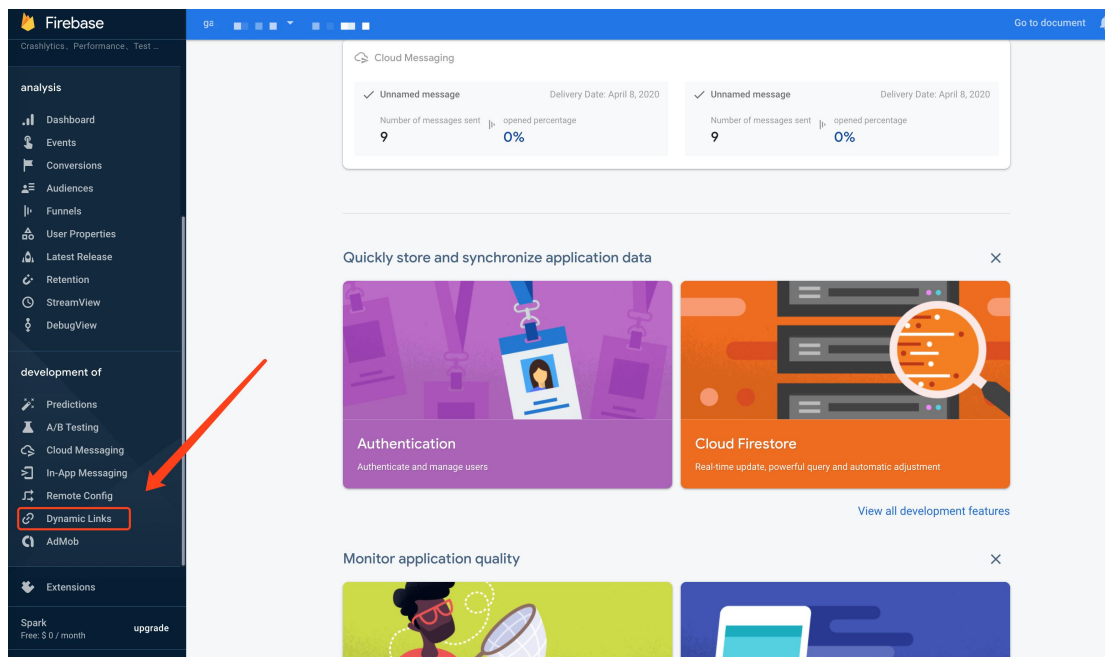

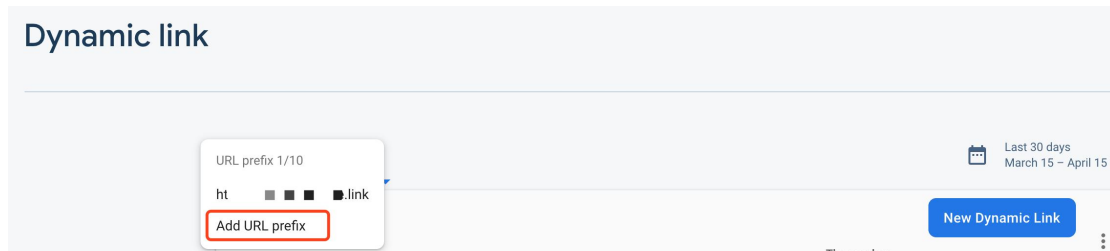

Add URL prefix

1 create — 2 Configuration — 3 verification — 4 carry out

Use a URL prefix consisting of a custom dynamic link domain name (such as yourdomain.com) and an optional path (such as yourdomain.com/mypath) to completely change your link format. The custom domain name looks more professional and provides more background information, which is conducive to more link clicks.

Domain ?

cancel carry on

After creating the URL, the game developer needs to configure the domain in the development project.

1. In the Info tab of your app's Xcode project, create a new URL type to be used for Dynamic Links. Set the Identifier field to a unique value and the URL scheme field to be your bundle identifier, which is the default URL scheme used by Dynamic Links.(See 4.1.3)


2. In the Capabilities tab of your app's Xcode project, enable Associated Domains and add the Associated Domains list.(See 4.1.1 for details)

1.5 Twitter

If you use Twitter related functions, you need to register with the Twitter development platform to create an application.

<https://developer.twitter.com/en/apps/>

- First create your app here.

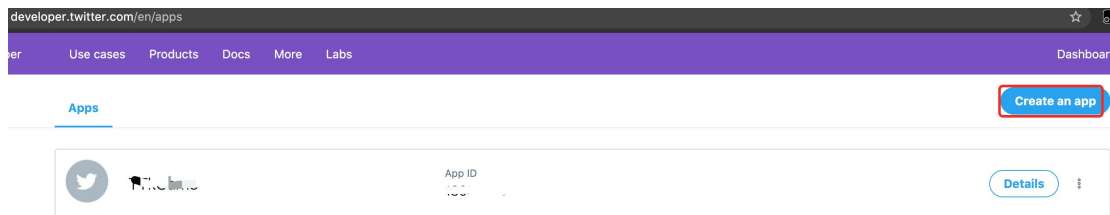

- Edit your app detail.
- Note the format of callback urls.

Callback URLs (required) ⓘ

OAuth 1.0a applications should specify their `oauth_callback` URL on the request token step, which must match the URLs provided here. To restrict your application from using callbacks, leave these blank.

twitterkit-M_504C...AIC3M0Nc://

format: *twitterkit-API Key://*

1.6 AppsFlyer

If you use AppsFlyer related functions, you need to register with the AppsFlyer development platform to create an application.

<https://hq1.appsflyer.com/apps/myapps>

1.7 Tapjoy

If you use Tapjoy related functions, you need to register with the Tapjoy development platform to create an application.

<https://ltv.tapjoy.com/>

1.8 Botim

If you use Botim related functions, you need to register with the Botim development platform to create an application.

2. Installation and Runtime Environment

- IDE : Xcode 10.3 or higher
- iOS : iOS 9.0 or higher

3. Install SDK

SDK Directory Structure :

- AmuseGameSDK
 - Core/AmuseGameSDK.frame
 - SocialLibraries/Facebook/
 - SocialLibraries/TTGCAalytics/
 - SocialLibraries/Twitter/
 - SocialLibraries/AppsFlyer/
 - SocialLibraries/TapjoySDK/

Information of third-party SDK:

1. Facebook: use cocoapods dependency

'FBSDKCoreKit'

'FBSDKLoginKit'

'FBSDKShareKit'

2. Firebase : use cocoapods dependency

'Firebase/Analytics'

'Firebase/DynamicLinks'

3. Twitter: use cocoapods dependency

'TwitterKit5'

4. AppsFlyer: use cocoapods dependency

'AppsFlyerFramework'

5. Tapjoy: use cocoapods dependency

'TapjoySDK'

Note:

1. If you don't need any third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/Core'
```

2. If you only use the Firebase third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/Analytics'
```

3. If you only use the Facebook third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/Facebook'
```

4. If you only use the Twitter third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/Twitter'
```

5. If you only use the AppsFlyer third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/AppsFlyer'
```

6. If you only use the Tapjoy third-party SDK, you can use the command:

```
pod 'AmuseGameSDK/Tapjoy'
```

3.1 Use Pod Install SDK (Recommend)

It is recommended to use the cocoapods install SDK. Cocoapods provides a simple dependency management system to avoid errors caused by manual import .

first you need to confirm that Cocoapods has been installed, if you have not installed Cocoapods, refer to the official website user guide:

<https://cocoapods.org/>.

1. In the root directory of the Xcode project, create a new Podfile.

```
$ pod init
```

Add the following to this file :

```
source 'https://github.com/CocoaPods/Specs.git'
```

```
pod 'AmuseGameSDK'
```

2. In the Podfile directory, execute the following instructions :

```
$ pod install
```

3. After executing pod install, open the project directory and find the .xcworkspace file to run.

4. Future SDK upgrades can use the update command.

```
$ pod update
```


4. Project Configuration

4.1 Build Configuration



Note: The build item value needs to be a number.

**4.1.1 Apple service configuration, push, keychain, in-app purchase, and Universal Link are the services provided by Apple and need to be configured here .
as shown below**

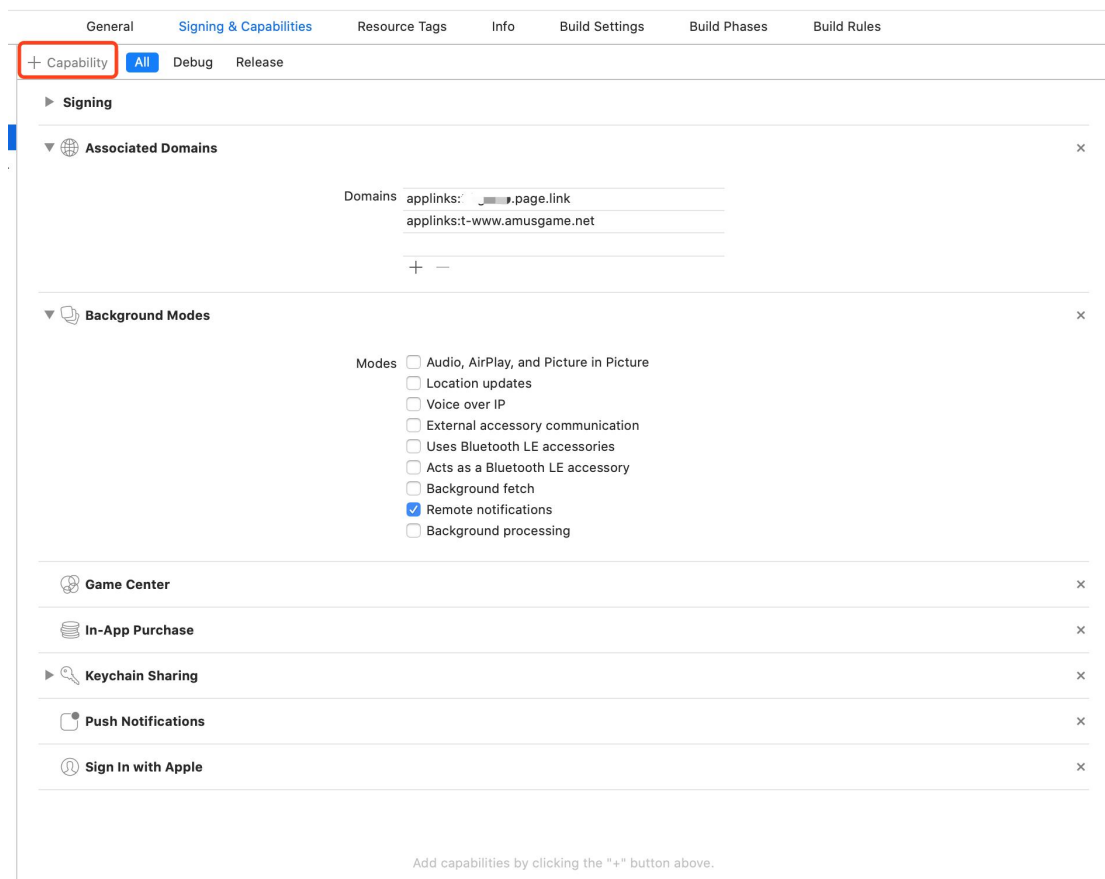

Domains(Test):

applinks:t-www.amusgame.net

applinks:***your_dynamic_links_domain*** (From step 1.4.2)

Domains(Production):

applinks:www.falcongames.net

applinks:***your_dynamic_links_domain*** (From step 1.4.2)

4.1.2 Set bitcode to NO (not supported by Facebook) as shown in the below



4.1.3 Set plist.info

Relevant function configuration:

Facebook related:

key: CFBundleURLSchemes value: fbxxxxxxx (fb+FacebookAppID)
key: FacebookAppID value: xxxxxxxx (FacebookAppID)
key: FacebookDisplayName value: xxxxxxxx (AppName)
key: FacebookClientToken value: xxxxxxxx (FacebookClientToken facebook SDK
v11.2.0 or later)

Twitter related:

key: CFBundleURLSchemes value: twitterkit-xxxxxxx (twitterkit-+Twitter key)
key: TwitterConsumerKey value: xxxxxxxx (Twitter key)
key: TwitterConsumerSecret value: xxxxxxxx (Twitter secret)

Firebase related:

key: CFBundleURLSchemes value: xxx.xxx.xxx (bundle id)

AppsFlyer related:

key: AppID value: xxxxxxxx (AppID from AppStore)
key: AppsFlyerDevKey value: xxxxxxxx (AppsFlyer key)

Tapjoy related:

key: TapjoyKey value: xxxxxxxx (Tapjoy key)

Botim related:

key: CFBundleURLSchemes value: bingamexxxxxxx (bingame+Botim appid)
key: BotimAppid value: xxxxxxxx (Botim appid)
LSApplicationQueriesSchemes : bot botim

```
<key>NSPhotoLibraryUsageDescription</key>
<string>Photo albums are required to share pictures, please allow access</string>
<key>NSUserTrackingUsageDescription</key>
<string>This only uses device info for less annoying, more relevant ads</string>
<key>AppsFlyerDevKey</key>
<string>xxxxxxx</string>
<key>AppID</key>
<string>xxxxxxx</string>
```

```
<key>TapjoyKey</key>
<string>xxxxxxxx</string>
<key>TwitterConsumerKey</key>
<string>xxxxxxxx</string>
<key>TwitterConsumerSecret</key>
<string>xxxxxxxx</string>
<key>BotimAppid</key>
<string>xxxxxxxx</string>
<key>CFBundleURLTypes</key>
<array>
<dict>
<key>CFBundleURLSchemes</key>
<array>
<string>fbxxxxxxxx</string>
</array>
</dict>
<dict>
<key>CFBundleTypeRole</key>
<string>Editor</string>
<key>CFBundleURLName</key>
<string>Bundle</string>
<key>CFBundleURLSchemes</key>
<array>
<string>xxx.xxx.xxx</string>
</array>
</dict>
<dict>
<key>CFBundleTypeRole</key>
<string>Editor</string>
<key>CFBundleURLSchemes</key>
<array>
<string>twitterkit-xxxxxxxx</string>
</array>
</dict>
<dict>
<key>CFBundleTypeRole</key>
```

```
<string>Editor</string>

<key>CFBundleURLSchemes</key>

<array>

<string>bimgamexxxxxxxx</string>

</array>

</dict>

</array>

<key>FacebookAppID</key>

<string>xxxxxxxx</string>

<key>FacebookDisplayName</key>

<string>AppName</string>

<key>FacebookClientToken</key>

<string>FacebookClientToken</string>

<key>LSApplicationQueriesSchemes</key>

<array>

<string>bot</string>

<string>botim</string>

<string>whatsapp</string>

<string>fbapi</string>

<string>fbapi20130214</string>

<string>fbapi20130410</string>

<string>fbapi20130702</string>

<string>fbapi20131010</string>

<string>fbapi20131219</string>

<string>fbapi20140410</string>

<string>fbapi20140116</string>

<string>fbapi20150313</string>

<string>fbapi20150629</string>

<string>fbapi20160328</string>

<string>fbauth</string>

<string>fbauth2</string>

<string>fb-messenger-public</string>

<string>fb-messenger-share-api</string>

<string>fbshareextension</string>

<string>fb-messenger-api20140430</string>

<string>fb-messenger-platform-20150128</string>
```

```
<string>fb-messenger-platform-20150218</string>
<string>fb-messenger-platform-20150305</string>
</array>
<key>NSAppTransportSecurity</key>
<dict>
  <key>NSAllowsArbitraryLoads</key>
  <true/>
  <key>NSExceptionDomains</key>
  <dict>
    <key>akamaihd.net</key>
    <dict>
      <key>NSExceptionRequiresForwardSecrecy</key>
      <false/>
      <key>NSIncludesSubdomains</key>
      <true/>
    </dict>
    <key>facebook.com</key>
    <dict>
      <key>NSExceptionRequiresForwardSecrecy</key>
      <false/>
      <key>NSIncludesSubdomains</key>
      <true/>
    </dict>
    <key>fbcdn.net</key>
    <dict>
      <key>NSExceptionRequiresForwardSecrecy</key>
      <false/>
      <key>NSIncludesSubdomains</key>
      <true/>
    </dict>
  </dict>
</dict>
```

5. Push configuration

If you'd like to send push notifications to your iOS users, you will need to provide either an APNs Push Certificate, or an APNs Auth Key.

5.1 APNs Auth Key (Recommend)

We recommend that you create and provide an APNs Auth Key for the following reasons:


1. No need to re-generate the push certificate every year.
2. One auth key can be used for all your apps – this avoids the complication of maintaining different certificates.

When sending push notifications using an APNs Auth Key, we require the following information about your app:


- Auth Key file
- Team ID
- Your app's bundle ID

To create an APNs auth key, follow the steps below.

- Log in to the Apple Developer Website and enter your developer account.

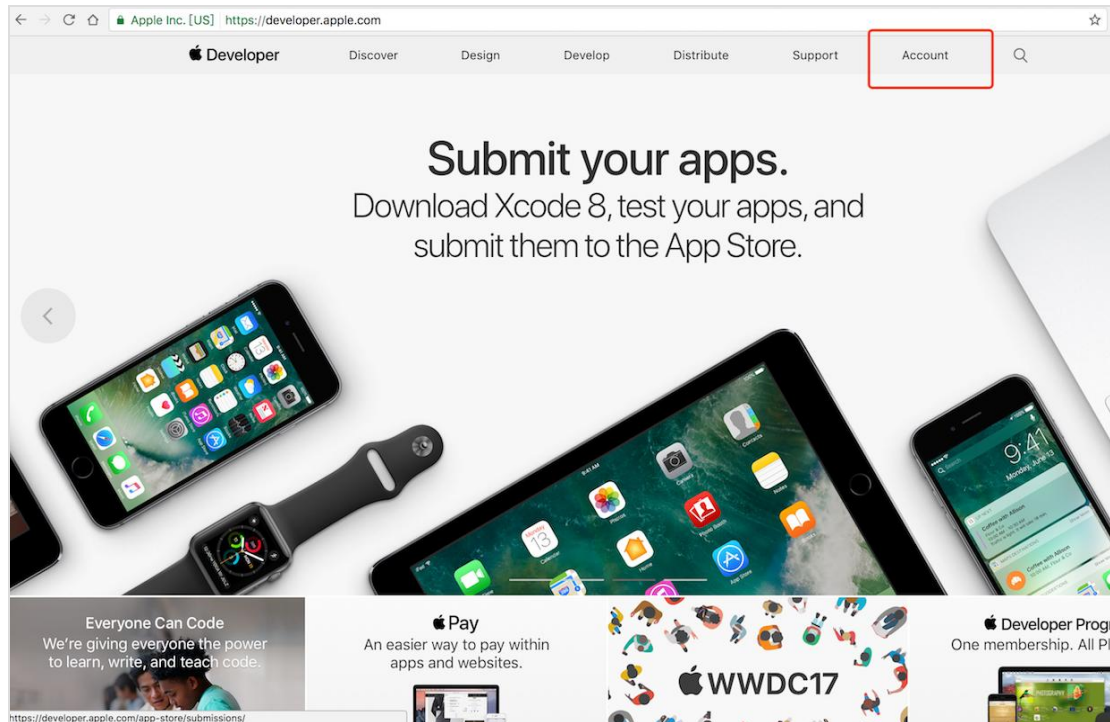

- In your developer account, go to Certificates, Identifiers & Profiles, and under Keys, select All.
- Click the Add button (+) in the upper-right corner.

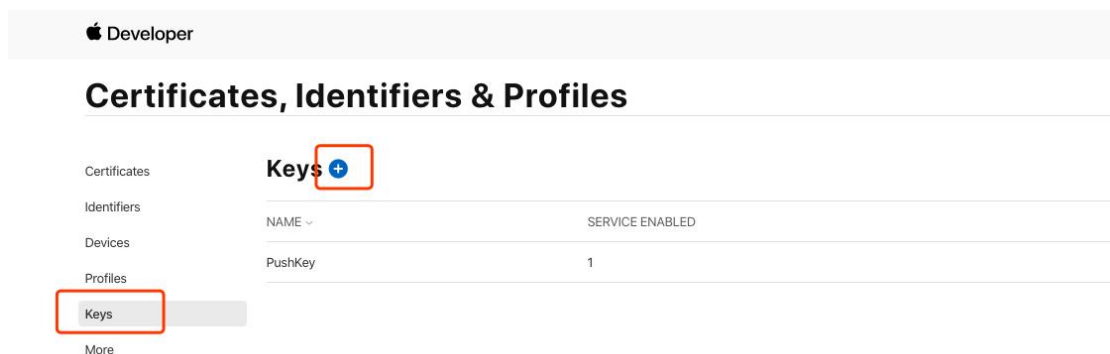

- Enter a description for the APNs Auth Key
- Under Key Services, select the APNs checkbox, and click Continue.

[← All Keys](#)

Register a New Key

Key Name


You cannot use special characters such as @, &, *, ' , "

| ENABLE | NAME | SERVICE |
|--------------------------|---|---|
| <input type="checkbox"/> | Apple Push Notifications service (APNs) | Establish connectivity between your notification server and the Apple Push Notification service. One key is used for all of your apps. Learn more |
| <input type="checkbox"/> | DeviceCheck | Access per-device, per-developer data that your associated server can use in its business logic. One key is used for all of your apps. Learn more |
| <input type="checkbox"/> | MusicKit | Access the Apple Music catalog and make personalized requests for authorized users. Learn more ⓘ There are no identifiers available that can be associated with the key |
| <input type="checkbox"/> | Sign in with Apple | Enable your apps to allow users to authenticate in your application with their Apple ID. Configuration is required to enable this feature. ⓘ There are no identifiers available that can be associated with the key |

- Click Confirm and then Download. Save your key in a secure place. This is a one-time download, and the key cannot be retrieved later.

5.2 Certificate configuration

- Go to the “Certificates, IDs & Profiles” page from the left entry of the developer account page.

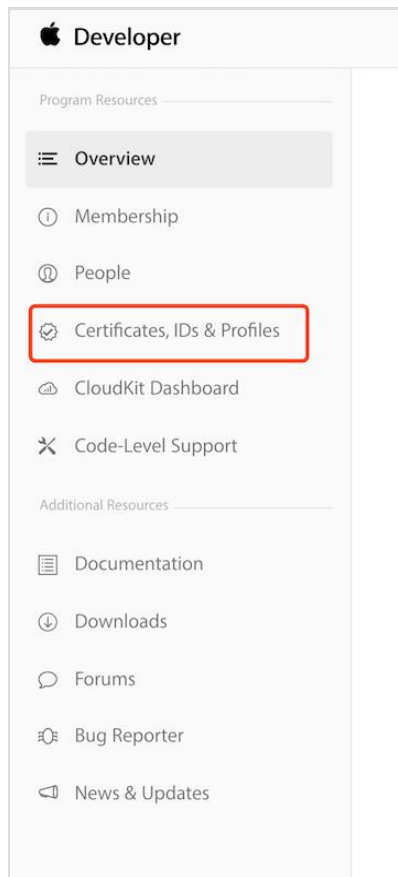

- Create an App ID, fill in the name of the App ID and the Bundle ID (skip this step if the ID already exists).



Note: You need to specify the specific bundle ID here. Do not use wildcard characters.

Certificates, Identifiers & Profiles

< All Identifiers

Register an App ID

Back Continue

Platform
☒ iOS, tvOS, watchOS ☐ macOS

Description

You cannot use special characters such as @, &, '., '., *

App ID Prefix
 com.push.demo (Team ID)

Bundle ID
☒ Explicit ☐ Wildcard

We recommend using a reverse-domain name style string (i.e., com.domainname.appname). It cannot contain an asterisk (*).

Capabilities

- Enable Push Notification for the app. If the App ID has already been created, you can also enable the Push Notification function through settings.

< All Identifiers

Register an App ID

Back Continue

Capabilities

| ENABLED | NAME |
|-------------------------------------|---|
| <input type="checkbox"/> | Access WiFi Information |
| <input type="checkbox"/> | App Groups |
| <input type="checkbox"/> | Apple Pay Payment Processing |
| <input type="checkbox"/> | Associated Domains |
| <input type="checkbox"/> | AutoFill Credential Provider |
| <input type="checkbox"/> | Network Extensions |
| <input type="checkbox"/> | NFC Tag Reading |
| <input type="checkbox"/> | Personal VPN |
| <input checked="" type="checkbox"/> | Push Notifications |
| <input type="checkbox"/> | Sign In with Apple |
| <input type="checkbox"/> | SiriKit |
| <input type="checkbox"/> | System Extension (Supported only on: macOS) |

Configure

- After filling in the above attributes, click “Continue” to confirm the correctness of the AppId attribute, and click “Register” to register the AppId successfully.
- If you haven't created a Push certificate before or want to re-create a new one, please create a new one below the certificate list.

Certificates, Identifiers & Profiles

Certificates
Identifiers
Devices
Profiles
Keys
More

Certificates

| NAME | TYPE | PLATFORM | CREATED BY | EXPIRATION |
|--------------|---------------------|----------|-----------------|------------|
| Development | iOS Development | iOS | Apple Developer | 2020/08/21 |
| Distribution | iOS Distribution | iOS | Apple Developer | 2020/08/21 |
| Development | Development | All | Apple Developer | 2020/09/22 |
| Distribution | Distribution | All | Apple Developer | 2020/09/25 |
| Apple Push | Apple Push Services | iOS | Apple Developer | 2020/10/24 |

- When creating a new certificate, you need to choose the type of APNs certificate. As shown in the figure APNs certificate has two types of development (development) and production (production).

Note: The development certificate is used for development and debugging; the production certificate can be used for both development and debugging and product release. Here we choose the production certificate as an example.

Create a New Certificate

[Continue](#)

Services

- ☐
iOS Apple Push Notification service SSL (Sandbox)
use for develop

Establish connectivity between your notification server and the Apple Push Notification service sandbox environment to deliver remote notifications to your app. A separate certificate is required for each app you develop.
- ☒
Apple Push Notification service SSL (Sandbox & Production)
use for develop and production

Establish connectivity between your notification server, the Apple Push Notification service sandbox, and production environments to deliver remote notifications to your app. When utilizing HTTP/2, the same certificate can be used to deliver app notifications, update ClockKit complication data, and alert background VoIP apps of incoming activity. A separate certificate is required for each app you distribute.
- ☐
macOS Apple Push Notification service SSL (Production)

Establish connectivity between your notification server and the Apple Push Notification service production environment. A separate certificate is required for each app you distribute.
- ☐
Pass Type ID Certificate

Sign and send updates to passes in Wallet.
- ☐
Website Push ID Certificate

Sign and send updates for Websites.
- ☐
WatchKit Services Certificate

Establish connectivity between your notification server, the Apple Push Notification service sandbox, and production environment to update ClockKit complication data. When utilizing HTTP/2, the same certificate can be used to deliver app notifications, update ClockKit complication data, and alert background VoIP apps of incoming activity. A separate certificate is required for each app you distribute.
- ☐
VoIP Services Certificate

Establish connectivity between your notification server, the Apple Push Notification service sandbox, and production environment to alert background VoIP apps of incoming activity. A separate certificate is required for each app you distribute.
- ☐
Apple Pay Payment Processing Certificate

Decrypt app transaction data sent by Apple to a merchant/developer.
- ☐
Apple Pay Merchant Identity Certificate

A client TLS certificate that is used to authenticate you to Apple Pay Payment Processing Servers. You need to accept the agreement 'Apple Pay Platform Web Merchant Terms and Conditions'. [Review Agreement](#)

- Click "Continue", then select the certificate and the AppID to be bound.

Certificates, Identifiers & Profiles

[< All Certificates](#)

Create a New Certificate

[Back](#) [Continue](#)

Select an App ID for your Apple Push Notification service SSL Certificate (Sandbox & Production)

All App IDs that you want to enable for remote notifications require their own Apple Push Notification service SSL certificate. The App ID-specific SSL certificate allows your server to connect to the Apple Push Notification service. Note that only explicit App IDs with a specific Bundle Identifier can be used to create an Apple Push Notification service SSL certificate.

App ID:

- Clicking "Continue" again will let you upload the CSR file. (CSR file will be created in the next step)

Certificates, Identifiers & Profiles

[< All Certificates](#)

Create a New Certificate

[Back](#) [Continue](#)

Upload a Certificate Signing Request


To manually generate a Certificate, you need a Certificate Signing Request (CSR) file from your Mac.

[Learn more >](#)


[Choose File](#) CertificateSigningRequest.certSigningRequest

- Open KeychainAccess that comes with the mac system to create a Certificate Signing Request.


Operate as shown below:

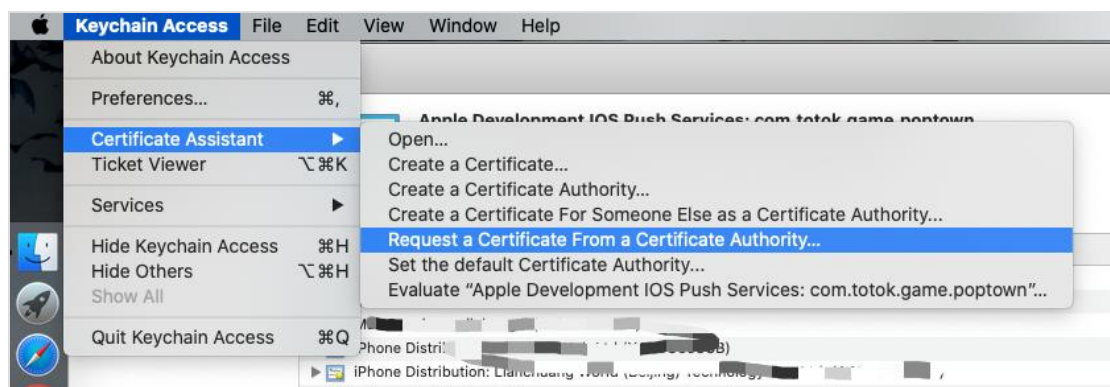



- Fill in "User Email" and "Common Name" and select "Save to Disk". The certificate file suffix is .certSigningRequest.

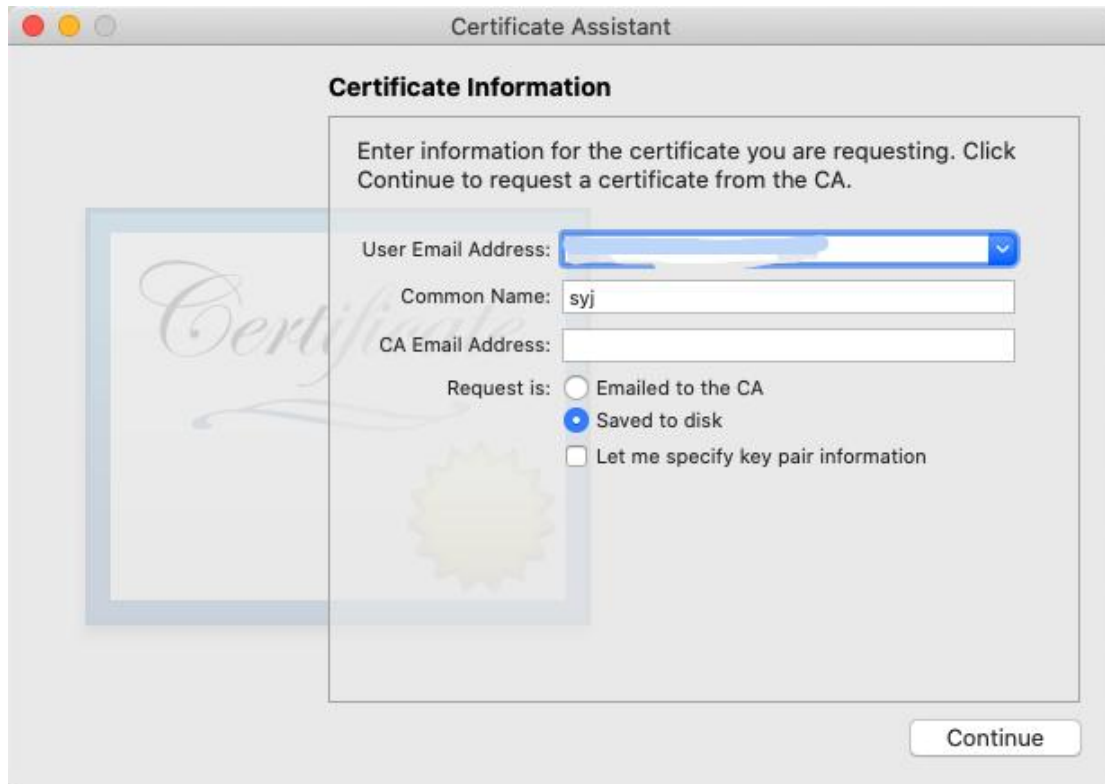

- Go back to the CSR upload page in your browser and upload the file with the suffix .certSigningRequest just generated.
- After the certificate is generated successfully, click the "Download" button to download the certificate. It is a file with the extension .cer.

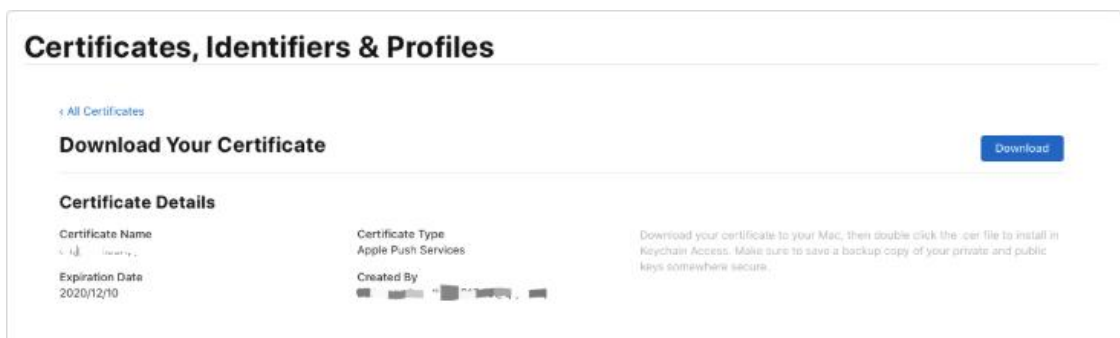

- After double-clicking the certificate, it will open in "KeychainAccess", select "Login" in the "Keychain" list on the left, and "My certificate" in the "Type" list, find the certificate you just downloaded, and export it as a .p12 file. As shown below:

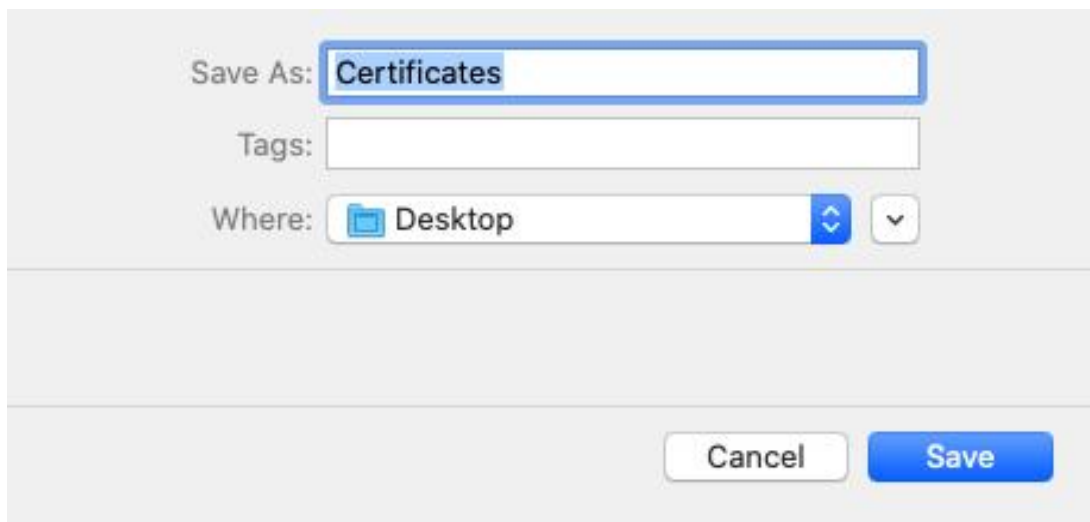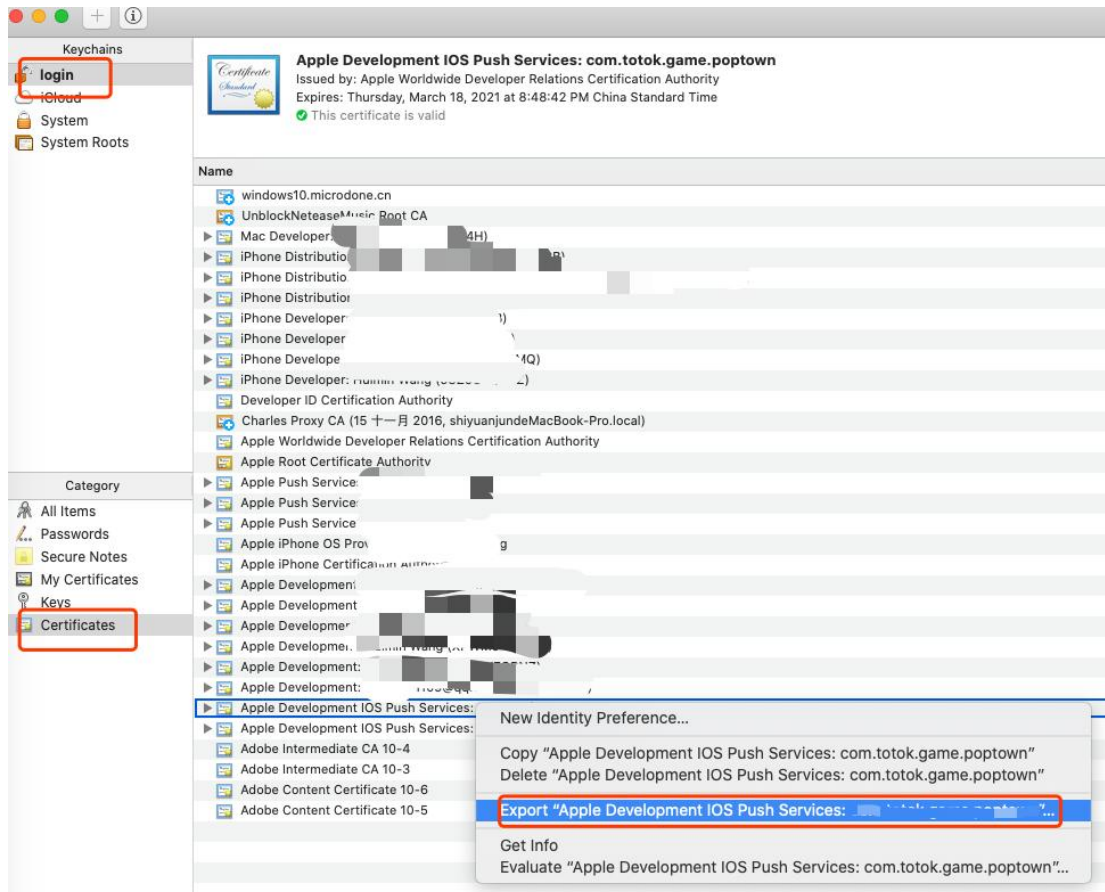










6. Sign in with Apple configuration

Edit your App ID Configuration

[< All Identifiers](#)

Edit your App ID Configuration

| | | |
|-------------------------------------|--|---|
| <input type="checkbox"/> |  Maps ⓘ | |
| <input type="checkbox"/> |  Multipath ⓘ | |
| <input type="checkbox"/> |  Network Extensions ⓘ | |
| <input type="checkbox"/> |  NFC Tag Reading ⓘ | |
| <input type="checkbox"/> |  Personal VPN ⓘ | |
| <input checked="" type="checkbox"/> |  Push Notifications ⓘ | Edit Certificates (1) |
| <input checked="" type="checkbox"/> |  Sign In with Apple ⓘ | Edit Enable as a primary App ID |
| <input type="checkbox"/> |  SiriKit ⓘ | |
| <input type="checkbox"/> |  System Extension ⓘ | |

Register a New Key for Sign in with Apple

Apple Developer

Certificates, Identifiers & Profiles

| | |
|--------------|---------------|
| Certificates | Keys + |
| Identifiers | |
| Devices | |
| Profiles | |
| Keys | |
| More | |

| NAME | SERVICE ENABLED |
|-----------|-----------------|
| PushKey | 1 |
| SigninKey | 1 |

[< All Keys](#)

Register a New Key

[Continue](#)

Key Name

You cannot use special characters such as @, &, *, , " "

| ENABLE | NAME | SERVICE | |
|-------------------------------------|---|--|---------------------------|
| <input type="checkbox"/> | Apple Push Notifications service (APNs) | Establish connectivity between your notification server and the Apple Push Notification service. One key is used for all of your apps. Learn more | |
| <input type="checkbox"/> | DeviceCheck | Access per-device, per-developer data that your associated server can use in its business logic. One key is used for all of your apps. Learn more | |
| <input type="checkbox"/> | MusicKit | Access the Apple Music catalog and make personalized requests for authorized users. Learn more ⓘ There are no identifiers available that can be associated with the key | Configure |
| <input checked="" type="checkbox"/> | Sign in with Apple | Enable your apps to allow users to authenticate in your application with their Apple ID. Configuration is required to enable this feature. | Configure |

Configure the App ID

[← View Key](#)

Configure Key

Create a key for each of your primary App IDs in order to implement Sign in with Apple. This key will also be used for any App IDs grouped with the primary. The user will see your primary app's icon at sign in and in their Apple ID account settings.

Primary App ID:

1 App ID

● Common Problem

1. pod related

If you have a pod installed, running pod install directly may cause the following problems

```
→ ToTokGameApp git:(master) ✗ pod install
Analyzing dependencies
[!] Unable to find a specification for 'ToTokGameSDK'

You have either:
* out-of-date source repos which you can update with 'pod repo update' or with 'pod install --repo-update'.
* mistyped the name or version.
* not added the source repo that hosts the Podspec to your Podfile.
```

Need to update the pod repo

```
$ pod install --repo-update
```

2. Project related

If you use xcode11 to create a new project, the iOS13 + real machine or simulator has a black screen

Reason: For the multi-window function of the iPad, the life cycle has changed. At present, the SDK does not support the multi-window function, so developer who use the SDK can change the project to the previous structure.

Specific steps are as follows:

1. First delete the Application Scene Manifest column from info.plist

| Key | Type | Value |
|--|------------|---------------------------------|
| ▼ Information Property List | Dictionary | (15 items) |
| Localization native development re... | String | \$(DEVELOPMENT_LANGUAGE) |
| Executable file | String | \$(EXECUTABLE_NAME) |
| Bundle identifier | String | \$(PRODUCT_BUNDLE_IDENTIFIER) |
| InfoDictionary version | String | 6.0 |
| Bundle name | String | \$(PRODUCT_NAME) |
| Bundle OS Type code | String | \$(PRODUCT_BUNDLE_PACKAGE_TYPE) |
| Bundle versions string, short | String | 1.0 |
| Bundle version | String | 1 |
| Application requires iPhone enviro... | Boolean | YES |
| ▶ Application Scene Manifest | Dictionary | (2 items) |
| Launch screen interface file base... | String | LaunchScreen |
| Main storyboard file base name | String | Main |
| ▶ Required device capabilities | Array | (1 item) |
| ▶ Supported interface orientations | Array | (3 items) |
| ▶ Supported interface orientations (i... | Array | (4 items) |

2. In the project directory, delete the Scenedelegate.h and Scenedelegate.m files

3. Then enter AppDelegate.m to comment or delete the content shown below

```
#pragma mark - UISceneSession lifecycle

- (UISceneConfiguration *)application:(UIApplication *)application
  configurationForConnectingSceneSession:(UISceneSession
  *)connectingSceneSession options:(UISceneConnectionOptions
  *)options {
    // Called when a new scene session is being created.
    // Use this method to select a configuration to create the new
    // scene with.
    return [[UISceneConfiguration alloc] initWithName:@"Default
    Configuration" sessionRole:connectingSceneSession.role];
}

- (void)application:(UIApplication *)application
  didDiscardSceneSessions:(NSSet<UISceneSession *> *)sceneSessions {
    // Called when the user discards a scene session.
    // If any sessions were discarded while the application was not
    // running, this will be called shortly after
    // application:didFinishLaunchingWithOptions.
    // Use this method to release any resources that were specific to
    // the discarded scenes, as they will not return.
}
```

4. The last step is to add the window property in AppDelegate.h

```
@property (strong, nonatomic) UIWindow * window;
```