

flight price

In [1]:

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

In [2]:

```
traindf=pd.read_csv(r"C:\Users\jas_m\Downloads\Data_Train1.csv")
traindf
```

Out[2]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dura
0	IndiGo	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h
1	Air India	1/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h
2	Jet Airways	9/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	
3	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h
4	IndiGo	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h
...	
10678	Air Asia	9/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h
10679	Air India	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h
10680	Jet Airways	27/04/2019	Banglore	Delhi	BLR ? DEL	08:20	11:20	
10681	Vistara	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h
10682	Air India	9/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h

10683 rows × 11 columns



In [3]:

```
testdf=pd.read_csv(r"C:\Users\jas_m\Downloads\Test_set26.csv")
testdf
```

Out[3]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durat
0	Jet Airways	6/06/2019	Delhi	Cochin	DEL ? BOM ? COK	17:30	04:25 07 Jun	10h 5
1	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? MAA ? BLR	06:20	10:20	
2	Jet Airways	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	19:15	19:00 22 May	23h 4
3	Multiple carriers	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	08:00	21:00	
4	Air Asia	24/06/2019	Banglore	Delhi	BLR ? DEL	23:55	02:45 25 Jun	2h 5
...	
2666	Air India	6/06/2019	Kolkata	Banglore	CCU ? DEL ? BLR	20:30	20:25 07 Jun	23h 5
2667	IndiGo	27/03/2019	Kolkata	Banglore	CCU ? BLR	14:20	16:55	2h 3
2668	Jet Airways	6/03/2019	Delhi	Cochin	DEL ? BOM ? COK	21:50	04:25 07 Mar	6h 3
2669	Air India	6/03/2019	Delhi	Cochin	DEL ? BOM ? COK	04:00	19:15	15h 1
2670	Multiple carriers	15/06/2019	Delhi	Cochin	DEL ? BOM ? COK	04:55	19:15	14h 2

2671 rows × 10 columns



In [4]:

```
traindf.head()
```

Out[4]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duration
0	IndiGo	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h 50m
1	Air India	1/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 25m
2	Jet Airways	9/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	19h
3	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h 25m
4	IndiGo	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h 45m

In [5]:

```
testdf.head()
```

Out[5]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duration
0	Jet Airways	6/06/2019	Delhi	Cochin	DEL ? BOM ? COK	17:30	04:25 07 Jun	10h 55m
1	IndiGo	12/05/2019	Kolkata	Banglore	CCU ? MAA ? BLR	06:20	10:20	4h
2	Jet Airways	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	19:15	19:00 22 May	23h 45m
3	Multiple carriers	21/05/2019	Delhi	Cochin	DEL ? BOM ? COK	08:00	21:00	13h
4	Air Asia	24/06/2019	Banglore	Delhi	BLR ? DEL	23:55	02:45 25 Jun	2h 50m

In [6]:

traindf.tail()

Out[6]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dura
10678	Air Asia	9/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h
10679	Air India	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h
10680	Jet Airways	27/04/2019	Banglore	Delhi	BLR ? DEL	08:20	11:20	
10681	Vistara	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h
10682	Air India	9/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h

In [7]:

testdf.tail()

Out[7]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duratic
2666	Air India	6/06/2019	Kolkata	Banglore	CCU ? DEL ? BLR	20:30	20:25 07 Jun	23h 55
2667	IndiGo	27/03/2019	Kolkata	Banglore	CCU ? BLR	14:20	16:55	2h 35
2668	Jet Airways	6/03/2019	Delhi	Cochin	DEL ? BOM ? COK	21:50	04:25 07 Mar	6h 35
2669	Air India	6/03/2019	Delhi	Cochin	DEL ? BOM ? COK	04:00	19:15	15h 15
2670	Multiple carriers	15/06/2019	Delhi	Cochin	DEL ? BOM ? COK	04:55	19:15	14h 20

In [8]:

```
traindf.describe()
```

Out[8]:

	Price
count	10683.000000
mean	9087.064121
std	4611.359167
min	1759.000000
25%	5277.000000
50%	8372.000000
75%	12373.000000
max	79512.000000

In [9]:

```
testdf.describe()
```

Out[9]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Dura
count	2671	2671	2671	2671	2671	2671	2671	2671
unique	11	44	5	6	100	199	704	
top	Jet Airways	9/05/2019	Delhi	Cochin	DEL ? BOM ? COK	10:00	19:00	2h
freq	897	144	1145	1145	624	62	113	

In [10]:

```
traindf.shape
```

Out[10]:

(10683, 11)

In [11]:

```
testdf.shape
```

Out[11]:

(2671, 10)

In [12]:

```
traindf.columns
```

Out[12]:

```
Index(['Airline', 'Date_of_Journey', 'Source', 'Destination', 'Route',  
      'Dep_Time', 'Arrival_Time', 'Duration', 'Total_Stops',  
      'Additional_Info', 'Price'],  
      dtype='object')
```

In [13]:

```
testdf.columns
```

Out[13]:

```
Index(['Airline', 'Date_of_Journey', 'Source', 'Destination', 'Route',  
      'Dep_Time', 'Arrival_Time', 'Duration', 'Total_Stops',  
      'Additional_Info'],  
      dtype='object')
```

In [14]:

```
traindf.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
RangeIndex: 10683 entries, 0 to 10682  
Data columns (total 11 columns):  
#   Column                Non-Null Count  Dtype  
---  ---  
0   Airline                10683 non-null  object  
1   Date_of_Journey        10683 non-null  object  
2   Source                 10683 non-null  object  
3   Destination            10683 non-null  object  
4   Route                  10682 non-null  object  
5   Dep_Time               10683 non-null  object  
6   Arrival_Time           10683 non-null  object  
7   Duration               10683 non-null  object  
8   Total_Stops            10682 non-null  object  
9   Additional_Info        10683 non-null  object  
10  Price                  10683 non-null  int64  
dtypes: int64(1), object(10)  
memory usage: 918.2+ KB
```

In [15]:

```
testdf.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 2671 entries, 0 to 2670
Data columns (total 10 columns):
 #   Column                Non-Null Count  Dtype  
---  -
 0   Airline                2671 non-null  object 
 1   Date_of_Journey        2671 non-null  object 
 2   Source                 2671 non-null  object 
 3   Destination            2671 non-null  object 
 4   Route                  2671 non-null  object 
 5   Dep_Time               2671 non-null  object 
 6   Arrival_Time           2671 non-null  object 
 7   Duration               2671 non-null  object 
 8   Total_Stops            2671 non-null  object 
 9   Additional_Info        2671 non-null  object 
dtypes: object(10)
memory usage: 208.8+ KB
```

In [16]:

```
traindf.isnull().sum()
```

Out[16]:

```
Airline                0
Date_of_Journey        0
Source                 0
Destination            0
Route                  1
Dep_Time               0
Arrival_Time           0
Duration               0
Total_Stops            1
Additional_Info         0
Price                  0
dtype: int64
```

In [17]:

```
testdf.isnull().sum()
```

Out[17]:

```
Airline                0
Date_of_Journey        0
Source                 0
Destination            0
Route                  0
Dep_Time               0
Arrival_Time           0
Duration               0
Total_Stops            0
Additional_Info         0
dtype: int64
```


In [18]:

```
traindf.dropna(inplace=True)
```

In [19]:

```
traindf.isnull().sum()
```

Out[19]:

```
Airline           0
Date_of_Journey   0
Source            0
Destination       0
Route            0
Dep_Time          0
Arrival_Time      0
Duration          0
Total_Stops       0
Additional_Info    0
Price            0
dtype: int64
```

In [20]:

```
traindf.shape
```

Out[20]:

```
(10682, 11)
```

In [21]:

```
traindf['Airline'].value_counts()
```

Out[21]:

```
Jet Airways          3849
IndiGo               2053
Air India            1751
Multiple carriers    1196
SpiceJet             818
Vistara              479
Air Asia             319
GoAir                194
Multiple carriers Premium economy  13
Jet Airways Business    6
Vistara Premium economy    3
Trujet               1
Name: Airline, dtype: int64
```

In [22]:

```
traindf['Source'].value_counts()
```

Out[22]:

```
Delhi      4536
Kolkata    2871
Banglore   2197
Mumbai     697
Chennai    381
Name: Source, dtype: int64
```

In [23]:

```
traindf['Destination'].value_counts()
```

Out[23]:

```
Cochin      4536
Banglore    2871
Delhi        1265
New Delhi    932
Hyderabad    697
Kolkata      381
Name: Destination, dtype: int64
```

In [24]:

```
traindf['Total_Stops'].value_counts()
```

Out[24]:

```
1 stop      5625
non-stop    3491
2 stops     1520
3 stops      45
4 stops      1
Name: Total_Stops, dtype: int64
```

In [25]:

```
airline={"Airline":{"Jet Airways":0,"IndiGo":1,"Air India":2,"Multiple carriers":3,
"SpiceJet":4,"Vistara":5,"Air Asia":6,"GoAir":7,
"Multiple carriers Premium economy":8,
"Jet Airways Business":9,"Vistara Premium economy":10,"Trujet":11}}
traindf=traindf.replace(airline)
traindf
```

Out[25]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durat
0	1	24/03/2019	Banglore	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h 5
1	2	1/05/2019	Kolkata	Banglore	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 2
2	0	9/06/2019	Delhi	Cochin	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	
3	1	12/05/2019	Kolkata	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h 2
4	1	01/03/2019	Banglore	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h 4
...	
10678	6	9/04/2019	Kolkata	Banglore	CCU ? BLR	19:55	22:25	2h 3
10679	2	27/04/2019	Kolkata	Banglore	CCU ? BLR	20:45	23:20	2h 3
10680	0	27/04/2019	Banglore	Delhi	BLR ? DEL	08:20	11:20	
10681	5	01/03/2019	Banglore	New Delhi	BLR ? DEL	11:30	14:10	2h 4
10682	2	9/05/2019	Delhi	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 2

10682 rows × 11 columns



In [26]:

```
city={"Source":{"Delhi":0,"Kolkata":1,"Banglore":2,
"Mumbai":3,"Chennai":4}}
traindf=traindf.replace(city)
traindf
```

Out[26]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	New Delhi	BLR ? DEL	22:20	01:10 22 Mar	2h 50
1	2	1/05/2019	1	Banglore	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 25
2	0	9/06/2019	0	Cochin	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	1h
3	1	12/05/2019	1	Banglore	CCU ? NAG ? BLR	18:05	23:30	5h 25
4	1	01/03/2019	2	New Delhi	BLR ? NAG ? DEL	16:50	21:35	4h 45
...
10678	6	9/04/2019	1	Banglore	CCU ? BLR	19:55	22:25	2h 30
10679	2	27/04/2019	1	Banglore	CCU ? BLR	20:45	23:20	2h 35
10680	0	27/04/2019	2	Delhi	BLR ? DEL	08:20	11:20	3h
10681	5	01/03/2019	2	New Delhi	BLR ? DEL	11:30	14:10	2h 40
10682	2	9/05/2019	0	Cochin	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 20

10682 rows × 11 columns




In [28]:

```
destination={"Destination":{"Cochin":0,"Banglore":1,"Delhi":2,
    "New Delhi":3,"Hyderabad":4,"Kolkata":5}}
traindf=traindf.replace(destination)
traindf
```

Out[28]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 50
1	2	1/05/2019	1	1	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 25
2	0	9/06/2019	0	0	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	1h
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 25
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 45
...
10678	6	9/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 30
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 35
10680	0	27/04/2019	2	2	BLR ? DEL	08:20	11:20	3h
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 40
10682	2	9/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 20

10682 rows × 11 columns



In [29]:

```
stops={"Total_Stops":{"non-stop":0,"1 stop":1,"2 stops":2,
"3 stops":3,"4 stops":4}}
traindf=traindf.replace(stops)
traindf
```

Out[29]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Durati
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 50
1	2	1/05/2019	1	1	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 25
2	0	9/06/2019	0	0	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	1h
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 25
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 45
...
10678	6	9/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 30
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 35
10680	0	27/04/2019	2	2	BLR ? DEL	08:20	11:20	3h
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 40
10682	2	9/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 20

10682 rows × 11 columns




In [30]:

```
traindf
```

Out[30]:

	Airline	Date_of_Journey	Source	Destination	Route	Dep_Time	Arrival_Time	Duration
0	1	24/03/2019	2	3	BLR ? DEL	22:20	01:10 22 Mar	2h 50
1	2	1/05/2019	1	1	CCU ? IXR ? BBI ? BLR	05:50	13:15	7h 25
2	0	9/06/2019	0	0	DEL ? LKO ? BOM ? COK	09:25	04:25 10 Jun	1h
3	1	12/05/2019	1	1	CCU ? NAG ? BLR	18:05	23:30	5h 25
4	1	01/03/2019	2	3	BLR ? NAG ? DEL	16:50	21:35	4h 45
...
10678	6	9/04/2019	1	1	CCU ? BLR	19:55	22:25	2h 30
10679	2	27/04/2019	1	1	CCU ? BLR	20:45	23:20	2h 35
10680	0	27/04/2019	2	2	BLR ? DEL	08:20	11:20	3h
10681	5	01/03/2019	2	3	BLR ? DEL	11:30	14:10	2h 40
10682	2	9/05/2019	0	0	DEL ? GOI ? BOM ? COK	10:55	19:15	8h 20

10682 rows × 11 columns




In [31]:

#EDA

```
fdf=traindf[['Airline','Source','Destination','Total_Stops','Price']]
sns.heatmap(fdf.corr(),annot=True)
```

Out[31]:

<Axes: >

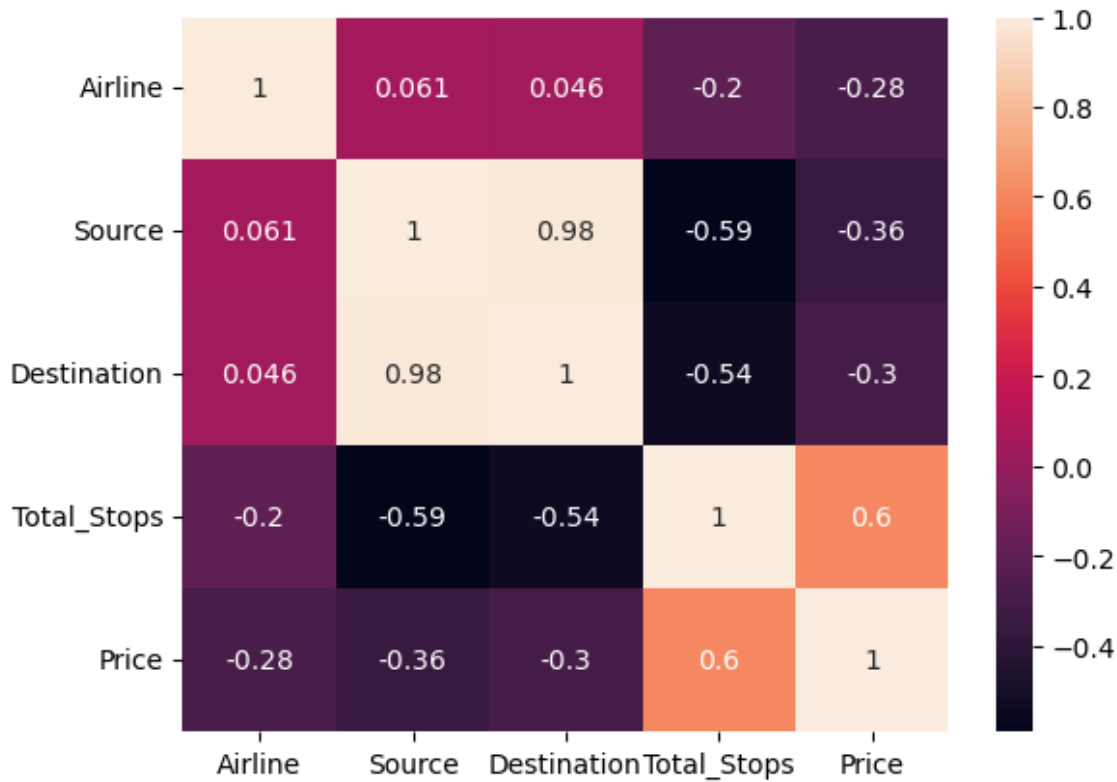

In [32]:

```
x=fdf[['Airline','Source','Destination','Total_Stops']]
y=fdf['Price']
```

In [33]:

#Linear Regression

```
from sklearn.model_selection import train_test_split
X_train,X_test,y_train,y_test=train_test_split(x,y,test_size=0.3,random_state=100)
```


In [34]:

```
from sklearn.linear_model import LinearRegression
regr=LinearRegression()
regr.fit(X_train,y_train)
print(regr.intercept_)
coeff_df=pd.DataFrame(regr.coef_,x.columns,columns=['coefficient'])
coeff_df
```

7211.098088897481

Out[34]:

	coefficient
Airline	-418.483922
Source	-3275.073380
Destination	2505.480291
Total_Stops	3541.798053

In [35]:

```
#Linear Rgeression
score=regr.score(X_test,y_test)
print(score)
```

0.4108304890928346

In [36]:


```
predictions=regr.predict(X_test)
```

In [37]:

```
plt.scatter(y_test,predictions)
```

Out[37]:

<matplotlib.collections.PathCollection at 0x1fc28d04c70>

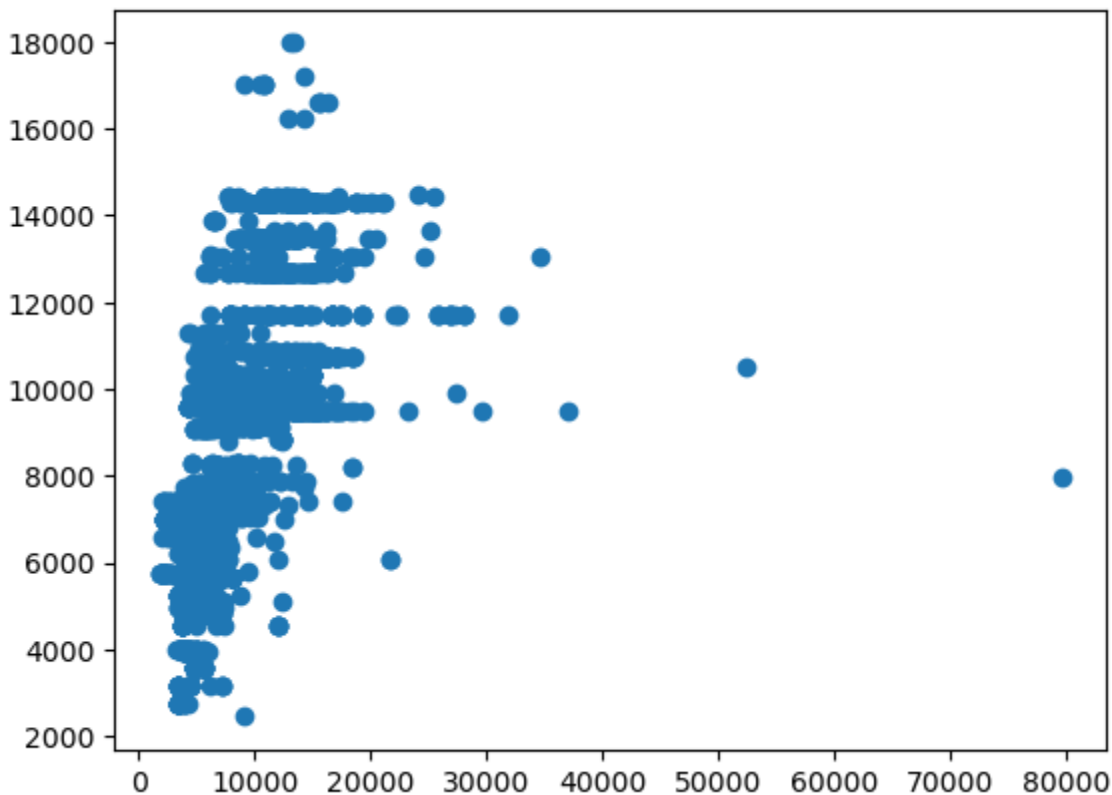

In [38]:

```
x=np.array(fdf['Price']).reshape(-1,1)
y=np.array(fdf['Total_Stops']).reshape(-1,1)
fdf.dropna(inplace=True)
```

C:\Users\jas_m\AppData\Local\Temp\ipykernel_47624\521034954.py:3: SettingWithCopyWarning:

A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)

```
fdf.dropna(inplace=True)
```

In [39]:


```
X_train,X_test,y_train,y_test=train_test_split(x,y,test_size=0.3)
regr.fit(X_train,y_train)
regr.fit(X_train,y_train)
```

Out[39]:

```
LinearRegression
LinearRegression()
```

In [40]:

```
y_pred=regr.predict(X_test)
plt.scatter(X_test,y_test,color='y')
plt.plot(X_test,y_pred,color='b')
plt.show()
```

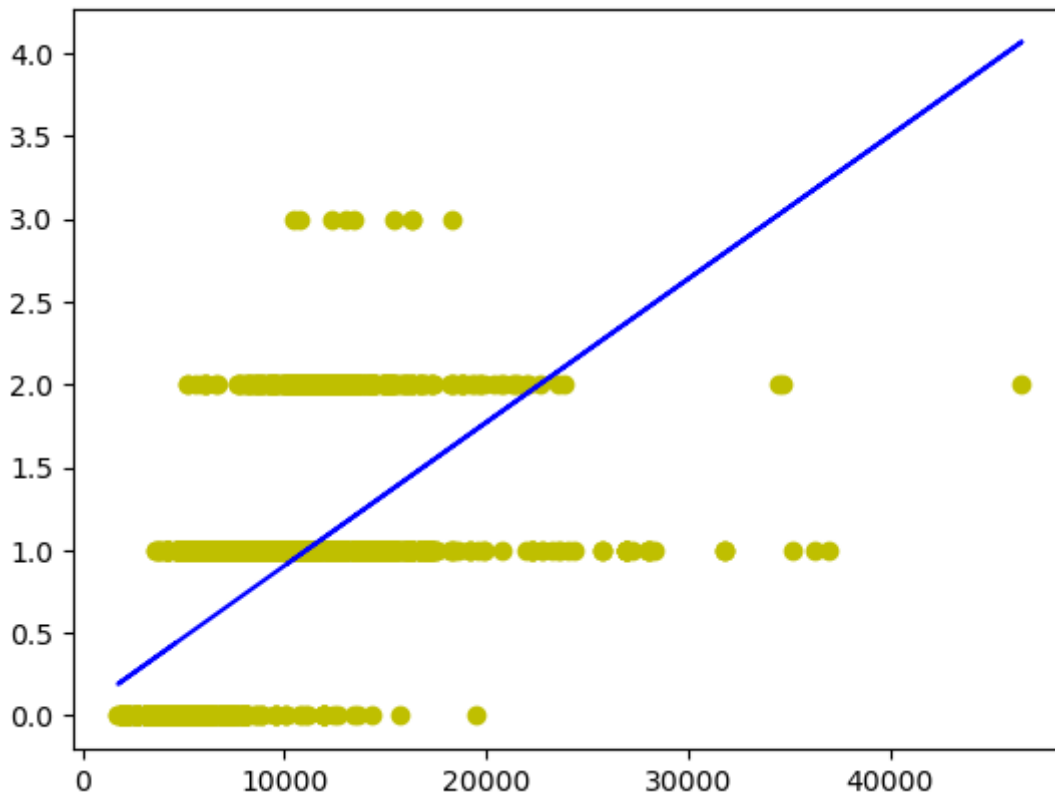

In [41]:

```
#Logistic Regression
x=np.array(fdf['Price']).reshape(-1,1)
y=np.array(fdf['Total_Stops']).reshape(-1,1)
fdf.dropna(inplace=True)
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3,random_state=1)
from sklearn.linear_model import LogisticRegression
lr=LogisticRegression(max_iter=10000)
```

C:\Users\jas_m\AppData\Local\Temp\ipykernel_47624\325765256.py:4: SettingWithCopyWarning:
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)
fdf.dropna(inplace=True)

In [42]:

```
lr.fit(x_train,y_train)
```

C:\Users\jas_m\anaconda3\lib\site-packages\sklearn\utils\validation.py:1143: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().

```
y = column_or_1d(y, warn=True)
```

Out[42]:

```
LogisticRegression
LogisticRegression(max_iter=10000)
```

In [43]:

```
score=lr.score(x_test,y_test)
print(score)
```

0.7160686427457098

In [44]:


```
sns.regplot(x=x,y=y,data=fdf,logistic=True,ci=None)
```

C:\Users\jas_m\anaconda3\lib\site-packages\statsmodels\genmod\family\link.py:187: RuntimeWarning: overflow encountered in exp

```
t = np.exp(-z)
```

Out[44]:

<Axes: >

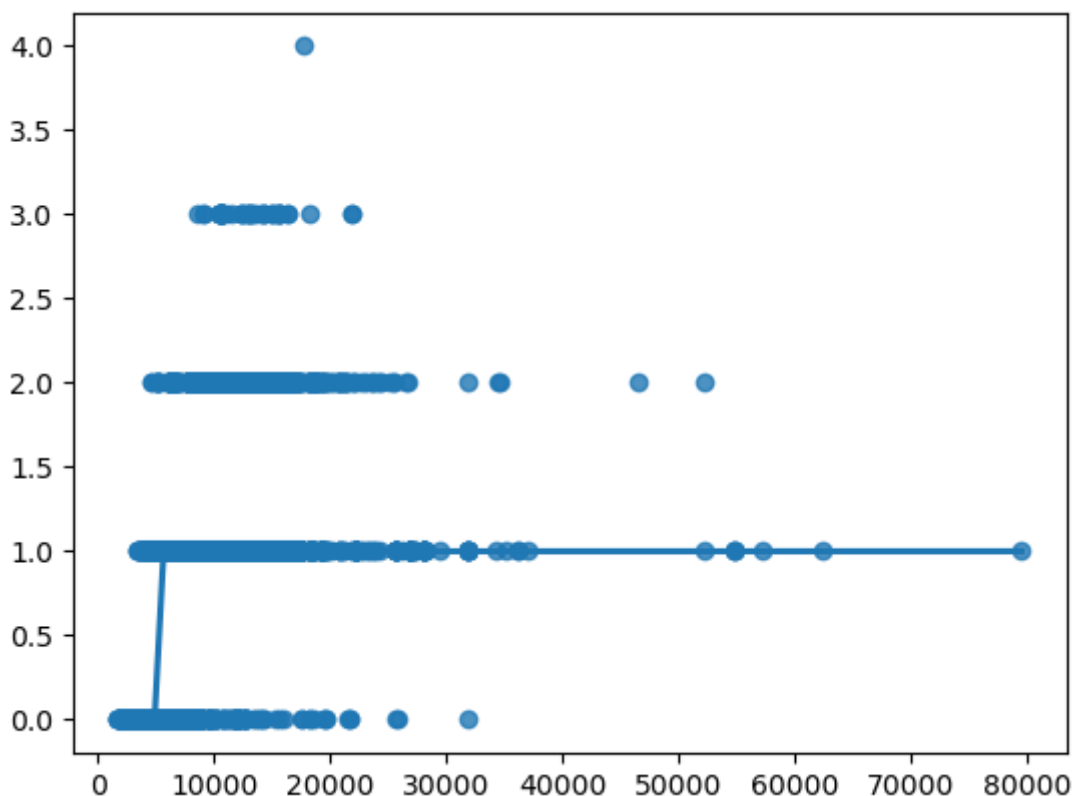

In [45]:

```
#Decision tree
from sklearn.tree import DecisionTreeClassifier
clf=DecisionTreeClassifier(random_state=0)
clf.fit(x_train,y_train)
```

Out[45]:

```
▼ DecisionTreeClassifier
DecisionTreeClassifier(random_state=0)
```

In [46]:

```
score=clf.score(x_test,y_test)
print(score)
```

0.9369734789391576

In [47]:

```
#Random forest classifier
from sklearn.ensemble import RandomForestClassifier
rfc=RandomForestClassifier()
rfc.fit(X_train,y_train)
```

C:\Users\jas_m\AppData\Local\Temp\ipykernel_47624\2470359396.py:4: DataCon
versionWarning: A column-vector y was passed when a 1d array was expected.
Please change the shape of y to (n_samples,), for example using ravel().
rfc.fit(X_train,y_train)

Out[47]:

```
▼ RandomForestClassifier
RandomForestClassifier()
```

In [48]:

```
params={'max_depth':[2,3,5,10,20],
'min_samples_leaf':[5,10,20,50,100,200],
'n_estimators':[10,25,30,50,100,200]}
```

In [49]:

```
from sklearn.model_selection import GridSearchCV
grid_search=GridSearchCV(estimator=rfc,param_grid=params,cv=2,scoring="accuracy")
```

In [50]:

```
grid_search.fit(X_train,y_train)
```

```
s,), for example using ravel().
estimator.fit(X_train, y_train, **fit_params)
C:\Users\jas_m\anaconda3\lib\site-packages\sklearn\model_selection\_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().
estimator.fit(X_train, y_train, **fit_params)
C:\Users\jas_m\anaconda3\lib\site-packages\sklearn\model_selection\_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().
estimator.fit(X_train, y_train, **fit_params)
C:\Users\jas_m\anaconda3\lib\site-packages\sklearn\model_selection\_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n_samples,), for example using ravel().
estimator.fit(X_train, y_train, **fit_params)
C:\Users\jas_m\anaconda3\lib\site-packages\sklearn\model_selection\_validation.py:686: DataConversionWarning: A column-vector y was passed when a 1d array was expected. Please change the shape of y to (n sample
```

In [51]:

```
grid_search.best_score_
```

Out[51]:

```
0.523605715699528
```

In [52]:

```
rf_best=grid_search.best_estimator_
rf_best
```

Out[52]:


```
RandomForestClassifier
RandomForestClassifier(max_depth=2, min_samples_leaf=5, n_estimators=10)
```

In [53]:

```
from sklearn.tree import plot_tree
plt.figure(figsize=(80,40))
plot_tree(rf_best.estimators_[4],class_names=['0','1','2','3','4'],filled=True)
```

Out[53]:

```
[Text(0.5, 0.8333333333333334, 'x[0] <= 3122.5\ngini = 0.597\nsamples = 4728\nvalue = [2402, 3944, 1106, 24, 1]\nnclass = 1'),
Text(0.25, 0.5, 'x[0] <= 1991.0\ngini = 0.496\nsamples = 141\nvalue = [47, 143, 25, 0, 0]\nnclass = 1'),
Text(0.125, 0.16666666666666666, 'gini = 0.518\nsamples = 16\nvalue = [11, 16, 1, 0, 0]\nnclass = 1'),
Text(0.375, 0.16666666666666666, 'gini = 0.485\nsamples = 125\nvalue = [36, 127, 24, 0, 0]\nnclass = 1'),
Text(0.75, 0.5, 'x[0] <= 14730.0\ngini = 0.599\nsamples = 4587\nvalue = [2355, 3801, 1081, 24, 1]\nnclass = 1'),
Text(0.625, 0.16666666666666666, 'gini = 0.601\nsamples = 4188\nvalue = [2166, 3431, 988, 23, 1]\nnclass = 1'),
Text(0.875, 0.16666666666666666, 'gini = 0.575\nsamples = 399\nvalue = [189, 370, 93, 1, 0]\nnclass = 1')]
```

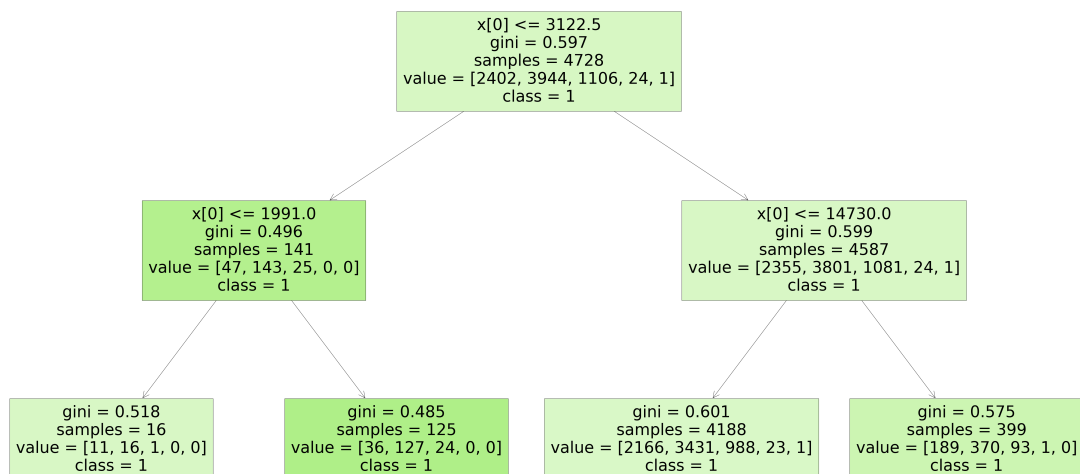

In [54]:

```
score=rfc.score(x_test,y_test)
print(score)
```

0.44586583463338536

In []:

In []:

