


# Latex in Examples

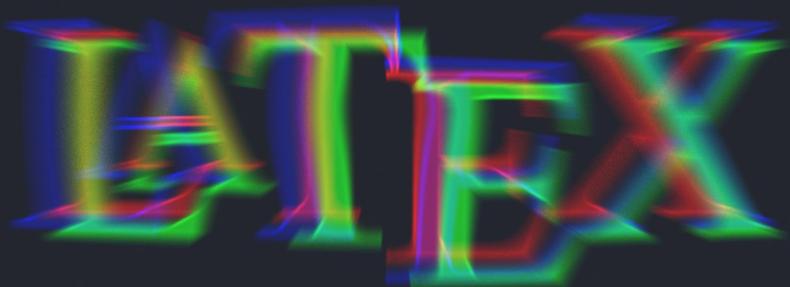

Thanks to me

Examples in this book is updated  
every week.

This work is licensed under a [Creative Commons “Attribution-NonCommercial-ShareAlike 3.0 Unported” license](#).



# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Math Tips</b>  | <b>6</b>  |
| 1.1      | Auto-resizing equation . . . . .  | 6         |
| 1.2      | Form for simplest calculation . . . . .                                 | 6         |
| 1.3      | Equation in the form of steps . . . . .                                 | 7         |
| 1.4      | One number for multiline equation . . . . .                             | 7         |
| 1.5      | Matrix in <b>standalone</b> documentclass . . . . .                     | 7         |
| 1.6      | Multiple lines, one centered label . . . . .                            | 8         |
| 1.7      | Array as a fraction . . . . .   | 8         |
| 1.8      | Aligning equations inbetween text . . . . .                             | 8         |
| <b>2</b> | <b>Text, Symbols</b>  | <b>9</b>  |
| 2.1      | New section symbol . . . . .  | 9         |
| 2.2      | Wireframe rendering . . . . .   | 9         |
| 2.3      | Justifyed text . . . . .  | 9         |
| 2.4      | Text under an underline . . . . .                                       | 10        |
| 2.5      | Bullets Style . . . . .   | 10        |
| <b>3</b> | <b>Code, listings, minted ...</b>                                       | <b>12</b> |
| 3.1      | Code listing using <code>minted</code> in <code>beamer</code> . . . . . | 12        |
| 3.2      | "Zebra" style listing . . . . .   | 13        |
| 3.3      | Listing with russian language . . . . .                                 | 13        |
| 3.4      | Listing with <code>minted</code> . . . . .                              | 14        |
| <b>4</b> | <b>Tables, boxes and so on</b>  | <b>15</b> |
| 4.1      | Nice tcolorbox . . . . .  | 15        |
| 4.2      | Color box with yellow border . . . . .                                  | 15        |
| 4.3      | A drop capital in a tcolorbox . . . . .                                 | 16        |
| 4.4      | <i>Table with the desired length.</i> . . . . .                         | 16        |
| 4.5      | bclogo – Creating colourful boxes with logos . . . . .                  | 17        |
| 4.6      | Warning banner . . . . .  | 18        |
| 4.7      | Photo positioning . . . . .   | 18        |
| 4.8      | Absolutely centered cells (vertically and horisontally) . . . . .       | 19        |
| 4.9      | Martix made of table . . . . .  | 19        |

|          |   |           |
|----------|---|-----------|
| 4.10     | Centering cells with <code>NiceTabular</code>                     | 20        |
| 4.11     | Centered cells in <code>longtable</code>                          | 20        |
| 4.12     | If table is not wide enough                                       | 21        |
| 4.13     | Text next to a table  | 21        |
| 4.14     | Text next to a table  | 22        |
| 4.15     | Hand Drawn tcolorbox  | 23        |
| 4.16     | Halfframed boxes  | 25        |
| <b>5</b> | <b>Figures</b>  | <b>26</b> |
| 5.1      | Comment to figure   | 26        |
| 5.2      | Positioning 1   2   | 26        |
| 5.3      | Placing image <code>anywhere</code> You want                      | 27        |
| 5.4      | Italic subfigure references                                       | 27        |
| 5.5      | Wrapfigure  | 27        |
| 5.6      | Figures in landscape mode   | 27        |
| <b>6</b> | <b>Numbering, enumeration, itemizing</b>                          | <b>29</b> |
| 6.1      | Numbering in few columns  | 29        |
| 6.2      | Enumeration environment with position number in the format (i, j) | 29        |
| 6.3      | Colored enumeration   | 30        |
| 6.4      | Leveled arabic enumeration  | 30        |
| 6.5      | Change footnote symbol  | 31        |
| 6.6      | Bullets Style   | 31        |
| <b>7</b> | <b>Plots, tikz, pie charts ...</b>                                | <b>33</b> |
| 7.1      | Simple pie chart  | 33        |
| 7.2      | Circled arrows with text  | 33        |
| 7.3      | Diamond with text   | 34        |
| 7.4      | Levels of skills  | 34        |
| 7.5      | Round levels of skills  | 35        |
| 7.6      | Huge margin line  | 35        |
| 7.7      | Aligning anything to a corner                                     | 36        |
| <b>8</b> | <b>Highlighting</b>   | <b>37</b> |
| 8.1      | Words highlighting (1)  | 37        |
| 8.2      | Unusual words highlighting  | 37        |
| 8.3      | Colored circles   | 38        |
| 8.4      | Whole line colored  | 38        |
| 8.5      | Circle text in points to other text                               | 38        |

|           |  |           |
|-----------|--|-----------|
| <b>9</b>  | <b>For Fun</b>                                   | <b>40</b> |
| 9.1       | LaTeX Coffee Stains . . . . .                    | 40        |
| 9.2       | Sticky notes . . . . .                           | 40        |
| 9.3       | . . . . .  | 41        |
| 9.4       | Single Watermark . . . . .                       | 42        |
| 9.5       | Full page of Watermarks . . . . .                | 42        |
| 9.6       | Generating QR code . . . . .                     | 43        |
| 9.7       | Gradient QR code . . . . .                       | 44        |
| 9.8       | Lobsrets . . . . .                               | 44        |
| 9.9       | Watermark over <b>everything</b> . . . . .       | 44        |
| <b>10</b> | <b>Animation, videos, interaction</b>            | <b>47</b> |
| 10.1      | Video in PDF (okular as a .pdf viewer) . . . . . | 47        |

~~\begin{equation\*}\Label{eq1}~~ \begin{equation\*}\Label{eq1} \begin{equation\*}\Label{eq1}

~~\dot{\rho}=\frac{x^3}{45a},\rightarrow^9-23b\}~~ ~~\dot{\rho}=\frac{x^3}{45a},\rightarrow^9-23b\}~~ ~~\dot{\rho}=\frac{x^3}{45a},\rightarrow^9-23b\}~~

~~\end{equation\*}~~ ~~\end{equation\*}~~ ~~\end{equation\*}~~

CORRECT paste code from examples

how

# Chapter 1

# Math Tips

## 1.1 Auto-resizing equation

$$\dot{\rho} = \frac{x^3}{45a^9 - 23b}$$

```
\begin{equation*}\label{eq1}
\begin{array}{l} \text{\scriptsize \textcolor{blue}{\% change .4 to 0.5...}} \\ \text{\scriptsize \textcolor{blue}{\$dot{\rho}=dfrac{x^3}{45a^{9-23b}}\$}} \end{array}
\end{equation*}
```

## 1.2 Form for simplest calculation

Fill with number  
if it does't work try another PDF viewer

a:

b:

6

$\sum =$

```
\documentclass{article}
\usepackage{hyperref}
\begin{document}
\newcommand{\sss}[1]{this.getField("#1").value}
\begin{Form}
\noindent%
Fill with number\ \
\TextField[name=a]{a:} \\
\TextField[name=b]{b:} \\
\TextField[name=c]{c:} \\
\noindent%
\$ \sum = \$ \TextField[name=AvgStat, calculate={%
    event.value = (
        \sss{a} +
        \sss{b} +
        \sss{c}) ;
}, readonly, value=0]{}
\end{Form}
\end{document}
```

## 1.3 Equation in the form of steps

$$\frac{n_0}{n_1} = q_1 + \frac{1}{q_2 + \frac{1}{q_3 + \frac{1}{q_4 + \dots + \frac{1}{q_{k-1} + \frac{1}{q_k}}}}}$$

```
\documentclass{article}
\usepackage{amsmath}
\def\mywd{35pt}
\begin{document}
\begin{array}{c}
\\
\frac{n_0}{n_1} = q_1 + \frac{1}{\raisebox{-6pt}{$\frac{}{}$}\frac{n_1}{n_2} + \frac{1}{\raisebox{-12pt}{$\frac{}{}$}\frac{}{} + \frac{1}{\frac{}{} + \frac{1}{\frac{}{} + \dots + \frac{1}{\frac{}{} + \frac{1}{\frac{}{} + \frac{1}{\frac{}{} + \frac{1}{q_k}}}}}}}} \\
\end{array}
\end{document}
```

## 1.4 One number for multiline equation

$$\begin{aligned} x_{ij} &= d_{ijk} E_k, \\ x_{ij} &= \varsigma_{ijk} H_k, \\ x_{ij} &= s_{ijkl} X_{kl}, \\ x_{ij} &= \xi_{ij} \delta p, \\ x_{ij} &= \alpha_{ij} \delta T \end{aligned} \quad (1.1)$$

```
\documentclass{article}
\usepackage{amsmath}
\begin{document}
\begin{aligned}
x_{ij} &= d_{ijk} E_k, \\
x_{ij} &= \varsigma_{ijk} H_k, \\
x_{ij} &= s_{ijkl} X_{kl}, \\
x_{ij} &= \xi_{ij} \delta p, \\
x_{ij} &= \alpha_{ij} \delta T
\end{aligned}
\end{document}
```

## 1.5 Matrix in standalone documentclass

$$\begin{matrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{matrix}$$

```
\documentclass[preview,border={-5cm 0cm -5cm -0.1cm}]{standalone}
\usepackage{amsmath}
\begin{document}
\begin{equation*}
\begin{matrix}
a_{11} & a_{12} & a_{13} \\
a_{21} & a_{22} & a_{23} \\
a_{31} & a_{32} & a_{33}
\end{matrix}
\end{equation*}
\end{document}
```

## 1.6 Multiple lines, one centered label

**16**

$$A = \frac{\pi r^2}{2} = \frac{1}{2}\pi r^2 \quad (1.2)$$

```
\begin{equation} \label{eq1}
\begin{aligned}
A &= \frac{\pi r^2}{2} \\
&= \frac{1}{2}\pi r^2
\end{aligned}
\end{equation}
```

## 1.7 Array as a fraction

**17**

$$I - IV - V^{6-4 \atop 4-3 \atop 6-4} - I - cadence$$


$$I - IV - V^{6-4 \atop 4-3} - I - cadence$$

$$I - IV - V^{6-4 \atop 4-3} - I - cadence$$

```
\documentclass{article}
\usepackage{amsmath}

\begin{document}
\$I-IV-V^{ \substack{6-4 \\ 4-3 \\ 6-4}}-I-cadence\$ \\
\$I-IV-V^{ \genfrac{}{}{0pt}{}{6-4}{4-3}}-I-cadence\$ \\
\$I-IV-V^{ \begin{array}{c}6-4 \\ \hookrightarrow \\ 4-3\end{array}}-I-cadence\$ \\
\end{document}
```

## 1.8 Aligning equations inbetween text

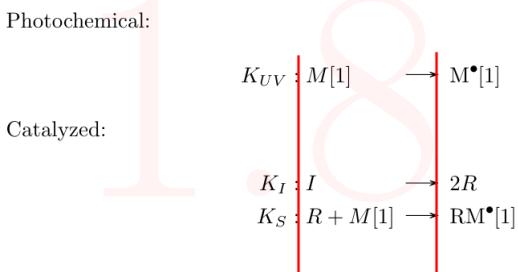

```
\documentclass{article}
\usepackage{amsmath}

\begin{document}
\begin{aligned}
&\text{\textbackslash begin\{document\}} \\
&\text{\textbackslash begin\{alignat*\}\{2\}} \\
&\text{\textbackslash intertext\{Photochemical:\}} \\
&K_{UV} \&: M[1] \& \text{\textbackslash ch\{-\>} M^\bullet[*]\}[1] \\
&\text{\textbackslash intertext\{Catalyzed:\}} \\
&K_I \&: I \& \text{\textbackslash ch\{-\>} 2R \\\& \\
&K_S \&: R + M[1] \& \text{\textbackslash ch\{-\>} RM^\bullet[*]\}[1]
\end{aligned}
\end{document}
```

# Chapter 2


## Text, Symbols

### 2.1 New section symbol



```
\usepackage[object=vectorian]{pgfornament}
\usepackage{lipsum,tikz}
\newcommand{\sectionlinetwo}[2]{%
\nointerlineskip \vspace{.5\baselineskip}\hspace{\fill}
{\color{#1}\resizebox{0.5\linewidth}{2ex}%
{\begin{tikzpicture}
\node (C) at (0,0) {};
\node (D) at (9,0) {};
\path (C) to [ornament=#2] (D);
\end{tikzpicture}}}}%
\hspace{\fill}\par\nointerlineskip
\vspace{.5\baselineskip}}
\usage---> \sectionlinetwo{orange}{88}
```

### 2.2 Wireframe rendering

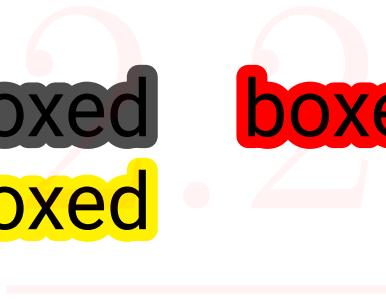

```
\documentclass{article}
\usepackage{xcolor}
\usepackage{roboto}
\usepackage[outline]{contour}
\begin{document}
\roboto\huge\contourlength{.15em}
\contour{gray}{boxed}
\end{document}
```

### 2.3 Justified text

1. First item in a list
2. Second item in a list
3. Third item in a list
4. Fourth item in a list
5. Fifth item in a list
6. Sixth item in a list
7. Seventh item in a list
8. Eighth item in a list
9. Ninth item in a list
10. Tenth item in a list

```
\documentclass{article}
\usepackage{blindtext}
\newcommand*\justify{%
  \fontdimen2\font=0.4em% interword space
  \fontdimen3\font=0.2em% interword stretch
  \fontdimen4\font=0.1em% interword shrink
  \fontdimen7\font=0.1em% extra space
  \hyphenchar\font='-'% allowing hyphenation
}

\begin{document}
\texttt{\justify\blindenumerate[10]}
\end{document}
```

## 2.4 Text under an underline

This is short text  
 (some text)

```
\documentclass[12pt]{article}
\usepackage{amsmath,soul}
\usepackage{soulpos}
\ulposdef{\ulnumaux}{%
\$ \underset{\rule[-.7ex]{\ulwidth}{.4pt}}{\text{\ulnum}}{}%
\newcommand{\ulnum}[2]{%
\def\saveulnum{\#1}%
\ulnumaux{\#2}%
}

\begin{document}
\ulnum{\text{(some text)}}{This is short text}
\end{document}
```

## 2.5 Bullets Style

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| 32    | 33    | 34    | 35    | 36    | 37    | 38    | 39    |
| 40 →  | 41 □  | 42 ◀  | 43 ▶  | 44 ⌂  | 45 ↖  | 46 ↘  | 47 ⇔  |
| 48 ⌂  | 49 ⇔  | 50 ⇕  | 51 ✓  | 52 ✓  | 53 ×  | 54 ✗  | 55 ✗  |
| 56 ✗  | 57 ✗  | 58 ✗  | 59 ✗  | 60 ✗  | 61 †  | 62 †  | 63 †  |
| 64 ✗  | 65 ✗  | 66 ✗  | 67 ✗  | 68 ✗  | 69 ✗  | 70 ✗  | 71 ✗  |
| 72 ★  | 73 □  | 74 ○  | 75 ☆  | 76 *  | 77 ★  | 78 ★  | 79 *  |
| 80 ✗  | 81 *  | 82 *  | 83 *  | 84 *  | 85 *  | 86 *  | 87 *  |
| 88 *  | 89 *  | 90 *  | 91 *  | 92 *  | 93 *  | 94 *  | 95 ✗  |
| 96 ✗  | 97 ○  | 98 ○  | 99 *  | 100 * | 101 * | 102 * | 103 * |
| 104 ✗ | 105 * | 106 * | 107 * | 108 ● | 109 ○ | 110 ■ | 111 □ |
| 112 □ | 113 □ | 114 □ | 115 ▲ | 116 ▼ | 117 ◆ | 118 ✗ | 119 ▶ |
| 120 ━ | 121 ━ | 122 ━ | 123 ━ | 124 ━ | 125 ━ | 126 ━ | 127 ━ |
| 161 § | 162 ♦ | 163 ♦ | 164 ♦ | 165 ♦ | 166 ♦ | 167 ♦ | 168 ♦ |
| 168 ♦ | 169 ♦ | 170 ♦ | 171 ♦ | 172 ① | 173 ② | 174 ③ | 175 ④ |
| 176 ⑤ | 177 ⑥ | 178 ⑦ | 179 ⑧ | 180 ⑨ | 181 ⑩ | 182 ⑪ | 183 ⑫ |
| 184 ⑬ | 185 ⑭ | 186 ⑮ | 187 ⑯ | 188 ⑯ | 189 ⑯ | 190 ⑯ | 191 ⑯ |
| 192 ⑰ | 193 ⑱ | 194 ⑲ | 195 ⑳ | 196 ⑳ | 197 ⑳ | 198 ⑳ | 199 ⑳ |
| 200 ⑳ | 201 ⑳ | 202 ⑳ | 203 ⑳ | 204 ⑳ | 205 ⑳ | 206 ⑳ | 207 ⑳ |
| 208 ⑳ | 209 ⑳ | 210 ⑳ | 211 ⑳ | 212 ⑳ | 213 ⑳ | 214 ⑳ | 215 ⑳ |
| 216 ↖ | 217 → | 218 ↖ | 219 → | 220 → | 221 → | 222 → | 223 → |
| 224 → | 225 → | 226 ↖ | 227 ↖ | 228 → | 229 → | 230 → | 231 → |
| 232 → | 233 → | 234 ↖ | 235 ↖ | 236 → | 237 → | 238 → | 239 → |
| 241 ↖ | 242 ↖ | 243 ↖ | 244 ↖ | 245 ↖ | 246 ↖ | 247 ↖ | 248 ↖ |
| 248 ↖ | 249 ↖ | 250 ↖ | 251 ↖ | 252 ↖ | 253 ↖ | 254 ↖ | 255 ↖ |

```
\documentclass{article}
\usepackage{pifont}

\begin{document}
\begin{itemize}
\item[\ding{51}] Code 51
\item[\ding{56}] Code 56
\item[\ding{43}] Code 43
\item[\ding{118}] Code 118
\item[\ding{170}] Code 170
\end{itemize}
\end{document}
```

# Chapter 3

## Code, listings, minted . . .

### 3.1 Code listing using `minted` in `beamer`

Python Code Example  
1      import glob  
2

```
\documentclass{beamer}
\usepackage{tcolorbox}
\tcbuselibrary{minted,skins,breakable}
\newtcblisting{pythoncode}[2]{%
    listing engine=minted, breakable, colback=bg,
    colframe=black!70, listing only,
    minted style=colorful, minted language=python,
    minted options={numbersep=3mm,texcl=true,#1},
    left=5mm,enhanced,
    overlay={\begin{tcbclipinterior}\fill[black!25] (frame.south west)
rectangle ([xshift=5mm]frame.north west);\end{tcbclipinterior}},
#2,
\begin{document}
\begin{frame}[fragile]
\frametitle{Premature Optimization}
\begin{pythoncode}[linenos=true,]{title=Python Code
    \hookrightarrow Example}
import glob
\end{pythoncode}
\end{frame}
\end{document}
```

## 3.2 "Zebra" style listing

```
/**  
 * Prints Hello World.  
 **/  
#include <stdio.h>  
  
int main(void) {  
    printf("Hello World!");  
    return 0;  
}
```

```
\documentclass{article}  
\usepackage[T1]{fontenc}  
\usepackage{beramono}  
\usepackage{listings}  
\usepackage{xcolor}  
\newcommand\realnumberstyle[1]{}  
\makeatletter  
\newcommand{\zebra}[3]{%  
    \realnumberstyle{#3}}%  
    \begingroup  
    \lst@basicstyle  
    \ifodd\value{listnumber}%  
        \color{#1}%  
    \else  
        \color{#2}%  
    \fi  
    \rlap{\hspace*{\lst@numbersep}}%  
    \color@block{\ linewidth}{\ht\strutbox}{\dp\strutbox}}%  
    }%  
    \endgroup  
\makeatother  
\begin{document}  
\begin{lstlisting}[language=C,basicstyle=\ttfamily,  
numberstyle=\zebra{green!35}{yellow!35},numbers=left]  
/*  
 * Prints Hello World.  
 **/  
#include <stdio.h>  
int main(void) {  
    printf("Hello World!");  
    return 0;  
}  
\end{lstlisting}  
\end{document}
```

## 3.3 Listing with russian language

```
print("English comment"); // English comment  
print("Russian comment"); // Русский комментарий
```

```
\documentclass{article}  
\usepackage[T2A]{fontenc}  
\usepackage[utf8]{inputenc}  
\usepackage[russian]{babel}  
\usepackage{listings}  
\usepackage{xcolor}  
  
\begin{document}  
\lstset{ keepspaces=true,  
backgroundcolor=\color{blue},  
showstringspaces=false,  
language=C,  
extendedchars=\true,  
framexrightmargin=0pt,  
framexleftmargin=0pt,  
framextopmargin=15pt,  
framexbottommargin=15pt,  
frame=tb, framerule=0pt,  
basicstyle=\color{yellow}\ttfamily\small}  
  
\begin{lstlisting}% <<<<<< add "/"  
print("English comment"); // English comment  
print("Russian comment"); // %here can be russian words  
\end{lstlisting}% <<<<<< add "/"  
\end{document}
```

## 3.4 Listing with **minted**

```
1 int main(int ac, char *av[])
2 {
3     printf("Hello, World");
4     return 0;
5 }
```

```
\documentclass{article}
\usepackage[many]{tcolorbox}
\tcbuselibrary{minted}
\newtcblisting{mylisting}[
    colframe=cyan,
    colback=cyan!10,
    listing only,
    listing engine=minted,
    minted language=cpp,
    minted options={fontsize=\small,linenos,numbersep=3mm},
]
\begin{document}
\begin{mylisting}
some code
\end{mylisting}
\end{document}
```

# Chapter 4


## Tables, boxes and so on

### 4.1 Nice tcolorbox



```
\PassOptionsToPackage{svgnames}{xcolor}
\documentclass[twocolumn,a4paper]{article}
\usepackage{tcolorbox}
\tcbuselibrary{skins,breakable}
\usetikzlibrary{shadings,shadows} %preamble
\begin{tcolorbox}[colback=white!100,colframe=red!75!black,width=7cm,
    righttitle=0.5cm, subtitle style={boxrule=0.4pt,colback=yellow!50!red
    !25!white},title= \bf{1}\hfill \bf{22}]
\begin{center}\bf{333}\end{center}
\tcblower
\href{https://tools.ietf.org/doc/texlive-doc/latex/tcolorbox/tcolorbox.pdf}{URL}
\end{tcolorbox}
```

### 4.2 Color box with yellow border



```
\documentclass[border=2mm]{standalone}
\usepackage[most]{tcolorbox}
\usepackage{lipsum}

\newtcolorbox{mycolorbox}[1]{
    enhanced, breakable,
    title=#1, colback=white,
    colbacktitle=green!20!white,
    coltitle=black,
    fonttitle=\bfseries,
    boxrule=.5pt, arc=0pt,
    outer arc=0pt,
    colframe=yellow!80!orange,
    borderline west={2pt}{0pt}{red} }

\begin{document}
\begin{mycolorbox}{Remarque}
\lipsum[1]
\end{mycolorbox}
\end{document}
```

## 4.3 A drop capital in a tcolorbox

SOME text. Lorem ipsum dolor sit amet, consec-tetuer adipiscing elit.

```
\documentclass{article}
\usepackage{lettrine}
\usepackage{tcolorbox}
\usepackage{lipsum}

\begin{document}
\begin{tcolorbox}
\lettrine[S]{ome} text. \lipsum[1]
\end{tcolorbox}
\end{document}
```

## 4.4 Table with the desired length.

Table 1: Caption


| Variant | res | Veriaty of waters $f_0$ , res | C, res | L, res |
|---------|-----|-------------------------------|--------|--------|
| 5       | 1   | 2                             | 1.26   | 5      |

a command was also created to make a new cell view in the table

```
\usepackage{graphicx}
\usepackage{tabularx}
\newcolumntype{Y}{>{\centering\arraybackslash}X}
\begin{document}
\begin{table}[h!]
\begin{center}
\caption{\textbf{Caption}}
\begin{tabularx}{14cm}{|Y|Y|c|Y|Y|}
\hline
Variant & res & Veriaty of waters $f_0$, res & C, res & L, res\\
\hline
5 & 1 & 2 & 1.26 & 5\\
\hline
\end{tabularx}
\end{center}
\end{table}

```

## 4.5 bclogo – Creating colourful boxes with logos

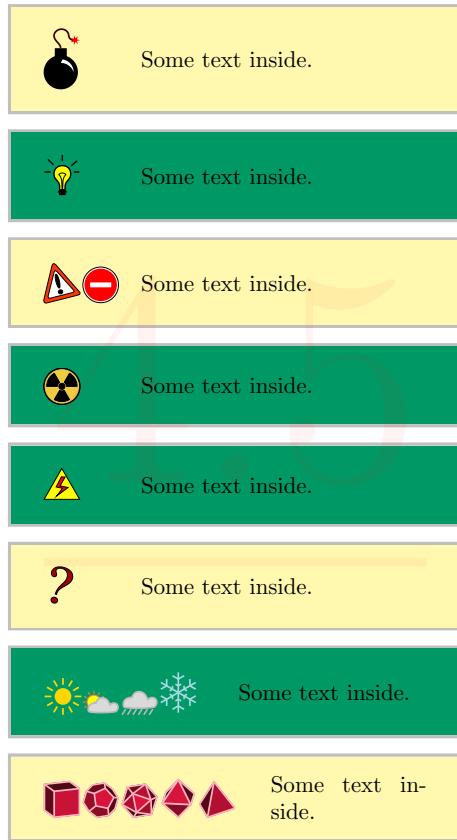

```
\documentclass{article}
\usepackage{geometry}
\geometry{
paperwidth=8cm,
paperheight=14cm,
margin=0.5cm
}
\usepackage{xcolor}
\usepackage[most]{tcolorbox}
\usepackage[tikz]{bclogo}

\newtcbox{\framedd}[1]{
colframe=lightgray,
colback=yellow!40!white,
enhanced jigsaw,
sharp corners,
lower separated=false,
lethand width=1cm,
sidebyside gap=0.5cm,
sidebyside,#1}

\begin{document}
\begin{framedd}
\bc bombe \tc blower Some text inside.
\end{framedd}

\begin{framedd}[colback=blue!40!green]
\bc lampe \tc blower Some text inside.
\end{framedd}

\begin{framedd}
\bc attention \bc interdit \tc blower
Some text inside.
\end{framedd}

\begin{framedd}[colback=blue!40!green]
\bc nucleaire \tc blower
Some text inside.
\end{framedd}

\begin{framedd}[colback=blue!40!green]
\bc danger \tc blower
Some text inside.
\end{framedd}

\begin{framedd}
\bc question \tc blower
Some text inside.
\end{framedd}

\begin{framedd}[colback=blue!40!green, lethand width=2.5cm]
\bc soleil \bc claircie \bc pluie \bc neige \tc blower
Some text inside.
\end{framedd}


\begin{framedd}[lethand width=3cm]
\bc cube \bc dodecaedre \bc icosaedre \bc octaedre \bc tetraedre \tc blower
Some text inside.
\end{framedd}
\end{document}
```

## 4.6 Warning banner



```
\usepackage[utf8]{inputenc}
\usepackage[T1]{fontenc}
\usepackage[most]{tcolorbox}
\definecolor{orang}{RGB}{255,155,0}
\newtcolorbox[auto counter,number within=section]{caja}[1][]{%
enhanced,jigsaw,colback=white,colframe=orang,coltitle=orang,
fonttitle=\bfseries\sffamily,
sharp corners,
detach title,
leftrule=10mm,
% What you need %%%%%%%%%%%%%%
underlay unbroken and first={\node[below,text=black,anchor=east]
at ([xshift=-5pt]interior.base west) {\Huge \textbf{!}}};,
%%%%%%%%%%%%%
breakable,pad at break=1mm,
#1,
code={\ifdefempty{\tcbtitletext}{}{\tcbset{before upper={\color{orang}\textbf{!}}}}},}
\begin{document}
\begin{caja}[title=warning]
The vertical alignment settings
\end{caja}
\end{document}
```

## 4.7 Photo positioning



```
\documentclass{article}
\usepackage[most]{tcolorbox}
\usepackage{graphicx}
\begin{document}
\begin{tcolorbox}[enhanced,sharp corners,
width={5cm},
colback=white,
overlay={\node at (frame.south east) {\includegraphics[scale=0.1]{example-image-a}};}] 
Sample text here.
\end{tcolorbox}
\end{document}
```

## 4.8 Absolutely centered cells (vertically and horizontally)

|     |              |            |
|-----|--------------|------------|
| all | in           | cells      |
| are | centered     | vertically |
| and | horisontally | $\Sigma$   |

## 4.9 Martix made of table

$$\begin{array}{ccc|c}
 a_{1,1} & \dots & a_{1,n} & 0 \\
 a_{1,1} & \dots & a_{1,n} & 0 \\
 \dots & \dots & \dots & \dots \\
 a_{1,1} & \dots & a_{1,n} & 0 \\
 a_{1,1} & \dots & a_{1,n} & 0 \\
 \dots & \dots & \dots & \dots \\
 a_{1,1} & \dots & a_{1,n} & 0
 \end{array} = 0$$

```
\documentclass[a4paper,14pt]{extreport}
\begin{document}
\begin{table}[]
\begin{tabular}{l|c r|l}
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
& \multicolumn{3}{l}{\dotfill} & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
\$d_{n+1} & \multicolumn{3}{l}{\dotfill} & = \$pm 2ad_n = 0 \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
& \multicolumn{3}{l}{\dotfill} & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & 0 & \\
\end{tabular}
\end{table}
\end{document}
```

## 4.10 Centering cells with **NiceTabular**

|   |   |          |
|---|---|----------|
| 1 | 1 | EVERY    |
| 1 | 1 | CELL     |
| 1 | 1 | CENTERED |

```
\documentclass{article}
\usepackage[table]{xcolor}
\usepackage{nicematrix}
\NiceMatrixOptions{cell-space-top-limit=5pt,cell-space-bottom-
    limit=5pt}

\begin{document}
\begin{table}[htbp]
\centering
\begin{NiceTabular}{|c|c|c|} \hline
\cellcolor{red}1&\cellcolor{green}1 & EVERY \\ \hline
\cellcolor{orange}1 & \cellcolor{pink}1 & CELL \\ \hline
1 & \cellcolor{blue}1 & CENTERED \\ \hline
\end{NiceTabular}
\end{table}
\end{document}
```

## 4.11 Centered cells in **longtable**

| Enum | Example | Description   |
|------|---------|---|
| 1    | test    | Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu. |
| 2a   | test    | Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu. |
| 2b   | test    | Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu. |

```
\documentclass{article}
\usepackage[left=1.5cm,right=1.5cm,
top=1.5cm,bottom=2cm,bindingoffset=0cm]{geometry}
\usepackage{float}
\usepackage{array, makecell}
\usepackage[utf8]{inputenc}
\usepackage{lipsum}
\usepackage{booktabs}
\usepackage{multirow}
\usepackage{pdflscape}
\usepackage{longtable, array}

\begin{document}
\begin{landscape}
\begin{longtable}{@{} *{2}{m{.15\paperwidth}} *{1}{m{.40\paperwidth}} @{}}
\textbf{Enum} & \textbf{Example} & \textbf{Description} \\
\midrule
1 & test & \lipsum[50]\\
\midrule
2a & test & \lipsum[50]\\
\midrule
2b & test & \lipsum[50]\\
\bottomrule
\end{longtable}
\end{landscape}
\end{document}
```

## 4.12 If table is not wide enough

|        | Item1 | Item2 | Item3 |
|--------|-------|-------|-------|
| Group1 | 0.8   | 0.1   | 0.1   |
| Group2 | 0.1   | 0.8   | 0.1   |
| Group3 | 0.1   | 0.1   | 0.8   |
| Group4 | 0.34  | 0.33  | 0.33  |

```
\documentclass{article}
\usepackage[left=1.5cm,right=1.5cm,
top=1.5cm,bottom=2cm,bindingoffset=0cm]{geometry}
\usepackage{graphicx}
\usepackage{booktabs}
\usepackage{tabularx}

\begin{document}

\begin{table}[!ht]
\caption{Vertical and lateral stresses of mortar.}
\vspace{0.5cm}
\begin{tabularx}{\textwidth}{X X X X}
& Item1 & Item2 & Item3 \\ \hline
Group1 & 0.8 & 0.1 & 0.1 \\
Group2 & 0.1 & 0.8 & 0.1 \\
Group3 & 0.1 & 0.1 & 0.8 \\
Group4 & 0.34 & 0.33 & 0.33 \\ \bottomrule
\end{tabularx}
\label{c}
\end{table}

\end{document}
```

## 4.13 Text next to a table


text text text

|   |    |     |
|---|----|-----|
| 1 | 22 | 333 |
|   |    |     |
|   |    |     |
|   |    |     |

```
\documentclass[a4paper,14pt]{extreport}
\usepackage[left=1.5cm,right=1.5cm,top=1.5cm,bottom=2cm,
           bindingoffset=0cm]{geometry}
\usepackage{lipsum}

\begin{document}
\begin{minipage}[m]{0.58\textwidth}
text text text
\end{minipage}
\hspace{0.2cm}
\begin{minipage}[m]{0.40\textwidth}
\begin{tabular}{|c|c|c|} \hline
1 & 22 & 333 \\ \hline
& & \\ \hline
& & \\ \hline
& & \\ \hline
\end{tabular}
\end{minipage}
\end{document}
```

## 4.14 Text next to a table

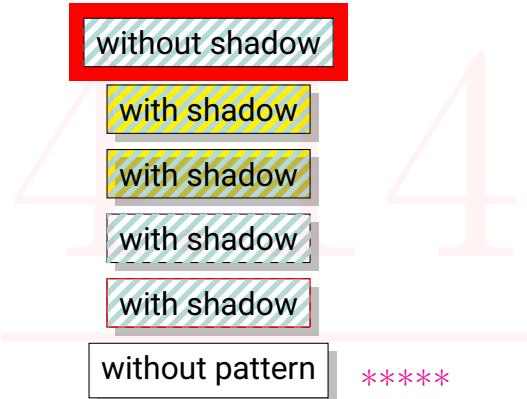

```
\documentclass[tikz,border=5mm]{standalone}
\usepackage{tikz}
\tikzset{%
    % customization of pattern
    % based on <m.wibrow@gm...> - 2013-03-24 07:20:
    hatch distance/.store in=\hatchdistance,
    hatch distance=5pt,
    hatch thickness/.store in=\hatchthickness,
    hatch thickness=5pt
}
\pgfdeclarepatternformonly[\hatchdistance,\hatchthickness]{north east hatch}
{\pgfqpoint{-1pt}{-1pt}}{\pgfqpoint{\hatchdistance}{\hatchdistance}}{\pgfpoint{\hatchdistance-1pt}{\hatchdistance-1pt}}
{
    \pgfsetcolor{\tikz@pattern@color}
    \pgfsetlinewidth{\hatchthickness}
    \pgfpathmoveto{\pgfqpoint{0pt}{0pt}}
    \pgfpathlineto{\pgfqpoint{\hatchdistance}{\hatchdistance}}
    \pgfusepath{stroke}
}
\makeatother

\begin{document}
\begin{tikzpicture}[
    start chain=going below,
    node distance=2mm,
    Node/.style = {minimum width=#1,
        shape=rectangle,
        draw, fill=white,
        on chain},
    Pattern/.style = {pattern=north east hatch,
        pattern color=teal!30,
        hatch distance=7pt,
        hatch thickness=2pt},
    font=\small\sffamily]
%---
\node[Node=24mm, Pattern,
    preaction={fill=white}] (a) {without shadow};
\begin{scope}[on background layer]
    \node[fit=(a),fill=red] {};
\end{scope}

\node[Node=24mm, drop shadow,
    preaction={fill=yellow}, Pattern] (b) {with shadow};


\node[Node=24mm, preaction={fill=yellow},
    drop shadow, Pattern] (b) {with shadow};

\node[Node=24mm, postaction={Pattern},
    drop shadow] (b) {with shadow};

\node[Node=24mm, postaction={draw=red, Pattern},
    drop shadow] (b) {with shadow};

\node[Node=24mm, drop shadow] (c) {without pattern};
%---
\end{tikzpicture}
\end{document}
```

## 4.15 Hand Drawn tcolorbox




```
\documentclass{article}
\usepackage[most]{tcolorbox}
\usepackage{emerald}
\usetikzlibrary{decorations.pathmorphing}
\usetikzlibrary{shadows}
\tikzset{decoration={random steps,segment length=2mm,
    \rightarrow amplitude=0.6pt}}
\newtcboxtheorem{mytheo}{Theorem}[
    coltitle=green!80!black,
    colback=lightgray!20,
    colbacktitle=lightgray!20,
    fonttitle=\bfseries\ECFAugie,
    enhanced,
    attach boxed title to top left={yshift=-0.18cm,xshift=-0.5mm},
    boxed title style={
        tikz={rotate=4,transform shape},
        frame code={
            \draw[decorate,fill=lightgray!20] (frame.south west) rectangle
                \rightarrow (frame.north east);
        } },
    frame code={
        \draw[decorate,fill=lightgray!20,drop shadow] (frame.north east
            \rightarrow ) rectangle (frame.south west);
    },}{th}

\begin{document}
\begin{mytheo}{}{theoexample}
content...
\end{mytheo}
\end{document}
```



## 4.16 Halfframed boxes

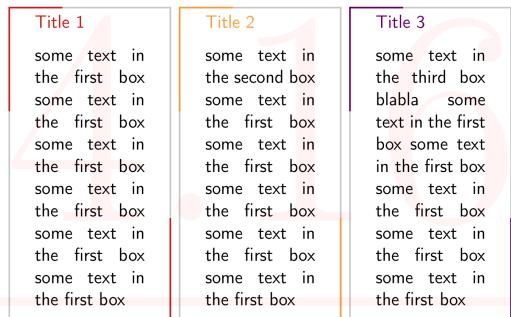

```
\documentclass{beamer}
\usepackage[english]{babel}
\usepackage[T1]{fontenc}
\usepackage[utf8]{inputenc}
\usepackage{tikz}
\usepackage{tcolorbox}
\usetikzlibrary{calc}
\ tcbuselibrary{skins,breakable,raster}
\makeatletter
\definecolor{myred}{RGB}{209,23,23}
\definecolor{myorange}{RGB}{255,153,51}
\definecolor{mypurple}{RGB}{102,0,102}
\definecolor{mygrey}{RGB}{200,200,200}

\newtcolorbox{mybox}[2]{%
empty,
coltitle = #1,
title = #2,
overlay ={
\draw[mygrey,line width=1pt]
(frame.north west)--(frame.north east)--(frame.south east)--(frame.
    \textcolor{red}{\textarrow} south west)--(frame.north west);
\draw[#1,line width=1pt]
($frame.north west)!0.33!(frame.south west)$)
--(frame.north west)
--($frame.north west)!0.33!(frame.north east$);
\draw[#1,line width=1pt]
($frame.south east)!0.33!(frame.south west$)
--(frame.south east)
--($frame.south east)!0.33!(frame.north east$);}


\tcbset{marktext/.style={%
overlay={\node[rotate=90,text=black,anchor=north east] at (
\textcolor{red}{\textarrow} frame.north west){#1};},
code={\setbox\z@=\color@hbox{\color@endbox\tcbdimto\textcolor{red}{\textarrow} myheight{\wd\z@+3mm}},%
minimum for equal height group=\tcb@ehgid:\myheight,}}
\makeatother

\begin{document}
\begin{frame}
\begin{tcraster}[
raster columns=3,
raster equal height=rows
]
\begin{mybox}{myred}{Title 1}
some text in the first box
\end{mybox}
\begin{mybox}{myorange}{Title 2}
some text in the second box
\end{mybox}
\begin{mybox}{mypurple}{Title 3}
some text in the third box blabla
\end{mybox}
\end{tcraster}
\end{frame}
\end{document}
```

# Chapter 5

## Figures


### 5.1 Comment to figure

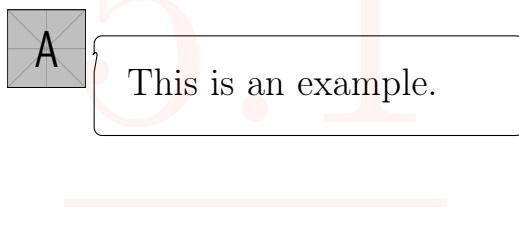

```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{shapes.callouts}


\begin{document}
\begin{tikzpicture}
\node [anchor=south west] at (0, 0) (cartoon) {\includegraphics[width=.15\textwidth,height=.15\textwidth]{example-image-a}};
\node [anchor=north west,rectangle callout,draw=black,
callout absolute pointer=(cartoon.east),
rounded corners=3pt,text width=0.7\textwidth, inner sep=2ex] at (.19\
\textwidth,.125\textwidth) {This is an example.};
\end{tikzpicture}
\end{document}
```

### 5.2 Positioning 1 | 2

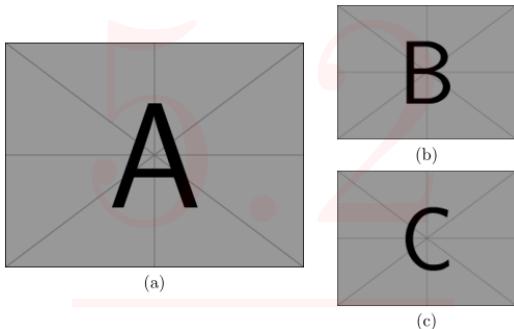

```
\documentclass{article}
\usepackage{graphicx}
\usepackage{subfig}
\begin{document}
\begin{figure}[htp]
\centering
\begin{tabular}{@{}c@{}}
\subfloat{\includegraphics[width=0.5\linewidth]{example-image-a.png}}\\ (a)
\end{tabular} \qquad % some space
\begin{tabular}{@{}c@{}}
\subfloat{\includegraphics[width=0.3\linewidth]{example-image-b.png}}\\ (b)
\end{tabular} \\
\begin{tabular}{@{}c@{}}
\subfloat{\includegraphics[width=0.3\linewidth]{example-image-c.png}}\\ (c)
\end{tabular}
\caption{Caption.}
\end{figure}
\end{document}
```

## 5.3 Placing image anywhere You want



```
\usepackage{graphicx}
\usepackage{tikz}
\begin{document}
\begin{tikzpicture}[overlay, remember picture]
\node[anchor=north west,xshift=4cm,yshift=-11cm]
at (current page.north west)
{\includegraphics[width=5.5cm]{example-image-a.png}};
\end{tikzpicture}
\end{document}
```

## 5.4 Italic subfigure references

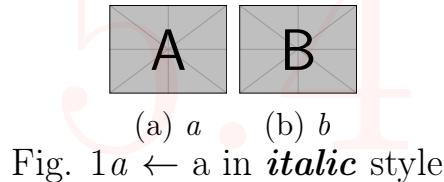


Fig. 1a  $\leftarrow$  a in *italic* style

```
\documentclass{article}
\usepackage{graphicx}
\usepackage{subcaption}
\renewcommand\thesubfigure{{\itshape\alph{subfigure}}} %<--- added

\begin{document}
\begin{figure}
\centering
\begin{subfigure}{.25\textwidth}
\centering
\includegraphics[width=.6\linewidth]{example-image-a}
\caption{\textit{a}}
\label{1a}
\end{subfigure}
\begin{subfigure}{.25\textwidth}
\centering
\includegraphics[width=.715\linewidth]{example-image-b}
\caption{\textit{b}}
\label{1b}
\end{subfigure}
\caption{Fig. \ref{1a}  $\leftarrow$  a in \textbf{\textit{italic}} style}
\end{figure}
\end{document}
```

## 5.5 Wrapfigure

## 5.6 Figures in landscape mode



Figure 1: FIG 1

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kijft – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.



Figure 2: FIG 2

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information?

Is there a difference between this text and some nonsense like "Huardest gefburn"? Kijft – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.



Figure 3: FIG 3

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kijft – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

1

```
\documentclass[11pt]{scrartcl}
\usepackage[english]{babel}
\usepackage[utf8]{inputenc}
\usepackage{blindtext}
\usepackage[demo]{graphicx}
\usepackage{wrapfig}
\setlength{\parindent}{0pt}
```

```
\begin{document}
\begin{wrapfigure}[11]{l}{0.4\textwidth}
\centering
\includegraphics[scale=0.1]{Bild}
\caption{FIG 1}
\end{wrapfigure}
\blindtext
```

```
\begin{wrapfigure}[11]{r}{0.4\textwidth}
\centering
\includegraphics[scale=0.1]{Bild}
\caption{FIG 2}
\end{wrapfigure}
\blindtext
```

```
\begin{wrapfigure}[11]{l}{0.4\textwidth}
\centering
\includegraphics[scale=0.1]{Bild}
\caption{FIG 3}
\end{wrapfigure}
\blindtext
\end{document}
```




Table 5.2




Table 5.3

```
\documentclass[12pt]{report}
\usepackage{graphicx}
\usepackage{lipsum}
\begin{document}
qqqqqq
\begin{figure}[htb]
\hfill
\rotatebox{90}{%
\begin{minipage}{0.45\linewidth}
\includegraphics[width=\linewidth]{example-image-a}
\caption{Caption1}
\label{fig:First}
\end{minipage}}
\hfill
\rotatebox{90}{%
\begin{minipage}{0.45\linewidth}
\includegraphics[width=\linewidth]{example-image-b}
\caption{Caption2}
\label{fig:First}
\end{minipage}}
\hfill\strut
\end{figure}
\end{document}
```

# Chapter 6

## Numbering, enumeration, itemizing

### 6.1 Numbering in few columns

1. c                  3. d  
2. g                  4. f

```
\documentclass{article}
\usepackage{multicol}

\begin{document}
\begin{multicols}{2} %change to have more columns
\begin{enumerate}
\item c
\item g
\item d
\item f
\end{enumerate}
\end{multicols}
\end{document}
```

### 6.2 Enumeration environment with position number in the format (i, j)

- (1) First level-one item
- (1,1) First level-two item
  - (1,2) Second level-two item
- (2) Second level-one item
- (2,1) Still another level-two item

```
\documentclass{article}
\renewcommand{\theenumi}{(\arabic{enumi})}
\renewcommand{\theenumii}{(\arabic{enumi},\arabic{enumii})}
\renewcommand{\labelenumi}{\theenumi}
\renewcommand{\labelenumii}{\theenumii}
\makeatletter \renewcommand{\p@enumii}{} \makeatother

\begin{document}
\begin{enumerate}
\item First level-one item
\begin{enumerate}
\item First level-two item
\item Second level-two item
\end{enumerate}
\item Second level-one item
\begin{enumerate}
\item Still another level-two item
\end{enumerate}
\end{enumerate}
\end{document}
```

## 6.3 Colored enumeration

- 1) item
- 2)
- 3) item
- 4)
- 5) → special item
- 6)
- 7) item

```
\documentclass{article}
\usepackage{tikz}
\definecolor{amethyst}{rgb}{0.6, 0.4, 0.8}
\definecolor{applegreen}{rgb}{0.55, 0.71, 0.0}
\definecolor{arylideyellow}{rgb}{0.91, 0.84, 0.42}
\definecolor{asparagus}{rgb}{0.53, 0.66, 0.42}
\definecolor{atomictangerine}{rgb}{1.0, 0.6, 0.4}
\definecolor{bananayellow}{rgb}{1.0, 0.88, 0.21}
\definecolor{brightgreen}{rgb}{0.4, 1.0, 0.0}
\definecolor{cambridgeblue}{rgb}{0.64, 0.76, 0.68}
\definecolor{capri}{rgb}{0.0, 0.75, 1.0}
\definecolor{carnationpink}{rgb}{1.0, 0.65, 0.79}
\newcommand{\ClaudioList}{red,applegreen,amethyst,carnationpink,blue!50!
    ↪ cyan,arylideyellow,asparagus,atomictangerine,bananayellow,brightgreen
    ↪ ,cambridgeblue,capri}
\newcommand{\SebastianoItem}[1]{\foreach \X[count=\Y] in \ClaudioList
{\ifnum\Y=1\relax
\edef\SebastianoColor{\X}
\fi}
\tikz[baseline=(\SebastianoItem.base),remember
picture]{%
\node[fill=\SebastianoColor,inner sep=4pt,font=\sffamily,fill opacity=0.5] (
    ↪ \SebastianoItem){#1};}}
\newcommand{\SebastianoHighlight}{\tikz[overlay,remember picture]{%
\fill[\SebastianoColor,fill opacity=0.5] ([yshift=4pt,xshift=-\pgflinewidth]
    ↪ \SebastianoItem.east) -- ++(4pt,-4pt)
-- ++(-4pt,-4pt) -- cycle;}}
```


```
\begin{document}
\renewcommand{\labelenumi}{\SebastianoItem{\arabic{enumi}}}
\begin{enumerate}
\item item
\item special item \SebastianoHighlight
\item item
\end{enumerate}
\end{document}
```

## 6.4 Leveled arabic enumeration

- (1) First level-one item
- (1,1) First level-two item
- (1,2) Second level-two item
- (2) Second level-one item
- (2,1) Still another level-two item

```
\documentclass{article}
\renewcommand{\theenumi}{(\arabic{enumi})}
\renewcommand{\theenumii}{(\arabic{enumi},\arabic{enumii})}
\renewcommand{\labelenumi}{\theenumi}
\renewcommand{\labelenumii}{\theenumii}
\makeatletter
\renewcommand{\p@enumii}{}
\makeatother
\begin{document}
\begin{enumerate}
\item First level-one item
\begin{enumerate}
\item First level-two item
\item Second level-two item
\end{enumerate}
\item Second level-one item
\begin{enumerate}
\item Still another level-two item
\end{enumerate}
\end{enumerate}
\end{document}
```

## 6.5 Change footnote symbol

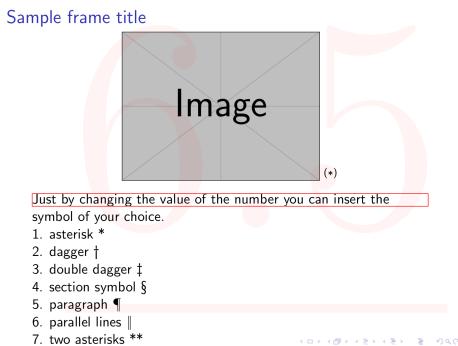

```
\documentclass{beamer}
\renewcommand{\thefootnote}{ (\fnsymbol{footnote})}

\begin{document}
\begin{frame}
\frametitle{Sample frame title}
\begin{figure}
\includegraphics[width=0.5\linewidth]{example-image}\footnote[1]{image
\hookrightarrow description}
\end{figure}
\end{frame}
\end{document}
```

## 6.6 Bullets Style

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| 32    | 33    | 34    | 35    | 36    | 37    | 38    | 39    |
| 40 →  | 41 ☐  | 42 ↗  | 43 ↘  | 44 ↙  | 45 ↖  | 46 ↓  | 47 ↔  |
| 48 ↕  | 49 ↸  | 50 ↹  | 51 ✓  | 52 ✓  | 53 ✗  | 54 ✗  | 55 ✗  |
| 56 ✗  | 57 +  | 58 +  | 59 +  | 60 +  | 61 +  | 62 +  | 63 +  |
| 64 ✗  | 65 ✗  | 66 +  | 67 +  | 68 +  | 69 +  | 70 +  | 71 +  |
| 72 ★  | 73 ☐  | 74 ☠  | 75 ★  | 76 *  | 77 ★  | 78 ★  | 79 *  |
| 80 ✗  | 81 *  | 82 *  | 83 *  | 84 *  | 85 *  | 86 *  | 87 *  |
| 88 *  | 89 *  | 90 *  | 91 *  | 92 *  | 93 *  | 94 *  | 95 *  |
| 96 ✗  | 97 ✗  | 98 ☠  | 99 *  | 100 * | 101 * | 102 * | 103 * |
| 104 + | 105 * | 106 * | 107 * | 108 ● | 109 ○ | 110 ■ | 111 □ |
| 112 □ | 113 □ | 114 □ | 115 ▲ | 116 ▼ | 117 ◆ | 118 ✗ | 119 ▶ |
| 120 I | 121 I | 122 I | 123 ♦ | 124 ♠ | 125 ♣ | 126 ♤ | 127 ♥ |
|       | 161 § | 162 ♦ | 163 ♠ | 164 ♥ | 165 ♣ | 166 ♤ | 167 ♥ |

✓ Code 51

✗ Code 56

☛ Code 43

❖ Code 118

♥ Code 170

| ◆     | ♦     | +     | ○     |
|-------|-------|-------|-------|
| 168 ♣ | 169 ♦ | 170 ♥ | 171 ♠ |
| 176 ⑤ | 177 ⑥ | 178 ⑦ | 179 ⑧ |
| 184 ⑨ | 185 ⑩ | 186 ⑪ | 187 ⑫ |
| 192 ⑬ | 193 ⑭ | 194 ⑮ | 195 ⑯ |
| 200 ⑰ | 201 ⑱ | 202 ⑲ | 203 ⑳ |
| 208 ⑳ | 209 ⑳ | 210 ⑳ | 211 ⑳ |
| 216 ↘ | 217 ↛ | 218 ↗ | 219 ↘ |
| 224 ↚ | 225 ↛ | 226 ↗ | 227 ↗ |
| 232 ↞ | 233 ↛ | 234 ↜ | 235 ↞ |
| 241 ↞ | 242 ↛ | 243 ↜ | 244 ↞ |
| 248 ↞ | 249 ↛ | 250 ↞ | 251 ↛ |
|       | 252 ↜ | 253 ↞ | 254 ↛ |


```
\documentclass{article}
\usepackage{pifont}

\begin{document}
\begin{itemize}
    \item[\ding{51}] Code 51
    \item[\ding{56}] Code 56
    \item[\ding{43}] Code 43
    \item[\ding{118}] Code 118
    \item[\ding{170}] Code 170
\end{itemize}
\par
\ding{46} \ding{70} \ding{57} \ding{98} \ding{96}
\end{document}
```

# Chapter 7

## Plots, tikz, pie charts ...


### 7.1 Simple pie chart

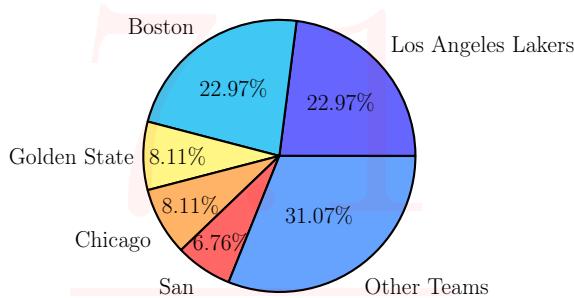

```
\documentclass[border=0.2cm]{standalone}
\usepackage{pgf-pie}

\begin{document}
\begin{tikzpicture}[->,scale=.7]
\node (i) at (90:1cm) {$T$};
\node (j) at (-30:1cm) {$D$};
\node (k) at (210:1cm) {$R$};
\draw (70:1cm) arc (70:-10:1cm) node[midway, right] {\tiny \texttt{\{|\footnotesize 1\}}};
\draw (-50:1cm) arc (-50:-130:1cm) node[midway, below] {\tiny \texttt{\{|\footnotesize 1\}}};
\draw (190:1cm) arc (190:110:1cm) node[midway, left] {\tiny \texttt{\{|\footnotesize -1\}}};
\end{tikzpicture}
\end{document}
```


### 7.2 Circled arrows with text



```
\documentclass{article}
\usepackage{tikz}

\begin{document}
\begin{tikzpicture}[->,scale=.7]
\node (i) at (90:1cm) {$T$};
\node (j) at (-30:1cm) {$D$};
\node (k) at (210:1cm) {$R$};
\draw (70:1cm) arc (70:-10:1cm) node[midway, right] {\tiny \texttt{\{|\footnotesize 1\}}};
\draw (-50:1cm) arc (-50:-130:1cm) node[midway, below] {\tiny \texttt{\{|\footnotesize 1\}}};
\draw (190:1cm) arc (190:110:1cm) node[midway, left] {\tiny \texttt{\{|\footnotesize -1\}}};
\end{tikzpicture}
\end{document}
```

## 7.3 Diamond with text

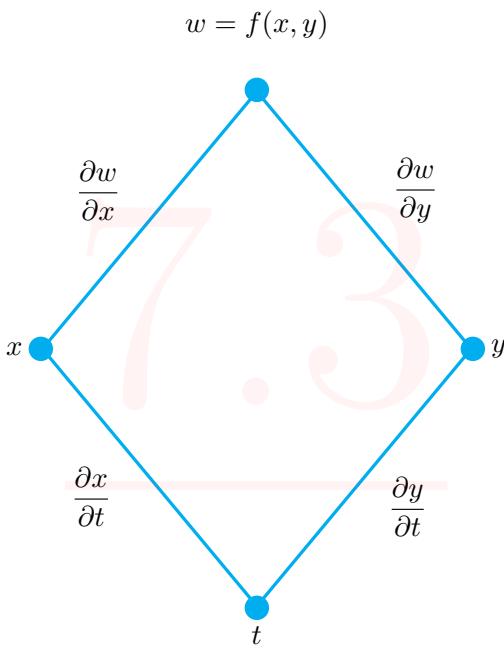

```

\documentclass[a4paper,14pt]{extreport}
\usepackage[left=1.5cm,right=1.5cm,top=1.5cm,bottom=2cm,bindingoffset=0
           cm]{geometry}
\usepackage{amsmath}
\usepackage{tikz}
\usetikzlibrary{shapes.geometric}

\begin{document}
\begin{tikzpicture}
\node[diamond,font=\small,
line width=0.4mm,scale=0.7,
draw = cyan, minimum width = 7.5cm, %text = red,
minimum height = 9cm] (d) at (0,0) { };
\node [above=0.5cm] (a) at (d.90) {$w = f(x,y)$};
\node [above=0.5cm,right=0.1cm] (b) at (d.45) {$\frac{\partial w}{\partial y}$};
\node [above=0.5cm,left=0.1cm] (c) at (d.135) {$\frac{\partial w}{\partial x}$};
\node [left=0.1cm] (dd) at (d.180) {$\frac{\partial x}{\partial t}$};
\node [right=0.1cm] (e) at (d.0) {$\frac{\partial y}{\partial t}$};
\node [below=0.1cm] (f) at (d.270) {$\frac{\partial x}{\partial t}$};
\node [below=0.9cm,right=-0.3cm] (g) at (d.-30) {$\frac{\partial y}{\partial t}$};
\node [below=0.5cm,left=0.1cm] (h) at (d.220) {$\frac{\partial y}{\partial t}$};
\node at (d.90) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.180) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.0) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.270) [cyan,circle,fill,inner sep=3pt]{};
\end{tikzpicture}
\end{document}

```

## 7.4 Levels of skills



```

\documentclass{report}
\usepackage[T1]{fontenc}
\usepackage{tikz}
\usepackage{xcolor}

\definecolor{white}{RGB}{255,255,255}
\definecolor{gray}{HTML}{4D4D4D}
\definecolor{maingray}{HTML}{B9B9B9}

\newcommand\skills[1]{
\begin{tikzpicture}
\foreach [count=\i] \x/\y in {#1} {
\draw[fill=maingray,maingray] (0,\i) rectangle (6,\i+0.4);
\draw[fill=white,gray](0,\i) rectangle (\y,\i+0.4);
\node[above right] at (0,\i+0.4) {\x};
}
\end{tikzpicture}
}


\begin{document}
\skills{{b/2}}
\skills{{a/1}}
\end{document}

```

## 7.5 Round levels of skills



**Skill #1**  
info



**Skill #2**  
info



**Skill #3**  
info

```
\documentclass[svgnames]{article}
\usepackage{tikz}
\usetikzlibrary{calc}
\usepackage{siunitx} % only to force percentages to be integers
\usepackage{enumitem}

\let\realItem\item% save for later use
\newcommand\percentageItem[1][10]{%
\realItem\smash{\tikz[baseline]{%
\node[minimum width=4em] at (0,0) {\num[round-mode=places,round-
    \hookrightarrow precision=0]{#1}\%};%
\draw[thick, line width=1.5mm, Blue](90:5mm)
    arc [radius=5mm, start angle=90, delta angle=-#1*3.6];
\draw[thick, line width=1.5mm, LightSteelBlue](90-#1*3.6:5mm)
    arc [radius=5mm, start angle=90-#1*3.6, end angle=-270];
}}}%}


\newlist{achievements}{itemize}{1}
\setlist[achievements]{
before=\let\item\percentageItem,%make \item = \percentageItem
leftmargin=*,%
label={},%
itemsep=3mm,%
}

\begin{document}

\begin{achievements}
\item[57]\textbf{Skill \#1}\textbackslash info
\item[16]\textbf{Skill \#2}\textbackslash info
\item[77]\textbf{Skill \#3}\textbackslash info
\end{achievements}

\end{document}
```

## 7.6 Huge margin line

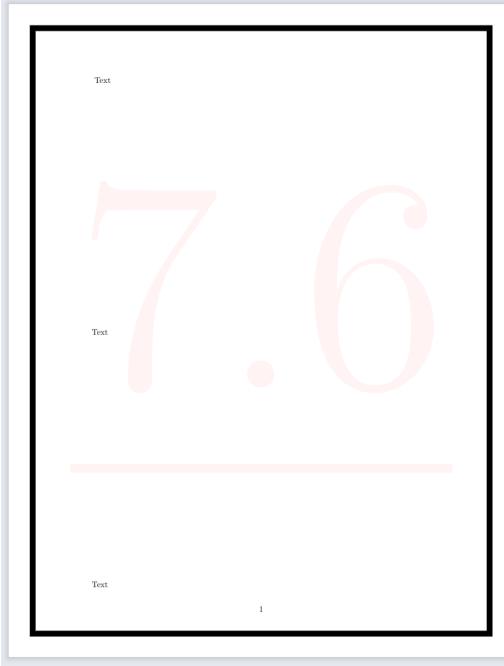

```
\documentclass{article}
\usepackage[margin=3cm]{geometry}
\usepackage{tikz}

\begin{document}
\tikz[overlay, remember picture] \draw[line width=2.5mm] ([xshift=1cm, yshift=-1cm]current page.north west) rectangle ([xshift=-1cm, yshift=1cm]current page.south east);
\end{document}
```

## 7.7 Aligning anything to a corner



```
\documentclass[14pt]{extreport}
\usepackage{tikz}
\usepackage{qrcode}

\begin{document}
\begin{tikzpicture}[remember picture,overlay]
\node[anchor=north west,yshift=0pt,xshift=0pt]%
at (current page.north west)
{\qrcode[height=0.5cm]{https://github.com/AnMnv/eBook}%; <--- put here
\rightarrow anything
};
\end{tikzpicture}
\end{document}
```

OR the

- $\rightarrow$  rainbow
- $\rightarrow$  variant
- $\rightarrow$  (see
- $\rightarrow$  example
- $\rightarrow$  9.7)

```
\begin{tikzpicture}[remember picture,overlay]
\node at ($(current page.north west)+(.70cm,-.75cm)$)
{\fadingtext[scale=0.5]{path picture shading=rainbow}
\qrcode[height=3cm]{https://github.com/AnMnv/eBook}};
\end{tikzpicture}
```

# Chapter 8

## Highlighting

### 8.1 Words highlighting 1

The quick brown fox jumps over  
the lazy dog.  
The quick brown fox  
jumps over the lazy dog.

```
\documentclass{article}
\usepackage{tcolorbox}
\newtcbox{\mybox}[1][red]{on line,
arc=0pt,outer arc=0pt,colback=#1!10!white,colframe=#1!50!black,
boxsep=0pt,left=1pt,right=1pt,top=2pt,bottom=2pt,
boxrule=0pt,bottomrule=1pt,toprule=1pt}
\newtcbox{\xmybox}[1][red]{on line,
arc=7pt,colback=#1!10!white,colframe=#1!50!black,
before upper={\rule[-3pt]{0pt}{10pt}},boxrule=1pt,
boxsep=0pt,left=6pt,right=6pt,top=2pt,bottom=2pt}
\begin{document}
The \mybox[green]{quick} brown \mybox{fox}...\par
The \xmybox[green]{quick} brown \xmybox{fox} ...
\end{document}
```


### 8.2 Unusual words highlighting

Here You  
can see  
and learn  
something new.

TYP [more examples](#)

```
\usepackage[many]{tcolorbox}
\newtcbox{\mylib}{enhanced,nobeforeafter, tcbox raise base, boxrule=0.4pt,
               top=0mm, bottom=0mm,
               right=0mm, left=4mm, arc=1pt, boxsep=2pt, before upper={\vphantom{dlg
               }}, colframe=green!50!black, coltext=green!25!black, colback=green
               !10!white, overlay={\begin{tcbclipinterior} \fill[green!75!blue!50!
               white] (frame.south west) rectangle node[text=white,font=\sffamily\
               bfseries\tiny,rotate=90] {TYP} ([xshift=4mm]frame.north west);\
               \end{tcbclipinterior}}}
\begin{document}
\mylib{recieve}
\end{document}
```

## 8.3 Colored circles

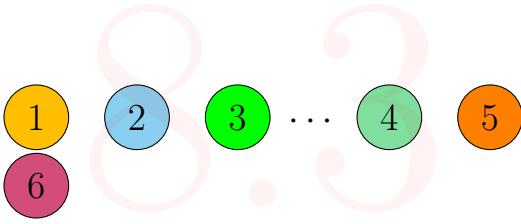

```
\usepackage{tikz}
\usepackage[framemethod=TikZ]{mdframed}
\usepackage{xcolor}
\usetikzlibrary{calc}
\makeatletter
\newlength{\mylength}
\xdef\CircleFactor{1.1}
\setlength{\mylength}{\dimexpr\f@size pt}
\newsavebox{\mybox}
\newcommand*\circled[2][draw=blue]{\savebox\mybox{\vphantom{%
    \text{\textcolor{amber}{WL1}}/\#1}}\setlength{\mylength}{\dimexpr\CircleFactor\dimexpr\ht\%
    \text{\textcolor{amber}{mybox}}+\dp\text{\textcolor{amber}{mybox}}\relax\relax}\tikzset{mystyle/.style={circle,#1,
    minimum height=\mylength}}\tikz[baseline=(char.base)]%
\node[mystyle] (char) {\#2};}
\makeatother
\definecolor{amber}{rgb}{1.0, 0.75, 0.0}
\definecolor{babyblue}{rgb}{0.54, 0.81, 0.94}
usage --> \circled[fill=amber,draw=black]{1}
```

## 8.4 Whole line colored



```
\documentclass{article}
\usepackage{xcolor}
\newcommand{\hly}[2]{\colorbox{#1!80}{\parbox{\textwidth}{#2}}}

\begin{document}
% \hly{YOURcolor}{some text}
\hly{green}{some text}
\hly{yellow}{some text}
\hly{red}{some text}
\end{document}
```

## 8.5 Circle text in points to other text

**This** is just some text that I will repeat for this section again and again. This is just some text that I will repeat for this section again and again.

your comment here

```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{tikzmark}

\begin{document}
\tikzset{mynode/.style={inner sep=2pt,fill=cyan!50,draw=blue,line width=1pt
    ,rounded corners}}
This is just some \tikzmarknode[mynode]{A}{text that} I will repeat for this
    section again and again. This is just some text that I will repeat for
    this section again and again.

\begin{tikzpicture}[remember picture, overlay]
    \draw[->,line width=1pt,blue] (A) --+(1,1) node[above right] {your
        comment here};
\end{tikzpicture}
\end{document}
```

# Chapter 9

## For Fun

### 9.1 LaTeX Coffee Stains

Download `coffee4.sty` and put in the same directory

```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{arrows,shapes}
\usepackage{coffee4}
\enum{\cofeAm{1}{0.6}{0}{0.cm}{6cm}}
\cofeCm{0.9}{0.5}{180}{-7.cm}{11cm}
\cofeDm{0.4}{0.2}{90}{1.0cm}{3.0cm}
\cofeBm{0.5}{0.5}{0}{-3.cm}{10cm}
%\cofeAm{alpha}{scale}{angle}{xoff}{yoff} <-- usage
\end{document}
```

### 9.2 Sticky notes

- first
- second

```
\documentclass{article}
\usepackage{xparse}
\usepackage{fancyvrb}
\usetikzlibrary{calc,shadows}
\NewDocumentCommand{\StickyNoteP}{O{6cm}mO{6cm}}{%
\begin{tikzpicture}
\node[
drop shadow={shadow xshift=3pt,},
inner xsep=0pt,
xslant=-0.1,yslant=0.1,
inner ysep=0pt,
text depth=\the\dimexpr#1+2.5ex\relax
] {\parbox[t]{#1}[c]{#3}{#2}};
\end{tikzpicture}}
\begin{document}
\StickyNoteP[2.5cm]{%
\NotebookPar[spiral=false]{%
\textbf{LARGE first}\textbf{ second }}[6.5cm]
}
\end{document}
```

## 9.3

9.3

```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{fadings, shadings}
\newcounter{fadcnt}\setcounter{fadcnt}{0}
\newcommand\fadingtext[3][]{%
\stepcounter{fadcnt}
\begin{tikzfadingfrompicture}[name=fading letter\thefadcnt]
\node[transparent!0,inner xsep=0pt,outer xsep=0pt,#1]{#3};
\end{tikzfadingfrompicture}%
\begin{tikzpicture}[baseline=(textnode.base)]
\node[inner sep=0pt,outer sep=0pt,#1](textnode){\phantom{#3}};
\shade[path fading=fading letter\thefadcnt,#2,fit fading=false]
(textnode.south west) rectangle (textnode.north east);%
\end{tikzpicture}%
}
\usetikzlibrary{calc}
\newbox\shbox
\tikzset{%
path picture shading/.style={%
path picture={%
\pgfpointdiff{\pgfpointanchor{path picture bounding box}{south west}}{%
\pgfpointanchor{path picture bounding box}{north east}}%
\pgfgetlastxy\pathwidth\pathheight%
\pgfinterruptpicture%
\global\setbox\shbox=\hbox{\pgfuseshading{\#1}}%
\endpgfinterruptpicture%
\pgftransformshift{\pgfpointanchor{path picture bounding box}{center}}%
\pgftransformxscale{\pathwidth/(\wd\shbox)}%
\pgftransformyscale{\pathheight/(\ht\shbox)}% \dp will (should) be 0pt
\pgftext{\box\shbox}%
}%
}
\pgfdeclarehorizontalshading{rainbow}{10bp}{color(0bp)=(violet);
color(1.6667bp)=(blue);
color(3.3333bp)=(cyan);
color(5bp)=(green);
color(6.6667bp)=(yellow);
color(8.3333bp)=(orange);
color(10bp)=(red)}
\begin{document}
\fadingtext[scale=10, font=\bfseries]{upper left=red, upper right=green,
→ lower left=blue,lower right=yellow}{\LaTeX}

\fadingtext[scale=10, font=\bfseries]{path picture shading=rainbow}{%
→ \LaTeX}

\noindent\fadingtext[scale=0.7, font=\bfseries]{path picture shading=
→ rainbow}{\parbox[b]{1.5\linewidth}{\strut\lipsum[1]}}
\end{document}
```



## 9.6 Generating QR code



```
\documentclass{article}
\usepackage{qrcode}

\begin{document}
\qrcode[height=0.5in]{https://github.com/AnMnv/eBook}
\textcolor{blue}{\qrcode[height=0.5in]{https://github.com/AnMnv/eBook}}
\textcolor{green}{\qrcode[height=0.5in]{https://github.com/AnMnv/eBook}}
\end{document}
```

## 9.7 Gradient QR code



```
\documentclass{article}
\usepackage{qrcode}%
\usepackage{tikz}
\usetikzlibrary{fadings, shadings}
\newcounter{fadcnt}\setcounter{fadcnt}{0}
\newcommand\fadingtext[3]{%
\stepcounter{fadcnt}
\begin{tikzfadingfrompicture}[name=fading letter\thefadcnt]
\node[transparent!0,inner xsep=0pt,outer xsep=0pt,\#1]{\#3};
\end{tikzfadingfrompicture}%
\begin{tikzpicture}[baseline=(textnode.base)]
\node[inner sep=0pt,outer sep=0pt,\#1](textnode){\phantom{\#3}};
\shade[path fading=fading letter\thefadcnt,\#2,fit fading=false]
(textnode.south west) rectangle (textnode.north east);%
\end{tikzpicture}%
\usetikzlibrary{calc}
\newbox\shbox
\tikzset{%
path picture shading/.style={%
path picture={%
\pgfpointdiff{\pgfpointanchor{path picture bounding box}{south west}}{%
\pgfpointanchor{path picture bounding box}{north east}}%
\pgfgetlastxy\pathwidth\pathheight%
\pgfinterruptpicture%
\global\setbox\shbox=\hbox{\pgfuseshading{\#1}}%
\endpgfinterruptpicture%
\pgftransformshift{\pgfpointanchor{path picture bounding box}{center}}%
\pgftransformxscale{\pathwidth/(\wd\shbox)}%
\pgftransformyscale{\pathheight/(\ht\shbox)}% \dp will (should) be 0pt
\pgftext{\box\shbox}%
} } }
\pgfdeclarehorizontalshading{rainbow}{10bp}{color(0bp)=(violet);
color(1.6667bp)=(blue);
color(3.3333bp)=(cyan);
color(5bp)=(green);
color(6.6667bp)=(yellow);
color(8.3333bp)=(orange);
color(10bp)=(red)}
\pgfdeclareverticalshading{rainbow_vertical}{10bp}{color(0bp)=(violet);
color(1.6667bp)=(blue);
color(3.3333bp)=(cyan);
color(5bp)=(green);
color(6.6667bp)=(yellow);
color(8.3333bp)=(orange);
color(10bp)=(red)}

\begin{document}
\fadingtext[scale=0.5]{upper left=red, upper right=green, lower left=blue,lower
→ right=yellow}{\qrcode[height=5cm]{https://github.com/AnMnv/
→ eBook}}
\fadingtext[scale=0.5]{path picture shading=rainbow}{\qrcode[height=5cm]{%
→ https://github.com/AnMnv/eBook}}
\fadingtext[scale=0.5]{path picture shading=rainbow_vertical}{\qrcode[height
→ =5cm]{https://github.com/AnMnv/eBook}}
\end{document}
```

## 9.8 Lobsrets

## 9.9 Watermark over everything



1

2

```
\documentclass[14pt]{extreport}
\usepackage[left=1.5cm,right=3cm,top=1.5cm,
bottom=1.5cm,bindingoffset=0cm]{geometry}
\usepackage{loblib}

\begin{document}
\lob{1} \lob{12}
\lob{2} \lob{20}
\lob{3} \lob{21}
\lob{4} \lob{22}
\lob{5} \lob{28}
\lob{6} \lob{32}
\lob{7} \lob{33}
\lob{8} \lob{74}
\lob{9} \lob{76}


\vspace*{2cm}
\hspace*{-2.8cm}
\definecolor{shadow}{rgb}{0.85,0.85,0.85}
\lob[rotate=-90,shadow,xscale=-1.2,yscale=1.2]{77}

\lobwatermark
\end{document}
```

LobLib documentation on [GitHub](#) in LobLib-package folder.

Origins of the package <https://github.com/bryce-evans/LobLib>

However, to print lobsters put objects folder and loblib.sty from the LobLib-package folder into the same directory with your .tex file.

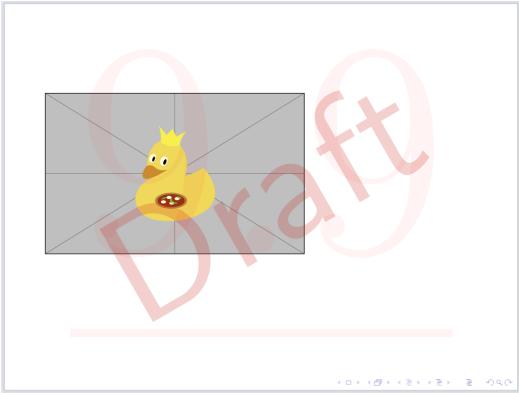

```
\documentclass{beamer}

\usepackage{tikz}
\AddToHook{shipout/foreground}{%
  \begin{tikzpicture}[remember picture,overlay]
    \node[red,rotate=30,scale=10,opacity=0.2] at (current page.center) {Draft
      ↵};
  \end{tikzpicture}
}

\begin{document}
\begin{frame}
\includegraphics{example-image-duck}
\end{frame}
\end{document}
```

# Chapter 10

## Animation, videos, interaction

### 10.1 Video in PDF (okular as a .pdf viewer)



```

\documentclass{article}
% \input{embed_video.tex}
\usepackage{graphicx}
\usepackage[hidelinks]{hyperref}

%%%%%%%%%%%%%This is embed_video.tex (below till \begin{document})
%>>> %%%%%%%%%%%%%%
\ExplSyntaxOn
\NewDocumentCommand\embedvideo{smm} {
    \group_begin:
    \leavevmode
    \tl_if_exist:cTF{file_\file_mdfive_hash:n{\#3}}{
        \tl_set_eq:Nc{\video}{file_\file_mdfive_hash:n{\#3}}
    }{
        \IfFileExists{\#3}{}{\GenericError{File~'#3'~not~found}{}{}}
        \pbs_pdfobj:nnn{\fstream}{\dict}{%
            /Type/Filespec/F~(\#3)/UF~(\#3)
            /EF~<</F\pbs_pdflastobj:>>
        }
        \tl_set:Nx{\video}{\pbs_pdflastobj:}
        \tl_gset_eq:cN{\file_mdfive_hash:n{\#3}}{\video}
    }
    %
    \pbs_pdfobj:nnn{\dict}{%
        /Type/RichMediaInstance/Subtype/Video
        /Asset~\video
        /Params~<</FlashVars (
            source=\#3&
            skin=SkinOverAllNoFullNoCaption.swf&
            skinAutoHide=true&
            skinBackgroundColor=0x5F5F5F&
            skinBackgroundAlpha=0
        )>>
    }
    %
    \pbs_pdfobj:nnn{\dict}{%
        /Type/RichMediaConfiguration/Subtype/Video
        /Instances~[\pbs_pdflastobj:]
    }
    %
    \pbs_pdfobj:nnn{\dict}{%
        /Type/RichMediaContent
        /Assets~<<
            /Names~[(\#3)\video]
        >>
        /Configurations~[\pbs_pdflastobj:]
    }
    \tl_set:Nx{\rmcontent}{\pbs_pdflastobj:}
    %
    \pbs_pdfobj:nnn{\dict}{%
        /Activation~<<
            /Condition/\IfBooleanTF{\#1}{PV}{XA}
            /Presentation~<</Style/Embedded>>
        >>
        /Deactivation~<</Condition/PI>>
    }
    %
    \hbox_set:Nn{\l_tmpa_box}{\#2}
    \tl_set:Nx{\l_box_wd_tl}{\dim_use:N\box_wd:N\l_tmpa_box}
    \tl_set:Nx{\l_box_ht_tl}{\dim_use:N\box_ht:N\l_tmpa_box}
    \tl_set:Nx{\l_box_dp_tl}{\dim_use:N\box_dp:N\l_tmpa_box}
    \pbs_pdfsform:nnnn{\l_tmpa_box}{\l_tmpa_box}
    %
    \pbs_pdfaannot:nnnn{\l_box_wd_tl}{\l_box_ht_tl}{\l_box_dp_tl}{%
        /Subtype/RichMedia
        /BS~<</W~0/S>>
        /Contents~(embedded~video~file:\#3)
        /NM~(rma:\#3)
        /AP~<</N~\pbs_pdflastxform:>>
        /RichMediaSettings~\pbs_pdflastobj:
        /RichMediaContent~\rmcontent
    }
    \phantom{\#2}
    \group_end:
}
\ExplSyntaxOff
%%%%%%%%%%%%%


\begin{document}
\begin{center}
    \embedvideo{\includegraphics[width=\textwidth]{ANY_IMAGE.jpg}}{%
        ANY_VIDEO.mp4
    }
\end{center}
\end{document}

```