


Latex in Examples



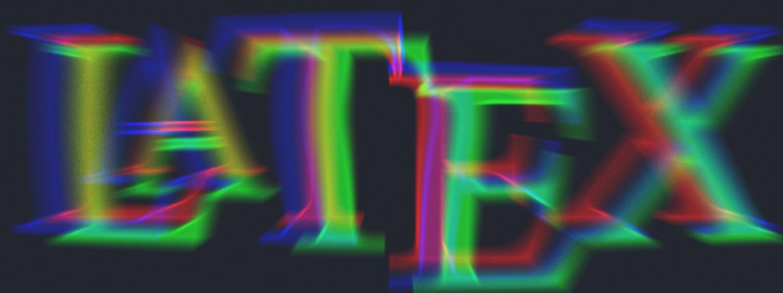

Thanks to me

Examples in this book is updated
every week.

Contents

1	Math Tips	4
1.1	Auto-resizing equation	4
1.2	Form for simplest calculation	4
1.3	Equation in the form of steps	5
1.4	One number for multiline equation	5
1.5	Matrix in standalone documentclass	5
1.6	Multiple lines, one centered label	6
2	Text, Symbols	7
2.1	New section symbol	7
3	Code, listings, minted . . .	8
3.1	Code listing using <i>minted</i> in <u>beamer</u>	8
3.2	"Zebra" style listing	9
3.3	Listing with russian language	9
4	Tables, boxes and so on	10
4.1	Nice tcolorbox	10
4.2	Color box with yellow border	10
4.3	A drop capital in a tcolorbox	11
4.4	<i>Table with the desired length.</i>	11
4.5	qqqqqqqqqqqqqq	11
4.6	Warning banner	12
4.7	Photo positioning	12
4.8	Absolutely centered cells (vertically and horisontally)	13
4.9	Martix made of table	13
4.10	Centering cells with <u>NiceTabular</u>	14
4.11	Centered cells in <u>longtable</u>	14
4.12	If table is not wide enough	15

4.13	Text next to a table	15
5	Figures	16
5.1	Comment to figure	16
5.2	Positioning 1 2	16
5.3	Placing image  You want	17
5.4	Italic sabfigure references	17
6	Numbering, enumeration, itemizing	18
6.1	Numbering in few columns	18
6.2	Enumeration environment with position number in the format (i, j)	18
6.3	Colored enumeration	19
7	Plots, tikz, pie charts ...	20
7.1	Simple pie chart	20
7.2	Circled arrows with text	20
7.3	Diamond with text	21
8	Highlighting	22
8.1	Words highlighting 	22
8.2	Unusual words highlighting	22
8.3	Colored circles	23
8.4	Whole line colored	23
9	For Fun	24
9.1	LaTeX Coffee Stains	24
9.2	25
9.3	25

<pre>\begin{equation*}\label{eq1} \resizebox{.4\textwidth}{!}{ \$\dot{\rho}=\dfrac{x^3}{45a ,\rightarrow^9-23b}\$} \end{equation*}</pre>	<pre>\begin{equation*}\label{eq1} \resizebox{.4\textwidth}{!}{ \$\dot{\rho}=\dfrac{x^3}{45a ,\rightarrow^9-23b}\$} \end{equation*}</pre>	<pre>\begin{equation*}\label{eq1} \resizebox{.4\textwidth}{!}{ \$\dot{\rho}=\dfrac{x^3}{45a ^9-23b}\$} \end{equation*}</pre>
--	--	--

Figure 1: how CORRECT paste code from examples

Chapter 1

Math Tips

1.1 Auto-resizing equation

$$\dot{\rho} = \frac{x^3}{45a^9 - 23b}$$

```
\begin{equation*}\label{eq1}  
\resizebox{.4\textwidth}{!}{ % change .4 to 0.5...  
$\dot{\rho}=\dfrac{x^3}{45a^9-23b}$}  
\end{equation*}
```

1.2 Form for simplest calculation

Fill with number

if it doesn't work try another PDF viewer

a:

b:

c:

$\Sigma =$

```
\documentclass{article}  
\usepackage{hyperref}  
\begin{document}  
\newcommand{\sss}[1]{this.getField("#1").value}  
\begin{Form}  
\noindent%  
Fill with number\\  
  
\TextField[name=a]{a:} \\  
  
\TextField[name=b]{b:} \\  
  
\TextField[name=c]{c:} \\  
\noindent%  
$\sum = \$ \TextField[name=AvgStat, calculate={  
event.value = (  
  \sss{a} +  
  \sss{b} +  
  \sss{c}) ;  
}, readonly, value=0]{}  
\end{Form}  
\end{document}
```

1.3 Equation in the form of steps

$$\frac{n_0}{n_1} = q_1 + \frac{1}{q_2 + \frac{1}{q_3 + \frac{1}{q_4 + \dots + \frac{1}{q_{k-1} + \frac{1}{q_k}}}}}$$

```

\documentclass{article}
\usepackage{amsmath}
\def\mywd{35pt}
\begin{document}
\[
\frac{n_0}{n_1} = q_1 + \dfrac{\makebox[\mywd][l]{
\begin{array}{c}
\hookrightarrow \$1\$
\end{array}
}}{\makebox[\mywd][l]{
\begin{array}{c}
\$q_2 + \dfrac{\makebox[\mywd][l]{
\begin{array}{c}
\hookrightarrow \$1\$
\end{array}
}}{\makebox[\mywd][l]{
\begin{array}{c}
\$q_3 + \dfrac{\makebox[\mywd][l]{
\begin{array}{c}
\hookrightarrow \$1\$
\end{array}
}}{\makebox[\mywd][l]{
\begin{array}{c}
\$q_4 + \\
\raisebox{-6pt}{\$\ddots\$} \\
\raisebox{-12pt}{\{+\$ \dfrac{\makebox[\mywd][l]{
\begin{array}{c}
\hookrightarrow kern30pt\$
\end{array}
}}{\{q_{k-1} + \dfrac{1}{\{q_k\}\$\}\$\}\$\}}\}
\end{array}
}}
\end{array}
}}
\end{array}
}}
\]
\end{document}

```

1.4 One number for multiline equation

$$\begin{aligned} x_{ij} &= d_{ijk} E_k, \\ x_{ij} &= \varsigma_{ijk} H_k, \\ x_{ij} &= s_{ijkl} X_{kl}, \\ x_{ij} &= \xi_{ij} \delta p, \\ x_{ij} &= \alpha_{ij} \delta T \end{aligned} \quad (1.1)$$

```

\documentclass{article}
\usepackage{amsmath}
\begin{document}
\begin{equation}
\begin{aligned}
x_{\{ij\}} &= d_{\{ijk\}}E_k, \backslash\backslash \\
x_{\{ij\}} &= \varsigma_{\{ijk\}}H_k, \backslash\backslash \\
x_{\{ij\}} &= s_{\{ijkl\}}X_{\{kl\}}, \backslash\backslash \\
x_{\{ij\}} &= \xi_{\{ij\}}\delta p, \backslash\backslash \\
x_{\{ij\}} &= \alpha_{\{ij\}}\delta T
\end{aligned}
\end{equation}
\end{document}

```

1.5 Matrix in standalone documentclass

$$\begin{array}{ccc} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{array}$$

```
\documentclass[preview,border={-5cm 0cm -5cm -0.1cm}]{
  ↪ standalone}
\usepackage{amsmath}
\begin{document}
\begin{equation*}
\begin{matrix}
a_{11} & a_{12} & a_{13} \\
a_{21} & a_{22} & a_{23} \\
a_{31} & a_{32} & a_{33}
\end{matrix}
\end{equation*}
\end{document}
```

1.6 Multiple lines, one centered label


$$\begin{aligned} A &= \frac{\pi r^2}{2} \\ &= \frac{1}{2} \pi r^2 \end{aligned} \quad (1.2)$$

```
\begin{equation} \label{eq1}
\begin{split}
A &= \frac{\pi r^2}{2} \\
&= \frac{1}{2} \pi r^2
\end{split}
\end{equation}
```

Chapter 2

Text, Symbols

2.1 New section symbol

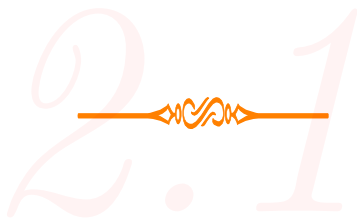

```
\usepackage[object=vectorian]{pgfornament}  
\usepackage{lipsum,tikz}  
\newcommand{\sectionlinetwo}[2]{%  
  \nointerlineskip \vspace{.5\baselineskip} \hspace{\fill}  
  {\color{#1}\resizebox{0.5\linewidth}{2ex}  
  {{{\begin{tikzpicture}  
    \node (C) at (0,0) {}; \node (D) at (9,0) {};  
    \path (C) to [ornament=#2] (D);  
  \end{tikzpicture}}}}}%  
  \hspace{\fill} \par \nointerlineskip  
  \vspace{.5\baselineskip}  
  %usage---> \sectionlinetwo{orange}{88}
```

1. First item in a list
2. Second item in a list
3. Third item in a list
4. Fourth item in a list
5. Fifth item in a list
6. Sixth item in a list
7. Seventh item in a list
8. Eighth item in a list
9. Ninth item in a list
10. Tenth item in a list

```
\documentclass{article}  
\usepackage{lipsum}  
\newcommand*{\justify}{%  
  \fontdimen2\font=0.4em% interword space  
  \fontdimen3\font=0.2em% interword stretch  
  \fontdimen4\font=0.1em% interword shrink  
  \fontdimen7\font=0.1em% extra space  
  \hyphenchar\font=-% allowing hyphenation  
}  
  
\begin{document}  
\texttt{\small{\justify \lipsum[1].} }  
\end{document}
```


Chapter 3

Code, listings, minted ...

3.1 Code listing using *minted* in beamer



```
Python Code Example
1 import glob
2
```

```
\documentclass{beamer}
\usepackage{amsmath}
\usepackage{tcolorbox}
\tcbuselibrary{minted,skins,breakable}
\newtcblisting{pythoncode}[2][]{
  listing engine=minted, breakable, colback=bg,
  colframe=black!70, listing only,
  minted style=colorful, minted language=python,
  minted options={numbersep=3mm, texcl=true, #1},
  left=5mm, enhanced,
  overlay={\begin{tcbclipinterior}\fill[black!25] (frame.south west)
rectangle ([xshift=5mm]frame.north west);\end{tcbclipinterior}},
#2,}
\begin{document}
\begin{frame}[fragile]
  \frametitle{Premature Optimization}
  \begin{pythoncode}[linenos=true,]{title=Python Code
    ↪ Example}
    import glob
  \end{pythoncode}
\end{frame}
\end{document}
```

3.2 "Zebra" style listing

```
/**
 * Prints Hello World.
 **/
#include <stdio.h>

int main(void) {
    printf("Hello World!");
    return 0;
}
```

```
\documentclass{article}
\usepackage[T1]{fontenc}
\usepackage{beramono}
\usepackage{listings}
\usepackage{xcolor}
\newcommand\realnumberstyle[1]{%
\makeatletter
\newcommand{\zebra}[3]{%
  {\realnumberstyle{#3}}%
  \begin{group}
  \list@basicstyle
  \ifodd\value{lstnumber}%
    \color{#1}%
  \else
    \color{#2}%
  \fi
  \rlap{\hspace*{\lst@numbersep}%
    \color@block{\linewidth}{\ht\strutbox}{\dp\strutbox}%
  }%
  \end{group}
\makeatother
\begin{document}
\begin{lstlisting}[language=C,basicstyle=\ttfamily,
numberstyle=\zebra{green!35}{yellow!35},numbers=left]
/**
 * Prints Hello World.
 **/
#include <stdio.h>
int main(void) {
    printf("Hello World!");
    return 0;
}
\end{lstlisting}
\end{document}
```

3.3 Listing with russian language

```
print("English comment"); // English comment
print("Russian comment"); // Русский комментарий
```

```
\documentclass{article}
\usepackage[T2A]{fontenc}
\usepackage[utf8]{inputenc}
\usepackage[russian]{babel}
\usepackage{listings}
\usepackage{xcolor}

\begin{document}
\lstset{ keepspaces=true,
backgroundcolor=\color{blue},
showstringspaces=false,
language=C,
extendedchars=true,
framexrightmargin=0pt,
framexleftmargin=0pt,
framextopmargin=15pt,
framebottommargin=15pt,
frame=tb, framerule=0pt,
basicstyle=\color{yellow}\ttfamily\small}

\begin{lstlisting}% <<<<<<<<< add "/"
print("English comment"); // English comment
print("Russian comment"); // %here can be russian words
\end{lstlisting}% <<<<<<<<< add "/"

\end{document}
```

Chapter 4

Tables, boxes and so on

4.1 Nice tcolorbox

1	22
333	
Source	

```
\PassOptionsToPackage{svgnames}{xcolor}
\documentclass[twocolumn,a4paper]{article}
\usepackage{tcolorbox}
\tcbuselibrary{skins,breakable}
\usetikzlibrary{shadings,shadows}%preamble
\begin{tcolorbox}[colback=white!100,colframe=red!75!black,width=7cm,
  ↳ righttitle=0.5cm, subtitle style={boxrule=0.4pt,colback=yellow!50!red
  ↳ !25!white},title= \bf{1}\hfill \bf{22}]
  \begin{center}\bf{333}\end{center}
  \tcblower
  \href{https://tools.ietf.org/doc/texlive-doc/latex/tcolorbox/tcolorbox.
    ↳ pdf}{URL}
\end{tcolorbox}
```

4.2 Color box with yellow border

Remarque
Some text inside

```
\documentclass[border=2mm]{standalone}
\usepackage[most]{tcolorbox}
\usepackage{lipsum}

\newtcolorbox{mycolorbox}[1]{
  enhanced, breakable,
  title=#1, colback=white,
  colbacktitle=green!20!white,
  coltitle=black,
  fonttitle=\bfseries,
  boxrule=.5pt, arc=0pt,
  outer arc=0pt,
  colframe=yellow!80!orange,
  borderline west={2pt}{0pt}{red} }

\begin{document}
\begin{mycolorbox}{Remarque}
\lipsum[1]
\end{mycolorbox}
\end{document}
```

4.3 A drop capital in a tcolorbox

SOME text. Lorem ipsum dolor sit amet, consectetur adipiscing elit.

```
\documentclass{article}
\usepackage{lettrine}
\usepackage{tcolorbox}
\usepackage{lipsum}

\begin{document}
\begin{tcolorbox}
\lettrine{S}{ome} text. \lipsum[1]
\end{tcolorbox}
\end{document}
```

4.4 Table with the desired length.

Table 1: Caption


Variant	res	Veriaty of waters f_0 , res	C, res	L, res
5	1	2	1.26	5

a command was also created to make a new cell view in the table

```
\usepackage{graphicx}
\usepackage{tabularx}
\newcolumntype{Y}{>\centering\arraybackslash}X}
\begin{document}
\begin{table}[h!]
\begin{center}
\caption{\textbf{Caption}}
\begin{tabularx}{14cm}{|Y|Y|c|Y|Y|}
\hline
Variant & res & Veriaty of waters  $f_0$ , res & C, res & L, res \\
\hline
5 & 1 & 2 & 1.26 & 5 \\
\hline
\end{tabularx}
\end{center}
\end{table}
```


4.5 qqqqqqqqqqqqqqqqq

4.6 Warning banner



```
\usepackage[utf8]{inputenc}
\usepackage[T1]{fontenc}
\usepackage[most]{tcolorbox}
\definecolor{orang}{RGB}{255,155,0}
\newtcolorbox[auto counter,number within=section]{caja}[1][]{
enhanced jigsaw,colback=white,colframe=orang,coltitle=orang,
fonttitle=\bfseries\sffamily,
sharp corners,
detach title,
leftrule=10mm,
% What you need %%%%%%%%%%%
underlay unbroken and first={\node[below,text=black,anchor=east]
at ([xshift=-5.5pt]interior.base west) {\Huge \textbf{!}};},
%%%%%%%%%%
breakable,pad at break=1mm,
#1,
code={\ifdefempty{\tcbtitletext}{\tcbset{before upper={\
    ↳ tcbtitle\par\medskip}}},}
\begin{document}
\begin{caja}[title=warning]
The vertical alignment settings
\end{caja}
\end{document}
```

4.7 Photo positioning



```
\documentclass{article}
\usepackage[most]{tcolorbox}
\usepackage{graphicx}
\begin{document}
\begin{tcolorbox}[enhanced,sharp corners,
width={5cm},
colback=white,
overlay={\node at (frame.south east) {\includegraphics[scale=0.1]{
    ↳ example-image-a}};}]
Sample text here.
\end{tcolorbox}
\end{document}
```

4.8 Absolutely centered cells (vertically and horison- tally)

all	in	cells
are	centered	vertically
and	horisontally	Σ

```

\documentclass{article}
\usepackage{float}
\usepackage{array, makecell}
\setcellgapes{5pt}

\begin{document}
\begin{table}[H]
\center
\makegapedcells
\begin{tabular}{|c|c|c|c|}
\hline
1&1&1&1 \\ \hline
1&1&1&1 \\ \hline
1&1&1&1 \\ \hline
\end{tabular}
\end{table}

\end{document}

```

4.9 Martix made of table

$$d_{n+1} \begin{vmatrix} a_{1,1} & \dots, & a_{1,n} & 0 \\ a_{1,1} & \dots, & a_{1,n} & 0 \\ \dots\dots\dots & & & \\ a_{1,1} & \dots, & a_{1,n} & 0 \\ a_{1,1} & \dots, & a_{1,n} & 0 \\ a_{1,1} & \dots, & a_{1,n} & 0 \\ \dots\dots\dots & & & \\ a_{1,1} & \dots, & a_{1,n} & 0 \end{vmatrix} = 0$$

```

\documentclass[a4paper,14pt]{extreport}
\begin{document}
\begin{table}[]
\begin{tabular}{|l| c r |l}
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& \multicolumn{3}{|l|}{\dotfill} & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& $d_{n+1}$ & & $= \pm 2ad_n = 0$ & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
& \multicolumn{3}{|l|}{\dotfill} & \\
& $a_{1,1}$ & $\dots$, $a_{1,n}$ & $0$ & \\
\end{tabular}
\end{table}
\end{document}

```

4.10 Centering cells with NiceTabular

1	1	EVERY
1	1	CELL
1	1	CENTERED

```

\documentclass{article}
\usepackage[table]{xcolor}
\usepackage{nicematrix}
\NiceMatrixOptions{cell-space-top-limit=5pt,cell-space-bottom-
  ↳ limit=5pt}

\begin{document}
\begin{table}[htbp]
\centering
\begin{NiceTabular}{|c|c|c|}
\hline
\cellcolor{red}1&\cellcolor{green}1&1\\ \hline
\cellcolor{orange}1&\cellcolor{red!35}1&1\\ \hline
\cellcolor{green!35}1&\cellcolor{blue!45}1&1\\ \hline
\end{NiceTabular}
\end{table}
\end{document}

```

4.11 Centered cells in longtable

Enum	Example	Description
1	test	Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu.
2a	test	Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu.
2b	test	Quisque facilisis auctor sapien. Pellentesque gravida hendrerit lectus. Mauris rutrum sodales sapien. Fusce hendrerit sem vel lorem. Integer pellentesque massa vel augue. Integer elit tortor, feugiat quis, sagittis et, ornare non, lacus. Vestibulum posuere pellentesque eros. Quisque venenatis ipsum dictum nulla. Aliquam quis quam non metus eleifend interdum. Nam eget sapien ac mauris malesuada adipiscing. Etiam eleifend neque sed quam. Nulla facilisi. Proin a ligula. Sed id dui eu nibh egestas tincidunt. Suspendisse arcu.

```

\documentclass{article}
\usepackage[left=1.5cm,right=1.5cm,
top=1.5cm,bottom=2cm,bindingoffset=0cm]{geometry}
\usepackage{float}
\usepackage{array, makecell}
\usepackage{utf8}{inputenc}
\usepackage{lipsum}
\usepackage{booktabs}
\usepackage{multirow}
\usepackage{pdfscape}
\usepackage{longtable, array}

\begin{document}
\begin{landscape}
\begin{longtable}{@{} *{2}{m{.15\paperwidth}} *{1}{m{.40\paperwidth}} @{}}
\endfirsthead
\endhead
\toprule
\textbf{Enum} & \textbf{Example} & \textbf{Description} \\
\midrule
1 & test & \lipsum[50] \\
\midrule
2a & test & \lipsum[50] \\
2b & test & \lipsum[50] \\
\bottomrule
\end{longtable}
\end{landscape}
\end{document}

```

4.12 If table is not wide enough

	Item1	Item2	Item3
Group1	0.8	0.1	0.1
Group2	0.1	0.8	0.1
Group3	0.1	0.1	0.8
Group4	0.34	0.33	0.33

```

\documentclass{article}
\usepackage[left=1.5cm,right=1.5cm,
top=1.5cm,bottom=2cm,bindingoffset=0cm]{geometry}
\usepackage{graphicx}
\usepackage{booktabs}
\usepackage{tabularx}

\begin{document}

\begin{table}[!ht]
\caption{Vertical and lateral stresses of mortar.}
\vspace{0.5cm}
\begin{tabularx}{\textwidth}{X X X X}
& Item1 & Item2 & Item3 \\ \midrule
Group1 & 0.8 & 0.1 & 0.1 \\
Group2 & 0.1 & 0.8 & 0.1 \\
Group3 & 0.1 & 0.1 & 0.8 \\
Group4 & 0.34 & 0.33 & 0.33 \\ \bottomrule
\end{tabularx}
\label{c}
\end{table}

\end{document}

```

4.13 Text next to a table

text text text

1	22	333

```

\documentclass[a4paper,14pt]{extreport}
\usepackage[left=1.5cm,right=1.5cm,top=1.5cm,bottom=2cm,
↪ bindingoffset=0cm]{geometry}
\usepackage{lipsum}


\begin{document}
\begin{minipage}[m]{0.58\textwidth}
text text text
\end{minipage}
\hspace{0.2cm}
\begin{minipage}[m]{0.40\textwidth}
\begin{tabular}{|c|c|c|}
\hline
1 & 22 & 333 \\ \hline
& & \\ \hline
& & \\ \hline
& & \\ \hline
\end{tabular}
\end{minipage}
\end{document}

```


Chapter 5

Figures


5.1 Comment to figure



```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{shapes.callouts}

\begin{document}
\begin{tikzpicture}
  \node [anchor=south west] at (0,0) (cartoon) {\includegraphics[width
    ↪=.15\textwidth,height=.15\textwidth]{example-image-a}};
  \node [anchor=north west,rectangle callout,draw=black,
    callout absolute pointer=(cartoon.east),
    rounded corners=3pt,text width=0.7\textwidth,inner sep=2ex] at (.19\
    ↪\textwidth,.125\textwidth) {This is an example.};
\end{tikzpicture}
\end{document}
```

5.2 Positioning 1 | 2

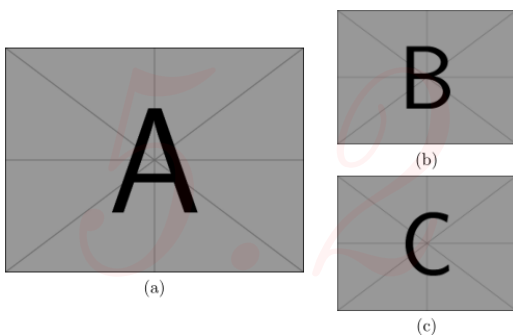


```
\documentclass{article}
\usepackage{graphicx}
\usepackage{subfig}
\begin{document}
\begin{figure}[htp]
\centering
\begin{tabular}{@{}c@{}}
\subfloat{\includegraphics[width=0.5\linewidth]{example-image-a.png}}\\ (a)
\end{tabular}
\quad % some space
\begin{tabular}{@{}c@{}}
\subfloat{\includegraphics[width=0.3\linewidth]{example-image-b.png}}\\ (b)
\end{tabular}
\\ [0.1cm]
\subfloat{\includegraphics[width=0.3\linewidth]{example-image-c.png}}\\ (c)
\end{tabular}
\caption{Caption.}
\end{figure}
\end{document}
```

5.3 Placing image anywhere You want



```
\usepackage{graphicx}
\usepackage{tikz}
\begin{document}
\begin{tikzpicture}[overlay, remember picture]
\node[anchor=north west,xshift=4cm,yshift=-11cm]
at (current page.north west)
{\includegraphics[width=5.5cm]{example-image-a.png}};
\end{tikzpicture}
\end{document}
```

5.4 Italic subfigure references



(a) *a* (b) *b*

Fig. 1 *a* ← a in *italic* style

```
\documentclass{article}
\usepackage{graphicx}
\usepackage{subcaption}
\renewcommand\thesubfigure{\itshape\alph{subfigure}} %<--- added

\begin{document}
\begin{figure}
\centering
\begin{subfigure}{.25\textwidth}
\centering
\includegraphics[width=.6\linewidth]{example-image-a}
\caption{\textit{a}}
\label{1a}
\end{subfigure}%
\begin{subfigure}{.25\textwidth}
\centering
\includegraphics[width=.715\linewidth]{example-image-b}
\caption{\textit{b}}
\label{1b}
\end{subfigure}
\caption{}
\label{fig1}
\end{figure}
Fig. \ref{1a} $\leftarrow$ a in \textbf{\textit{style}}
\end{document}
```

Chapter 6

Numbering, enumeration, itemizing

6.1 Numbering in few columns

- 
1. c
 2. g
 3. d
 4. f

```
\documentclass{article}
\usepackage{multicol}

\begin{document}
\begin{multicols}{2}%change to have more columns
\begin{enumerate}
\item c
\item g
\item d
\item f
\end{enumerate}
\end{multicols}
\end{document}
```

6.2 Enumeration environment with position number in the format (i, j)

- (1) First level-one item
 - (1,1) First level-two item
 - (1,2) Second level-two item
- (2) Second level-one item
 - (2,1) Still another level-two item

```

\documentclass{article}
\renewcommand{\theenumi}{(\arabic{enumi})}
\renewcommand{\theenumii}{(\arabic{enumi},\arabic{enumii})}
\renewcommand{\labelenumi}{\theenumi}
\renewcommand{\labelenumii}{\theenumii}
\makeatletter \renewcommand{\p@enumii}{} \makeatother

\begin{document}
\begin{enumerate}
\item First level-one item
  \begin{enumerate}
\item First level-two item
\item Second level-two item
\end{enumerate}
\item Second level-one item
  \begin{enumerate}
\item Still another level-two item
\end{enumerate}
\end{enumerate}
\end{document}

```

6.3 Colored enumeration

- 1) item
- 2)
- 3) item
- 4)
- 5) special item
- 6)
- 7) item

```

\documentclass{article}
\usepackage{tikz}
\definecolor{amethyst}{rgb}{0.6, 0.4, 0.8}
\definecolor{applegreen}{rgb}{0.55, 0.71, 0.0}
\definecolor{arylideyellow}{rgb}{0.91, 0.84, 0.42}
\definecolor{asparagus}{rgb}{0.53, 0.66, 0.42}
\definecolor{atomictangerine}{rgb}{1.0, 0.6, 0.4}
\definecolor{bananayellow}{rgb}{1.0, 0.88, 0.21}
\definecolor{brightgreen}{rgb}{0.4, 1.0, 0.0}
\definecolor{cambridgeblue}{rgb}{0.64, 0.76, 0.68}
\definecolor{capri}{rgb}{0.0, 0.75, 1.0}
\definecolor{carnationpink}{rgb}{1.0, 0.65, 0.79}
\newcommand{\ClaudioList}{red,applegreen,amethyst,carnationpink,blue!50!
  ↳ cyan,arylideyellow,asparagus,atomictangerine,bananayellow,brightgreen
  ↳ ,cambridgeblue,capri}
\newcommand{\SebastianoItem}[1]{\foreach \X[count=\Y] in \ClaudioList
\ifnum\Y=#1\relax
\edef\SebastianoColor{\X}
\fi}
\tikz[baseline=(SebastianoItem.base),remember
picture]{%
\node[fill=\SebastianoColor,inner sep=4pt,font=\sffamily,fill opacity=0.5] (
  ↳ SebastianoItem){#1};}
\newcommand{\SebastianoHighlight}{\tikz[overlay,remember picture]{%
\fill[\SebastianoColor,fill opacity=0.5] ([yshift=4pt,xshift=-\pgflinewidth]
  ↳ SebastianoItem.east) -- ++(4pt,-4pt)
-- ++(-4pt,-4pt) -- cycle;}}


\begin{document}
\renewcommand{\labelenumi}{\SebastianoItem{\arabic{enumi}}}
\begin{enumerate}
\item item
\item special item \SebastianoHighlight
\item item
\end{enumerate}
\end{document}

```

Chapter 7

Plots, tikz, pie charts ...


7.1 Simple pie chart

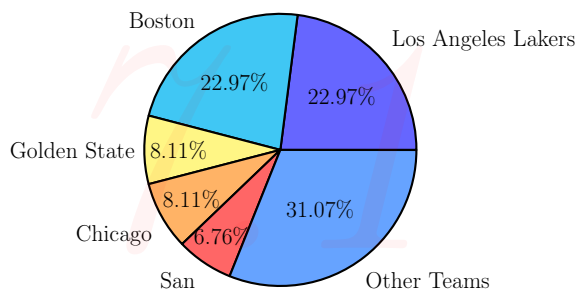

```
\documentclass[border=0.2cm]{standalone}
\usepackage{pgf-pie}

\begin{document}
\begin{tikzpicture}
\pie{22.97/Los Angeles Lakers,
22.97/Boston Celtics,
8.11/Golden State Warriors,
8.11/Chicago Bulls,
6.76/San Antonio Spurs,
31.07/Other Teams}
\end{tikzpicture}
\end{document}
```


7.2 Circled arrows with text



```
\documentclass{article}
\usepackage{tikz}

\begin{document}
\begin{tikzpicture}[>,>,scale=.7]
\node (i) at (90:1cm) {$T$};
\node (j) at (-30:1cm) {$D$};
\node (k) at (210:1cm) {$R$};
\draw (70:1cm) arc (70:-10:1cm) node[midway, right] {{\footnotesize 1}};
\draw (-50:1cm) arc (-50:-130:1cm) node[midway, below] {{\footnotesize 1}};
\draw (190:1cm) arc (190:110:1cm) node[midway, left] {{\footnotesize -1}};
\end{tikzpicture}
\end{document}
```

7.3 Diamond with text

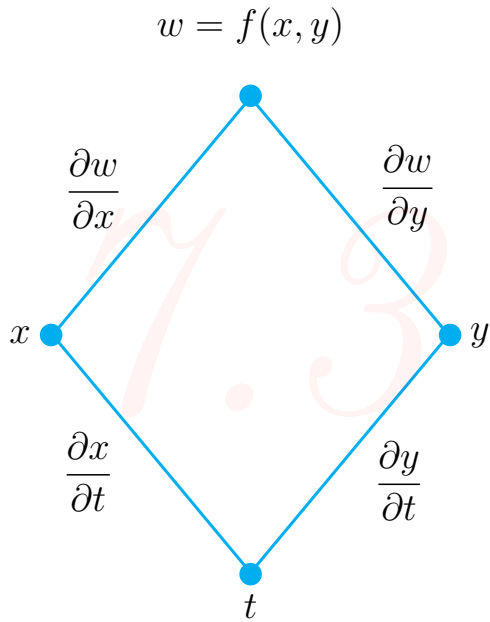

```

\documentclass[a4paper,14pt]{extreport}
\usepackage[left=1.5cm,right=1.5cm,top=1.5cm,bottom=2cm,bindingoffset=0
  \rightarrow cm]{geometry}
\usepackage{amsmath}
\usepackage{tikz}
\usetikzlibrary{shapes.geometric}

\begin{document}
\begin{tikzpicture}
\node[diamond,font=\small,
line width=0.4mm,scale=0.7,
draw = cyan, minimum width = 7.5cm, %text = red,
minimum height = 9cm] (d) at (0,0) { };
\node [above=0.5cm] (a) at (d.90) {\$w = f(x,y)\$};
\node [above=0.5cm,right=0.1cm] (b) at (d.45) {\$\dfrac{\partial w}{\partial y}\$};
\node [above=0.5cm,left=0.1cm] (c) at (d.135) {\$\dfrac{\partial w}{\partial x}\$};
\node [left=0.1cm] (dd) at (d.180) {\$x\$};
\node [right=0.1cm] (e) at (d.0) {\$y\$};
\node [below=0.1cm] (f) at (d.270) {\$t\$};
\node [below=0.9cm,right=-0.3cm] (g) at (d.-30) {\$\dfrac{\partial y}{\partial t}\$};
\node [below=0.5cm,left=0.1cm] (h) at (d.220) {\$\dfrac{\partial x}{\partial t}\$};
\node at (d.90) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.180) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.0) [cyan,circle,fill,inner sep=3pt]{};
\node at (d.270) [cyan,circle,fill,inner sep=3pt]{};
\end{tikzpicture}
\end{document}

```

Chapter 8

Highlighting

8.1 Words highlighting 1

The quick brown fox jumps over the lazy dog.
 The quick brown fox jumps over the lazy dog.


```
\documentclass{article}
\usepackage{tcolorbox}
\newtcbbox{\mybox}[1][red]{on line,
arc=0pt,outer arc=0pt,colback=#1!10!white,colframe=#1!50!black,
boxsep=0pt,left=1pt,right=1pt,top=2pt,bottom=2pt,
boxrule=0pt,bottomrule=1pt,toprule=1pt}
\newtcbbox{\xmybox}[1][red]{on line,
arc=7pt,colback=#1!10!white,colframe=#1!50!black,
before upper={\rule[-3pt]{0pt}{10pt}},boxrule=1pt,
boxsep=0pt,left=6pt,right=6pt,top=2pt,bottom=2pt}
\begin{document}
The \mybox{green}{quick} brown \mybox{fox}...\par
The \xmybox{green}{quick} brown \xmybox{fox} ...
\end{document}
```

8.2 Unusual words highlighting

Here You can see
TYP more examples and learn
 something new.

```
\usepackage[many]{tcolorbox}
\newtcbbox{\mylib}{enhanced,nobeforeafter, tcbox raise base, boxrule=0.4pt,
↪ top=0mm, bottom=0mm,
right=0mm, left=4mm, arc=1pt, boxsep=2pt, before upper={\vphantom{dlg
↪ }}, colframe=green!50!black, coltext=green!25!black, colback=green
↪ !10!white, overlay={\begin{tcbclipinterior} \fill[green!75!blue!50!
↪ white] (frame.south west) rectangle node[text=white,font=\sffamily\
↪ bfseries\tiny,rotate=90] {TYP} ([xshift=4mm]frame.north west);\
↪ end{tcbclipinterior}}}}
\begin{document}
\mylib{recieve}
\end{document}
```

8.3 Colored circles



```
\usepackage{tikz}
\usepackage[framemethod=TikZ]{mdframed}
\usepackage{xcolor}
\usetikzlibrary{calc}
\makeatletter
\newlength{\mylength}
\xdef\CircleFactor{1.1}
\setlength{\mylength}{\dimexpr\f@size pt}
\newsavebox{\mybox}
\newcommand*\circled[2][draw=blue]{\savebox\mybox{\vbox{\vphantom{
  ↳ WL1/}#1}}\setlength{\mylength}{\dimexpr\CircleFactor\dimexpr\ht\
  ↳ mybox+\dp\mybox\relax\relax}\tikzset{mystyle/.style={circle,#1,
  ↳ minimum height={\mylength}}}\tikz[baseline=(char.base)]
\node[mystyle] (char) {#2};}
\makeatother
\definecolor{amber}{rgb}{1.0, 0.75, 0.0}
\definecolor{babyblue}{rgb}{0.54, 0.81, 0.94}
usage --> \circled[fill=amber,draw=black]{1}
```

8.4 Whole line colored



```
\documentclass{article}
\usepackage{xcolor}
\newcommand{\hly}[2]{\colorbox{#1!80}{\parbox{\textwidth}{#2}}}

\begin{document}
%\hly{YOURcolor}{some text}
\hly{green}{some text}
\hly{yellow}{some text}
\hly{red}{some text}
\end{document}
```


Chapter 9

For Fun

9.1 LaTeX Coffee Stains

Download `coffee4.sty` and put it in the same directory

```
\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{arrows,shapes}
\usepackage{coffee4}
\enum{\cofeAm{1}{0.6}{0}{0.cm}{6cm}
\cofeCm{0.9}{0.5}{180}{-7.cm}{11cm}
some example of dummy text
\cofeDm{0.4}{0.2}{90}{1.0cm}{3.0cm}
\cofeBm{0.5}{0.5}{0}{-3.cm}{10cm}

%\cofeAm{alpha}{scale}{angle}{xoff}{yoff} <-- usage
\end{document}
```

9.2

9.2

```

\documentclass{article}
\usepackage{tikz}
\usetikzlibrary{fadings, shadings}
\newcounter{fadcnt}\setcounter{fadcnt}{0}
\newcommand\fadingtext[3][l]{%
\stepcounter{fadcnt}
\begin{tikzfadingfrompicture}[name=fading letter\thefadcnt]
\ode{text=transparent!0,inner xsep=0pt,outer xsep=0pt,#1}{#3};
\end{tikzfadingfrompicture}%
\begin{tikzpicture}[baseline=(textnode.base)]
\ode{inner sep=0pt,outer sep=0pt,#1}(textnode){\phantom{#3}};
\shade[path fading=fading letter\thefadcnt,#2,fit fading=false]
(textnode.south west) rectangle (textnode.north east);%
\end{tikzpicture}%
}
\usetikzlibrary{calc}
\newbox\shbox
\def\shboxset{%
\path picture shading/.style={%
\path picture={%
%
\pgfpointdiff{\pgfpointanchor{path picture bounding box}{south west}}{
\pgfpointanchor{path picture bounding box}{north east}}%
\pgfgetlastxy\pathwidth\pathheight%
\pgfinterruptpicture%
\global\setbox\shbox=\hbox{\pgfuses shading{#1}}%
\endpgfinterruptpicture%
\pgftransformshift{\pgfpointanchor{path picture bounding box}{center}}%
\pgftransformxscale{\pathwidth/(\wd\shbox)}%
\pgftransformyscale{\pathheight/(\ht\shbox)}% \dp will (should) be 0pt
\pgftext{\box\shbox}%
%
}
}
}
\pgfdeclarehorizontalshading{rainbow}{10bp}{color(0bp)=(violet);
color(1.6667bp)=(blue);
color(3.3333bp)=(cyan);
color(5bp)=(green);
color(6.6667bp)=(yellow);
color(8.3333bp)=(orange);
color(10bp)=(red)}
\begin{document}
\fadingtext[scale=10, font=\bfseries]{upper left=red, upper right=green,
↪ lower left=blue,lower right=yellow}{\LaTeX}

\fadingtext[scale=10, font=\bfseries]{path picture shading=rainbow}{\
↪ \LaTeX}

\noindent\fadingtext[scale=0.7, font=\bfseries]{path picture shading=
↪ rainbow}{\parbox[b]{1.5\linewidth}{\strut\lipsum[1]}}
\end{document}

```

9.3

qqqqqqqqqq

qqqqqqqqqqqqqqqqqqqq