Free & Open RISC-V Reference Card ①

Base Integer Instructions: RV32I, RV64I, and RV128I

Category	Name	Fmt	RV32I Base	+RV{64,128}
Loads	Load Byte	I	`LB rd,rs1,imm`	
	Load Halfword	I	`LH rd,rs1,imm`	
	Load Word	I	`LW rd,rs1,imm`	`L{D|Q} rd,rs1,imm`
	Load Byte Unsigned	I	`LBU rd,rs1,imm`	
	Load Half Unsigned	I	`LHU rd,rs1,imm`	`L{W|D}U rd,rs1,imm`
Stores	Store Byte	S	`SB rs1,rs2,imm`	
	Store Halfword	S	`SH rs1,rs2,imm`	
	Store Word	S	`SW rs1,rs2,imm`	`S{D|Q} rs1,rs2,imm`
Shifts	Shift Left	R	`SLL rd,rs1,rs2`	`SLL{W|D} rd,rs1,rs2`
	Shift Left Immediate	I	`SLLI rd,rs1,shamt`	`SLLI{W|D} rd,rs1,shamt`
	Shift Right	R	`SRL rd,rs1,rs2`	`SRL{W|D} rd,rs1,rs2`
	Shift Right Immediate	I	`SRLI rd,rs1,shamt`	`SRLI{W|D} rd,rs1,shamt`
	Shift Right Arithmetic	R	`SRA rd,rs1,rs2`	`SRA{W|D} rd,rs1,rs2`
	Shift Right Arith Imm	I	`SRAI rd,rs1,shamt`	`SRAI{W|D} rd,rs1,shamt`
Arithmetic	ADD	R	`ADD rd,rs1,rs2`	`ADD{W|D} rd,rs1,rs2`
	ADD Immediate	I	`ADDI rd,rs1,imm`	`ADDI{W|D} rd,rs1,imm`
	SUBtract	R	`SUB rd,rs1,rs2`	`SUB{W|D} rd,rs1,rs2`
	Load Upper Imm	U	`LUI rd,imm`	
	Add Upper Imm to PC	U	`AUIPC rd,imm`	
Logical	XOR	R	`XOR rd,rs1,rs2`	
	XOR Immediate	I	`XORI rd,rs1,imm`	
	OR	R	`OR rd,rs1,rs2`	
	OR Immediate	I	`ORI rd,rs1,imm`	
	AND	R	`AND rd,rs1,rs2`	
	AND Immediate	I	`ANDI rd,rs1,imm`	
Compare	Set <	R	`SLT rd,rs1,rs2`	
	Set < Immediate	I	`SLTI rd,rs1,imm`	
	Set < Unsigned	R	`SLTU rd,rs1,rs2`	
	Set < Imm Unsigned	I	`SLTIU rd,rs1,imm`	
Branches	Branch =	SB	`BEQ rs1,rs2,imm`	
	Branch ≠	SB	`BNE rs1,rs2,imm`	
	Branch <	SB	`BLT rs1,rs2,imm`	
	Branch ≥	SB	`BGE rs1,rs2,imm`	
	Branch < Unsigned	SB	`BLTU rs1,rs2,imm`	
	Branch ≥ Unsigned	SB	`BGEU rs1,rs2,imm`	
Jump & Link	J&L	UJ	`JAL rd,imm`	
	Jump & Link Register	~~UJ~~	`JALR rd,rs1,imm`	
Synch	Synch thread	I	`FENCE`	
	Synch Instr & Data	I	`FENCE.I`	
System	System CALL	I	`SCALL`	
	System BREAK	I	`SBREAK`	
Counters	ReaD CYCLE	I	`RDCYCLE rd`	
	ReaD CYCLE upper Half	I	`RDCYCLEH rd`	
	ReaD TIME	I	`RDTIME rd`	
	ReaD TIME upper Half	I	`RDTIMEH rd`	
	ReaD INSTR RETired	I	`RDINSTRET rd`	
	ReaD INSTR upper Half	I	`RDINSTRETH rd`	

(Note: JALR is I-type in 2.1)

RV Privileged Instructions

Category	Name	RV mnemonic
CSR Access	Atomic R/W	`CSRRW rd,csr,rs1`
	Atomic Read & Set Bit	`CSRRS rd,csr,rs1`
	Atomic Read & Clear Bit	`CSRRC rd,csr,rs1`
	Atomic R/W Imm	`CSRRWI rd,csr,imm`
	Atomic Read & Set Bit Imm	`CSRRSI rd,csr,imm`
	Atomic Read & Clear Bit Imm	`CSRRCI rd,csr,imm`
Change Level	Env. Call	`ECALL`
	Environment Breakpoint	`EBREAK`
	Environment Return	`ERET`
Trap Redirect	to Supervisor	`MRTS`
	Redirect Trap to Hypervisor	`MRTH`
	Hypervisor Trap to Supervisor	`HRTS`
Interrupt	Wait for Interrupt	`WFI`
MMU	Supervisor FENCE	`SFENCE.VM rs1`

Optional Compressed (16-bit) Instruction Extension: RVC

Category	Name	Fmt	RVC	RVI equivalent
Loads	Load Word	CL	`C.LW rd',rs1',imm`	`LW rd',rs1',imm*4`
	Load Word SP	CI	`C.LWSP rd,imm`	`LW rd,sp,imm*4`
	Load Double	CL	`C.LD rd',rs1',imm`	`LD rd',rs1',imm*8`
	Load Double SP	CI	`C.LDSP rd,imm`	`LD rd,sp,imm*8`
	Load Quad	CL	`C.LQ rd',rs1',imm`	`LQ rd',rs1',imm*16`
	Load Quad SP	CI	`C.LQSP rd,imm`	`LQ rd,sp,imm*16`
Stores	Store Word	CS	`C.SW rs1',rs2',imm`	`SW rs1',rs2',imm*4`
	Store Word SP	CSS	`C.SWSP rs2,imm`	`SW rs2,sp,imm*4`
	Store Double	CS	`C.SD rs1',rs2',imm`	`SD rs1',rs2',imm*8`
	Store Double SP	CSS	`C.SDSP rs2,imm`	`SD rs2,sp,imm*8`
	Store Quad	CS	`C.SQ rs1',rs2',imm`	`SQ rs1',rs2',imm*16`
	Store Quad SP	CSS	`C.SQSP rs2,imm`	`SQ rs2,sp,imm*16`
Arithmetic	ADD	CR	`C.ADD rd,rs1`	`ADD rd,rd,rs1`
	ADD Word	CR	`C.ADDW rd,rs1`	`ADDW rd,rd,imm`
	ADD Immediate	CI	`C.ADDI rd,imm`	`ADDI rd,rd,imm`
	ADD Word Imm	CI	`C.ADDIW rd,imm`	`ADDIW rd,rd,imm`
	ADD SP Imm * 16	CI	`C.ADDI16SP x0,imm`	`ADDI sp,sp,imm*16`
	ADD SP Imm * 4	CIW	`C.ADDI4SPN rd',imm`	`ADDI rd',sp,imm*4`
	Load Immediate	CI	`C.LI rd,imm`	`ADDI rd,x0,imm`
	Load Upper Imm	CI	`C.LUI rd,imm`	`LUI rd,imm`
	MoVe	CR	`C.MV rd,rs1`	`ADD rd,rs1,x0`
	SUB	CR	`C.SUB rd,rs1`	`SUB rd,rd,rs1`
Shifts	Shift Left Imm	CI	`C.SLLI rd,imm`	`SLLI rd,rd,imm`
Branches	Branch=0	CB	`C.BEQZ rs1',imm`	`BEQ rs1',x0,imm`
	Branch≠0	CB	`C.BNEZ rs1',imm`	`BNE rs1',x0,imm`
Jump	Jump	CJ	`C.J imm`	`JAL x0,imm`
	Jump Register	CR	`C.JR rd,rs1`	`JALR x0,rs1,0`
Jump & Link	J&L	CJ	`C.JAL imm`	`JAL ra,imm`
	Jump & Link Register	CR	`C.JALR rs1`	`JALR ra,rs1,0`
System	Env. BREAK	CI	`C.EBREAK`	`EBREAK`

32-bit Instruction Formats

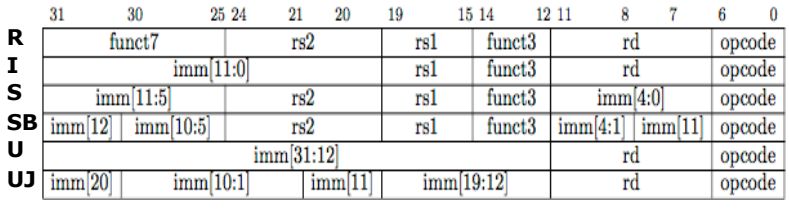

16-bit (RVC) Instruction Formats

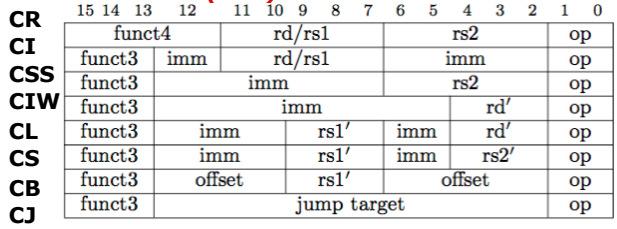

RISC-V Integer Base (RV32I/64I/128I), privileged, and optional compressed extension (RVC). Registers x1-x31 and the pc are 32 bits wide in RV32I, 64 in RV64I, and 128 in RV128I (x0=0). RV64I/128I add 10 instructions for the wider formats. The RVI base of <50 classic integer RISC instructions is required. Every 16-bit RVC instruction matches an existing 32-bit RVI instruction. See risc.org.

Free & Open RISC-V Reference Card (riscv.org) ②

Optional Multiply-Divide Instruction Extension: RVM

Category	Name	Fmt	RV32M (Multiply-Divide)		+RV{64,128}	
Multiply	MULtiply	R	MUL	rd,rs1,rs2	MUL{W|D}	rd,rs1,rs2
	MULtiply upper Half	R	MULH	rd,rs1,rs2		
	MULtiply Half Sign/Uns	R	MULHSU	rd,rs1,rs2		
	MULtiply upper Half Uns	R	MULHU	rd,rs1,rs2		
Divide	DIVide	R	DIV	rd,rs1,rs2	DIV{W|D}	rd,rs1,rs2
	DIVide Unsigned	R	DIVU	rd,rs1,rs2		
Remainder	REMainder	R	REM	rd,rs1,rs2	REM{W|D}	rd,rs1,rs2
	REMainder Unsigned	R	REMU	rd,rs1,rs2	REMU{W|D}	rd,rs1,rs2

Optional Atomic Instruction Extension: RVA

Category	Name	Fmt	RV32A (Atomic)		+RV{64,128}	
Load	Load Reserved	R	LR.W	rd,rs1	LR.{D|Q}	rd,rs1
Store	Store Conditional	R	SC.W	rd,rs1,rs2	SC.{D|Q}	rd,rs1,rs2
Swap	SWAP	R	AMOSWAP.W	rd,rs1,rs2	AMOSWAP.{D|Q}	rd,rs1,rs2
Add	ADD	R	AMOADD.W	rd,rs1,rs2	AMOADD.{D|Q}	rd,rs1,rs2
Logical	XOR	R	AMOXOR.W	rd,rs1,rs2	AMOXOR.{D|Q}	rd,rs1,rs2
	AND	R	AMOAND.W	rd,rs1,rs2	AMOAND.{D|Q}	rd,rs1,rs2
	OR	R	AMOOR.W	rd,rs1,rs2	AMOOR.{D|Q}	rd,rs1,rs2
Min/Max	MINimum	R	AMOMIN.W	rd,rs1,rs2	AMOMIN.{D|Q}	rd,rs1,rs2
	MAXimum	R	AMOMAX.W	rd,rs1,rs2	AMOMAX.{D|Q}	rd,rs1,rs2
	MINimum Unsigned	R	AMOMINU.W	rd,rs1,rs2	AMOMINU.{D|Q}	rd,rs1,rs2
	MAXimum Unsigned	R	AMOMAXU.W	rd,rs1,rs2	AMOMAXU.{D|Q}	rd,rs1,rs2

Three Optional Floating-Point Instruction Extensions: RVF, RVD, & RVQ

Category	Name	Fmt	RV32{F|D|Q} (HP/SP,DP,QP Fl Pt)		+RV{64,128}	
Move	Move from Integer	R	FMV.{H|S}.X	rd,rs1	FMV.{D|Q}.X	rd,rs1
	Move to Integer	R	FMV.X.{H|S}	rd,rs1	FMV.X.{D|Q}	rd,rs1
Convert	Convert from Int	R	FCVT.{H|S|D|Q}.W	rd,rs1	FCVT.{H|S|D|Q}.{L|T}	rd,rs1
	Convert from Int Unsigned	R	FCVT.{H|S|D|Q}.WU	rd,rs1	FCVT.{H|S|D|Q}.{L|T}U	rd,rs1
	Convert to Int	R	FCVT.W.{H|S|D|Q}	rd,rs1	FCVT.{L|T}.{H|S|D|Q}	rd,rs1
	Convert to Int Unsigned	R	FCVT.WU.{H|S|D|Q}	rd,rs1	FCVT.{L|T}U.{H|S|D|Q}	rd,rs1
Load	Load	I	FL{W,D,Q}	rd,rs1,imm		
Store	Store	S	FS{W,D,Q}	rs1,rs2,imm		
Arithmetic	ADD	R	FADD.{S|D|Q}	rd,rs1,rs2		
	SUBtract	R	FSUB.{S|D|Q}	rd,rs1,rs2		
	MULtiply	R	FMUL.{S|D|Q}	rd,rs1,rs2		
	DIVide	R	FDIV.{S|D|Q}	rd,rs1,rs2		
	SQuare RooT	R	FSQRT.{S|D|Q}	rd,rs1		
Mul-Add	Multiply-ADD	R	FMADD.{S|D|Q}	rd,rs1,rs2,rs3		
	Multiply-SUBtract	R	FMSUB.{S|D|Q}	rd,rs1,rs2,rs3		
	Negative Multiply-SUBtract	R	FNMSUB.{S|D|Q}	rd,rs1,rs2,rs3		
	Negative Multiply-ADD	R	FNMADD.{S|D|Q}	rd,rs1,rs2,rs3		
Sign Inject	SiGN source	R	FSGNJ.{S|D|Q}	rd,rs1,rs2		
	Negative SiGN source	R	FSGNJN.{S|D|Q}	rd,rs1,rs2		
	Xor SiGN source	R	FSGNJX.{S|D|Q}	rd,rs1,rs2		
Min/Max	MINimum	R	FMIN.{S|D|Q}	rd,rs1,rs2		
	MAXimum	R	FMAX.{S|D|Q}	rd,rs1,rs2		
Compare	Compare Float =	R	FEQ.{S|D|Q}	rd,rs1,rs2		
	Compare Float <	R	FLT.{S|D|Q}	rd,rs1,rs2		
	Compare Float ≤	R	FLE.{S|D|Q}	rd,rs1,rs2		
Categorization	Classify Type	R	FCLASS.{S|D|Q}	rd,rs1		
Configuration	Read Status	R	FRCSR	rd		
	Read Rounding Mode	R	FRRM	rd		
	Read Flags	R	FRFLAGS	rd		
	Swap Status Reg	R	FSCSR	rd,rs1		
	Swap Rounding Mode	R	FSRM	rd,rs1		
	Swap Flags	R	FSFLAGS	rd,rs1		
	Swap Rounding Mode Imm	I	FSRMI	rd,imm		
	Swap Flags Imm	I	FSFLAGSI	rd,imm		

RISC-V Calling Convention

Register	ABI Name	Saver	Description
x0	zero	---	Hard-wired zero
x1	ra	Caller	Return address
x2	sp	Callee	Stack pointer
x3	gp	---	Global pointer
x4	tp	---	Thread pointer
x5-7	t0-2	Caller	Temporaries
x8	s0/fp	Callee	Saved register/frame pointer
x9	s1	Callee	Saved register
x10-11	a0-1	Caller	Function arguments/return values
x12-17	a2-7	Caller	Function arguments
x18-27	s2-11	Callee	Saved registers
x28-31	t3-t6	Caller	Temporaries
f0-7	ft0-7	Caller	FP temporaries
f8-9	fs0-1	Callee	FP saved registers
f10-11	fa0-1	Caller	FP arguments/return values
f12-17	fa2-7	Caller	FP arguments
f18-27	fs2-11	Callee	FP saved registers
f28-31	ft8-11	Caller	FP temporaries

RISC-V calling convention and five optional extensions: 10 multiply-divide instructions (RV32M); 11 optional atomic instructions (RV32A); and 25 floating-point instructions each for single-, double-, and quadruple-precision (RV32F, RV32D, RV32Q). The latter add registers f0-f31, whose width matches the widest precision, and a floating-point control and status register fcsr. Each larger address adds some instructions: 4 for RVM, 11 for RVA, and 6 each for RVF/D/Q. Using regex notation, { } means set, so `L{D|Q}` *is both* `LD` *and* `LQ`*. See risc.org. (8/21/15 revision)*