
Ana Beatriz de Sousa Costa - 01191000

CONTINUADA 2 - 23/04/2019

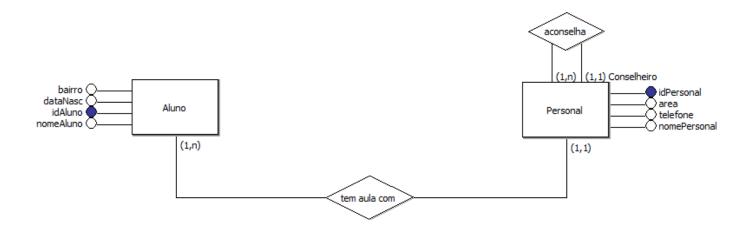


```
create database Personal;
use Personal;

create table T_Personal (
     idPersonal int primary key auto_increment,
    nomePersonal varchar(40),
    area varchar(40),
    telefone char(10),
    fkConselheiro int
    )auto_increment= 1;
```


```
alter table T_Personal add foreign key (fkconselheiro) references T_Personal(idPersonal);
desc t_personal;
insert into T_Personal (idPersonal, nomePersonal, area, telefone) values
  (null, 'Paulo', 'Musculação', '95436-0953'),
  (null, 'Bruno', 'Pilates', '94325-7628'),
  (null, 'Fernanda', 'Boxe', '92134-7659'),
  (null, 'Chris', 'Yoga', '93210-3425');
update t_personal set fkConselheiro = 3 where idPersonal in (1,4);
create table aluno (
  idAluno int primary key auto_increment,
  nomeAluno varchar(40),
  bairro varchar(40),
  dataNasc date,
  fkPersonal int,
  foreign key (fkPersonal) references t_personal(idPersonal)
  )auto_increment=1000;
insert into aluno values
      (null, 'Bianca', 'Lagoa Bonita', '2000-02-18', 2),
  (null, 'José', 'Bairro B', '1998-03-20', 4),
```

```
(null, 'Luis', 'Capão Redondo', '1994-01-30', 1),
(null, 'Geovanna', 'Bairro C', '2001-09-20', 3),
(null, 'Marcos', 'Jadim Belo', '1999-04-25', 4),
(null, 'Jennifer', 'Interlagos', '2001-05-14', 2);
```


select * from t_personal;

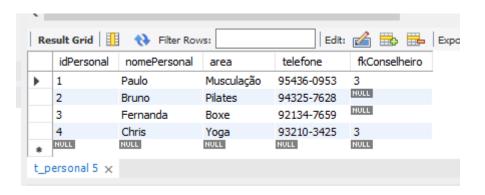


select * from aluno;

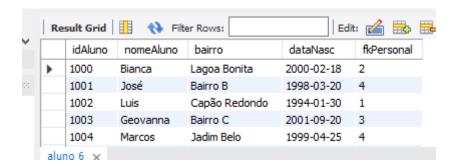


select p.*, idAluno, nomeAluno, bairro, datanasc from t_personal as p, aluno where fkpersonal = idpersonal;

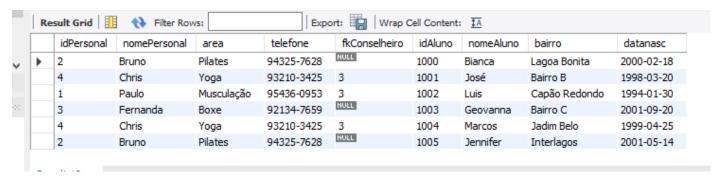

select p.*, idAluno, nomeAluno, bairro, datanasc from t_personal as p, aluno where fkpersonal = idpersonal and nomePersonal = 'chris';




select p.*, c.* from t_personal as p, t_personal as c where p.fkconselheiro = c.idPersonal;



select p.*, c.* from t_personal as p, t_personal as c where p.fkconselheiro = c.idPersonal and p.nomePersonal = 'paulo';



select p.*, idAluno, nomeAluno, bairro, datanasc, c.idpersonal, c.nomepersonal, c.area, c.telefone from aluno as a, t_personal as p, t_personal as c where a.fkpersonal = p.idpersonal and p.fkconselheiro = c.idpersonal;

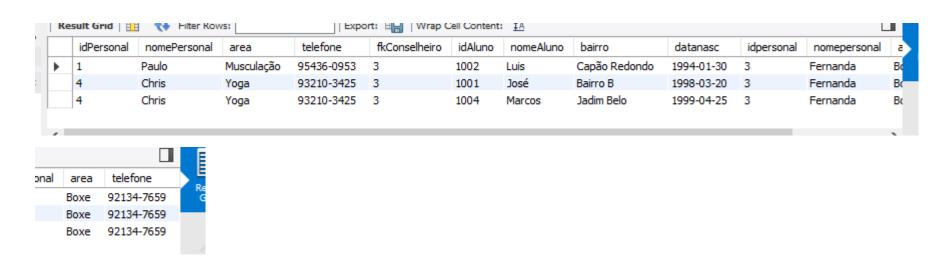

select p.*, idAluno, nomeAluno, bairro, datanasc, c.idpersonal, c.nomepersonal, c.area, c.telefone from aluno as a, t_personal as p, t_personal as c where a.fkpersonal = p.idpersonal and p.fkconselheiro = c.idpersonal and p.nomePersonal = 'Chris';

