使用 TTman 命令行调用 TTworkbench clf 进行测试

1、在 TTworkbench 客户端上创建“可执行的 clf”

先通过手动方式在 TTworkbench 客户端上创建可执行的 clf，包括测试仪参数、配置参数、测试用例执行次数等，例如：

- 在 CFL 文件夹中复制一个“.clf”文件并重命名成某个测试用例的名字

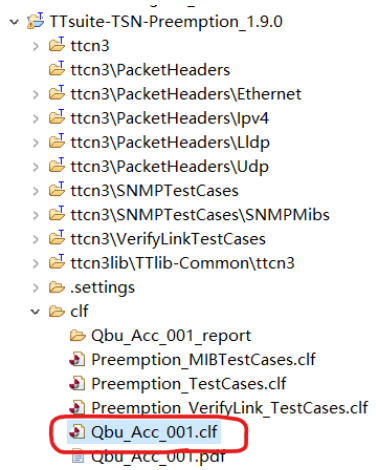

- 双击加载该 clf，配置 Parameters 并进行调试，确保 case 可以正常执行；然后把这个 clf 文件对应的 case 的 Runs 参数设置为 1，其他 case 全部设置为 0（确保使用 TTman 命令调用 clf 的时候只会执行这一个 case）。依次类推，再创建第二个 clf 文件，再设置对应的 Runs 参数，每个 clf 文件对应一个可执行 case。

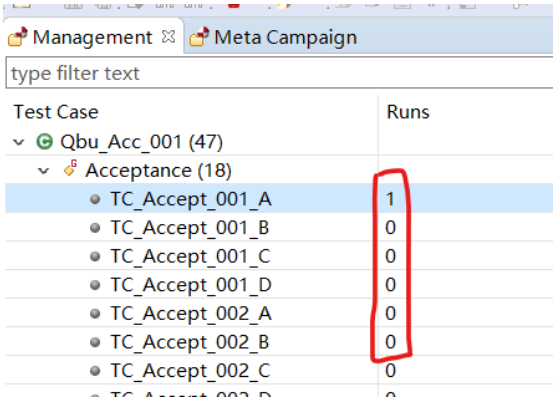

2、关闭 TTworkbench，使用 TTman 命令调用该 clf

- 在 TTworkbench 安装目录下启动 cmd 控制台

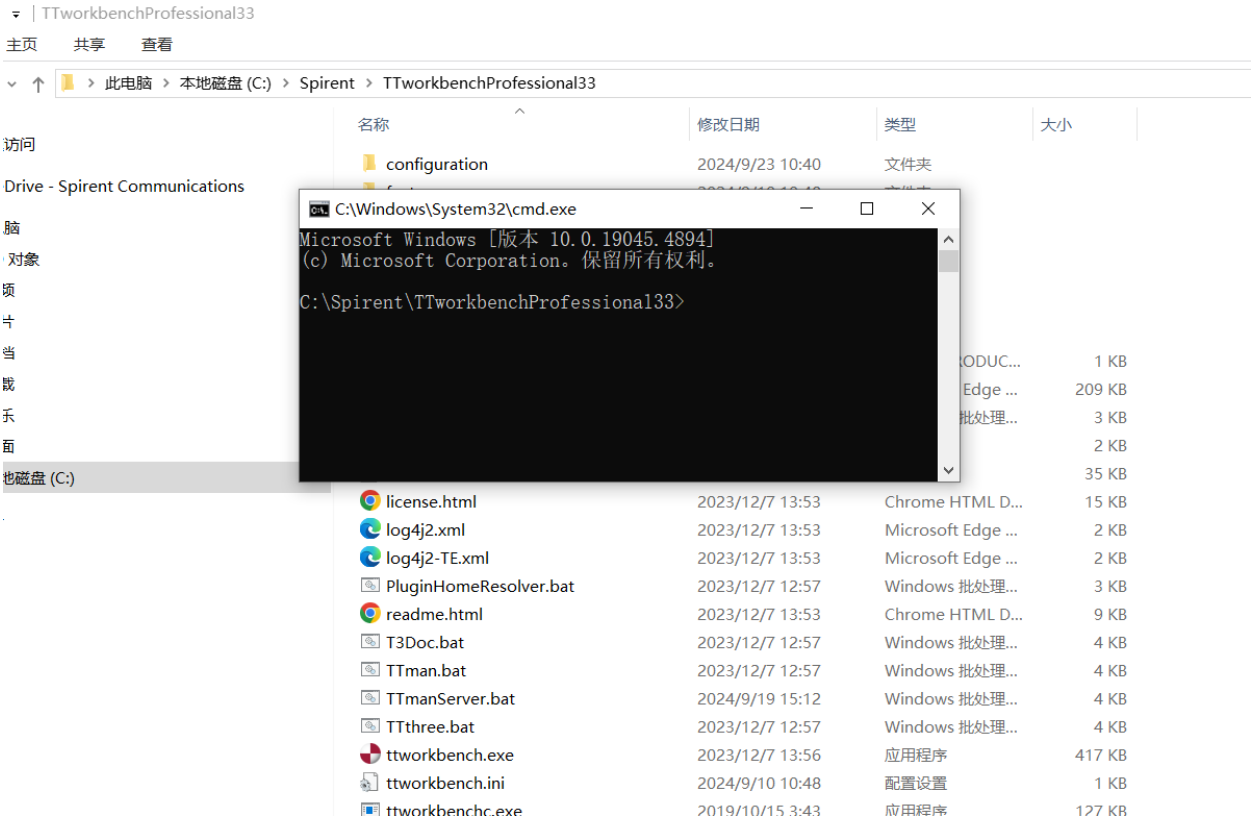

- 使用 TTman.bat 脚本调用 clf 文件进行测试，指令格式如下：

TTman.bat --data <workspace_Path> --log C:\Spirent\Logs -r pdf --report-dir C:\Spirent\Logs <CLF_Path>\DinoListTestControl.clf

举例：

TTman.bat --data C:\Users\lzheng\workspace33 --log C:\Spirent\TTworkbenchLogAndReport\Logs -r pdf --report-dir C:\Spirent\TTworkbenchLogAndReport C:\Users\lzheng\workspace33\TTsuite-TSN-Preemption_1.9.0\clf\Qbu_Acc_001.clf

上面命令中红色部分用于指定 workspace 的路径，蓝色部分用于指定把测试完毕的 tlz log 导出到哪个路径，绿色部分用于指定测试 report 的导出路径和格式，黄色部分为要调用的某个 clf 文件进行测试

- 执行过程在 cmd 会有 log 打印

```
C:\Spirent\TTworkbenchProfessional33>TTman.bat --data C:\Users\lzheng\workspace33 --log C:\Spirent\TTwo
rkbenchLogAndReport\Logs -r pdf --report-dir C:\Spirent\TTworkbenchLogAndReport C:\Users\lzheng\workspa
ce33\TTsuite-TSN-Preemption_1.9.0\clf\Qbu_Acc_001.clf
MAN-EP expires in 166 days
TTWORKBENCH_SUPPORT expires in 166 days
TT3-EP expires in 166 days
Key repository file not present, ignored.
adding libraries for plugin RTPPortPlugin
10:36:59.701: parsing given loader file 'C:\Users\lzheng\workspace33\TTsuite-TSN-Preemption_1.9.0\clf\Q
bu_Acc_001.clf'
loaded module SNMPv1v2c_Configuration
loaded module SNMPv2_PDU
loaded module SNMPv2_SMI
loaded module ASNAUX
loaded module SNMPv1v2c_Constants
loaded module Preemption_Parameters
loaded module Vlan_Types
loaded module LibCommon_BasicTypesAndValues
loaded module LibCommon_DataStrings
loaded module Preemption_Types
loaded module EthernetFrame_Types
loaded module LldpPacket_Types
loaded module Ipv4Packet_Types
```

- Log 上出现 Test execution finished，测试结束

```
Save configuration to [TC_Accept_001_B_STC_2024-09-23-10-38-47.xml]
Starting Stream
Current generator state RUNNING
Stop Generator
Current generator state STOPPED
Stop Stream
Retrieving Captured frames...
Retrieving Captured frames...
Captured frames:        6
Releasing ports ...
Disconnect from the chassis ...
Deleting project
10:39:22.578: TC_Accept_001_B -> pass [Reason: "All frames are received in expected order at TS2"]
STCProxy: Shutdown
STCProxy: Done

Total number of executed test cases: 2
pass:     2 = 100%


Test execution finished. Please find the created log file at: C:\Spirent\TTworkbenchLogAndReport\Logs.t
lz
WARNING: An illegal reflective access operation has occurred
WARNING: Illegal reflective access by com.lowagie.text.pdf.MappedRandomAccessFile$1 (file:/C:/Spirent/T
TworkbenchProfessional33/plugins/com.lowagie.text_2.1.7.v201004222200.jar) to method java.nio.DirectByt
eBuffer.cleaner()
WARNING: Please consider reporting this to the maintainers of com.lowagie.text.pdf.MappedRandomAccessFi
le$1
WARNING: Use --illegal-access=warn to enable warnings of further illegal reflective access operations
WARNING: All illegal access operations will be denied in a future release
Test report generation finished. Please find the created test report at: C:\Spirent\TTworkbenchLogAndRe
port\Qbu_Acc_001.pdf
```
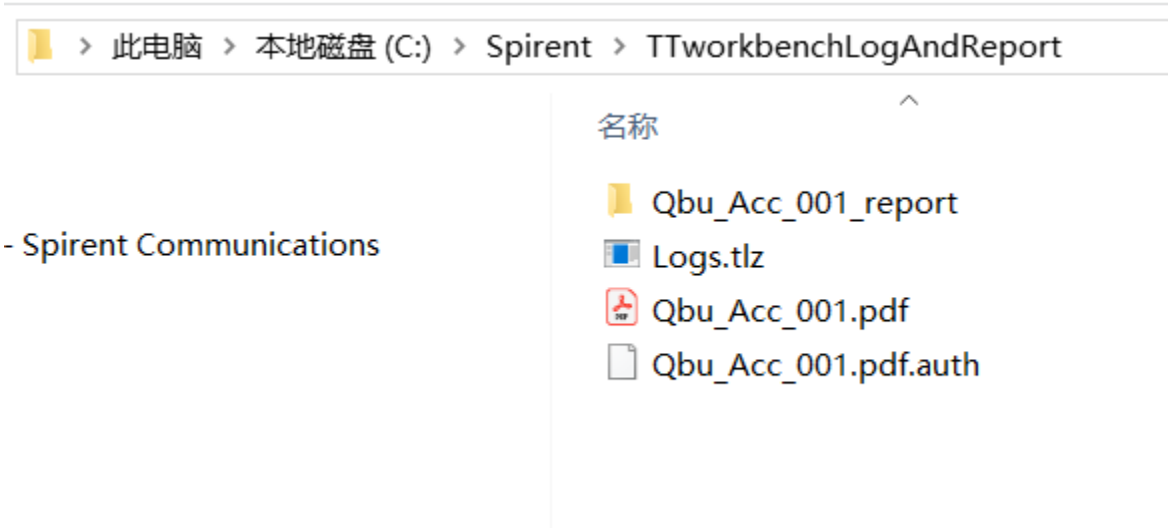
3、在导出路径中找到 tlz log 和 report 文件