FortiOS - Hardening your FortiGate

Version 6.0

FORTINET DOCUMENT LIBRARY

https://docs.fortinet.com

FORTINET VIDEO GUIDE

https://video.fortinet.com

FORTINET BLOG

https://blog.fortinet.com

CUSTOMER SERVICE & SUPPORT

https://support.fortinet.com

FORTINET TRAINING & CERTIFICATION PROGRAM

https://www.fortinet.com/support-and-training/training.html

NSE INSTITUTE

https://training.fortinet.com

FORTIGUARD CENTER

https://fortiguard.com/

END USER LICENSE AGREEMENT

https://www.fortinet.com/doc/legal/EULA.pdf

FEEDBACK

Email: techdoc@fortinet.com

TABLE OF CONTENTS

Change log

Date	Change description
July 18, 2019	FortiOS 6.0.6 document release. Minor updates.
July 4, 2019	Minor updates.
June 3, 2019	Minor updates.
May 14, 2019	FortiOS 6.0.5 document release. Minor updates.
April 29, 2019	FortiOS 6.0.4 document release.
October 4, 2018	FortiOS 6.0.3 document release. See Hardening your FortiGate on page 6.
July 26, 2018	FortiOS 6.0.2 document release. Correction to Restrict logins from trusted hosts on page 18.
June 18, 2018	FortiOS 6.0.1 document release.

Hardening your FortiGate

This guide describes some of the techniques used to harden (improve the security of) FortiGate devices and FortiOS.

This document contains the following sections:

- Building security into FortiOS
- FortiOS ports and protocols
- Security best practices

Building security into FortiOS

The FortiOS operating system, FortiGate hardware devices, and FortiOS virtual machines (VMs) are built with security in mind, so many security features are built into the hardware and software. Fortinet maintains an ISO:9001 certified software and hardware development processes to ensure that FortiOS and FortiGate products are developed in a secure manner

Boot PROM and BIOS security

The boot PROM and BIOS in FortiGate hardware devices use Fortinet's own FortiBootLoader that is designed and controlled by Fortinet. FortiBootLoader is a secure, proprietary BIOS for all FortiGate appliances. FortiGate physical devices always boot from FortiBootLoader.

FortiOS kernel and user processes

FortiOS is a multi-process operating system with kernel and user processes. The FortiOS kernel runs in a privileged hardware mode while higher-level applications run in user mode. FortiOS is a closed system that does not allow the loading or execution of third-party code in the FortiOS user space. All non-essential services, packages, and applications are removed.

FortiGate appliances with SD drives are encrypted to prevent unauthorized access to data.

Administration access security

This section describes FortiOS and FortiGate administration access security features.

Admin administrator account

All FortiGate firewalls ship with a default administrator account called admin. By default, this account does not have a password. FortiOS allows administrators to add a password for this account or to remove the account and create new custom super_admin administrator accounts.

For more information, see .

Secure password storage

User and administrator passwords are stored securely on the system in an encrypted format. The encryption hash used for admin account passwords is SHA256/SHA1. The value that is seen in the configuration file is the Base64 encoded

hash value. For example:

```
config system admin
   edit "admin"
      set accprofile "super_admin"
      set vdom "root"
      set password ENC SH2nlSm9QL9tapcHPXIqAXvX7vBJuuqu22hpa0JX0sBuKIo7z2g0Kz/+0KyH4E=
   next
   end
```

Pre-shared keys in IPSec phase-1 configurations are stored in plain text. In the configuration file these pre-shared keys are encoded. The encoding consists of encrypting the password with a fixed key using DES (AES in FIPS mode) and then Base64 encoding the result.

Maintainer account

Administrators with physical access to a FortiGate appliance can use a console cable and a special administrator account called maintainer to log into the CLI. When enabled, the maintainer account can be used to log in from the console after a hard reboot. The password for the maintainer account is bcpb followed by the FortiGate serial number. An administrator has 60-seconds to complete this login. See the Fortinet knowledge base or Resetting a lost Admin password for details.

The only action the maintainer account has permissions to perform is to reset the passwords of super_admin accounts. Logging in with the maintainer account requires rebooting the FortiGate. FortiOS generates event log messages when you login with the maintainer account and for each password reset.

The maintainer account is enabled by default; however, there is an option to disable this feature. The maintainer account can be disabled using the following command:

```
config system global
   set admin-maintainer disable
end
```

> ⚠ If you disable this feature and lose your administrator passwords you will no longer be able to log into your FortiGate.

Administrative access security

Secure administrative access features:

- SSH, Telnet, and SNMP are disabled by default. If required, these admin services must be explicitly enabled on each interface from the GUI or CLI.
- SSHv1 is disabled by default. SSHv2 is the default version.
- SSLv3 and TLS1.0 are disabled by default. TLSv1.1 and TLSv1.2 are the SSL versions enabled by default for HTTPS admin access.
- HTTP is disabled by default, except on dedicated MGMT, DMZ, and predefined LAN interfaces. HTTP redirect to HTTPS is enabled by default.
- The `strong-crypto` global setting is enabled by default and configures FortiOS to use strong ciphers (AES, 3DES) and digest (SHA1) for HTTPS/SSH/TLS/SSL functions.

- SCP is disabled by default. Enabling SCP allows downloading the configuration file from the FortiGate as an alternative method of backing up the configuration file. To enable SCP:
```
config system global
    set admin-scp enable
end
```
- DHCP is enabled by default on the dedicated MGMT interface and on the predefined LAN port (defined on some FortiGate models).
- The default management access configuration for FortiGate models with dedicated MGMT, DMZ, WAN, and LAN interfaces is shown below. Outside of the interfaces listed below, management access must be explicitly enabled on interfaces – management services are enabled on specific interfaces and not globally.
  - Dedicated management interface
    - Ping
    - FMG-Access (fgfm)
    - CAPWAP
    - HTTPS
    - HTTP
  - Dedicated WAN1/WAN2 interface
    - Ping
    - FMG-Access (fgfm)
  - Dedicated DMZ interface
    - Ping
    - FMG-Access (fgfm)
    - CAPWAP
    - HTTPS
    - HTTP
  - Dedicated LAN interface
    - Ping
    - FMG-Access (fgfm)
    - CAPWAP
    - HTTPS
    - HTTP

Network security

This section describes FortiOS and FortiGate network security features.

Network interfaces

The following are disabled by default on each FortiGate interface:

- Broadcast forwarding
- STP forwarding
- VLAN forwarding
- L2 forwarding

- Netbios forwarding
- Ident accept

For more information, see Disable unused protocols on interfaces on page 24.

TCP sequence checking

FortiOS uses TCP sequence checking to ensure a packet is part of a TCP session. By default, anti-replay protection is strict, which means that if a packet is received with sequence numbers that fall out of the expected range, FortiOS drops the packet. Strict anti-replay checking performs packet sequence checking and ICMP anti-replay checking with the following criteria:

- The SYN, FIN, and RST bit cannot appear in the same packet.
- FortiOS does not allow more than 1 ICMP error packet to go through before it receives a normal TCP or UDP packet.
- If FortiOS receives an RST packet, FortiOS checks to determine if its sequence number in the RST is within the un-ACKed data and drops the packet if the sequence number is incorrect.
- For each new session, FortiOS checks to determine if the TCP sequence number in a SYN packet has been calculated correctly and started from the correct value.

Reverse path forwarding

FortiOS implements a mechanism called Reverse Path Forwarding (RPF), or Anti Spoofing, to block an IP packet from being forwarded if its source IP does not:

- belong to a locally attached subnet (local interface), or
- be in the routing domain of the FortiGate from another source (static route, RIP, OSPF, BGP).

If those conditions are not met, FortiOS silently drops the packet.

FIPS and Common Criteria

FortiOS has received NDPP, EAL2+, and EAL4+ based FIPS and Common Criteria certifications. Common Criteria evaluations involve formal rigorous analysis and testing to examine security aspects of a product or system. Extensive testing activities involve a comprehensive and formally repeatable process, confirming that the security product functions as claimed by the manufacturer. Security weaknesses and potential vulnerabilities are specifically examined during an evaluation.

To see Fortinet's complete history of FIPS/CC certifications go to the following URL and add Fortinet to the Vendor field:

https://csrc.nist.gov/projects/cryptographic-module-validation-program/validated-modules/search

PSIRT advisories

The FortiGuard Labs Product Security Incident Response Team (PSIRT) continually tests and gathers information about Fortinet hardware and software products, looking for vulnerabilities and weaknesses. Any such findings are fed back to Fortinet's development teams and serious issues are described along with protective solutions. The PSIRT regulatory releases PSIRT advisories when issues are found and corrected. Advisories are listed at https://www.fortiguard.com/psirt.

FortiOS ports and protocols

Communication to and from FortiOS is strictly controlled and only selected ports are opened for supported functionality such as administrator logins and communication with other Fortinet products or services.

Accessing FortiOS using an open port is protected by authentication, identification, and encryption requirements. As well, ports are only open if the feature using them is enabled.

FortiOS open ports

The following diagram and tables shows the incoming and outgoing ports that are potentially opened by FortiOS.
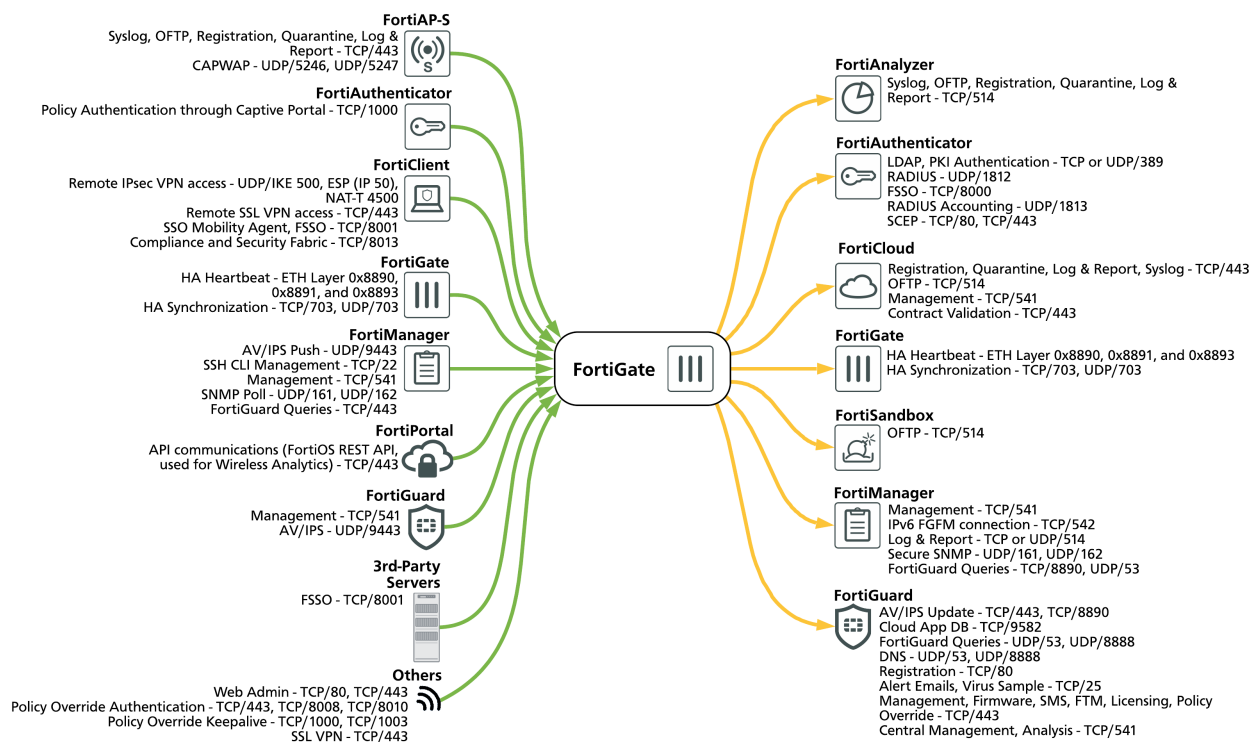
Incoming ports		
Purpose		**Protocol/Port**
FortiAP-S	Syslog, OFTP, Registration, Quarantine, Log & Report	TCP/443
	CAPWAP	UDP/5246, UDP/5247

Incoming ports		
Purpose		**Protocol/Port**
FortiAuthenticator	RADIUS	UDP/1812
	FSSO	TCP/8000
FortiGate	HA Heartbeat	ETH Layer 0x8890, 0x8891, and 0x8893
	HA Synchronization	TCP/703, UDP/703
FortiGuard	Management	TCP/541
	AV/IPS	UDP/9443
FortiManager	AV/IPS Push	UDP/9443
	SSH CLI Management	TCP/22
	Management	TCP/541
	SNMP Poll	UDP/161, UDP/162
	FortiGuard Queries	TCP/443
FortiPortal	API communications (FortiOS REST API, used for Wireless Analytics)	TCP/443
Others	Web Admin	TCP/80, TCP/443
	FSSO	TCP/8000
	Policy Override Authentication	TCP/443, TCP/8008
	FortiClient Portal	TCP/8009
	Policy Override Keepalive	TCP/1000, TCP/1003
	SSL VPN	TCP/10443
3rd-Party Servers	FSSO	TCP/8000

Outgoing ports		
Purpose		**Protocol/Port**
FortiAnalyzer	Syslog, OFTP, Registration, Quarantine, Log & Report	TCP/514
FortiAuthenticator	LDAP, PKI Authentication	TCP or UDP/389
FortiCloud	Registration, Quarantine, Log & Report, Syslog	TCP/443

Outgoing ports		
Purpose		**Protocol/Port**
	OFTP	TCP/514
	Management	TCP/541
	Contract Validation	TCP/443
FortiGate	HA Heartbeat	ETH Layer 0x8890, 0x8891, and 0x8893
	HA Synchronization	TCP/703, UDP/703
FortiGuard	AV/IPS Update	TCP/443, TCP/8890
	Cloud App DB	TCP/9582
	FortiGuard Queries	UDP/53, UDP/8888
	DNS	UDP/53, UDP/8888
	Registration	TCP/80
	Alert Email, Virus Sample	TCP/25
	Management, Firmware, SMS, FTM, Licensing, Policy Override	TCP/443
	Central Management, Analysis	TCP/541
FortiManager	Management	TCP/541
	IPv6 FGFM connection	TCP/542
	Log & Report	TCP or UDP/514
	Secure SNMP	UDP/161, UDP/162
	FortiGuard Queries	TCP/8890, UDP/53
FortiSandbox	OFTP	TCP/514

> Note that, while a proxy is configured, FortiGate uses the following URLs to access the FortiGuard Distribution Network (FDN):
> - **update.fortiguard.net**
> - **service.fortiguard.net**
> - **support.fortinet.com**

Closing open ports

You can close open ports by disabling the feature that opens them. For example, if FortiOS is not managing a FortiAP then the CAPWAP feature for managing FortiAPs can be disabled, closing the CAPWAP port.

The following sections of this document described a number of options for closing open ports:

- Use local-in policies to close open ports or restrict access on page 25
- Disable unused protocols on interfaces on page 24

Security best practices

This chapter describes some techniques and best practices that you can use to improve FortiOS security.

Install the FortiGate unit in a physically secure location

A good place to start with is physical security. Install your FortiGate in a secure location, such as a locked room or one with restricted access. A restricted location prevents unauthorized users from getting physical access to the device.

If unauthorized users have physical access, they can disrupt your entire network by disconnecting your FortiGate (either by accident or on purpose). They could also connect a console cable and attempt to log into the CLI. Also, when a FortiGate unit reboots, a person with physical access can interrupt the boot process and install different firmware.

Register your product with Fortinet Support

You need to register your Fortinet product with Fortinet Support to receive customer services, such as firmware updates and customer support. You must also register your product for FortiGuard services, such as up-to-date antivirus and IPS signatures. To register your product the Fortinet Support website.

Keep your FortiOS firmware up to date

Always keep FortiOS up to date. The most recent version is the most stable and has the most bugs fixed and vulnerabilities removed. Fortinet periodically updates the FortiGate firmware to include new features and resolve important issues.

After you register your FortiGate, you can receive notifications on FortiGate GUI about firmware updates. You can update the firmware directly from the GUI or by downloading firmware updates from the Fortinet Support website.

Before you install any new firmware, be sure to follow these steps:

- Review the release notes for the latest firmware release.
- Review the Upgrade Path tool to determine the best path to take from your current version of FortiOS to the latest version.
- Back up the current configuration.

Only FortiGate administrators who have read and write privileges can upgrade the FortiOS firmware.

System administrator best practices

This section describes a collection of changes you can implement to make administrative access to the GUI and CLI more secure.

Disable administrative access to the external (Internet-facing) interface

When possible, don't allow administration access on the external (Internet-facing) interface.

To disable administrative access, go to **Network > Interfaces,** edit the external interface and disable HTTPS, PING, HTTP, SSH, and TELNET under **Administrative Access.**

From the CLI:

```
config system interface
   edit <external-interface-name>
   unset allowaccess
end
```

Allow only HTTPS access to the GUI and SSH access to the CLI

For greater security never allow HTTP or Telnet administrative access to a FortiGate interface, only allow HTTPS and SSH access. You can change these settings for individual interfaces by going to **Network > Interfaces** and adjusting the administrative access to each interface.

From the CLI:

```
config system interface
   edit <interface-name>
      set allowaccess https ssh
   end
```

Require TLS 1.2 for HTTPS administrator access

Use the following command to require TLS 1.2 for HTTPS administrator access to the GUI:

```
config system global
   set admin-https-ssl-versions tlsv1-2
end
```

TLS 1.2 is currently the most secure SSL/TLS supported version for SSL-encrypted administrator access.

Re-direct HTTP GUI logins to HTTPS

Go to **System > Settings > Administrator Settings** and enable **Redirect to HTTPS** to make sure that all attempted HTTP login connections are redirected to HTTPS.

From the CLI:

```
config system global
   set admin-https-redirect enable
end
```

Change the HTTPS and SSH admin access ports to non-standard ports

Go to **System > Settings > Administrator Settings** and change the HTTPS and SSH ports.

You can change the default port configurations for HTTPS and SSH administrative access for added security. To connect to a non-standard port, the new port number must be included in the collection request. For example:

- If you change the HTTPS port to 7734, you would browse to `https://<ip-address>:7734`.
- If you change the SSH port to 2345, you would connect to `ssh admin@<ip-address>:2345`

To change the HTTPS and SSH login ports from the CLI:

```
config system global
   set admin-sport 7734
   set admin-ssh-port 2345
end
```

If you change to the HTTPS or SSH port numbers, make sure your changes do not conflict with ports used for other services.

Maintain short login timeouts

Set the idle timeout to a short time to avoid the possibility of an administrator walking away from their management computer and leaving it exposed to unauthorized personnel.

To set the administrator idle timeout, go to **System > Settings** and enter the amount of time for the **Idle timeout**. A best practice is to keep the default time of 5 minutes.

To set the administrator idle timeout from the CLI:

```
config system global
   set admintimeout 5
end
```

You can use the following command to adjust the grace time permitted between making an SSH connection and authenticating. The range can be between 10 and 3600 seconds, the default is 120 seconds (minutes). By shortening this time, you can decrease the chances of someone attempting a brute force attack a from being successful. For example, you could set the time to 30 seconds.

```
config system global
   set admin-ssh-grace-time 30
end
```

Restrict logins from trusted hosts

Setting up trusted hosts for an administrator limits the addresses from where they can log into FortiOS. The trusted hosts configuration applies to most forms of administrative access including HTTPS, SSH, and SNMP. When you identify a trusted host for an administrator account, FortiOS accepts that administrator's login only from one of the trusted hosts. A login, even with proper credentials, from a non-trusted host is dropped.

> Even if you have configured trusted hosts, if you have enabled ping administrative access on a FortiGate interface, it will respond to ping requests from any IP address.

To identify trusted hosts, go to **System > Administrators**, edit the administrator account, enable **Restrict login to trusted hosts**, and add up to ten trusted host IP addresses.

To add two trusted hosts from the CLI:

```
config system admin
   edit <administrator-name>
      set trustedhost1 172.25.176.23 255.255.255.255
      set trustedhost2 172.25.177.0 255.255.255.0
   end
```

Trusted host IP addresses can identify individual hosts or subnets. Just like firewall policies, FortiOS searches through the list of trusted hosts in order and acts on the first match it finds. When you configure trusted hosts, start by adding specific addresses at the top of the list. Follow with more general IP addresses. You don't have to add addresses to all of the trusted hosts as long as all specific addresses are above all of the 0.0.0.0 0.0.0.0 addresses.

Set up two-factor authentication for administrators

FortiOS supports FortiToken and FortiToken Mobile 2-factor authentication. FortiToken Mobile is available for iOS and Android devices from their respective application stores.

Every registered FortiGate unit includes two trial tokens for free. You can purchase additional tokens from your reseller or from Fortinet.

To assign a token to an administrator, go to **System > Administrators** and select **Enable Two-factor Authentication** for each administrator.

Create multiple administrator accounts

Rather than allowing all administrators to access ForiOS with the same administrator account, you can create accounts for each person or each role that requires administrative access. This configuration allows you to track the activities of each administrator or administrative role.

If you want administrators to have different functions you can add different administrator profiles. Go to **System > Admin Profiles** and select **Create New**.

Modify administrator account lockout duration and threshold values

By default, the FortiGate sets the number of password retries at three, allowing the administrator a maximum of three attempts to log into their account before locking the account for a set amount of time.

Both the number of attempts (admin-lockout-threshold) and the wait time before the administrator can try to enter a password again (admin-lockout-duration) can be configured within the CLI.

To configure the lockout options:

```
config system global
   set admin-lockout-threshold <failed_attempts>
   set admin-lockout-duration <seconds>
end
```

The default value of `admin-lockout-threshold` is 3 and the range of values is between 1 and 10. The `admin-lockout-duration` is set to 60 seconds by default and the range of values is between 1 and 4294967295 seconds.

Keep in mind that the higher the lockout threshold, the higher the risk that someone may be able to break into the FortiGate.

Example:

To set the `admin-lockout-threshold` to one attempt and the `admin-lockout-duration` to a five minute duration before the administrator can try to log in again, enter the commands:

```
config system global
   set admin-lockout-threshold 1
   set admin-lockout-duration 300
end
```

If the time span between the first failed login attempt and the `admin-lockout-threshold` failed login attempt is less than `admin-lockout-duration`, the lockout will be triggered.

Rename the admin administrator account

You can improve security by renaming the admin account. To do this, create a new administrator account with the super_admin admin profile and log in as that administrator. Then go to **System > Administrators** and edit the admin administrator and change the **User Name**. Renaming the admin account makes it more difficult for an attacker to log into FortiOS.

Add administrator disclaimers

FortiOS can display a disclaimer before or after logging into the GUI or CLI (or both). In either case the administrator must read and accept the disclaimer before they can proceed.

Use the following command to display a disclaimer before logging in:

```
config system global
   set pre-login-banner enable
end
```

Use the following command to display a disclaimer after logging in:

```
config system global
   set post-login-banner enable
end
```

You can customize the replacement messages for these disclaimers by going to **System > Replacement Messages**. Select **Extended View** to view and edit the **Administrator** replacement messages.

From the CLI:

```
config system replacemsg admin pre_admin-disclaimer-text
config system replacemsg admin post_admin-disclaimer-text
```

Global commands for stronger and more secure encryption

This section describes some best practices for employing stronger and more secure encryption.

Turn on global strong encryption

Enter the following command to configure FortiOS to use only strong encryption and allow only strong ciphers (AES, 3DES) and digest (SHA1) for HTTPS, SSH, TLS, and SSL functions.

```
config sys global
   set strong-crypto enable
end
```

Disable MD5 and CBC for SSH

In some cases, you may not be able to enable strong encryption. For example, your FortiGate may be communicating with a system that does not support strong encryption. With `strong-crypto` disabled you can use the following options to prevent SSH sessions with the FortiGate from using less secure MD5 and CBC algorithms:

```
config sys global
   set ssh-hmac-md5 disable
   set ssh-cbc-cipher disable
end
```

Disable static keys for TLS

You can use the following command to prevent TLS sessions from using static keys (AES128-SHA, AES256-SHA, AES128-SHA256, AES256-SHA256):

```
config sys global
   set ssl-static-key-ciphers disable
end
```

Require larger values for Diffie-Hellman exchanges

Larger Diffie-Hellman values result in stronger encryption. Use the following command to force Diffie-Hellman exchanges to use 8192 bit values (the highest configurable DH value).

```
config sys global
   set dh-params 8192
end
```

Setting higher DH but values may not be compatible with some systems that the FortiGate is communicating with. For example, some versions of FortiClient SSL VPN may not support 8192 DH bit values. Make sure the DH bit value setting that you choose is compatible with the systems that your FortiGate will be communicating with.

Disable sending Security Rating statistics to FortiGuard

Security Rating is a Fortinet Security Fabric feature that allows customers to audit their Security Fabric and find and fix security problems. As part of the feature, FortiOS sends your security rating to FortiGuard every time a security rating test runs.

You can opt out of submitting Security Rating scores to FortiGuard. If you opt out you won't be able to see how your organization's scores compare with the scores of other organizations. Instead, an absolute score is shown. Use the following command to disable FortiGuard Security Rating result submission:

```
config system global
   set security-rating-result-submission disable
end
```

Disable auto USB installation

If USB installation is enabled, an attacker with physical access to a FortiGate could load a new configuration or firmware on the FortiGate using the USB port. You can disable USB installation by entering the following from the CLI:

```
config system auto-install
   set auto-install-config disable
   set auto-install-image disable
end
```

Set system time by synchronizing with an NTP server

For accurate time, use an NTP server to set system time. Synchronized time facilitates auditing and consistency between expiry dates used in expiration of certificates and security protocols.

From the GUI go to **System > Settings > System Time** and select **Synchronize with NTP Server**. By default, this causes FortiOS to synchronize with Fortinet's FortiGuard secure NTP server.

From the CLI you can use one or more different NTP servers:

```
config system ntp
   set type custom
   set ntpsync enable
     config ntpserver
       edit 1
         set server <ntp-server-ip>
       next
       edit 2
         set server <other-ntp-server-ip>
       end
```

Disable the maintainer admin account

Administrators with physical access to a FortiGate appliance can use a console cable and a special administrator account called maintainer to log into the CLI.The maintainer account allows you to log into a FortiGate if you have lost all administrator passwords.

Once you have logged in with the maintainer account you can:

- Change the password of the admin administrator account (if it exists).
- Reset the FortiGate to the factory default configuration using the `execute factoryreset` command. This is the only way to get access to the FortiGate if you have deleted the admin administrator account.

See the Fortinet knowledge base or Resetting a lost Admin password for details about using the maintainer account to regain access to your FortiGate if you have lost all administrator account passwords.

The methodology for using the maintainer account is publicly available. As long as someone with physical access to the device has the serial number of the device, which is labeled on the device, they can change the admin administrator account password and access the FortiGate. This may be an unacceptable risk in some circumstances, especially where the hardware is not physically secured. As an added security measure, the maintainer account can be disabled using the following setting:

```
config system global
   set admin-maintainer disable
end
```

⚠️ If you disable this feature and lose your administrator passwords you will no longer be able to log into your FortiGate.The only way to access your FortiGate will be to start over with a new firmware installation and default configuration file. All of your settings will be lost.

Enable password policies

Go to **System > Settings > Password Policy**, to create a password policy that all administrators must follow. Using the available options you can define the required length of the password, what it must contain (numbers, upper and lower case, and so on) and an expiry time.

Use the password policy feature to make sure all administrators use secure passwords that meet your organization's requirements.

Configure auditing and logging

For optimum security go to **Log & Report > Log Settings** enable **Event Logging**. For best results send log messages to FortiAnalyzer or FortiCloud.

From FortiAnalyzer or FortiCloud, you can view reports or system event log messages to look for system events that may indicate potential problems. You can also view system events by going to **FortiView > System Events**.

Establish an auditing schedule to routinely inspect logs for signs of intrusion and probing.

Encrypt logs sent to FortiAnalyzer/FortiManager

To keep information in log messages sent to FortiAnalyzer private, go to **Log & Report > Log Settings** and when you configure Remote Logging to FortiAnalyzer/FortiManager select **Encrypt log transmission**.

From the CLI.

```
config log {fortianalyzer | fortianalyzer2 | fortianalyzer3} setting
   set enc-algorithm high
end
```

Disable unused interfaces

To disable an interface from the GUI, go to **Network > Interfaces**. Edit the interface to be disabled and set **Interface State** to **Disabled**.

From the CLI, to disable the port21 interface:

```
config system interface
   edit port21
      set status down
   end
```

Disable unused protocols on interfaces

You can use the `config system interface` command to disable unused protocols that attackers may attempt to use to gather information about a FortiGate unit. Many of these protocols are disabled by default. Using the `config system interface` command you can see the current configuration of each of these options for the selected interface and then choose to disable them if required.

```
config system interface
   edit <interface-name>
      set dhcp-relay-service disable
      set pptp-client disable
      set arpforward disable
      set broadcast-forward disable
      set l2forward disable
      set icmp-redirect disable
      set vlanforward disable
      set stpforward disable
      set ident-accept disable
      set ipmac disable
      set netbios-forward disable
      set security-mode none
      set device-identification disable
      set lldp-transmission disable
   end
```

Option	Description
`dhcp-relay-service`	Disable the DHCP relay service.
`pptp-client`	Disable operating the interface as a PPTP client.
`arpforward`	Disable ARP forwarding.
`broadcast-forward`	Disable forwarding broadcast packets.
`l2forward`	Disable layer 2 forwarding.
`icmp-redirect`	Disable ICMP redirect.
`vlanforward`	Disable VLAN forwarding.
`stpforward`	Disable STP forwarding.
`ident-accept`	Disable authentication for this interface. The interface will not respond to a connection with an authentication prompt.
`ipmac`	Disable IP/MAC binding.
`netbios-forward`	Disable NETBIOS forwarding.
`security-mode`	Set to `none` to disable captive portal authentication. The interface will not respond to a connection with a captive portal.
`device-identification`	Disable device identification.
`lldp-transmission`	Disable link layer discovery (LLDP).

Use local-in policies to close open ports or restrict access

You can also use local-in policies to close open ports or otherwise restrict access to FortiOS.

Close ICMP ports

Use the following command to close all ICMP ports on the WAN1 interface. The following example blocks traffic that matches the ALL_ICMP firewall service.

```
config firewall local-in-policy
   edit 1
      set intf wan1
      set srcaddr all
      set dstaddr all
      set action deny
      set service ALL_ICMP
      set schedule always
   end
```

Close the BGP port

Use the following command to close the BGP port on the wan1 interface. The following example blocks traffic that matches the BGP firewall service.

```
config firewall local-in-policy
   edit 1
      set intf wan1
      set srcaddr all
      set dstaddr all
      set action deny
      set service BGP
      set schedule always
   end
```

Optional settings

This section describes settings that you can turn off so that you do not send any statistics to FortiGuard.

Collecting security statistics helps to enhance some FortiGuard services. The security statistics might be important to customers who want to report to senior management. The collected information shows how your security is trending and how your security ranks against industry peers.

Disable sending malware statistics to FortiGuard

By default, FortiOS periodically sends encrypted malware statistics to FortiGuard. The malware statistics record Antivirus, IPS, or Application Control events. This data is used to improved FortiGuard services. The malware statistics that FortiOS sends do not include any personal or sensitive customer data. The information is not shared with any external parties and is used in accordance with Fortinet's Privacy Policy.

Sending the statistics to FortiGuard can be disabled. This will prevent FortiGate from sending malware statistics even if the FortiGate receives updates from FortiManager instead of FortiGuard.

To disable sending malware statistics to FortiGuard, enter the following command:

```
config system global
    set fds-statistics disable
end
```