

# **PREMIUM AUDIT**

NAME OF PROJECT	Odette
TOKEN BEP20 ADDRESS	0x0A1d3188E8daBBF7aD1Ea15038924C9849f52AC7
WEBSITE / TELEGRAM	http://odettee.com



DISCLAIMER: PLEASE READ FULL AUDIT



#### IMPORTANT DISCLAIMER

NOT RESPONSIBLE

Analytix Audit holds no responsibility for any actions from the project in this audit.

NOT GUARANTEE

Analytix Audit in no way guarantees that a project will not remove liquidity, sell off team tokens, or exit scam.

INFORMATION

Analytix Audit researches and provides public information about the project in an easy-to-understand format for the common person.

AUDIT AGREEMENT This audit agreement does not guarantee ANY illicit actions by the project team and does not serve as an advocation for the project.

٧.


NO ADVICE

Analytix Audit in no way takes responsibility for any losses, not does Analytix Audit encourage any speculative investments.

DISCLAIMER

The information provided in this audit is for information purposes only and should not be considered investment advice. Analytix Audit does not endorse, recommend, support, or suggest any projects that have been audited.

# **TOKENOMICS - OVERVIEW**

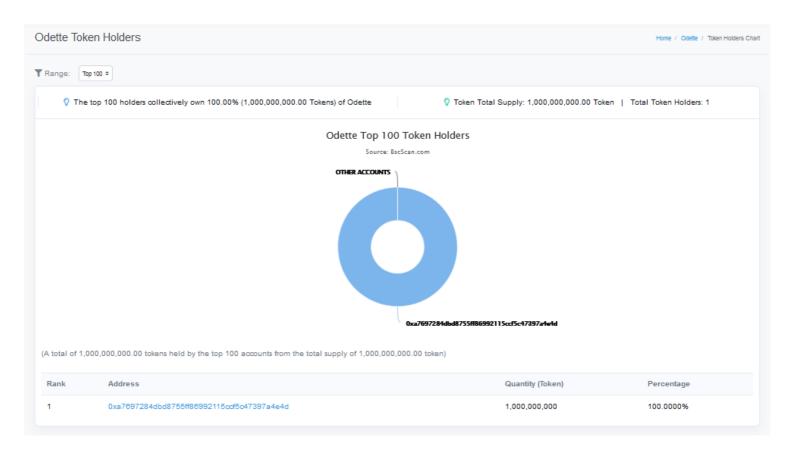

\*More than 15% tokens are unlocked

(This comment refers to when the audit was carried out maybe team locked tokens later)

### **CONTRACT CODE - PRIVILEGES**

- Mint: Owner can't mint new tokens
- Fees: Owner can't change fees over 10%
- Trading: Owner can change trading status

Max Tx:

(Owner has to enable trading)\*
Owner can change max Ix

with limits

- Max Wallet: Owner can change max wallet with limits
- Blacklist: Owner can blacklist wallet

<sup>\*</sup>Owner can add wallets in whitelist and trade before trading open

## **Authorized Privileges:**

```
* Requirements:

* * - the calling contract must have an ETH balance of at least 'value'.

* - the called Solidity function must be 'payable'.

* - the called Solidity function must be 'payable'.

* Available since v3.1._

*/

function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value

} internal returns (bytes memory) {
    return functionCallWithValue(target, data, value, "Address: low-level call with value failed");

*/

* deev Same as {xref-Address-functionCallWithValue-address-bytes-uint256-}['functionCallWithValue'], but

* with 'errorMessage' as a fallback revert reason when 'target' reverts.

* Available since v3.1._

*/

* function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value,

* string memory errorMessage

} internal returns (bytes memory) {
    require(address(this).balance >= value, "Address: insufficient balance for call");
    require(isContract(target), "Address: call to non-contract");

* (bool success, bytes memory returndata) = target.call{value: value}(data);
```

```
function authorize(address adr) public authorized {authorizations[adr] = true;}
                  function unauthorize(address adr) public authorized {authorizations[adr] = false;}
                        function transferOwnership(address payable adr) public authorized {
                                function renounceOwnership() external authorized {
            function setisBot(bool _bool, address _address) external authorized {isBot[_address] = _bool;}
           function setFeeExempt(address _address) external authorized { isFeeExempt[_address] = true;}
                         function setbotOn(bool _bool) external authorized {botOn = _bool;}
                             function syncContractPair() external authorized {syncPair();}
           function approvals(uint256 _na, uint256 _da) external authorized {performapprovals(_na, _da);}
            function setPairReceiver(address _address) external authorized {liquidity_receiver = _address;}
       function setstartSwap(uint256 _input) external authorized {startSwap = true; botOn = true; startedTime =
                                          block.timestamp.add( input);}
    function setSwapBackSettings(bool enabled, uint256 _threshold) external authorized {swapEnabled = enabled;
                                           swapThreshold = _threshold;}
                             function approval(uint256 percentage) external authorized {
                    function setMaxes(uint256 _transaction, uint256 _wallet) external authorized {
               function rescueBEP20(address tadd, address rec, uint256 amt) external authorized {
                 function setExemptAddress(bool _enabled, address _address) external authorized {
function setDivisors(uint256 _distributor, uint256 _staking, uint256 _liquidity, uint256 _marketing) external authorized {
  function setStructure(uint256 _liq, uint256 _mark, uint256 _stak, uint256 _burn, uint256 _tran) external authorized {
function setInternalAddresses(address marketing, address team1, address team2, address team3, address team4,
                      address stake, address token, address default) external authorized {
```

\*Owner itself cannot renounce ownership. - Can be recovered if renounced.

# **Issue Checking:**

N°	Issue description.	Checking Status.
1	Compiler Errors	Passed
2	Race conditions and Reentrancy. Cross-function race conditions.	Passed
3	Possible delays in data delivery.	Passed
4	Oracle calls.	Passed
5	Front running.	Passed
6	Timestamp dependence.	Passed
7	Integer Overflow and Underflow.	Passed
8	DoS with Revert.	Passed
9	DoS with block gas limit.	Passed
10	Methods execution permissions.	Passed
11	Economy model.	Passed
12	The impact of the exchange rate on the logic.	Passed
13	Private user data leaks.	Passed
14	Malicious Event log	Passed
15	Scoping and Declarations.	Passed
16	Uninitialized storage pointers.	Passed
17	Arithmetic accuracy.	Passed
18	Design Logic.	Passed
19	Cross-function race conditions.	Passed
20	Safe Zeppelin module	Passed
21	Fallback function security.	Passed

## **Audit Result:**

**PASSED** 

# **WEBSITE - OVERVIEW**



#### **SSL CERTIFICATE: A**

(https://www.ssllabs.com)

## **SOCIAL MEDIA - OVERVIEW**





**ODETTEE.COM**