

PREMIUM AUDIT

NAME OF PROJECT	Wallet VPN
TOKEN BEP20 ADDRESS	0x9d58be3a935a269d7423d8c027532b7f44dcee2a
WEBSITE / TELEGRAM	https://walletvpn.io/



DISCLAIMER: PLEASE READ FULL AUDIT



IMPORTANT DISCLAIMER

NOT RESPONSIBLE

Analytix Audit holds no responsibility for any actions from the project in this audit.

NOT GUARANTEE

Analytix Audit in no way guarantees that a project will not remove liquidity, sell off team tokens, or exit scam.

INFORMATION

Analytix Audit researches and provides public information about the project in an easy-to-understand format for the common person.

AUDIT AGREEMENT This audit agreement does not guarantee ANY illicit actions by the project team and does not serve as an advocation for the project.


NO ADVICE

Analytix Audit in no way takes responsibility for any losses, not does Analytix Audit encourage any speculative investments.

DISCLAIMER

The information provided in this audit is for information purposes only and should not be considered investment advice. Analytix Audit does not endorse, recommend, support, or suggest any projects that have been audited.

TOKENOMICS - OVERVIEW

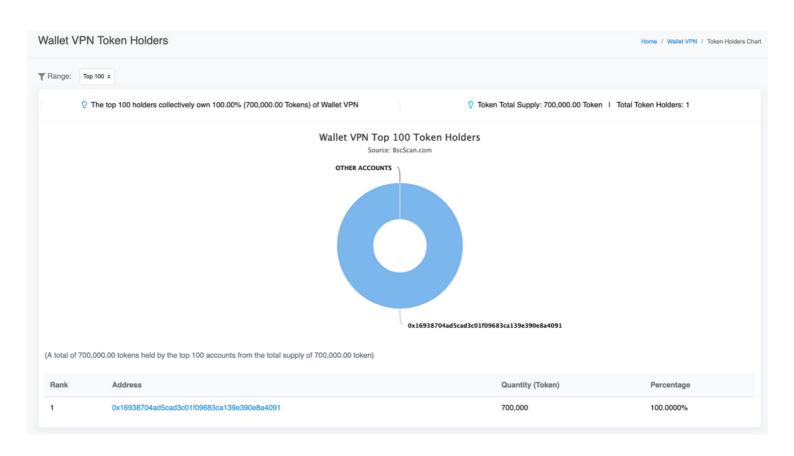

*More than 15% supply is unlocked

(This comment refers to when the audit was carried out maybe team locked tokens later)

CONTRACT CODE - PRIVILEGES

- Mint: Owner can't mint new tokens
- Fees: Owner can't change fees
- Trading: Owner can't change trading status
- Max Tx: Owner can't change maxTx
- Max Wallet: Owner can't change max wallet
- Blacklist: Owner can't blacklist wallet

Authorized Privileges:

```
* Requirements:

* the calling contract must have an ETH balance of at least 'value'.

* the calling contract must have an ETH balance of at least 'value'.

* the called Solidity function must be 'payable'.

* Available since v3.1._

*/

function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value

} internal returns (bytes memory) {
    return functionCallWithValue(target, data, value, "Address: low-level call with value failed");

* deev Same as {xref-Address-functionCallWithValue-address-bytes-uint256-){ functionCallWithValue' }, but

* with 'errorMessage' as a fallback revert reason when 'target' reverts.

* Available since v3.1._

*/

function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value,
    string memory errorMessage

} internal returns (bytes memory) {
    require(address(this).balance >= value, "Address: insufficient balance for call");
    require(isContract(target), "Address: call to non-contract");

(bool success, bytes memory returndata) = target.call{value: value}(data);
```

Issue Checking:

N°	Issue description.	Checking Status.
1	Compiler Errors	Passed
2	Race conditions and Reentrancy. Cross-function race conditions.	Passed
3	Possible delays in data delivery.	Passed
4	Oracle calls.	Passed
5	Front running.	Passed
6	Timestamp dependence.	Passed
7	Integer Overflow and Underflow.	Passed
8	DoS with Revert.	Passed
9	DoS with block gas limit.	Passed
10	Methods execution permissions.	Passed
11	Economy model.	Passed
12	The impact of the exchange rate on the logic.	Passed
13	Private user data leaks.	Passed
14	Malicious Event log	Passed
15	Scoping and Declarations.	Passed
16	Uninitialized storage pointers.	Passed
17	Arithmetic accuracy.	Passed
18	Design Logic.	Passed
19	Cross-function race conditions.	Passed
20	Safe Zeppelin module	Passed
21	Fallback function security.	Passed

Audit Result:

PASSED

WEBSITE - OVERVIEW



SSL CERTIFICATE: A

(https://www.ssllabs.com)

SOCIAL MEDIA - OVERVIEW



WALLET_VPN



WALLETVPN



WALLETVPN.IO