

# PREMIUM AUDIT

NAME OF PROJECT	DeForce
FILE .SOL AUDITED	0x9897f18bCA7D232cC3f7312DC577B4b652E38c11
WEBSITE / TELEGRAM	http://www.Deforce.org



DISCLAIMER: PLEASE READ FULL AUDIT



#### **IMPORTANT DISCLAIMER**

NOT RESPONSIBLE Analytix Audit holds no responsibility for any actions from the project in this audit.

II. NOT GUARANTEE

Analytix Audit in no way guarantees that a project will not remove liquidity, sell off team tokens, or exit scam.

III. INFORMATION

Analytix Audit researches and provides public information about the project in an easy-to-understand format for the common person.

IV.

**AUDIT AGREEMENT** This audit agreement does not guarantee ANY illicit actions by the project team and does not serve as an advocation for the project.

٧.

NO ADVICE


Analytix Audit in no way takes responsibility for any losses, not does Analytix Audit encourage any speculative investments.

۷١.

DISCLAIMER

The information provided in this audit is for information purposes only and should not be considered investment advice. Analytix Audit does not endorse, recommend, support, or suggest any projects that have been audited.

# **TOKENOMICS - OVERVIEW**

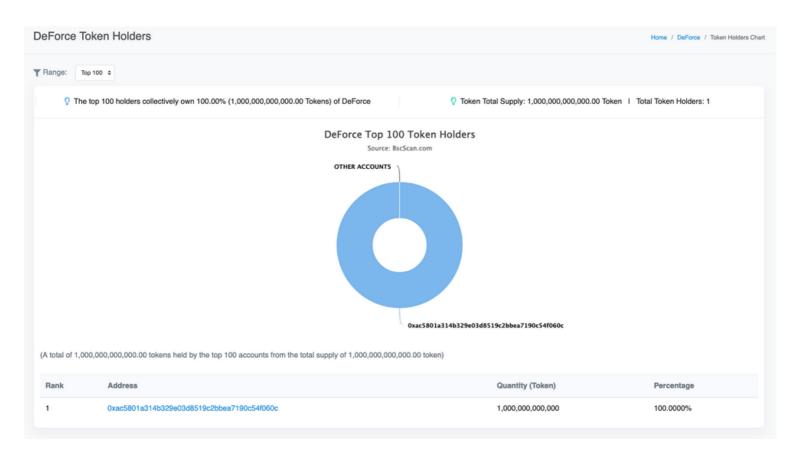

#### More than 15% tokens are unlocked

(This comment refers to when the audit was carried out maybe team locked tokens later)

### **CONTRACT CODE - PRIVILEGES**

```
* Requirements:

* The calling contract must have an ETH balance of at least 'value'.

* The calling contract must be 'payable'.

* Available since v3.1._

* Available since v3.1._

* Jeturn function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value

* Teturn functionCallWithValue(target, data, value, "Address: low-level call with value failed");

* Billion of the call with 'errorMessage' as a fallback revert reason when 'target' reverts.

* Available since v3.1._

* Jeturn functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value

* Jinction functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value,

* Jinction functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value,

* String memory errorMessage

* Jinternal returns (bytes memory) {
    require(address(this).balance >= value, "Address: insufficient balance for call");
    require(address(this).balance >= value, "Address: insufficient balance for call");
    require(isContract(target), "Address: call to non-contract");

* Chool success, bytes memory returndata) = target.call{value: value}(data);
```

- Mint: Owner cannot mint new tokens
- Fees: Owner can't change fees over 25%
- **Trading:** Owner can't change trading status (Owner has to enable it)
- Max Tx: Owner can't change maxTx
- Max Wallet: Owner can't change max wallet
- Blacklist: Owner cannot blacklist wallet

## **Owner Privileges:**

```
* Requirements:

* - the calling contract must have an ETH balance of at least 'value'.

* - the called Solidity function must be 'payable'.

* - the called Solidity function must be 'payable'.

* Available since v3.1._

*/

* function functionCallWithValue(
    address target,
    bytes memory data,
    uint256 value

* jinternal returns (bytes memory) {
    return functionCallWithValue(target, data, value, "Address: low-level call with value failed");

* gdev Same as {xref-Address-functionCallWithValue-address-bytes-uint256-}['functionCallWithValue'], but

* with 'errorWessage' as a fallback revert reason when 'target' reverts.

* _Available since v3.1._

*/

* function functionCallWithValue(
    address target,
    bytes memory ata,
    uint256 value,

* string memory data,
    uint256 value,

* string memory (bytes memory) {
    require(address(this).balance >= value, "Address: insufficient balance for call");
    require(isContract(target), "Address: call to non-contract");

* (bool success, bytes memory returndata) = target.call{value: value}(data);
```

```
function transferOwner(address newOwner) external onlyOwner {
                         function renounceOwnership() external onlyOwner {
                   function setNewRouter(address newRouter) external onlyOwner {
                  function setLpPair(address pair, bool enabled) external onlyOwner {
                     function setInitializer(address initializer) external onlyOwner {
           function setExcludedFromFees(address account, bool enabled) public onlyOwner {
       function setExcludedFromProtection(address account, bool enabled) external onlyOwner {
                     function removeSniper(address account) external onlyOwner {
          function setProtectionSettings(bool _antiSnipe, bool _antiBlock) external onlyOwner {
                               function lockTaxes() external onlyOwner {
       function setTaxes(uint16 buyFee, uint16 sellFee, uint16 transferFee) external onlyOwner {
               function setRatios(uint16 liquidity, uint16 marketing) external onlyOwner {
                 function setWallets(address payable marketing) external onlyOwner {
      function setPriceImpactSwapAmount(uint256 priceImpactSwapPercent) external onlyOwner {
function setContractSwapEnabled(bool swapEnabled, bool priceImpactSwapEnabled) external onlyOwner
        function excludePresaleAddresses(address router, address presale) external onlyOwner {
                             function enableTrading() public onlyOwner {
                          function sweepContingency() external onlyOwner {
function multiSendTokens(address[] memory accounts, uint256[] memory amounts) external onlyOwner {
```


# **Issue Checking:**

N°	Issue description.	Checking Status.
1	Compiler Errors	Passed
2	Race conditions and Reentrancy. Cross-function race conditions.	Passed
3	Possible delays in data delivery.	Passed
4	Oracle calls.	Passed
5	Front running.	Passed
6	Timestamp dependence.	Passed
7	Integer Overflow and Underflow.	Passed
8	DoS with Revert.	Passed
9	DoS with block gas limit.	Passed
10	Methods execution permissions.	Passed
11	Economy model.	Passed
12	The impact of the exchange rate on the logic.	Passed
13	Private user data leaks.	Passed
14	Malicious Event log	Passed
15	Scoping and Declarations.	Passed
16	Uninitialized storage pointers.	Passed
17	Arithmetic accuracy.	Passed
18	Design Logic.	Passed
19	Cross-function race conditions.	Passed
20	Safe Zeppelin module	Passed
21	Fallback function security.	Passed

### **Audit Result:**

**PASSED** 

### **WEBSITE - OVERVIEW**

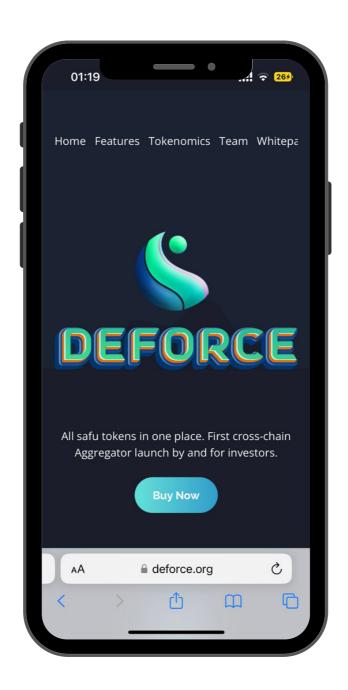

## Domain Registration:

1 year (2023-09-16)

### **SSL CERTIFICATE: A**

(https://www.ssllabs.com)

### **SOCIAL MEDIA - OVERVIEW**





