

Exercise 2

1. Task 1: Setup and use remote terraform backend


1. In the previous exercise you have created code that creates a storage account. Now we will configure and use that storage account as our backend for terraform. (if you have deleted that storage account, just reapply your terraform code from your previous exercise).


- I have deleted the resources from my previous exercise, and now I reapplied my terraform code.

1.1. Create a Container in the storage account named "tfstate" with default settings.

1.2. Inside the created container, upload an empty file named "<my_name>.tfstate".

```
resource "azurerm_storage_container" "example" {  
  name = "tfstate"  
  storage_account_name = azurerm_storage_account.example.name  
  container_access_type = "private"  
}  
  
# creating file in the storage container  
resource "azurerm_storage_blob" "example" {  
  name = "ana.tfstate"  
  storage_account_name = azurerm_storage_account.example.name  
  storage_container_name = azurerm_storage_container.example.name  
  type = "Block"  
}
```

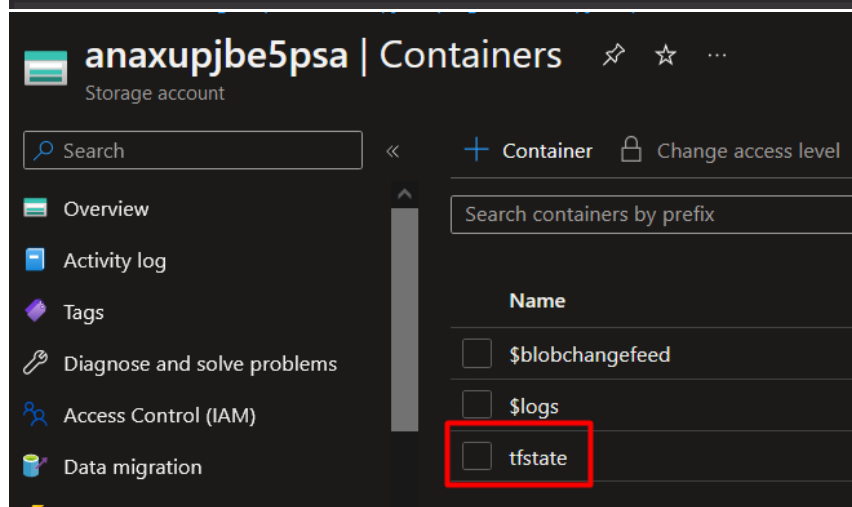

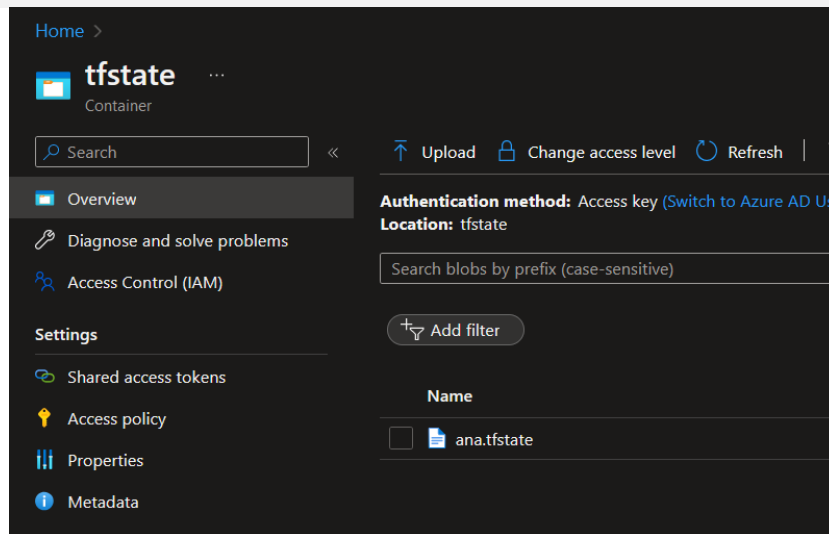

2. Configure your terraform to use the azurerm remote backend.
 - 2.1. Read the terraform documentation for azurerm terraform backend configuration (use authentication using Azure CLI).
 - 2.2. Add the backend configuration to your terraform code.
 - 2.2.1. Create a main.tf file and paste the code snippet from the documentation for backend configuration.
 - 2.2.2. Replace the values accordingly:
 - resource_group_name – The resource group where the terraform state storage account can be found.
 - storage_account_name – The storage account name in which the state will be kept.
 - container_name – The name of the container which will hold the blob with terraform state.
 - key – the name of the empty file that you uploaded in step 1.2.
 - 2.3. In case where we have multiple backends configurations for different environments where we configure them in pipelines, we want to be able to switch between different backend configurations for local development also. For this we will use different backend file for each environment.
 - 2.3.1. Create a subdirectory inside your current directory named “backends.”
 - 2.3.2. Create a file named <my_name>_env_backend.tf
 - 2.3.3. Move the content from the block – backend “azurerm” in main.tf to the <my_name>_env_backend.tf
 - 2.3.4. The files should have the following content:
 - main.tf

```
terraform {
  backend "azurerm" {}
}
```

- <my_name>_env_backend.tf

```
resource_group_name = "boris0jbjtlfq-rg"
storage_account_name = "boris0jbjtlfqsa"
container_name      = "tfstate"
key                 = "boris.tfstate"
```

3. Add the provider configuration for azure without version limitation.

- 3.1. Follow the guidelines from previous exercise about the provider configuration.
4. Initialize your terraform code with the `azurerm_subscription` data source.

- Add the following line in your code.

```
data "azurerm_subscription" "current" {}
```

5. Initialize your terraform code.
- 5.1. Execute the following command.

```
terraform init --backend-config=backends/<my_name>_env_backend.tf
```

- We execute the following command:
`terraform init --backend-config=backends/ana_env_backend.tf`

- 5.2. The code should initialize successfully and should give you the following output.

```
Initializing the backend...

Successfully configured the backend "azurerm"! Terraform will automatically
use this backend unless the backend configuration changes.

Initializing provider plugins...
- Finding latest version of hashicorp/azurerm...
- Installing hashicorp/azurerm v3.51.0...
- Installed hashicorp/azurerm v3.51.0 (signed by HashiCorp)

Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

6. With this we have finalized our remote backend setup and we can define different backends and switch between them using the command option `--backend-config`

```
nikki@DESKTOP-I298DGN:~/terraform-azure$ terraform init --backend-config=backends/ana_env_backend.tf
Initializing the backend...

Initializing provider plugins...
- Reusing previous version of hashicorp/random from the dependency lock file
- Reusing previous version of hashicorp/azurerm from the dependency lock file
- Using previously-installed hashicorp/random v3.5.1
- Using previously-installed hashicorp/azurerm v3.55.0

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
nikki@DESKTOP-I298DGN:~/terraform-azure$
```

2. Task 2: Define the network resources from your second midterm assignment

1. During your midterm assignment we have defined few network resources that were shared and needed to be created before the virtual machine can be deployed and configured and were not owned by the VM itself. Those resources are:
 - resource group – base resource used for logical grouping of the resources.
 - virtual network (VNet) – where the virtual machine will be hosted.
 - subnet – the subnet where the virtual machine will be deployed.
2. Since the resources that will be created are being managed from one terraform code, the simplest way of recognizing that is to use standardized naming for your resources and the simplest grouping of the resources in the code is to use same terraform resource names.

2.1. In the first exercise we have utilized the local values to give standardized names to our resources. Here we will use the same approach.

2.1.1. Define local value named `base_name` with the concatenated values of variables `my_name` and `environment`.

```
base_name = "${var.my_name}-${var.environment}"
```

2.1.2. Declare the variables `my_name` and `environment` in the `variable.tf` file.

2.1.3. Define values for the variables in your `tfvars` file.

2.1.4. Define network resources `network_base_name` prefix.

```
network_base_name = "${local.base_name}-ntwrk"
```

2.2. Execute terraform plan with the input from your `tfvars` file.

2.2.1. You should not see any errors and your output should be like below. If you have any errors, then you have written something incorrectly in your code. Try to resolve it by reading the error message.

```
data.azurearm_subscription.current: Reading...
data.azurearm_subscription.current: Read complete after 1s [id=/subscriptions/f65065a1-4bb6-48b4-bc72-e71cccfcc6]

No changes. Your infrastructure matches the configuration.

Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
```

```
data.azurearm_subscription.current: Reading...
data.azurearm_subscription.current: Read complete after 1s [id=/subscriptions/6ad3de4b-8806-45a3-bdae-c42ab48bc868]

No changes. Your infrastructure matches the configuration.

Terraform has compared your real infrastructure against your configuration and found no differences, so no changes are needed.
nikki@DESKTOP-I298DGN:~/terraform-midterms$
```

3. Define the general network resources.

3.1. Create a resource group with following parameters (see terraform registry documentation for `azurerm_resource_group`):

- Terraform resource name - `general_network`
- name - `${local.network_base_name}-rg`
- location - `var.location`

3.2. Create a virtual network with following parameters (`azurerm_virtual_network`):

- Terraform resource name - `general_network`
- name - `${local.network_base_name}-vnet`
- location - reference the `general_network` resource group location attribute.
- resource_group_name - reference the `general_network` resource group name attribute.
- address_space - `["10.0.0.0/16"]`

3.3. Create a subnet with following parameters (`azurerm_subnet`):

- Terraform resource name - `general_network_vms`.
- name - `${azurerm_virtual_network.general_network.name}-vms-snet`
- resource_group_name - reference the `general_network` resource group name attribute.
- virtual_network_name - reference the `general_network` virtual network name attribute.
- address_prefixes - `["10.0.1.0/24"]`

3.4. Execute terraform plan with the input from your `tfvars` file.

3.4.1. Your plan should not throw any errors. If any errors found troubleshoot your code from the error information.

```
data.azurerm_subscription.current: Reading...
data.azurerm_subscription.current: Read complete after 1s [id=/subscriptions/6ad3de4b-8806-45a3-bdae-c42ab48bc868]
```

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:

+ create

Terraform will perform the following actions:

```
# azurerm_resource_group.general_network will be created
+ resource "azurerm_resource_group" "general_network" {
  + id          = (known after apply)
  + location    = "westeurope"
  + name        = "ana-azure-ntwrk-rg"
}

# azurerm_subnet.general_network_vms will be created
+ resource "azurerm_subnet" "general_network_vms" {
  + address_prefixes = [
    + "10.0.1.0/24",
  ]
  + enforce_private_link_endpoint_network_policies = (known after apply)
  + enforce_private_link_service_network_policies = (known after apply)
  + id                                              = (known after apply)
  + name                                            = "ana-azure-ntwrk-vnet-vms-snet"
  + private_endpoint_network_policies_enabled     = (known after apply)
  + private_link_service_network_policies_enabled = (known after apply)
  + resource_group_name                           = "ana-azure-ntwrk-rg"
  + virtual_network_name                         = "ana-azure-ntwrk-vnet"
}

# azurerm_virtual_network.general_network will be created
+ resource "azurerm_virtual_network" "general_network" {
  + address_space = [
    + "10.0.0.0/16",
  ]
  + dns_servers   = (known after apply)
  + guid          = (known after apply)
  + id            = (known after apply)
  + location      = "westeurope"
  + name          = "ana-azure-ntwrk-vnet"
  + resource_group_name = "ana-azure-ntwrk-rg"
  + subnet        = (known after apply)
}
```

1. Task 3: Define and group the virtual machine and its resources into a module

1. Since we have already defined the base resources that are general and not directly related to the virtual machine, now we can start working on the Linux virtual machine declaration. If we look at the resource `azurerm_linux_virtual_machine` in terraform registry, there are some other resources (components) of the virtual machine that need to be declared first and assigned to the virtual machine. Those resources are:
 - resource group - the group where the virtual machine will be placed. We will use this resource. group for the resto of the VM components also, so we can have clear understanding what belongs and where.
 - public IP - this is not related directly to our virtual machine but to the network interface that is used by the virtual machine.
 - network interface - we need to define a network interface before we create a virtual machine.
 - network security group (NSG) - which will be configured for management and service public access by the virtual machine.
 - assignment of the NSG to the network interface - this is a separate resource in terraform because of the API functionality of the cloud provider.
2. Because here we will also use a module to group the resources configuration, the first step for the module creation is the creation of the directory and the basic module configurations.
 - 2.1. In your current directory create a subdirectory named "vm_module".
 - 2.2. Next, inside the directory we will create our required files for terraform code and variables. Inside the directory create files named `main.tf` and `variables.tf`

```
nikki@DESKTOP-I298DGN:~/terraform-midterms$ mkdir vm_module
nikki@DESKTOP-I298DGN:~/terraform-midterms$ cd vm_module/
nikki@DESKTOP-I298DGN:~/terraform-midterms/vm_module$ nano main.tf
● nikki@DESKTOP-I298DGN:~/terraform-midterms/vm_module$ nano variables.tf
● nikki@DESKTOP-I298DGN:~/terraform-midterms/vm_module$ ls
main.tf  variables.tf
○ nikki@DESKTOP-I298DGN:~/terraform-midterms/vm_module$ █
```

3. Since the components here are being defined to be used by the VM as resource, we will create one common name which will be the base for the resources.
 - 3.1. Follow the instructions from previous task and define local value name "vm_name" in `main.tf`, that will have the concatenated value of the base name variable and abbreviated with vm (don't forget to declare the variable in `variable.tf`):

```
vm_name = "${var.base_name}-vm"
```

4. Define the resources.
 - 4.1. Define the `azurerm_resource_group` resource with following parameters:
 - Terraform resource name - vm
 - name - `${local.vm_name}-rg`
 - location - `var.location`
 - 4.2. Define the `azurerm_public_ip` with the following parameters:
 - Terraform resource name - vm

- name - `${local.vm_name}-pip`
- resource_group_name - reference the name attribute of the vm resource group
- location - reference the location attribute of the vm resource group
- allocation_method - Static

4.3. Define the `azurerm_network_interface` resource with following parameters:

- Terraform resource name - `vm`
- `name` - `${local.vm_name}-nic`
- `resource_group_name` - reference the name attribute of the `vm` resource group
- `location` - reference the location attribute of the `vm` resource group
- under the `ip_configuration` block, define the following parameters:
 - `name` - `external`
 - `subnet_id` - `var.vms_subnet_id` (define the variable in the `variables.tf` file)
 - `private_ip_address_allocation` - `Dynamic`
 - `public_ip_address_id` - reference the attribute `id` from the `vm` public ip resource

4.4. Define the `azurerm_network_security_group` resource with the following parameters

- Terraform resource name - `vm`
- `name` - `${azurerm_network_interface.vm.name}-nsg`
- `resource_group_name` - reference the name attribute of the `vm` resource group
- `location` - reference the location attribute of the `vm` resource group
- define the first `security_rule` block with following parameters
 - `name` - `allow_ssh_from_my_ip`
 - `priority` - `110`
 - `direction` - `Inbound`
 - `access` - `Allow`
 - `protocol` - `Tcp`
 - `destination_port_range` - `22`
 - `source_address_prefix` - `var.my_public_ip` (define the variable in the `variables` file)
 - `destination_address_prefix` - `"*"`
 - `source_port_range` - `"*"`
- define the second `security_rule` block with following parameters
 - `name` - `allow_http_from_my_ip`
 - `priority` - `100`
 - `direction` - `Inbound`
 - `access` - `Allow`
 - `protocol` - `Tcp`
 - `destination_port_range` - `80`
 - `source_address_prefix` - `var.my_public_ip`
 - `destination_address_prefix` - `"*"`
 - `source_port_range` - `"*"`

4.5. Now we need to associate the network interface and the network security group using the resource called `network_interface_security_group_association` with following parameters:

- Terraform resource name - `vm_nsg_to_vm_nic`
- `network_interface_id` - reference the id attribute of the vm nic resource
- `network_security_group_id` - reference the id attribute of the vm nsg resource

4.6. And at the end we came to the point where we need to define the virtual machine resource `azurerm_linux_virtual_machine` with following parameters:

- Terraform resource name - `web_srv`
- `name` - the local value `vm_name`
- `resource_group_name` - reference the name attribute of the vm resource group
- `location` - reference the location attribute of the vm resource group
- `size` - `Standard_B2s`
- `admin_username` - `adminuser`
- `network_interface_ids` - [`azurerm_network_interface.vm.id`]
- `admin_password` - `var.my_password`
- `disable_password_authentication` - `false`
- in the `os_disk` block define the following parameters:
 - `caching` - `ReadWrite`
 - `storage_account_type` - `Standard_LRS`
- In the `source_image_reference` block define the following parameters:
 - `publisher` - `Canonical`
 - `offer` - `UbuntuServer`
 - `sku` - `18.04-LTS`
 - `version` - `latest`
- Since we defined all module resources, now we need to call the module from our root `main.tf` file
 - Declare the module named `vm` with source in the directory `vm_module`:

```
module "vm" {  
  source      = "./vm_module"  
  base_name   = local.base_name  
  location    = var.location  
}
```

4.7. Add the rest of the variables that you have defined with their respective values:

- `vms_subnet_id` - reference the id attribute from the `general_network_vms` subnet resource
- `my_public_ip` - define it as input variable in the variables file and assign your public ip in the `tfvars` file
- `my_password` - define it as input variable in the variables file and assign value in the `tfvars` file (not recommended in real use case)

- 4.8. When we add a module to our code, we need to reinitialize our terraform code
- 4.9. Now we can execute terraform plan with input from tfvars file
- 4.10. Since we have declared the public ip in the code, we would need to get it as an output from our code
 - 4.10.1. In the vm_module directory create file named outputs.tf
 - 4.10.2. Inside the file define an output value named "vm_public_ip" for the attribute ip_address from the vm public ip resource
 - 4.10.3. Reference the output value as your code output value like bellow:

```
output "vm_public_ip" {  
  value = module.vm.vm_public_ip  
}
```

- 4.11. As last execute another terraform plan with input variables from file and it should be without any errors. If you have errors correct them.

```
nikki@DESKTOP-I298DGN:~/terraform-midterms$ terraform plan --var-file=inputs.tfvars  
var.my_public_ip  
Enter a value: 185.100.244.35  
  
data.azurerm_subscription.current: Reading...  
module.vm.data.azurerm_subscription.current: Reading...  
module.vm.data.azurerm_subscription.current: Read complete after 1s [id=/subscriptions/6ad3de4b-8806-45a3-bdae-c42ab48bc868]  
data.azurerm_subscription.current: Read complete after 1s [id=/subscriptions/6ad3de4b-8806-45a3-bdae-c42ab48bc868]  
  
Terraform used the selected providers to generate the following  
execution plan. Resource actions are indicated with the following  
symbols:  
+ create  
  
Terraform will perform the following actions:  
  
# azurerm_resource_group.general_network will be created  
+ resource "azurerm_resource_group" "general_network" {  
  + id          = (known after apply)  
  + location    = "westeurope"  
  + name        = "ana-azure-ntwrk-rg"  
}  
  
# azurerm_subnet.general_network_vms will be created  
+ resource "azurerm_subnet" "general_network_vms" {  
  + address_prefixes = [  
    + "10.0.1.0/24",  
  ]  
  + enforce_private_link_endpoint_network_policies = (known after apply)  
  + enforce_private_link_service_network_policies = (known after apply)  
  + id = (known after apply)  
  + name = "ana-azure-ntwrk-vnet-vms-snet"  
  + private_endpoint_network_policies_enabled = (known after apply)  
  + private_link_service_network_policies_enabled = (known after apply)  
  + resource_group_name = "ana-azure-ntwrk-rg"  
  + virtual_network_name = "ana-azure-ntwrk-vnet"  
}
```

```
# azurerm_virtual_network.general_network will be created
+ resource "azurerm_virtual_network" "general_network" {
  + address_space      = [
    + "10.0.0.0/16",
  ]
  + dns_servers        = (known after apply)
  + guid               = (known after apply)
  + id                 = (known after apply)
  + location            = "westeurope"
  + name               = "ana-azure-ntwrk-vnet"
  + resource_group_name = "ana-azure-ntwrk-rg"
  + subnet             = (known after apply)
}

# module.vm.azurelinux_virtual_machine.web_srv will be created
+ resource "azurerm_linux_virtual_machine" "web_srv" {
  + admin_password      = (sensitive value)
  + admin_username      = "adminuser"
  + allow_extension_operations = true
  + computer_name        = (known after apply)
  + disable_password_authentication = false
  + extensions_time_budget = "PT1H30M"
  + id                  = (known after apply)
  + location             = "westeurope"
  + max_bid_price        = -1
  + name                 = "ana-azure-vm"
  + network_interface_ids = (known after apply)
  + patch_assessment_mode = "ImageDefault"
  + patch_mode           = "ImageDefault"
  + platform_fault_domain = -1
  + priority             = "Regular"
  + private_ip_address    = (known after apply)
  + private_ip_addresses  = (known after apply)
  + provision_vm_agent    = true
  + public_ip_address     = (known after apply)
  + public_ip_addresses   = (known after apply)
  + resource_group_name   = "ana-azure-vm-rg"
  + size                 = "Standard_B2s"
  + virtual_machine_id    = (known after apply)
}
```

```
+ resource_group_name      = "ana-azure-vm-rg"
+ size                     = "Standard_B2s"
+ virtual_machine_id       = (known after apply)

+ os_disk {
  + caching                = "ReadWrite"
  + disk_size_gb           = (known after apply)
  + name                   = (known after apply)
  + storage_account_type   = "Standard_LRS"
  + write_accelerator_enabled = false
}

+ source_image_reference {
  + offer      = "UbuntuServer"
  + publisher  = "Canonical"
  + sku        = "18.04-LTS"
  + version    = "latest"
}
}

# module.vm.azure_rm_network_interface.vm will be created
+ resource "azurerm_network_interface" "vm" {
  + applied_dns_servers      = (known after apply)
  + dns_servers              = (known after apply)
  + enable_accelerated_networking = false
  + enable_ip_forwarding     = false
  + id                       = (known after apply)
  + internal_dns_name_label   = (known after apply)
  + internal_domain_name_suffix = (known after apply)
  + location                 = "westeurope"
  + mac_address              = (known after apply)
  + name                     = "ana-azure-vm-nic"
  + private_ip_address       = (known after apply)
  + private_ip_addresses     = (known after apply)
  + resource_group_name      = "ana-azure-vm-rg"
  + virtual_machine_id       = (known after apply)
```

```

+ ip_configuration {
+   gateway_load_balancer_frontend_ip_configuration_id = (known after apply)
+   name                                               = "external"
+   primary                                           = (known after apply)
+   private_ip_address                               = (known after apply)
+   private_ip_address_allocation                     = "Dynamic"
+   private_ip_address_version                       = "IPv4"
+   public_ip_address_id                             = (known after apply)
+   subnet_id                                         = (known after apply)
+ }
}

# module.vm.azure_rm_network_interface_security_group_association.vm_nsg_to_vm_nic will be created
+ resource "azure_rm_network_interface_security_group_association" "vm_nsg_to_vm_nic" {
+   id                = (known after apply)
+   network_interface_id = (known after apply)
+   network_security_group_id = (known after apply)
+ }

# module.vm.azure_rm_network_security_group.vm will be created
+ resource "azure_rm_network_security_group" "vm" {
+   id                = (known after apply)
+   location          = "westeurope"
+   name              = "ana-azure-vm-nic-nsg"
+   resource_group_name = "ana-azure-vm-rg"
+   security_rule      = [
+     + {
+       + access                = "Allow"
+       + description           = ""
+       + destination_address_prefix = "*"
+       + destination_address_prefixes = []
+       + destination_application_security_group_ids = []
+       + destination_port_range = "22"
+       + destination_port_ranges = []
+       + direction             = "Inbound"
+       + name                   = "allow_ssh_from_my_ip"
+       + priority               = 110
+       + protocol               = "Tcp"
+       + source_address_prefix = "185.100.244.35"

```

```

+ protocol = "Tcp"
+ source_address_prefix = "185.100.244.35"
+ source_address_prefixes = []
+ source_application_security_group_ids = []
+ source_port_range = "*"
+ source_port_ranges = []
},
+ {
+ access = "Allow"
+ description = ""
+ destination_address_prefix = "*"
+ destination_address_prefixes = []
+ destination_application_security_group_ids = []
+ destination_port_range = "80"
+ destination_port_ranges = []
+ direction = "Inbound"
+ name = "allow_http_from_my_ip"
+ priority = 100
+ protocol = "Tcp"
+ source_address_prefix = "185.100.244.35"
+ source_address_prefixes = []
+ source_application_security_group_ids = []
+ source_port_range = "*"
+ source_port_ranges = []
},
]
}

# module.vm.azure_rm_public_ip.vm will be created
+ resource "azurerm_public_ip" "vm" {
+ allocation_method = "Static"
+ ddos_protection_mode = "VirtualNetworkInherited"
+ fqdn = (known after apply)
+ id = (known after apply)
+ idle_timeout_in_minutes = 4
+ ip_address = (known after apply)
+ ip_version = "IPv4"
+ location = "westeurope"
+ name = "ana-azure-vm-pip"
+ resource_group_name = "ana-azure-vm-rg"
+ sku = "Basic"
}

```

```

# module.vm.azure_rm_resource_group.vm will be created
+ resource "azurerm_resource_group" "vm" {
+ id = (known after apply)
+ location = "westeurope"
+ name = "ana-azure-vm-rg"
}

```

Plan: 9 to add, 0 to change, 0 to destroy.

5. Apply the terraform code

```

Plan: 9 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.

Enter a value: yes

azurerm_resource_group.general_network: Creating...
module.vm.azure_rm_resource_group.vm: Creating...

```

```
module.vm.azurelinux_virtual_machine.web_srv: Still creating... [21s elapsed]
module.vm.azurelinux_virtual_machine.web_srv: Still creating... [32s elapsed]
module.vm.azurelinux_virtual_machine.web_srv: Still creating... [42s elapsed]
module.vm.azurelinux_virtual_machine.web_srv: Creation complete after 51s [id=/subscriptions/6ad3de4b-8806-45a3-bdae-c42ab48bc868/resourceGroups/ana-azure-vm-rg/providers/Microsoft.Compute/virtualMachines/ana-azure-vm]
```

Apply complete! Resources: 9 added, 0 changed, 0 destroyed.

6. Get the public IP from the output
7. Connect to the vm using ssh with user adminuser. Usually takes around 2 minutes for the VM to be ready.
8. When successfully connected you should see the prompt from the VM. Provide print screen from it.

```
nikki@DESKTOP-I298DGN:~/terraform-midterms$ ssh adminuser@65.52.146.25
The authenticity of host '65.52.146.25 (65.52.146.25)' can't be established.
ECDSA key fingerprint is SHA256:apk6rcxuUAOrwo31NPP0vkBkvQOyehLKgPU9YyJGSXo.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '65.52.146.25' (ECDSA) to the list of known hosts.
Connection closed by 65.52.146.25 port 22
nikki@DESKTOP-I298DGN:~/terraform-midterms$ ssh adminuser@65.52.146.25
adminuser@65.52.146.25's password:
Welcome to Ubuntu 18.04.6 LTS (GNU/Linux 5.4.0-1107-azure x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

System information as of Wed May 10 22:03:37 UTC 2023

System load: 0.0          Processes:            112
Usage of /:  4.5% of 28.89GB Users logged in:        0
Memory usage: 5%          IP address for eth0: 10.0.1.4
Swap usage:  0%

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status


The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

adminuser@ana-azure-vm:~$
```

9. Review all of your resources on the subscription and provide print screen of the resource groups.
10. Take the time to observe the resources that you created and how the code reflects to the resources.

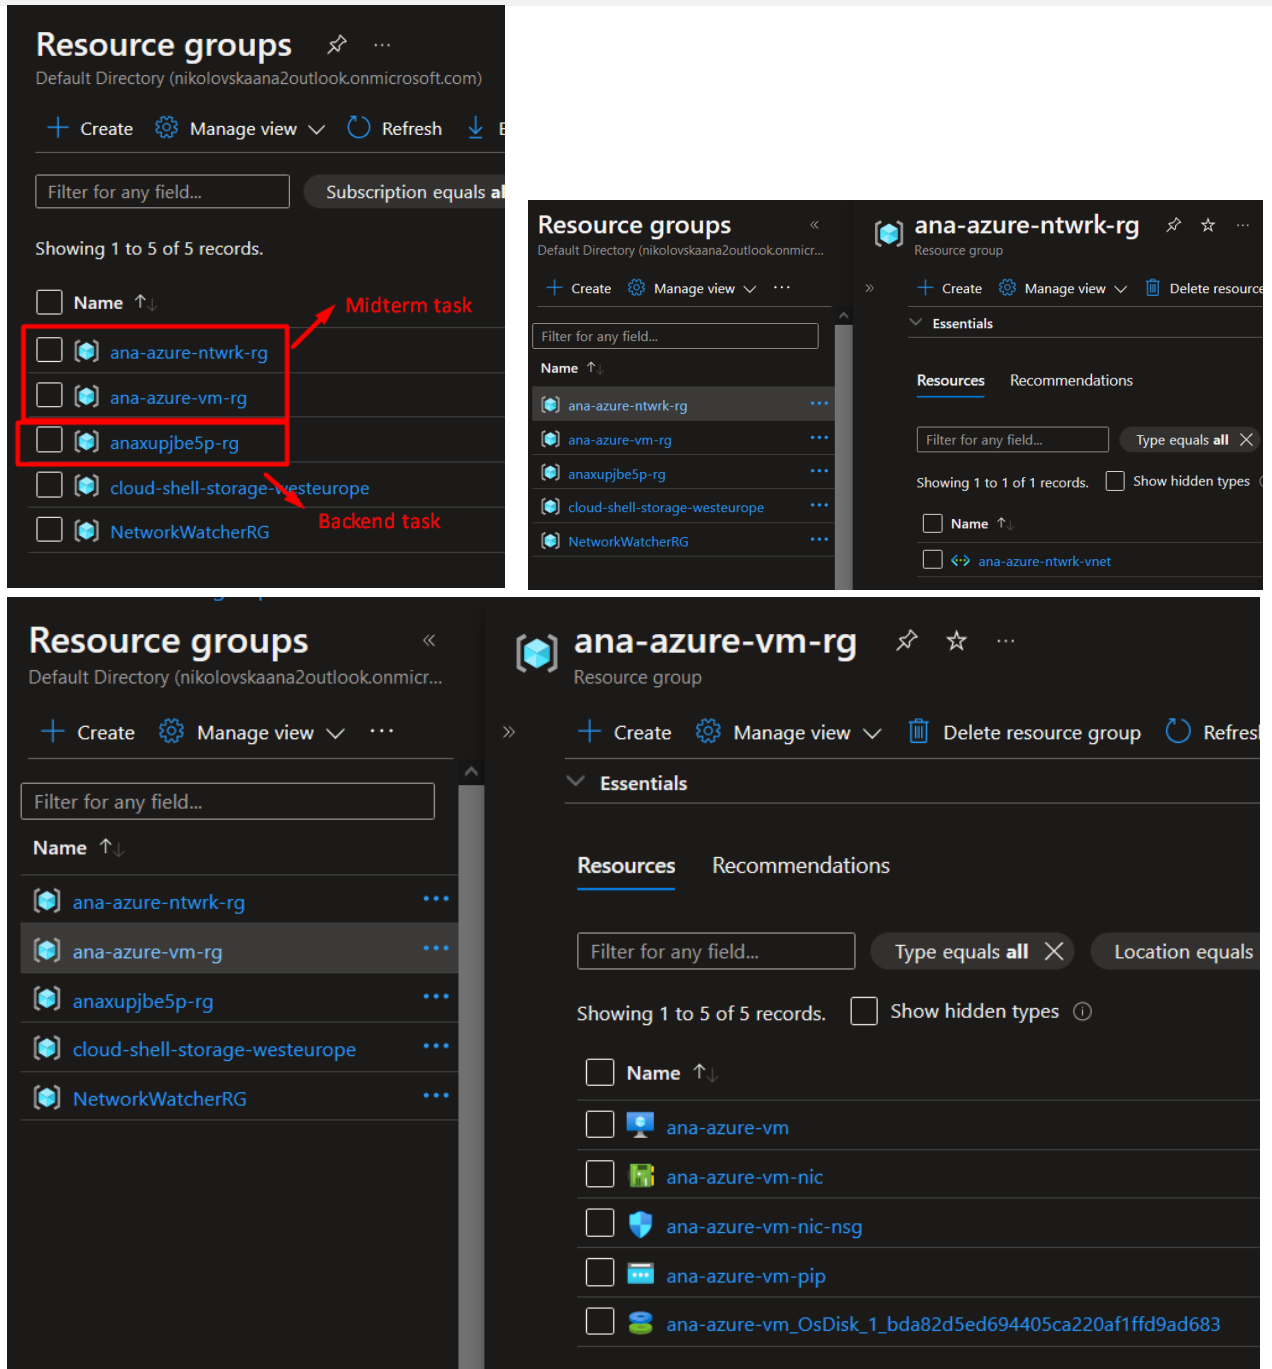

The screenshots illustrate the Azure portal interface for managing resource groups. The first screenshot shows a list of resource groups with a red box highlighting 'ana-azure-ntwrk-rg', 'ana-azure-vm-rg', and 'anaxupjbe5p-rg'. Red arrows point from these groups to the text 'Midterm task' and 'Backend task'. The second screenshot shows the details of 'ana-azure-ntwrk-rg'. The third screenshot shows the details of 'ana-azure-vm-rg'. The fourth screenshot shows the details of 'ana-azure-ntwrk-rg' again, but with a different set of resources listed.

11. Once completed, destroy the resources that you created using terraform destroy command with the parameter from input tfvars file (similar to plan and apply)

```

nikki@DESKTOP-I298DGN:~/terraform-midterms$ terraform destroy -var-file=inputs.tfvars
var.my_public_ip
Enter a value: 185.100.244.35

data.azurerm_subscription.current: Reading...
azurerm_resource_group.general_network: Refreshing state... [id=/subscriptions/6ad3de4b-
azurerm_virtual_network.general_network: Refreshing state... [id=/subscriptions/6ad3de4b-

```

```
azurerm_virtual_network.general_network: Destruction complete after 11s
azurerm_resource_group.general_network: Destroying... [id=/subscriptions/6a
module.vm.azure_rm_resource_group.vm: Destruction complete after 17s
azurerm_resource_group.general_network: Still destroying... [id=/subscripti
azurerm_resource_group.general_network: Destruction complete after 16s
```

```
Destroy complete! Resources: 9 destroyed.
```

```
o nikki@DESKTOP-I298DGN:~/terraform-midterms$
```

12. Once the destroy command has completed go with your terminal context to the directory from exercise 1 and execute terraform destroy over there also using the tfvars file input parameter
 - After running the terraform destroy command I got an error connected to the blob ana.tfstate. I needed to add the lease_id in the "azurerm_storage_blob".

```
o nikki@DESKTOP-I298DGN:~/terraform-azure$ terraform destroy -var-file=inputs.tfvars
random_string.random: Refreshing state... [id=xupjbe5p]
azurerm_resource_group.example: Refreshing state... [id=/subscriptions/6ad3de4b-8806-45a
data.azure_rm_subscription.current: Reading...
data.azure_rm_subscription.current: Read complete after 0s [id=/subscriptions/6ad3de4b-8806-45a
```

```
Do you really want to destroy all resources?
```

```
Terraform will destroy all your managed infrastructure, as shown above.
There is no undo. Only 'yes' will be accepted to confirm.
```

```
Enter a value: yes
```

```
azurerm_storage_blob.example: Destroying... [id=https://anaxupjbe5psa.blob.core.windows.net/tfstate/ana.tfstate]
```

```
Error: deleting Blob "ana.tfstate" (Container "tfstate" / Account "anaxupjbe5psa"): blobs.Client#Delete: Failure responding to request: StatusCode=412 -- Original Error: autorest/azure: Service returned an error. Status=412 Code="LeaseIdMissing" Message="There is currently a lease on the blob and no lease ID was specified in the request.\nRequestId:2b0e4288-201e-0046-448f-832447000000\nTime:2023-05-10T22:35:44.6379056Z"
```

- Steel after adding the lease_id the error persisted.

```
o nikki@DESKTOP-I298DGN:~/terraform-azure$ terraform destroy -var-file=inputs.tfvars
```

```
Error: Error acquiring the state lock
```

```
Error message: 2 errors occurred:
```

- * state blob is already locked
- * blob metadata "terraformlockid" was empty

```
Terraform acquires a state lock to protect the state from being written
by multiple users at the same time. Please resolve the issue above and try
again. For most commands, you can disable locking with the "-lock=false"
flag, but this is not recommended.
```

13. With this you have successfully completed the exercise and cleaned your subscription from the resources created from your code. (There will be a network watcher resource that is being created by azure automatically when we add vnet, and you can delete it manually)