

PPG-based Biometric Identification: Discovering and Identifying a New User

Yalan Ye¹, Guocheng Xiong¹, Zhengyi Wan¹, Tongjie Pan¹, Ziwei Huang¹

Abstract—The convenience of Photoplethysmography (PPG) signal acquisition from wearable devices makes it becomes a hot topic in biometric identification. A majority of studies focus on PPG biometric technology in a verification application rather than an identification application. Yet, in the identification application, it is an inevitable problem in discovering and identifying a new user. However, so far few works have investigated this problem. Existing approaches can only identify trained old users. Their identification model needs to be retrained when a new user joins, which reduces the identification accuracy. This work investigates the approach and performance of identifying both old users and new users on a deep neural network trained only by old users. We used a deep neural network as a feature extractor, and the distance of the feature vector to discover and identify a new user, which avoids retraining the identification model. On the BIDMC data set, we achieved an accuracy of more than 99% for old users, an accuracy of more than 90% for discovering a new user, and an average accuracy of about 90% for identifying a new user. Our proposed approach can accurately identify old users and has feasibility in discovering and identifying a new user without retraining in the identification application.

I. INTRODUCTION

Compared to fingerprint, iris and face biometric recognition technology, photoplethysmography (PPG) signal biometric technology has become the focus of current research due to its high security. PPG can be obtained from wearable devices and more convenient than other biomedical signals such as electrocardiogram (ECG) and electroencephalogram (EEG) signals. The PPG sensor is small in size, low in development cost, which provides people with a more efficient means of identification.

Generally, PPG-based identification systems are used for two applications: the verification application (one-to-one matching), is used to prove someone's identity by matching the acquired features only by the person's stored template, whereas the identification application (one-to-many matching) is used to identify a user by comparing his/her template with all the stored templates [1].

*This work was supported in part by a grant from the National Natural Science Foundation of China (No.61976047), in part by grants from Science & Technology Department of Sichuan Province of China (No. 2020YFG0087, 2020YFG0326 and 2021YFG0331), in part by a grant from the Fundamental Research Funds for the Central Universities (No. ZYGX2021YGLH016), and in part by a grant from the Open Innovation Fund of 55 Institute of China North Industries Group.

¹Y. Ye, G. Xiong, Z. Wan, T. Pan and Z. Huang are with the School of Computer Science and Engineering, University of Electronic Science and Technology of China, Chengdu 611731, China. (Email: yalan_ye@uestc.edu.cn; gorchun@163.com; jamsonwan92@gmail.com; tongjiepan@foxmail.com; qyziwei@163.com).

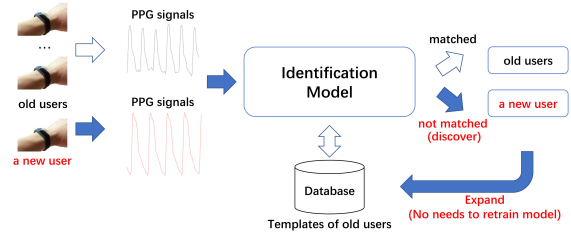


Fig. 1. Identification scenario for discovering a new user. The identification model doesn't need to retrain when a new user joins. This new user's feature can be automatically extracted and transformed into his/her template, then expanded by adding his/her template to the database.

For the verification application, Gu et al. [2] first proposed that PPG signals can be used for verification. Fourier analysis, fuzzy logic analysis, and linear discriminant analysis (LDA) [3] were used to process PPG signals, classification, and yielded an accuracy of more than 90%. For the identification application, the features extracted by discrete wavelet transform (DWT) were combined with support vector machine (SVM) to classify users in [4]. The study in [5] obtained three features by calculating the autocorrelation coefficients of raw PPG signal and its derivatives. K. Wang et al. [6] proposed a Crow Search Algorithm (CSA) to optimize the SVM classification model. Some researches [7] even extracted up to 40 features. The handcrafted feature extraction process is complicated and tedious.

Recently, an approach based on convolutional neural network (CNN) in conjunction with long and short-term memory (LSTM) neural network, proposed by L. Everson et al. [8], [9], was employed to move away from the complexity and instability of extracting handcrafted features. Based on this network structure, Dae Yon Hwang et al. [10] proposed PPSNet, achieve an average accuracy of 96% in a single session verification. They then evaluated the performance in two-sessions scenarios [11]. However, these approaches based on deep neural network learning have not been employed in the identification application. In addition, a trained neural network can only identify the trained users. When a new user joins, a model must be retrained for it.

Consequently, we envisaged an approach that can discover and identify a new user without retraining for the identification application. Fig. 1 shows this identification scenario. Templates of old users are added to the database during the training stage, and the model can discover a new user by matching the existing templates.

In this paper, our contribution is that we first proposed to use a deep network as a feature extractor, combined with the distance similarity to the cluster center to discover

TABLE I
A COMPREHENSIVE COMPARISON OF SOME EXISTING WORKS

Ref	Number of Users	Application	Feature Extraction		Classification		Expanding A New User	
			Method	Complex	Method	Complex	Method	Complex
[2]	17	Verification	Handcrafted Features	H	Discriminant Function	L	Retrain	M
[3]	29	Verification	Handcrafted Features	H	LDA	L	Retrain	M
[7]	40	Verification	Handcrafted Features	H	k-NN	M	Retrain	M
[8], [9]	20	Verification	Deep Features	M	Softmax	M	Retrain	H
[10], [11]	100	Verification	Deep Features	H	Softmax	M	Retrain	H
[4]	42	Identification	Handcrafted Features	H	k-NN + SVM	M	Retrain	M
[5]	38	Identification	Handcrafted Features	H	Minimum Distance Classifier	L	Retrain	M
[6]	50	Identification	Handcrafted Features	H	CSA-SVM	M	Retrain	M
Ours	53	Identification	Deep Features	M	Clustering + Distance Similarity	L	No retrain	L

* We denote the complexity of the method in the tables as High(H), Middle(M) and Low(L), which refers to the complexity analysis in [12].

* "Expanding a new user" denotes that whether the proposed method needs to be retrained when a new user joins and the price for retraining.

and identify a new user, which avoids the high time cost of retraining the model. Some similarities and differences between our work and previous studies are given in Table I. The performance of our work demonstrates that our proposed approach can accurately identify old users, and has feasibility in discovering and identifying a new user without retraining in the identification application.

II. METHOD

The overview of our proposed approach is given in Fig. 2. At the training stage, k users is selected as old users to train the deep network feature extractor, seek their cluster centers through clustering algorithm, so as to construct feature vectors and store them. Then, at the testing stage, features of a remaining new user are extracted through feature extractor. They are transformed into a feature vector according to their distance to cluster centers. Finally, similarity of two feature vectors is compared to identify whether it is an old user or a new user. More details are introduced below.

A. Preprocessing

A second-order Butterworth bandpass filter with a cutoff frequency 0.5Hz-5Hz was employed to eliminate noises. Then, we normalized the raw PPG signal to zero mean and unit variance. Systolic peak detection was applied to segment the raw PPG signal into individual heartbeats. Following this, the Pan Tompkins algorithm [13] is used to seek the correct peak value of a ppg signal. We utilized cubic spline interpolation to scale it to 128 samples and form a unified input format for deep neural networks.

B. Feature Extraction

A completely data-driven approach base on CNN in conjunction with LSTM, proposed by [8], [9], was adopted and modified by ourselves to automatically extract features from the ppg cycle sequence. Instead, they used it as a binary classifier for the verification application, while our idea is to train it as a feature extractor for the identification application. The implementation details are introduced below:

1) *Model Design*: A heartbeat cycle signal with 128 samples is served as the input of the network. Following the input layer are two 1-D convolutional layers consisted of a batch norm layer, a max-pooling layer, a dropout layer and a Rectified Linear Unit (ReLU) activation function. Two LSTM layers are then used to capture the temporal

properties. Finally, a dense layer with 32 neurons is used to retain the most discriminate features for clustering.

2) *Optimization*: Specially, we train the model by adding center loss L_c [14] with a balance parameter λ to traditional softmax loss L_s . The new loss function $L = L_s + \lambda L_c$ is used to update the parameters. Traditional softmax loss L_s is defined by the following equation:

$$L_s = - \sum_{i=1}^m \log \frac{e^{W_{y_i}^T x_i + b_{y_i}}}{\sum_{j=1}^n e^{W_{y_j}^T x_i + b_{y_j}}} \quad (1)$$

where $x_i \in \mathbb{R}^d$ denotes the i th deep feature, belonging to the y_i th subject. d is the feature dimension. $W_j \in \mathbb{R}^d$ denotes the j th column of the weights $W \in \mathbb{R}^{d \times n}$ in the last fully connected layer and $b \in \mathbb{R}^n$ is the bias term. The size of mini-batch and the number of class is m and n , respectively. Center loss function L_c is defined by the following equation:

$$L_c = \frac{1}{2} \sum_{i=1}^m \|x_i - c_{y_i}\|_2^2 \quad (2)$$

where $c_{y_i} \in \mathbb{R}^d$ denotes the y_i th subject's center of deep features. Root Mean Square Propagation (RMSProp) with the default hyperparameters is used to train the CNN network.

C. Feature Vector Construction

1) *Clustering*: The K-Means clustering algorithm was employed to fit the data. The center can be considered as a good representative of the class associated with each user in the feature space. A feature vector will be obtained at the output of the CNN for each user's input PPG signal.

2) *Transformation*: The position of a sample in the k -dimensional space is determined by the vector consisting of its distance to the k centers. Mahalanobis Distance was used as a distance metric to eliminate the interference of correlation between different features. The distance $D(x_j, c_{y_i})$ from each sample x_j to the y_i th user center c_{y_i} is calculated by the following equation:

$$D(x_j, c_{y_i}) = \sqrt{(x_j - c_{y_i})^T S_{y_i}^{-1} (x_j - c_{y_i})}, \quad (3)$$

where $S_{y_i}^{-1}$ denotes the covariance matrix of the y_i th user. The transformed feature vector z_j is given by:

$$z_j = (D(x_j, c_{y_1}), D(x_j, c_{y_2}), \dots, D(x_j, c_{y_k})). \quad (4)$$

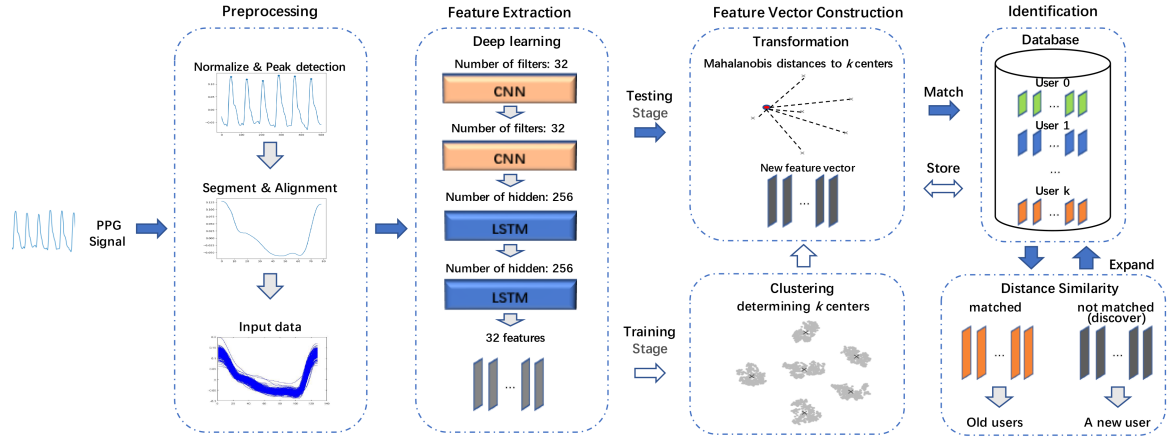


Fig. 2. Overview of our PPG-based biometric identification approach. Training stage for old users includes preprocessing, feature extraction, feature vector construction and template storage. k represents the k trained old users. Features are extracted and dimensionality reduced in the deep neural network. Testing stage for both old users and new users includes preprocessing, feature extraction, feature vector construction and matching.

D. Identification

A user-specific feature vector composed of the average distance of all samples was used for identification. The average distance \tilde{z}^{y_i} from the trained samples in the y_i user to all centers c_{y_i} is calculated as the feature vector of the class by:

$$\tilde{z}^{y_i} = \left(\frac{1}{m_i} \sum_{j=1}^{m_i} D(z_j^{y_i}, c_{y_1}), \dots, \frac{1}{m_i} \sum_{j=1}^{m_i} D(z_j^{y_i}, c_{y_k}) \right), \quad (5)$$

where $z_j^{y_i}$ denotes the j th sample in the y_i th user. m_i denotes the total number of the y_i th user. All \tilde{z}^{y_i} will be included in the database at the training stage. The transformed feature vector from the test samples \tilde{z} is also calculated by equation 5. The adjusted cosine similarity is utilized to quantify the similarity between \tilde{z} and \tilde{z}^{y_i} , which is defined by:

$$\cos\langle \tilde{z}, \tilde{z}^{y_i} \rangle = \frac{(\tilde{z} - \bar{\mu}) \cdot (\tilde{z}^{y_i} - \bar{\mu})}{\|\tilde{z} - \bar{\mu}\| \times \|\tilde{z}^{y_i} - \bar{\mu}\|}, \quad (6)$$

where $\bar{\mu}$ denotes the average vector of all \tilde{z}^{y_i} in the database. The cosine similarity has a range of $[-1, 1]$, where perfect label assignments produce a value of 1. We set 0.99 as the threshold value. The performance of this threshold is discussed in the next section. When the maximum similarity between a certain \tilde{z}^{y_i} and \tilde{z} exceeds the threshold, this sample will be identified as the y_i th user. If there is no such \tilde{z}^{y_i} , the sample will be identified as a new user.

III. RESULTS AND DISCUSSION

The dataset used in this work, which is called BIDMC, was obtained from [15], [16]. The 53 recordings containing physiological signals and physiological parameters were collected respectively for 8 minutes at a sampling rate of 125 Hz and 1 Hz. The first k recordings from 53 users were selected to train the feature extractor. For each user, 80% was randomly selected for training and the remaining 20% was used for testing. We conducted the following experiments in Python using Pytorch.

TABLE II

COMPARE IDENTIFICATION RESULT ON OLD USERS

Ref	Subjects	Application	Average Accuracy(%)
[8]	12	verification	98
[4]	42	identification	99.23
[5]	38	identification	89.48
[6]	50	identification	98.88
Ours	12	identification	99.72

A. Testing stage for identifying old users

We trained the network to get the feature extractor in the case of $k = 12$ and examined its performance. Table II compares identification results in old users among our approach and state of the art works. We achieved the average accuracy of 99.72% for these 12 users based on the clustering algorithm and the distance similarity. Fig. 3 (a) visualizes the results of clustering after dimensionality reduction through t-SNE. The adjusted cosine similarity matrix between the feature vector on the training set and the test set is given in Fig. 3 (b), which indicates that our approach can achieve accurate recognition on old users.

B. Testing stage for discovering a new user

We extracted 3, 6, or the remaining 41 new users' features to evaluate the ability to discover a new user in our approach. Fig. 4 (a) and (b) respectively introduce the t-SNE feature distribution of 3 and 6 new users extracted by the feature extractor trained by 12 old users. Although the performance in identifying 6 new users is worse than that in 3 new users (affected by the trained feature extractor), this result proves that the feature extractor has the ability to distinguish features of a new user from old users, which makes it possible to discover a new user.

C. Discussion

Five deep neural networks ($k=6, 9, 12, 15, 18$) were trained to explore the factors that impact the performance of our approach. The results in Table III show the accuracies of 5 networks on the test set, their respective training time, the accuracies of discovering a new user and identifying a

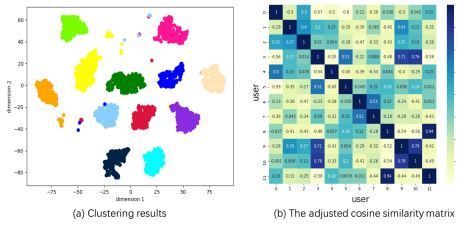


Fig. 3. (a) Visualization of old users' feature distribution embedded in 2 dimensions using t-SNE. (b) The adjusted cosine similarity matrix for 12 old users. The value in the i th row and the j th column represents the similarity of feature vector between the testing user i and the old user j .

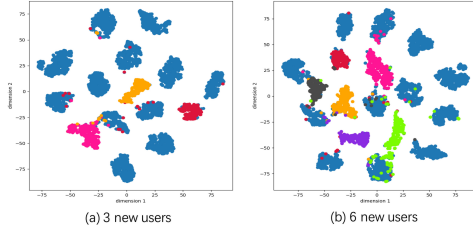


Fig. 4. Visualization of new users' feature distribution embedded in 2 dimensions using t-SNE. (a) and (b) represent the feature distribution of 3 new users and 6 new users respectively. The new user's features are given in different colors, while the old user's features are given in the same color.

new user. Training with more users will greatly increase the training time but can't yield a promising performance. We then evaluated the performance of different thresholds on the same deep neural network. Fig. 5 shows the performance of different thresholds when there are 12 old users ($k=12$). The 0.99 used in this work is the value that yielded the best performance in the experiment.

IV. CONCLUSIONS

In this paper, a semi-supervised approach combining deep learning, clustering algorithm and distance similarity was proposed to discover and identify a new user. We trained the CNN+LSTM network as the feature extractor, identified old users and new users based on Mahalanobis distance and cosine similarity, which can avoid retraining the feature extractor when a new user joins. We evaluated the performance of discovering and identifying a new user on different feature extractor models. The results demonstrate that our proposed approach can accurately identify old users, and has feasibility in discovering and identifying a new user without retraining in the identification application. Further exploration is to automatically select the most suitable trained old user k and classification threshold for better performance.

REFERENCES

- [1] A. K. Jain, A. Ross, and S. Prabhakar, "An introduction to biometric recognition," *IEEE Transactions on circuits and systems for video technology*, vol. 14, no. 1, pp. 4–20, 2004.
- [2] Y. Gu, Y. Zhang, and Y. Zhang, "A novel biometric approach in human verification by photoplethysmographic signals," in *4th International IEEE EMBS Special Topic Conference on Information Technology Applications in Biomedicine, 2003.*, pp. 13–14, IEEE, 2003.
- [3] P. Spachos, J. Gao, and D. Hatzinakos, "Feasibility study of photoplethysmographic signals for biometric identification," in *2011 17th International Conference on Digital Signal Processing (DSP)*, pp. 1–5, IEEE, 2011.
- [4] N. Karimian, Z. Guo, M. Tehranipoor, and D. Forte, "Human recognition from photoplethysmography (ppg) based on non-fiducial features," in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 4636–4640, IEEE, 2017.

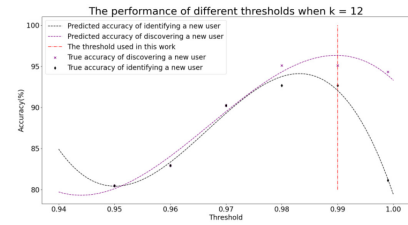


Fig. 5. The performance of different classification thresholds when $k=12$. The dashed line is fitted by the threshold selected in the experiment.

TABLE III

THE TEST ACCURACIES AND TRAINING TIMES OF DIFFERENT NETWORKS

Number of Old Users(k)	Training Time(min)	Old Users	Discover A New User	Identify A New User
6	18	99.664	93.62	87.32
9	73	99.443	100	93.18
12	177	97.162	95.12	92.69
15	324	91.196	100	94.74
18	589	88.907	97.14	91.43

* The values in the last three columns are percentages.

* "Discover A New User" denotes the percentage of an untrained user discovered as a new user.

* "Identify A New User" denotes the average accuracy of reidentifying a new user on the expanded database. He/she was regarded as a trained user since his/her template has already been added to the database.

- [5] A. Walia and A. Kaul, "Human recognition via ppg signal using temporal correlation," in *2019 5th International Conference on Signal Processing, Computing and Control (ISPCC)*, pp. 144–147, IEEE, 2019.
- [6] K. Wang and X. Chen, "Ppg signal identification method based on csasvm," in *2019 IEEE 10th International Conference on Software Engineering and Service Science (ICSESS)*, pp. 1–4, IEEE, 2019.
- [7] A. R. Kavsaoglu, K. Polat, and M. R. Bozkurt, "A novel feature ranking algorithm for biometric recognition with ppg signals," *Computers in biology and medicine*, vol. 49, pp. 1–14, 2014.
- [8] L. Everson, D. Biswas, M. Panwar, D. Rodopoulos, A. Acharyya, C. H. Kim, C. Van Hoof, M. Konijnenburg, and N. Van Helleputte, "Biometricnet: Deep learning based biometric identification using wrist-worn ppg," in *2018 IEEE International Symposium on Circuits and Systems (ISCAS)*, pp. 1–5, IEEE, 2018.
- [9] D. Biswas, L. Everson, M. Liu, M. Panwar, B.-E. Verhoef, S. Patki, C. H. Kim, A. Acharyya, C. Van Hoof, M. Konijnenburg, et al., "Cor-net: Deep learning framework for ppg-based heart rate estimation and biometric identification in ambulant environment," *IEEE transactions on biomedical circuits and systems*, vol. 13, no. 2, pp. 282–291, 2019.
- [10] D. Y. Hwang and D. Hatzinakos, "Ppg-based personalized verification system," in *2019 IEEE Canadian Conference of Electrical and Computer Engineering (CCECE)*, pp. 1–4, IEEE, 2019.
- [11] D. Y. Hwang, B. Taha, D. S. Lee, and D. Hatzinakos, "Evaluation of the time stability and uniqueness in ppg-based biometric system," *IEEE Transactions on Information Forensics and Security*, vol. 16, pp. 116–130, 2020.
- [12] D. Biswas, N. Simões-Capela, C. Van Hoof, and N. Van Helleputte, "Heart rate estimation from wrist-worn photoplethysmography: A review," *IEEE Sensors Journal*, vol. 19, no. 16, pp. 6560–6570, 2019.
- [13] J. Pan and W. J. Tompkins, "A real-time qrs detection algorithm," *IEEE transactions on biomedical engineering*, no. 3, pp. 230–236, 1985.
- [14] Y. Wen, K. Zhang, Z. Li, and Y. Qiao, "A discriminative feature learning approach for deep face recognition," in *European conference on computer vision*, pp. 499–515, Springer, 2016.
- [15] M. A. Pimentel, A. E. Johnson, P. H. Charlton, D. Birrenkott, P. J. Watkinson, L. Tarassenko, and D. A. Clifton, "Toward a robust estimation of respiratory rate from pulse oximeters," *IEEE Transactions on Biomedical Engineering*, vol. 64, no. 8, pp. 1914–1923, 2016.
- [16] A. L. Goldberger, L. A. Amaral, L. Glass, J. M. Hausdorff, P. C. Ivanov, R. G. Mark, J. E. Mietus, G. B. Moody, C.-K. Peng, and H. E. Stanley, "Physiobank, physiobank, and physionet: components of a new research resource for complex physiological signals," *circulation*, vol. 101, no. 23, pp. e215–e220, 2000.