

	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

This procedure is applicable to below models:

V810 STD	☒	S1	☒	S2
V810 XXL	☒	S1	☒	S2
V810 S2EX	☒			
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	30 Nov 2015	First Release	CHIN CHEE YAN
01	2 Oct 2016	Template Changes & Content Update	ONG KEAN SHENG

	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

1. Connect all the devices to Atom PC (P/N, 2160-0027) as shown.

- ❖ Monitor (VGA)
- ❖ Keyboard (USB)
- ❖ Mouse (USB)
- ❖ Atom PC Power Adapter (connect to 240vAC power plug)

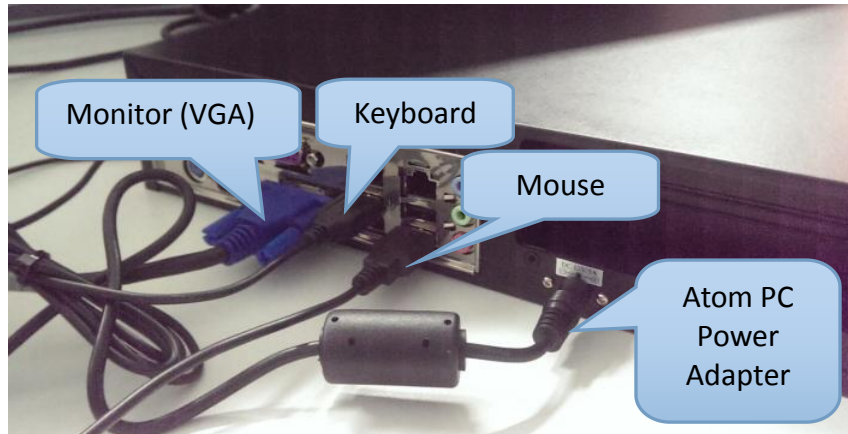


Figure 1 Atom PC (Rear view)

2. Power on the Atom PC as normal. At 1st boot up screen, press “Delete” key at keyboard and enter to BIOS interface.



Figure 2 Bios

3. Once log in, BOIS main screen will shown as below.

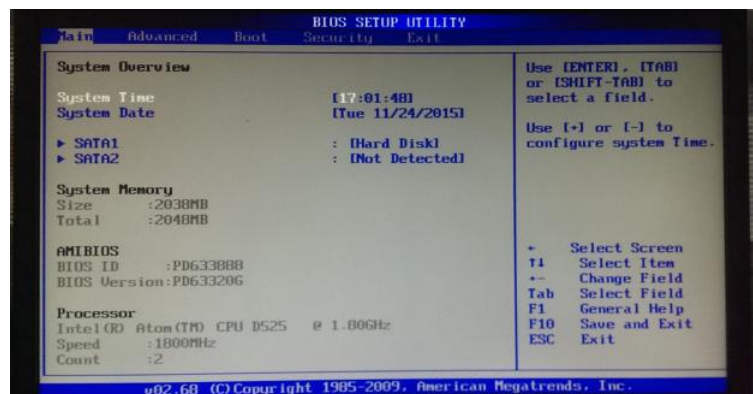


Figure 3 Bios

	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

4. Use keyboard arrow key and go to tab “Advance” and go to “LAN Configuration”. Press “Enter” and log in for configuration.

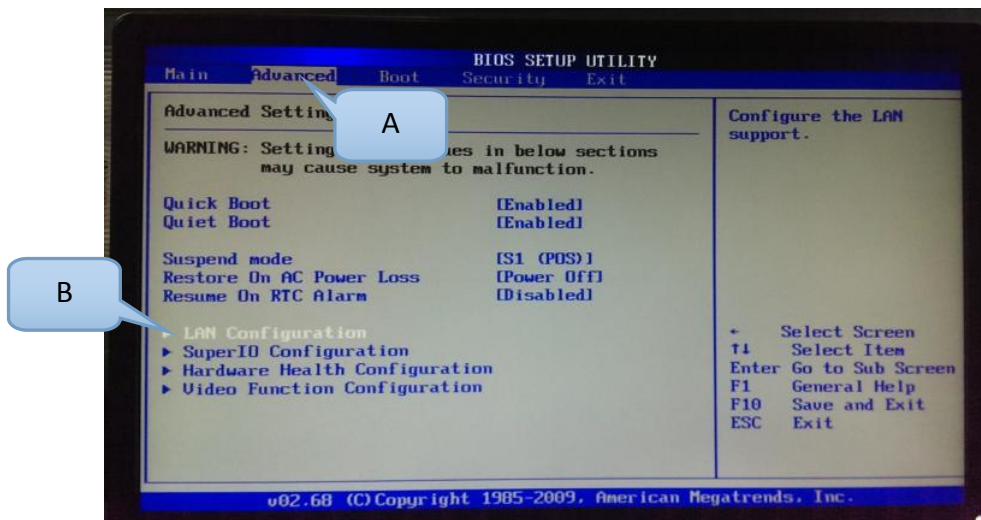


Figure 4 Bios

5. Once log in, screen below will shown. Ensure “Onboard LAN1 and LAN2” port is set to “Enable”.

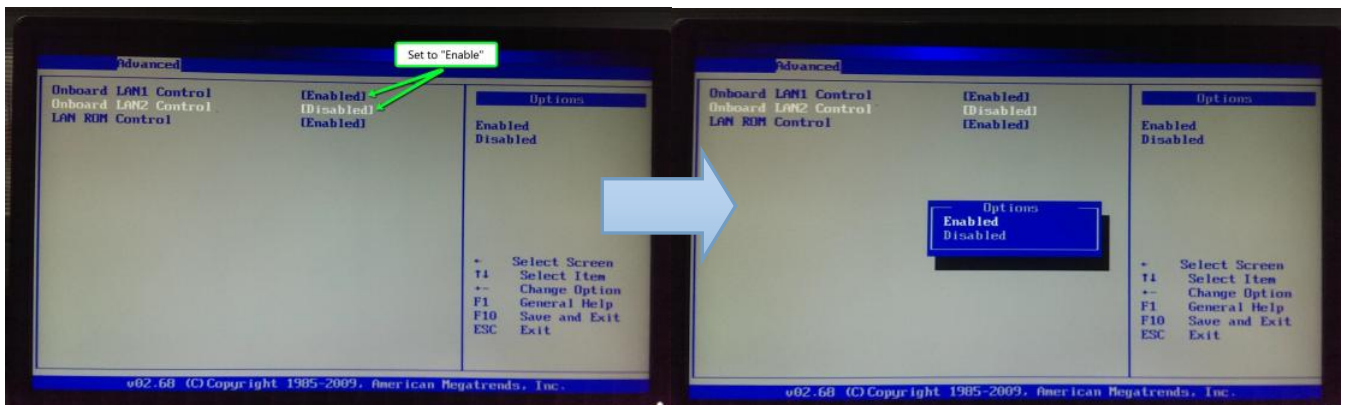


Figure 5 Bios

6. Once done configure, press “Esc” and used arrow key to go to “Exit” tab. Go to “Save Change and Exit”, click “OK” and Atom PC will reboot.

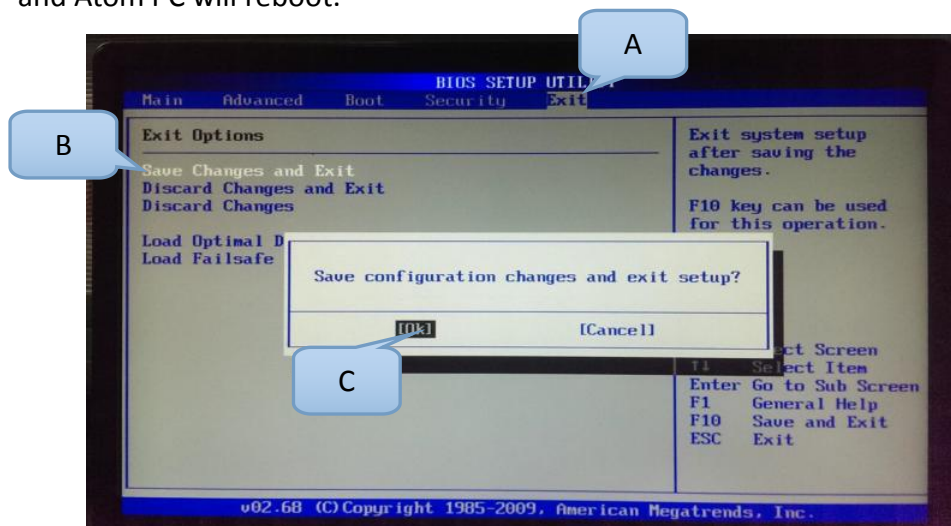


Figure 6 Bios

	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

7. Log in Window with User Name, “Administrator”, Password, “Please!”.
8. Once log in, window will auto detect the LAN port as shown. Wait until the complete installation message shown.

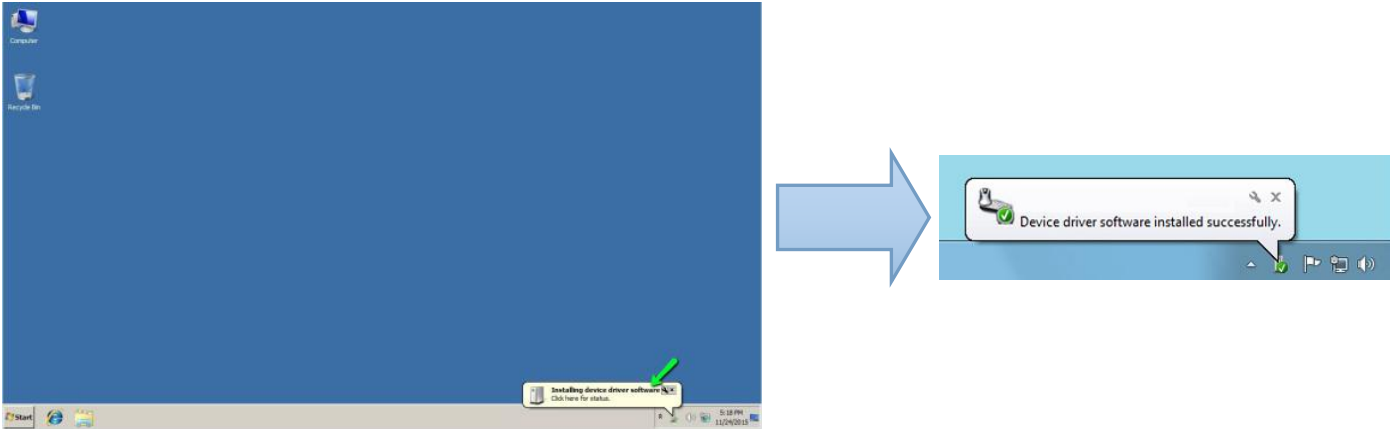


Figure 7 Device Driver

9. Once done installation, right click “My computer”, click “Properties” and go to “Devices Managers”, expand the “Network Adapters”, ensure dual LAN port is detected.

My Computer → Properties → Device Manager → Network Adapters

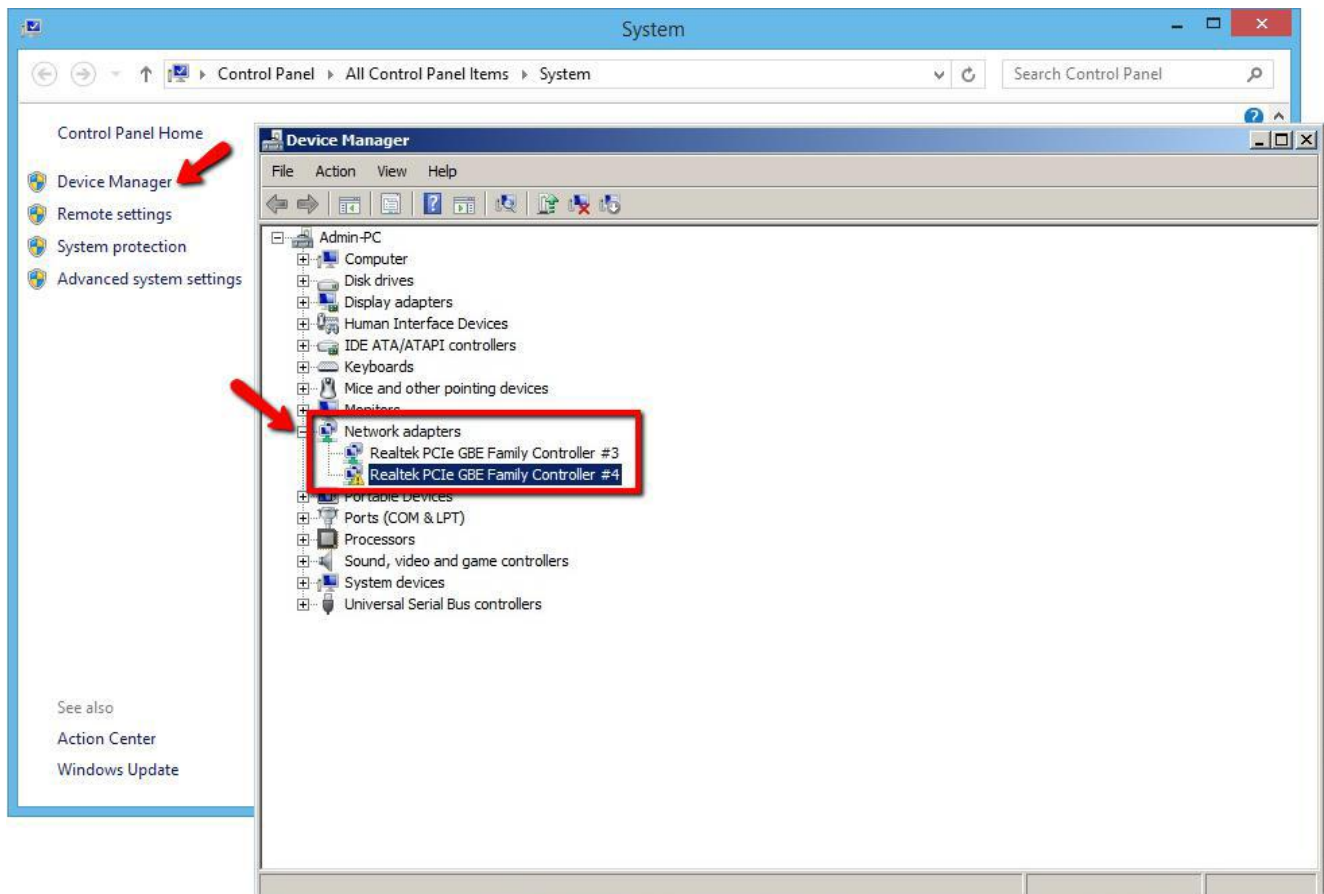


Figure 8 Device manager

ViTrox	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

10. Once done validate, restart the Atom PC as usual.
11. Once log in window again with User Name, "Administrator", Password, "Please!". Go to Device Manager, right click "My computer", click "Properties" and go to "Devices Managers", expand the "Network Adapters", ensure dual LAN port driver is installed (No Escalation Mark).

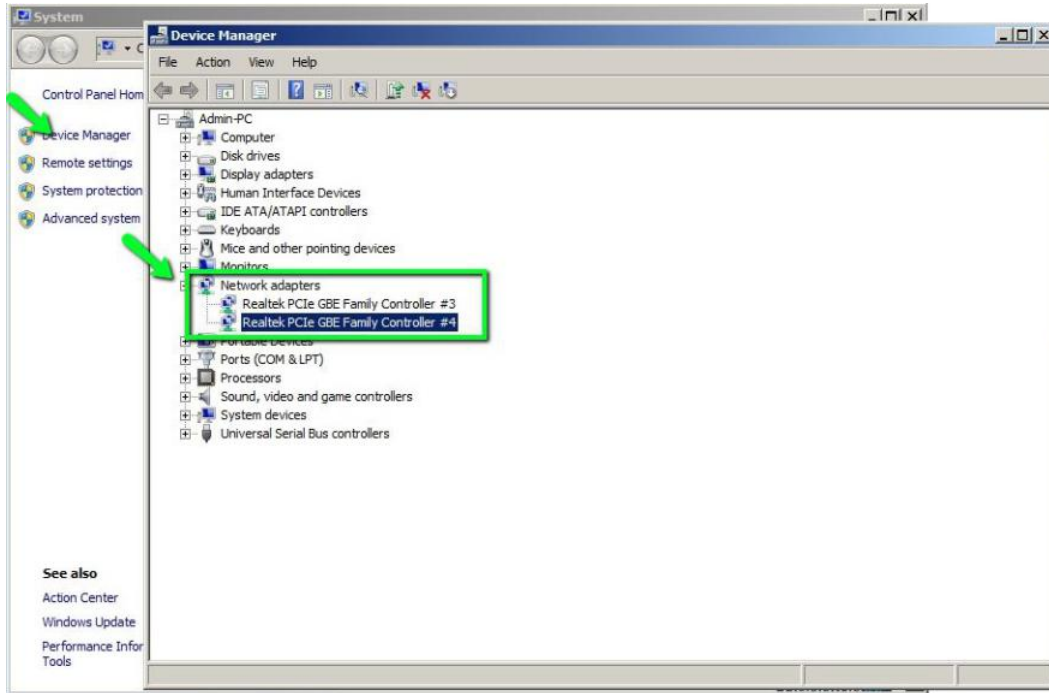


Figure 9 Device manager

12. Go to Control Panel → Network Internet → Network Connections. Interface will show as below.



Figure 10 Network connection

13. Connect a LAN cable (able to online) to one of the LAN port at Atom PC and configure the IP address.

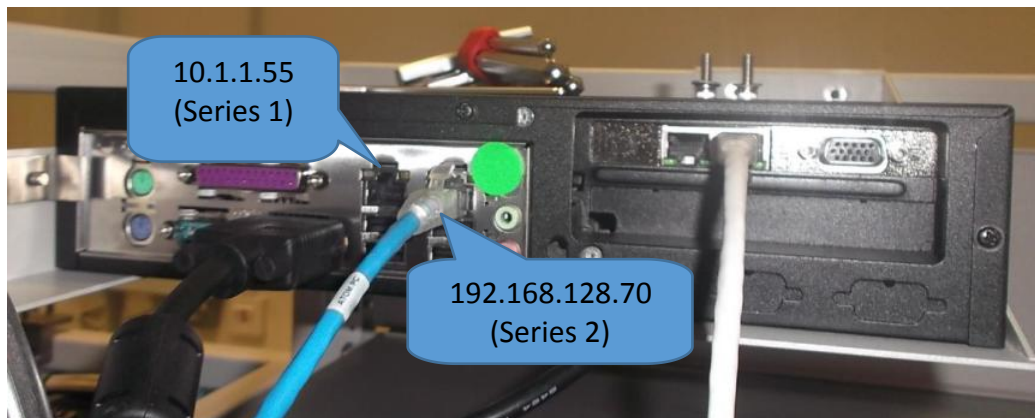


Figure 11 Network port

	Work Instruction	Doc. Revision	01
	AXI V810 Atom PC LAN Port Activation Procedure	Effective Date	2 Oct 2016

14. Configure the left port for V810 S1 with detail, IP Address; **10.1.1.55**; Subnet mask; **255.0.0.0**; Default gateway; **10.1.1.254**

Uncheck IPV6.

Configure IPV4 Only.

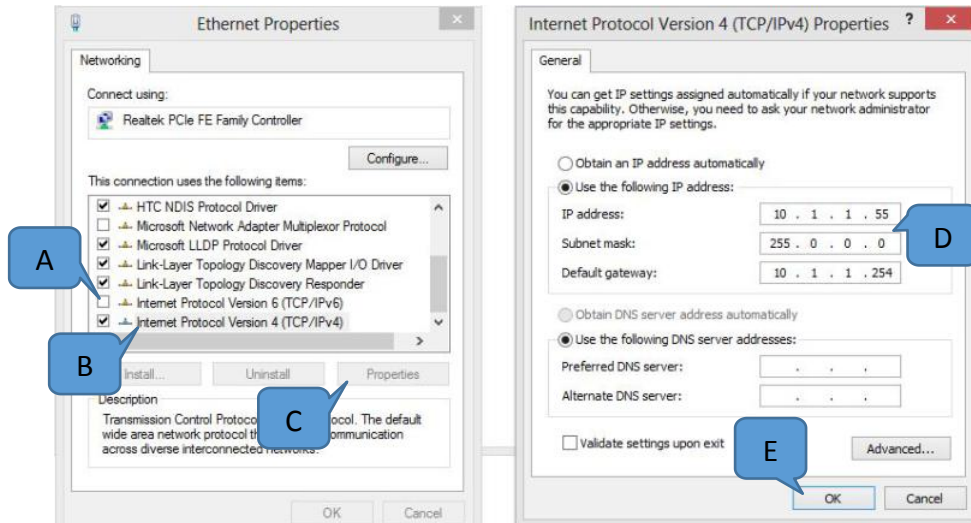


Figure 12 (Only for V810 Series 1)

15. Configuration the right port for V810 S2 with detail, IP Address; **192.168.128.70**; Subnet mask; **255.255.255.0**;

Uncheck IPV6.

Configure IPV4 Only

Leave the Default Gateway as blank

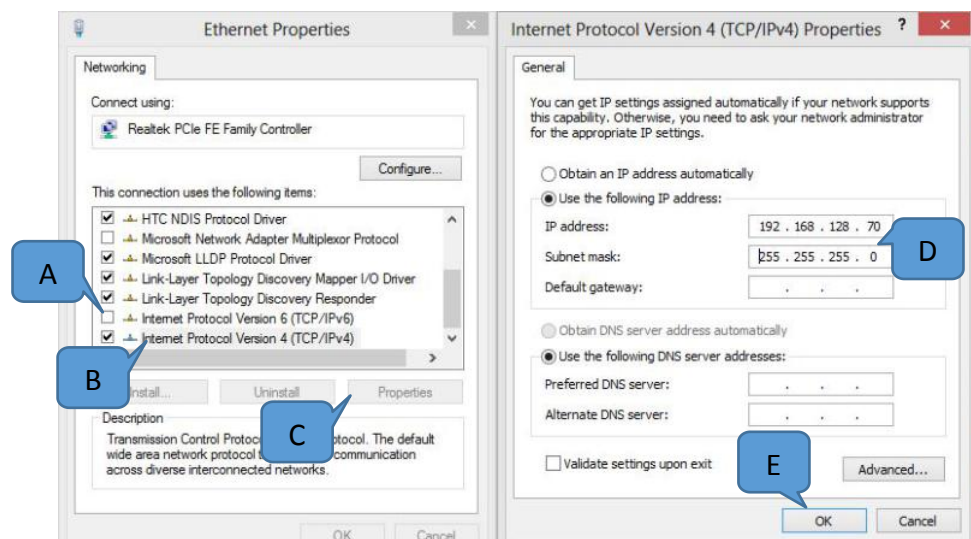


Figure 13 (Only for V810 Series 2)