

	Work Instruction	Doc. Revision	01
	AXI V810 Dell Gigabyte Switch Firmware Upgrade Procedure	Effective Date	2 Oct 2016

This procedure is applicable to below models:

V810 STD	☒	S1	☐	S2
V810 XXL	☒	S1	☐	S2
V810 S2EX	☐			
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	07 July 2015	First Release	CHIN CHEE YAN
01	2 Oct 2016	Template Changes & Content Update	ONG KEAN SHENG

1. Download attach zip file and extract the attachment to desktop.
2. Open Internet explorer and enter IP address **192.168.128.122**. “Dell OpenManageSwitch Administrator” interface will show as below.

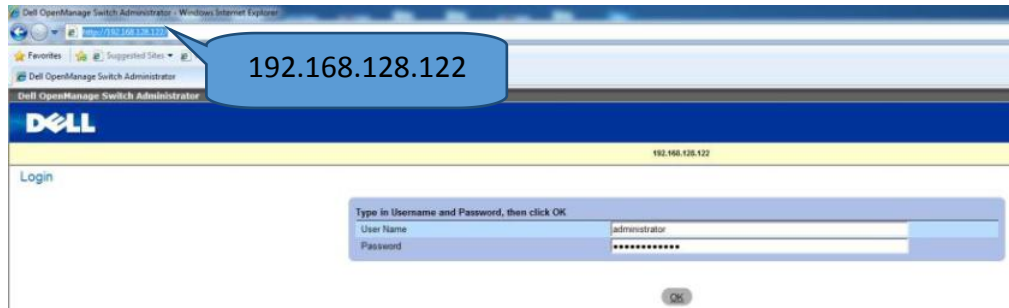


Figure 1 Dell gigabit switch interface

3. Log in to Dell Gigabit Switch with refer to table 1.

User name	Administrator
Password	PleasePlease

Table 1



Figure 2 Dell gigabit switch interface

4. Go to “Home” → “About” and check the gigabit switch current firmware version. Record down “Build No” which represent as “the current firmware version”.

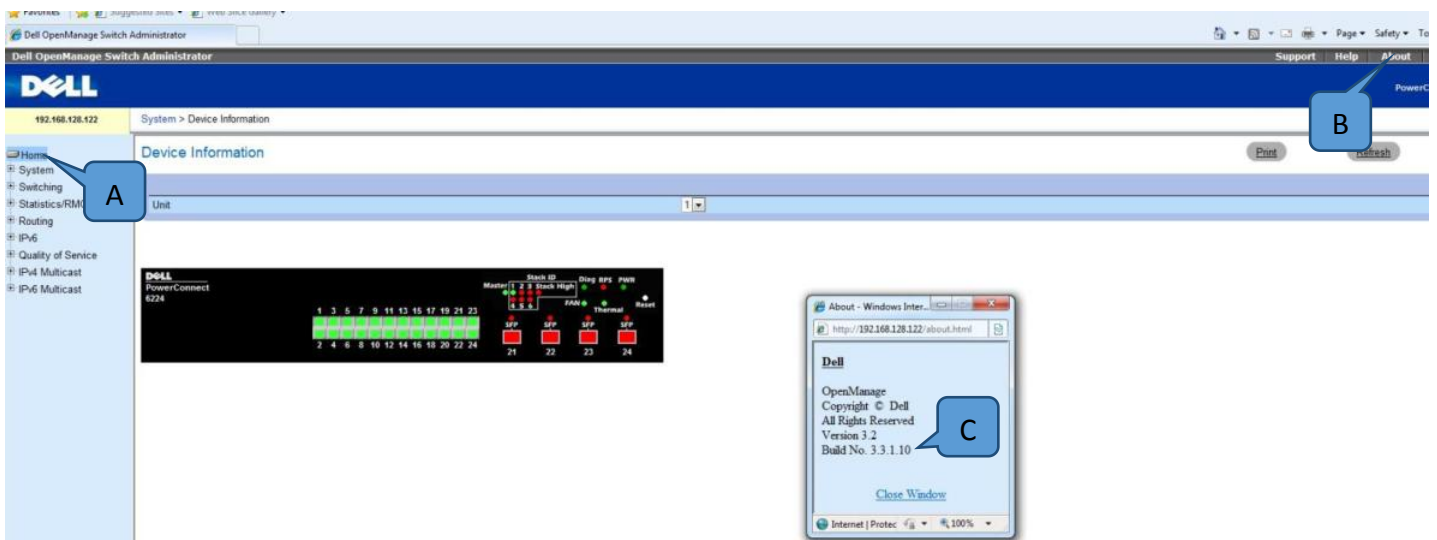


Figure 3 Dell gigabit switch interface

5. Go to **System** → **File Management** → **File Download**

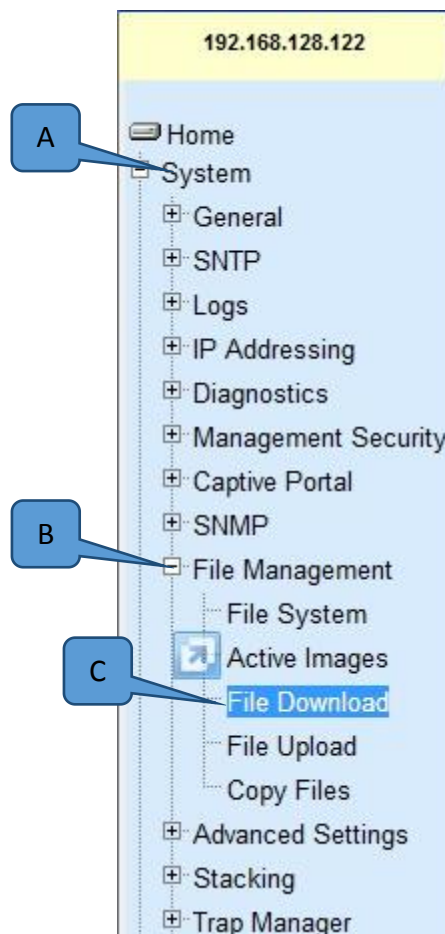


Figure 4 Dell gigabit switch interface

6. File download window will show. Configure setting with refer to table 2.

File Type	Firmware
Transfer Mode	HTTP

Table 2

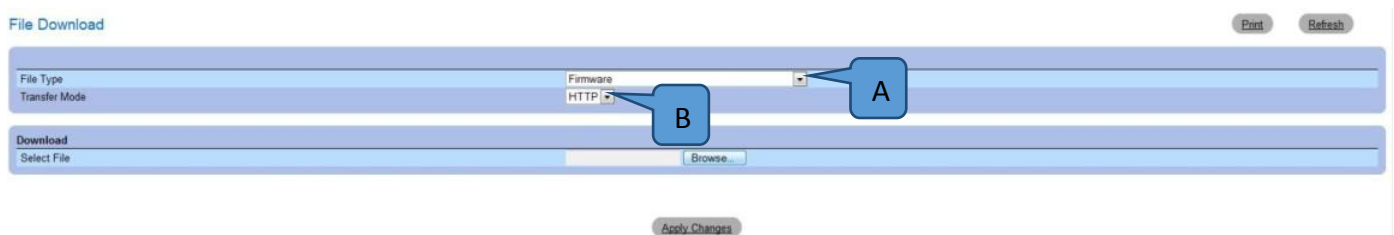


Figure 5 Dell gigabit switch interface

	Work Instruction	Doc. Revision	01
	AXI V810 Dell Gigabyte Switch Firmware Upgrade Procedure	Effective Date	2 Oct 2016

7. Click **“Browse”** → **“Go to the extract zip file path”**→ select **“.stk”** file → **“Open”**.

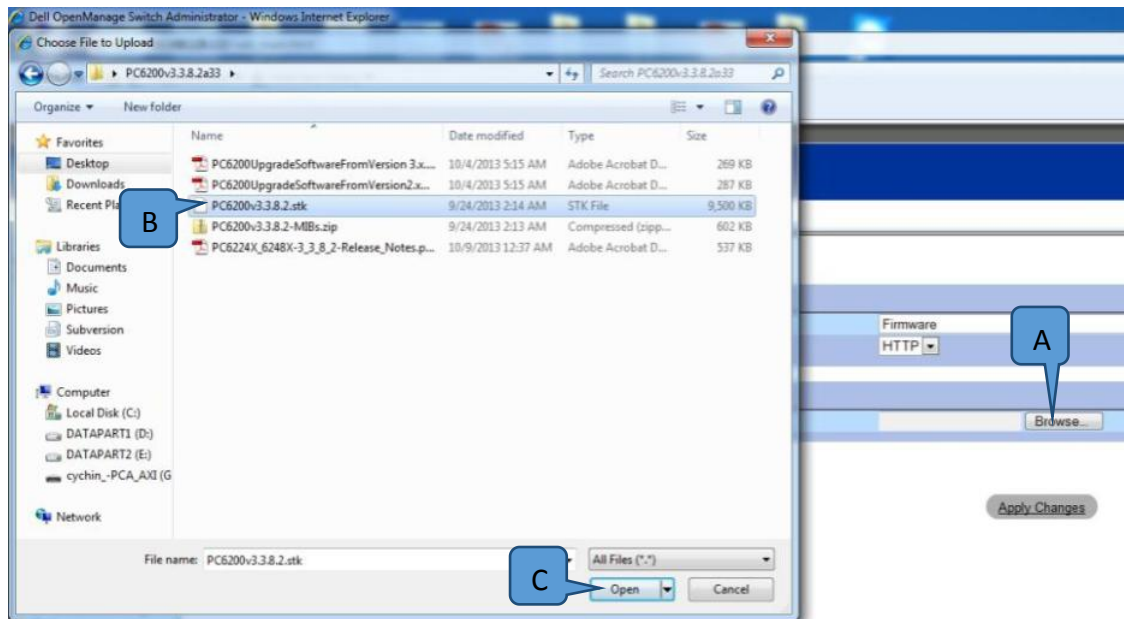


Figure 6 Dell gigabit switch interface

8. Click **Apply Changes** → **OK**.

Please be take note, the image transfer (Download)will approximately 15 min, do not interrupt the transferring progress.


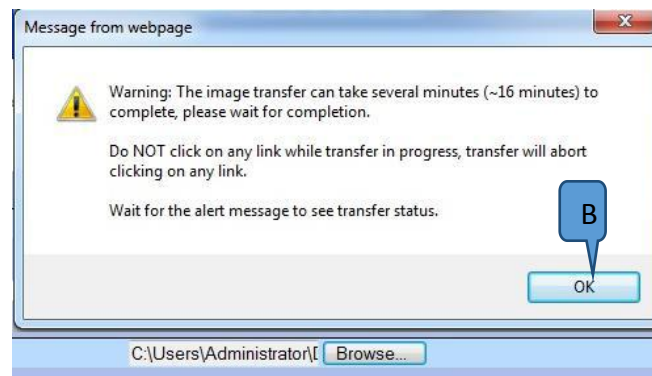


Figure 7 Dell gigabit switch interface

9. Please be take note, the image transfer will take around 15 min, do not interrupt the transferring progress. Once complete the message as show will turn off.

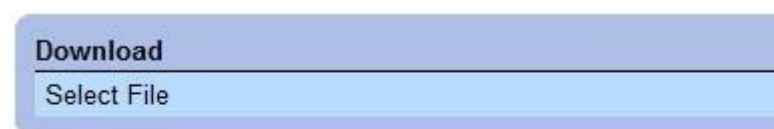

Transfer is in progress, please wait....

Figure 8 Dell gigabit switch interface

10. Once the transferring done, go to '**Active Image**' tab, transfer image progress will show. Press **F5** to refresh if need.



Figure 9

11. Once transferring image done continues with Active Image. At "After Reset" tab, select the correct image firmware. Please take note, Image select depending on active image selected term.

Example;

- If "Active Image" tab, "Image 1" is selected, at "After Reset" tab, "Image 2" needs to be select.
- If "Active Image" tab, "Image 2" is selected, at "After Reset" tab, "Image 1" needs to be select.



Figure 10 Dell gigabit switch interface

12. Once the correct image selected, the firmware version will show according to upload ".stk" file.

Ensure the firmware is same as the ".stk" file name with compare to the unzip folder. Click on **Apply Changes** once done confirmation.

Version	After Reset	Version
3.3.1.10	image2	3.3.8.2

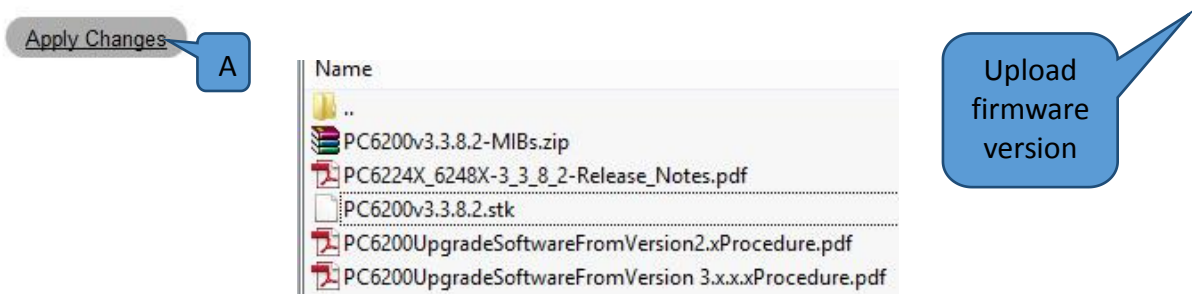


Figure 11 Dell gigabit switch interface

ViTrox	Work Instruction	Doc. Revision	01
	AXI V810 Dell Gigabyte Switch Firmware Upgrade Procedure	Effective Date	2 Oct 2016

13. Once done, quit internet explorer, go to Gigabyte switch, press Reset button as shown with use a probe pin. Reboot will take approximately 5 min. Once reboot done, all connected LAN is emitted.



Figure 12 Dell gigabit switch

14. Repeat step 1 to step 5, ensure the firmware is successful updated.