PIZZA SALE ANALYSIS

Home About Contact

- DATA ANALYTICS PROJECT



HELLO !!




My name is Komal Gupta.

In this project, I have utilized SQL queries to analyze pizza sales data and answer various business-related questions.

The main objective of this project is to explore sales data, identify trends, understand customer preferences, and generate meaningful business insights using SQL.

DATA BASE SCHEMA

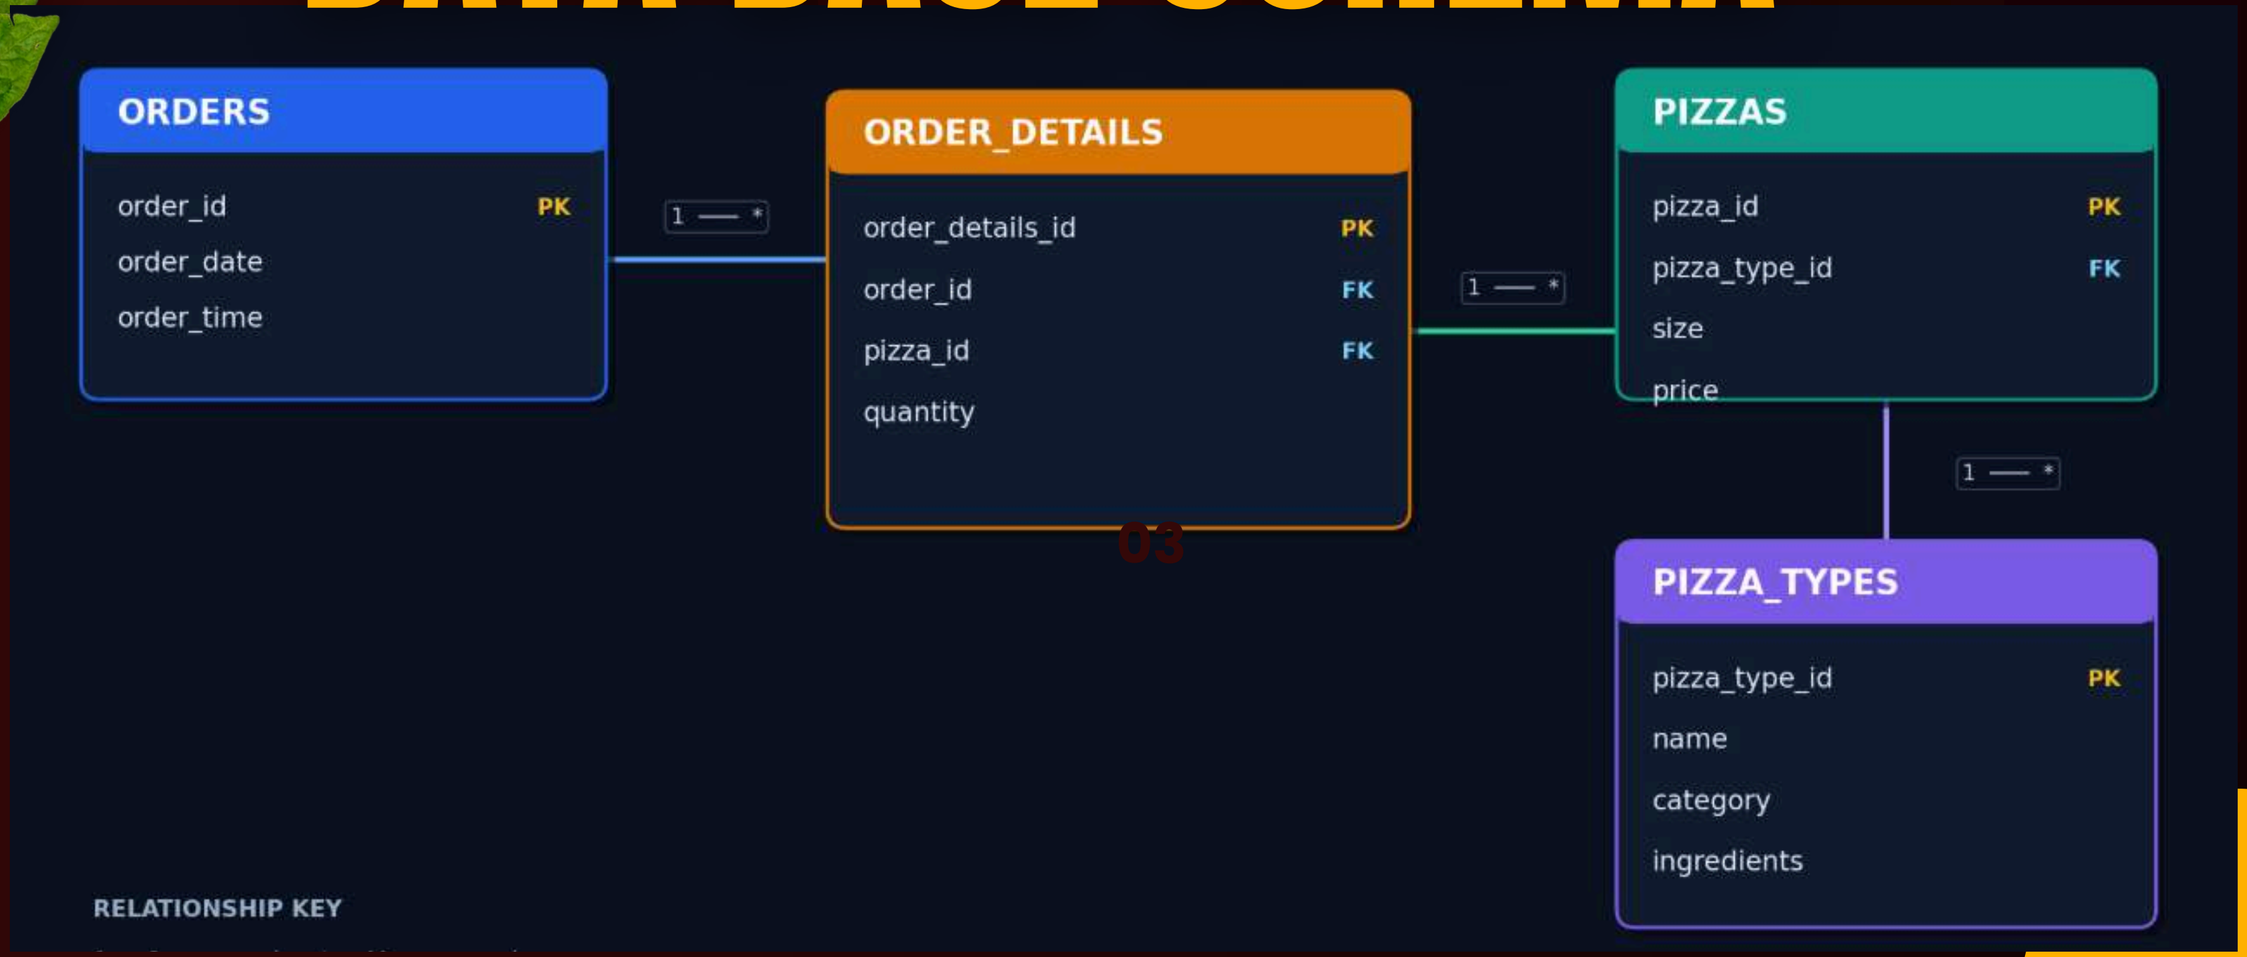

Q1. Retrieve the total number of orders placed

```sql
SELECT
    COUNT(order_id) AS total_orders
FROM
    orders;
```



Result Grid

	total_orders
▶	21350

Q2. Calculate the total revenue generated from pizza sales.

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id
```



Result Grid

	total_sales
▶	307091.2

Q3. Identify the highest-priced pizza.

```sql
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```



Result Grid | Filter Rows:

	name	price
▶	The Greek Pizza	35.95

Q4. Identify the most common pizza size ordered.

```sql
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid | Filter

size	order_count
L	6980
M	5751
S	5348
XL	216
XXL	9

Q5. List the top 5 most ordered pizza types along with their quantities

```sql
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```



Result Grid | Filter Rows:

name	quantity
The Hawaiian Pizza	927
The Pepperoni Pizza	919
The Barbecue Ch	
The Thai Chicken Pizza	906
The California Chicken Pizza	901

The Pepperoni Pizza

Q6. Join the necessary tables to find the total quantity of each pizza category ordered

```sql
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```



Result Grid | Filter

category	quantity
Classic	5629
Supreme	4447
Veggie	4356
Chicken	4190

Q7. Determine the distribution of orders by hour of the day

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS orders_count
FROM
    orders
GROUP BY HOUR(order_time);
```



Result Grid | Filter

hour	orders_count
11	1231
12	2520
13	2455
14	1472
15	1468

Q8.Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT
    category, COUNT(name) as category_count
FROM
    pizza_types
GROUP BY category;
```



Result Grid | Filter Rows

	category	category_count
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9

8

Q9. Group the orders by date and calculate the average number of pizzas ordered per day

```sql
SELECT
    ROUND(AVG(quantity), 0) as avg_pizzas_orders_perday
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details_id
    GROUP BY orders.order_date) AS order_quantity;
```





Result Grid | Filter Rows:

	avg_pizzas_orders_perday
▶	43

Q10. Determine the top 3 most ordered pizza types based on revenue

```sql
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```



Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	16623.5
The Barbecue Chicken Pizza	16127.75
The California Chicken Pizza	15635.75

Q11. Calculate the percentage contribution of each pizza type to total revenue

```sql
SELECT
    pizza_types.category,
    ROUND(SUM(order_details.quantity * pizzas.price) / (SELECT
                    ROUND(SUM(order_details.quantity * pizzas.price),
                                2) AS total_sales
                FROM
                    order_details
                        JOIN
                    pizzas ON pizzas.pizza_id = order_details.pizza_id) * 100,
            2) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```



Result Grid

	category	revenue
▶	Classic	27.17
	Supreme	25.1
	Chicken	24.16
	Veggie	23.57

Q12. Analyze the cumulative revenue generated over time



```sql
select order_date,
sum(revenue)  over (order by order_date) as  cum_revenue
from
(select orders.order_date,
sum(order_details.quantity * pizzas.price) as revenue
from order_details join pizzas
on order_details.pizza_id = pizzas.pizza_id
join orders
on orders.order_id = order_details.order_id
group by orders.order_date) as sales ;
```

Result Grid | Filter Rows:

order_date	cum_revenue
2015-04-02	126232.54999999997
2015-04-03	128592.74999999997
2015-04-04	129837.34999999998
2015-04-05	131068.24999999997
2015-04-06	132918.84999999998
2015-04-07	133811.24999999997
2015-04-08	136068.44999999998
2015-04-09	136619.59999999998
2015-04-10	138448.59999999998
2015-06-17	140099.09999999998
2015-06-18	140622.69999999998
2015-06-19	142890.24999999997
2015-06-20	143747.99999999997
2015-06-21	145167.24999999997

Q13.Determine the top 3 most ordered pizza types based on revenue for each pizza category.



```sql
select name  ,   revenue from
(select category, name , revenue,
rank() over (partition by category order by revenue desc ) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
group by pizza_types.category, pizza_types.name )  as a) as  b
where rn <= 3;
```



Home About Contact

THANK YOU!

🍕 PIZZA SALES ANALYSIS

SQL Database Project

Questions & Answers?

Thank you for your time and attention.