

How to Deploy OpenClaw on Orange Pi Boards with Rockchip RK3588/RK3588S

1. Opi 5

```
Orangepi5_1.2.2_ubuntu_jammy_desktop_gnome_linux5.10.160.7z
```

2. Opi 5plus

```
Orangepi5plus_1.2.0_ubuntu_jammy_desktop_xfce_linux6.1.43.7z.
```

3. Opi 5Pro

```
Orangepi5pro_1.0.6_ubuntu_jammy_server_linux5.10.160.7z
```

4. Opi 5Max

```
Orangepi5max_1.0.0_ubuntu_jammy_desktop_xfce_linux5.10.160.7z
```

5. Opi 5Ultra

```
Orangepi5ultra_1.0.0_ubuntu_jammy_desktop_gnome_linux5.10.160.7z
```

6. Opi 5B

```
Orangepi5b_1.0.10_ubuntu_jammy_desktop_xfce_linux5.10.160.7z
```

1. Flash a Linux system image onto the development board, Here, we take the image below as an example.

```
Orangepi5plus_1.2.0_ubuntu_jammy_desktop_xfce_linux6.1.43.7z
```

2. Execute the official one-click installation script in the terminal.

```
curl -fsSL https://molt.bot/install.sh | bash
```

```
▼ OpenClaw installer
If you're lost, run doctor; if you're brave, run prod; if you're wise, run tests.

✓ Detected: linux
✓ Node.js v22.22.0 found
✓ Git already installed
→ Configuring npm for user-local installs...
  npm configured for user installs
→ Installing OpenClaw 2026.2.1...
✓ OpenClaw installed

▼ OpenClaw installed successfully (2026.2.1)!
cracks claws Alright, what are we building?

Starting setup...

▼ OpenClaw 2026.2.1 (ed4529e) – Pairing codes exist because even bots believe in consent—and good security hygiene.

OPENCLAW
▼ OPENCLAW ▼

OpenClaw onboarding
○ Security
  Security warning – please read.

  OpenClaw is a hobby project and still in beta. Expect sharp edges.
  This bot can read files and run actions if tools are enabled.
  A bad prompt can trick it into doing unsafe things.

  If you're not comfortable with basic security and access control, don't run OpenClaw.
  Ask someone experienced to help before enabling tools or exposing it to the internet.

  Recommended baseline:
  - Pairing/allowlists + mention gating.
  - Sandbox + least-privilege tools.
```

3. After the download is complete, the system will automatically enter the configuration interface. You can refer to the configuration below to set up OpenClaw. You can reconfigure it at any time using the command `openclaw onboard`.

◇	I understand this is powerful and inherently risky. Continue?
	Yes
◇	Onboarding mode
	Manual
◇	What do you want to set up?
	Local gateway (this machine)
◇	Workspace directory
	/home/orangepi/.openclaw/workspace
◇	Model/auth provider
	Skip for now
◇	Filter models by provider
	All providers
◇	Default model
	Keep current (default: anthropic/claude-opus-4-5)
◇	Gateway port
	18789
◇	Gateway bind
	LAN (0.0.0.0)
◇	Gateway auth
	Password
◇	Tailscale exposure
	Off
◇	Gateway password
	orangeipi
◇	Configure chat channels now?
	Yes

```

◇ Select a channel
| Finished
◇ Configure skills now? (recommended)
| Yes
◇ Show Homebrew install command?
| Yes
◇ Preferred node manager for skill installs
| npm
◇ Install missing skill dependencies
| Skip for now
◇ Enable hooks?
| Skip for now
◇ Install Gateway service (recommended)
| Yes
◇ Gateway service runtime
| Node (recommended)
◇ How do you want to hatch your bot?
| Do this later
◇ Install shell completion script?
| Yes

```

4. Model configuration - here we take Qwen as an example.

```

orangeipi@orangeipi5plus:~$ openclaw configure

```

```

◇ Where will the Gateway run?
| Local (this machine)
|
◇ Select sections to configure
| Model
|
◇ Model/auth provider
| Qwen
|
◆ Qwen auth method
| ● Qwen OAuth

```

```

Starting Qwen OAuth...
Qwen OAuth
Open https://chat.qwen.ai/authorize?user_code=ZFXZAUUI&client=qwen-code to approve
access.
If prompted, enter the code ZFXZAUUI.
Starting Qwen OAuth....

```

5. Under normal circumstances, a browser window will automatically pop up and redirect you to the Qwen authorization page.



6. Logn in your own account and complete the authorization

7. Then restart the service to make the configuration take effect.

```
openclaw gateway restart
```

```
👉 OpenClaw 2026.2.1 (ed4529e) – If you can describe it, I can probably automate it-or at least make it funnier.  
Restarted systemd service: openclaw-gateway.service
```

8. You can check the model configuration status using the following method.

```
openclaw models list
```

```
👉 OpenClaw 2026.2.1 (ed4529e) – If you're lost, run doctor; if you're brave, run prod; if you're wise, run tests.
```

Model	Input	Ctx	Local	Auth	Tags
qwen-portal/coder-model	text	125k	no	yes	default,configured,alias:qwen
qwen-portal/vision-model	text+image	125k	no	yes	fallback#1,configured

9. Test the connectivity.

```
openclaw models status --probe
```

```
OpenClaw 2026.2.1 (ed4529e) - Less clicking, more shipping, fewer "where did that file go" moments.
|
|
|
Config      : ~/.openclaw/openclaw.json
Agent dir   : ~/.openclaw/agents/main/agent
Default     : qwen-portal/coder-model
Fallbacks (1) : qwen-portal/vision-model
Image model  : -
Image fallbacks (0): -
Aliases (1)  : qwen -> qwen-portal/coder-model
Configured models (2): qwen-portal/coder-model, qwen-portal/vision-model

Auth overview
Auth store   : ~/.openclaw/agents/main/agent/auth-profiles.json
Shell env    : off
Providers w/ OAuth/tokens (1): qwen-portal (1)
- qwen-portal effective=profiles:~/.openclaw/agents/main/agent/auth-profiles.json | profiles=1 (oauth=1, token=0, api_key=0) | qwen-portal:default
=OAuth | models.json=qwen-oauth | source=models.json: ~/.openclaw/agents/main/agent/models.json

OAuth/token status
- qwen-portal
- qwen-portal:default ok expires in 6h

Auth probes


| Model                   | Profile                     | Status    |
|-------------------------|-----------------------------|-----------|
| qwen-portal/coder-model | qwen-portal:default (oauth) | ok · 2.6s |


Probed 1 target in 2.7s
```


10. Command-line chat functionality.

openclaw agent --agent main --message "介绍下香橙派"

```
OpenClaw 2026.2.1 (ed4529e) - Meta wishes they shipped this fast.
|
|
香橙派（Orange Pi）是一款基于ARM架构的开源单板计算机（SBC），类似于树莓派，但通常具有更强的性能和更丰富的接口选项。它由深圳的香橙派团队开发，支持多种操作系统如Ubuntu、Debian等，并且拥有广泛的社区支持。
你对香橙派的哪方面感兴趣？例如硬件特性、软件兼容性、项目应用实例，或者是想要了解如何开始使用它？请告诉我，我会根据你的兴趣点进行详细介绍。
```

11. WebUI interface, enter the password you set during configuration, then click Connect

- (1) From a PC on the same local network, visit: <http://192.168.31.237:18789/overview> (The IP address shown here is the development board's IP. You can check it using the ip a command.)
- (2) Alternatively, you can access it directly from the Orange Pi 6 Plus browser: <http://localhost:18789/overview>

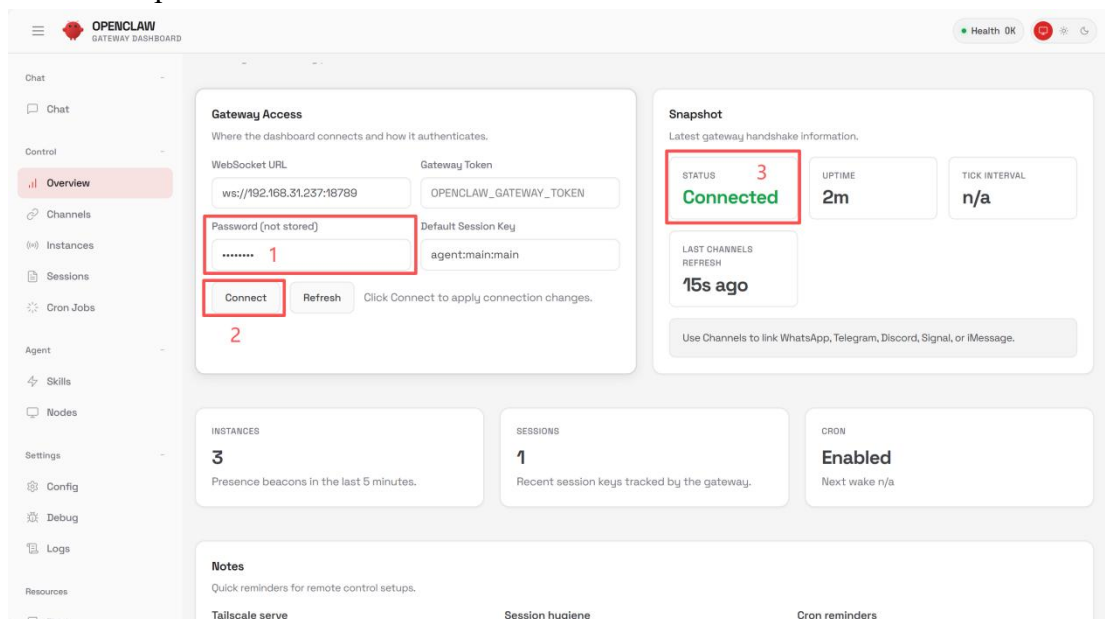

12. Once the Status is confirmed to be Connected, you can start a conversation.

