

# **“FOOD WASTE DONATION SYSTEM”**

A

## **Project Report**

*Submitted in partial fulfillment of the requirement for the award of*

*Degree of*

**Bachelor of Computer Applications**

**Submitted to**

**310 - CIMAGE Professional College**



**Submitted By  
Anand Kumar**

Registration No :19303310082  
BCA-6<sup>TH</sup> Sem  
Session-2019-2022

**Under Guidance of  
Ravi Kumar Soni**  
Asst. Professor  
Computer Science &  
Information Technology



Date: .....

**CERTIFICATE**

This is to certify that the work embodies in this project entitled, "**Food Waste Donation System**", being submitted by **Anand Kumar (19303310082)** in partial fulfillment of the requirement for the award of "**Bachelor of Computer Applications**" to **ARYABHATTA KNOWLEDGE UNIVERSITY, PATNA** during the academic year 2019-22 is a record of bonafide piece of work, carried out by him/her under our/my supervision and guidance in the "**Department of Computer Science & information Technology**", CIMAGE Professional College.

**Prof. Neeraj Agrawal**  
Director

**Er. Amit Kumar Shukla**  
Head of Department-IT

**Ravi Kumar Soni**  
Assistant Professor-IT



**CIMAGE Professional College**  
**Department of Computer Science & Information Technology**  
**Session: 2019-22**

---

Date: -----

## **APPROVAL CERTIFICATE**

The project report entitled "**Food Waste Donation System**", being submitted by **Anand Kumar (19303310082)** has been examined by us and is hereby approved for the award of degree "**Bachelor of Computer Applications**", for which it has been submitted. It is understood that by this approval the undersigned do not necessarily endorse or approve any statement made, the opinion expressed or conclusion drawn therein, but approve the project only for the purpose for which it has been submitted.

(Internal Examiner)

(External Examiner)

Date:

Date:



**CIMAGE Professional College**  
**Department of Computer Science & Information Technology**  
**Session 2019-22**

---

Date:-----

**DECLARATION**

I, **Anand Kumar** hereby declare that the work, which is being presented in the project report entitled "**Food Waste Donation System**", partial fulfillment of the requirements for the award of degree of "**Bachelor of Computer Applications**" submitted in the department of **Computer Science & Information Technology (CIMAGE Professional College)** is an authentic record of my own work carried under the guidance of **Mr. Ravi Kumar Soni**. I have not submitted the matter embodied in this report for the award of any other degree.

**Anand Kumar**

Registration No : **19303310082**

BCA 6<sup>TH</sup> Sem

Session: 2019-2022

## **ACKNOWLEDGEMENT**

*"A journey is easier when you travel together. Interdependence is certainly more valuable than independence."*

I would like to thanks, **Er. Neeraj Kumar Singh Sir and Prof. Ravi Kumar Soni Sir**, for providing regular guidance and insight into my project work. I also thank them for all advice he has given me in the past year, and for always having time for me, whenever I needed.

I give special thanks to **Er. Amit Kumar Shukla Sir, Er. Dinesh Kumar Sir, Er. Nilesh Sir** for always being willing to help find solutions to any problems I had with my work.

***"The completion of any project depends upon the cooperation, coordination, and combined efforts of several resources of knowledge, inspiration, and energy".***

I also extend my deepest gratitude to **Director, CIMAGE GROUP OF INSTITUTIONS, PATNA, Prof. Neeraj Agrawal Sir, Dean CIMAGE GROUP OF INSTITUTIONS, PATNA, Prof. Neeraj Poddar Sir and Centre Head Mrs. Megha Agrawal Mam** for providing all the necessary facilities and true encouraging environment to bring out the best in my endeavors.

I express my gratitude and thanks to all the staff members of Computer Science departments for their sincere cooperation in furnishing relevant information to complete this Project well in time successfully.

I extend a special word to my friends, who have been a constant source of inspiration throughout my project work.

Lastly but not least I must express my cordial thank to my parent and family members who gave me the moral support without that it is impossible to complete my project work. With this note, I thank everyone for the support.

**Anand Kumar**

Registration No : **19303310082**

BCA 6<sup>TH</sup> Sem

Session: 2019-2022

# CONTENTS

INTRODUCTION .....	7
OBJECTIVE.....	7
PROJECT CATEGORY PHP .....	8
ADVANTAGES OF PHP.....	9
TOOLS/PLATFORM REQUIRED .....	11
HARDWARE & SOFTWARE REQUIRED .....	11
PROBLEM DEFINITION .....	12
REQUIREMENT SPECIFICATIONS .....	12
PROJECT PLANNING & SCHEDULING .....	13
SYSTEM ANALYSIS.....	15
IDENTIFICATION OF NEED .....	155
PRELIMINARY INVESTIGATION .....	11
FEASIBILITY STUDY.....	18
DFD .....	21
ER DIAGRAM.....	25
MODULES .....	26
DATA STRUCTURE SNAPSHOTS.....	27
SNAPSHOTS AND CODING.....	35
SECURITY MECHANISM .....	342
PROS & CONS .....	343
SCOPE & FUTURE ENHANCEMENTS .....	344
IMPLEMENTATION METHODOLOGY.....	344
TESTING.....	345

# **PROJECT REPORT**

## INTRODUCTION

The “FOOD WASTE DONATION SYSTEM” has been design with the help of these powerful languages “HTML”, “CSS”, “JavaScript”, “PHP” and “MySQL”. The “HTML”, “CSS”, “JavaScript” being in the foreground and the “PHP” & “MySQL” in the background respectively.

HyperText Markup Language (HTML), Cascading Style Sheets (CSS), and JavaScript are three separate languages that work together to create web pages and web applications. HTML creates structure, CSS styles the markup, and JavaScript creates interactivity. This path will start with the basics of creating a web page and styling it all the way up to creating interaction with JavaScript.

While PHP is the most popular scripting language for web development. It is free, open source and server-side (the code is executed on the server). MySQL is a Relational Database Management System (RDBMS) that uses Structured Query Language (SQL). It is also free and open source. The combination of PHP and MySQL gives unmet options to create just about any kind of website

The wastage of food is a big problem which needs to be taken care of by collecting the leftover food and providing it to needy people. So the “FOOD WASTE DONATION SYSTEM” has been developed after brainstorming the needs and requirements of management of food wastage.

## OBJECTIVE

The motive of the project entitled “**Food Waste Donation System**” is to manage wastage of food in a useful way by providing a platform to donate food to any NGO, Orphanage or directly to the needy people.

## The objectives of this system:

- Minimizing the food wastage
- Feeding the needy people
- Promoting donation of left-over food
- Encouraging people to volunteer for this cause

## PROJECT CATEGORY PHP

The **PHP Hypertext Preprocessor (PHP)** is a programming language that allows web developers to create dynamic content that interacts with databases. PHP is basically used for developing web based software applications. This tutorial helps you to build your base with PHP.

PHP started out as a small open source project that evolved as more and more people found out how useful it was. Rasmus Lerdorf unleashed the first version of PHP way back in 1994.

PHP is a MUST for students and working professionals to become a great Software Engineer specially when they are working in Web Development Domain.

## CHARACTERISTICS OF PHP

Five important characteristics make PHP's practical nature possible –

- Simplicity
- Efficiency
- Security
- Flexibility
- Familiarity

## APPLICATIONS OF PHP

- PHP performs system functions, i.e. from files on a system it can create, open, read, write, and close them.
- PHP can handle forms, i.e. gather data from files, save data to a file, through email you can send data, return data to the user.
- You add, delete, modify elements within your database through PHP.
- Access cookies variables and set cookies.
- Using PHP, you can restrict users to access some pages of your website.
- It can encrypt data.

## ADVANTAGES OF PHP

### **1. Open Source**

PHP is open-source and free of cost, which helps developers to install it quickly and readily available for use. There are a lot of PHP frameworks and developer can choose any of the frameworks to work. All the features and tools will be provided to the developer for that framework easily.

### **2. Platform Independent**

PHP is mainly supported by all the operating systems like Windows, Unix, Linux etc. The PHP based developed web applications can be easily run on any platform. It can be integrated with other programming language and database easily and there is no requirement of re-development.

### **3. Simple and Easy**

This advantage of PHP is simple and easy to learn and code. It is mainly organized code and clean, which helps the new developers also. The command functions of PHP can easily learn and understood. The one who knows any programming language can easily work on PHP. It is simple to learn, as its learning curve is not large. The syntax is simple and flexible to use.

## **4. Database**

PHP is easily connected with the database and make the connection securely with databases. It has a built-in module that is used to connect to the database easily. There are many web applications, which require strong programming language with a good database management system.

## **5. Fast**

PHP is known as the fastest Programming language as compared to another. PHP applications can be easily loaded over the slow Internet and data speed. Other applications take a lot of time to connect the database and fetch the data after executing certain queries to the database

## **6. Maintenance**

PHP framework is mainly used to make the web application development easier and maintain the code automatically. The model view controller architecture in PHP framework helps the code to be easily maintained and used. The MVC architecture helps the separation of a file for different module separately.

## **7. Support**

This advantage of PHP has great online support and community, which helps the new developers to help in writing the code and developing the web applications. The documentation provided at the official site helps in using the different features of PHP and its framework.

## **8. Testing**

PHP based web applications can be easily tested. PHP unit uses to perform the unit testing quickly and easily. It also helps the programmers to write test cases and perform the testing smoothly. For PHP based web applications, the developers do not need to write the additional code. PHP frameworks help in automating the different tasks.

## **9. Security**

PHP frameworks built-in feature and tools make it easier to protect the web applications from the outer attacks and security threats. The security threats can be like SQL injection, data tampering, and forgery etc. To protect from

these security threats, developers used PHP frameworks for developing web applications.

## **10. Stable**

PHP is also stable as compared to other programming languages. It has been in existence for a long time. The developers have worked on PHP to make it easy for the programmers to work on developing the PHP web-based applications. They have fixed the issues and bugs over the period of time for the different version of PHP and make it very stable.

## **TOOLS/PLATFORM REQUIRED**

### **Operating System**

- Windows 10

## **HARDWARE & SOFTWARE REQUIREMENTS**

### **Hardware Requirements:**

- Pentium IV Processor
- 512 MB RAM
- 80 GB Hard Disk

### **Software Requirements:**

- HTML
- CSS

- JAVASCRIPT
- Bootstrap
- PHP
- MySQL
- Sublime Text

## PROBLEM DEFINITION

To provide registration and login for Donor, Agent, Needy and Admin with different forms for donation, delivery confirmation and forms for establishing contact among them. Also a portal for Admin to accept or reject the donation request, forwarding it to agent for picking up food from donor address and saving and tracking the data of the people involved.

## REQUIREMENT SPECIFICATIONS

A Software Requirements Specification (SRS) is a complete description of the behavior of the system to be developed. It includes a set of use cases that describe all the interactions the users will have with the software. Use cases are also known as functional requirements. In addition to use cases, the SRS also contains non-functional (or supplementary) requirements. Non-functional requirements are requirements which impose constraints on the design or implementation (such as performance engineering requirements, quality standards, or design constraints).

The general requirements of the project are:

- **To provide platform for food donation request by donor.**

- To provide necessary details to agent for picking up food.
- To provide platform for needy to directly request for food .
- To manage and track the food donation request and delivery.
- To keep the back-up of important data.

## PROJECT PLANNING & SCHEDULING

Project planning is all about choosing and designing effective policies and methodologies to attain project objectives. While ‘Project scheduling’ is a procedure of assigning tasks to get them completed by allocating appropriate resources within an estimated budget and time-frame.

The basis of project planning is the entire project. Unlike, project scheduling focuses only on the project-related tasks, the project start/end dates and project dependencies. Thus, a ‘project plan’ is a comprehensive document that contains the project aims, scope, costing, risks, and schedule. And a project schedule includes the estimated dates and sequential project tasks to be executed.

## STAGES OF PROJECT PLANNING

The project planning stages are as follows:

1. Identifying the key project sponsors and stakeholders, to determine the basis of project scope, budget, and time-frame for project execution.
2. Upon enlisting the stake-holder requirements, prioritizing/setting project objectives.
3. Identifying the project deliverables required to attain the project objectives.
4. Creating the project schedule.

5. Identifying the project risks, if any, and develop suitable mitigation plans.
6. Communicating and presenting the project plan to stakeholders.

## PROJECT SCHEDULING

The project scheduling phase refers to:

- Estimation of human resource and material requisite at every stage of the project; and approximate calculative time to complete each of these tasks.
- Indicates the start and end date of each project task and logical connectivity among various project tasks/activities.

## STAGES OF PROJECT SCHEDULING

The project scheduling stages are outlined below:

1. Based on the project scope, design and develop the TBS (Task-Breakdown Structure).
2. Identify the project-related tasks.
3. Identify the human resources and material requisite
4. Evaluate the approximate time required for each and every task
5. Allocation of resources
6. Analyze the detailed schedule
7. Monitor and govern the schedule

## SYSTEM ANALYSIS

System analysis is conducted for the purpose of studying a system or its parts in order to identify its objectives. It is a problem solving technique that improves the system and ensures that all the components of the system work efficiently to accomplish their purpose. Analysis specifies what the system should do.

## IDENTIFICATION OF NEED

To Important Indication for software we use the Principles of Requirement Engineering. Requirement engineering provides the appropriate mechanism for understanding what the customer wants, analyzing need, assessing feasibility, negotiating a reasonable solution, specifying the solution unambiguously, validating the specification and managing the requirement as they are transformed into an operational system. The requirement engineering process can be described in six distinct steps:

- **Requirement elicitation**
- **Requirement analysis & negotiation**
- **Requirement specification**
- **System Modeling**
- **Requirement validation**
- **Requirement Management**

In other words we can say that requirement analysis is a software task that bridges the gap between system level requirement engineering and software design.

Requirement analysis allows the software engineering to refine the software allocation and build models of the data, functional and behavioral domains that will be treated by software. Requirement analysis provides the software designer with a representation of information, function and behavior that can be translated into data, architectural, interface and component level design; finally the requirement specification provides the developer and the customer with the means to assess quality once software is built.

The most commonly used requirement elicitation technique is to conduct a meeting or interview. The first meeting between a software engineer and customer can be likened to the awareness of a first date between two adolescents.

Neither person knows what to say or ask; Both are worried that what they do say will be misinterpreted; both are thinking about where it might lead (Both likely have radically different expectation here); Both want to get the think over with, but at the same time, both want it to be a success.

Here according to this principle the analyst starts by asking context-free-questions. That is a set of question that will lead to a basic understanding of the problem, the people who want a solution, the nature of solution that is desired, and the effectiveness of the first encounter itself. The first set of Context-free question focuses on the customer, the overall goals, and the benefits. For example, the analyst might ask: -

Who is behind the request for this Work?

Who will use the solution?

What will be economic benefit of a successful solution?

Is there another source for the solution that you need?

The next set of questions enables the software engineer to gain a better Understanding of the problem and the customer to voice his or her perceptions about a solution: -

How would you characterize “good” output that would be generated by a successful solution?

What problem(s) will this solution address?

Can you show me (or describe) the environment in which the solution will be used?

Will special performance issues or constraints affect the way the solution is approached?

The final set of question focuses on the effectiveness of the meeting:

Are you the right person to answer these questions? Are your answers? Official”?

Are my questions relevant to the problem that you have?

Am I asking too many questions?

Can anyone else provide additional information?

Should I be asking you anything else?

According to the above concepts I went to institution and met its staffs, management, and some persons related with the organizational work, which advised me related with my project such as details of agent, policy related information will be cater this system.

## PRELIMINARY INVESTIGATION

The first step in the system development life cycle is the preliminary investigation to determine the feasibility of the System. The purpose of the preliminary investigation is to evaluate project requests. It is not a design study nor does it includes the collection of details top describe the business system in all respect. Rather, it is collecting of information that helps committee members to evaluate the merits of the project request and make an informed judgment about the feasibility of the proposed project.

Here for the Food Donation Management System, I have worked on the preliminary investigation that accomplished the following objectives: -

Clarify and understand the project request.

Determine the size of the project.

Assess costs and benefits of alternative approaches.

Determine the technical and operational; feasibility of alternative approaches.

Report the findings to management, with recommendation outlining the acceptances or rejection of the proposal.

Considering above criteria I also keep in mind that the requirements are clearly understandable when the clarification of project request is enquired. The data of the Food Waste Management System, which are collected by me during preliminary investigation, are through Reviewing organization Documents Onsite observation and Conducting interviews.

## FEASIBILITY STUDY

Not everything imaginable is feasible, not even in software, even as it may appear to outsiders. Feasibility is the determination of whether or not a project is worth doing. On the contrary, software feasibility has seven solid dimensions as below: -

- **Technical feasibility**
- **Operational feasibility**
- **Economic feasibility**
- **Social feasibility**
- **Management feasibility**
- **Legal feasibility**
- **Time feasibility**

The process followed in making this determination is called a feasibility study. The type of study determines if a project can and should be taken. Once it has been determined that a project is feasible, that analyst can go ahead and prepare the project specification which finalizes project requirements. Generally, feasibility studies are undertaken within tight time constraints and normally culminate in a written and oral feasibility report. The contents and recommendation of such a study will be used as a sound basis for deciding whether to proceed, postpone or cancel the project. Thus, since the feasibility study may lead to the commitment of large resources, it

becomes necessary that it should be conducted competently and that no fundamental errors of judgment are made.

In other words we can say that a feasibility study is conducted to select the best system that meets performance requirement. This contains and identification description, an evaluation of candidate system and the selection of best system for the job. The system required a statement of constraints; the identification of specific system objective and a description of outputs define performance.

---

#### TECHNICAL FEASIBILITY: -

Technical feasibility is concerned with specifying equipment and software that will successfully satisfy the user requirements. My project is fit in technical feasibility because it requires neither too much heavy configuration system for its run nor in its development.

Following hardware and software components are used in the development of proposed system.

The same configuration system is also meets all the requirements to run or for implements to run or for implementation of the system. Though I have also tested this software for that systems whose configuration is lower than the above specified

---

#### ECONOMICAL FEASIBILITY: -

Economic analysis is the most frequently used technique for evaluation of the effectiveness of a proposed system. More commonly known as Cost/Benefit analysis, the procedure is to determine the benefits and saving that are expected from a proposed system and compare them with costs. If benefits outweigh costs, a decision is taken to design and implement the system. Other weight costs, a decision is taken to design and implement the system. Otherwise, further justification or alternative in the proposed system will have to be made if is to have a chance of being approved. This is an ongoing effort that improves in accuracy at each phase of the system life cycle.

Before establishing Economical Feasibility so as to justify the expenses that different organization working under this category has to bear for this

Software. It is crystal clear that the user or Customer of this Software has no need to invest heavy amount for this software. As my project has been written in such a language, which is a platform Independent. It has also the feature of WORM. It means it possess the technology of Write Once & Read Many.

There is no any heavy expense on the maintenance of this Software. Also there is no need to expense a heavy amount on the set of "Very Expert Personals" because it is very easy and user-friendly software. It is fully tighten protection of Secret Password and User Name for unauthorized access of this Software.

For different types of Process or Operation, Reports or Query and Output also, there is no need of heavy expenditure.

---

#### OPERATIONAL FEASIBILITY: -

My project is also fit in Operational Feasibility Study. As I have explained before this about Technical Feasibility and Economical Feasibility, this Software is very easy and user-friendly. I have used a very easy menu system and also used some control buttons in the easy way by which one can choose the options on his desire.

Though this is fully protected with the security by word (Password and user name), if both are matched only then one can get access of this software.

Various Reports, Forms and Queries can be generated on the fingertips for the user.


In nutshell we can say that it has following operational features:

1. It is User-Friendly.
2. It is having less paperwork.
3. Efficient tractability.
4. Query can be generated.
5. Various Reports and Forms can be generated.
6. Fully protected by Password and User name for unauthorized access.


## DFD : DATA FLOW DIAGRAM

The DFD is an excellent communication tool for analysts to model processes and functional requirements. Used effectively, it is a useful and easy to understand modeling tool.


### Level 0 : Overall Concept

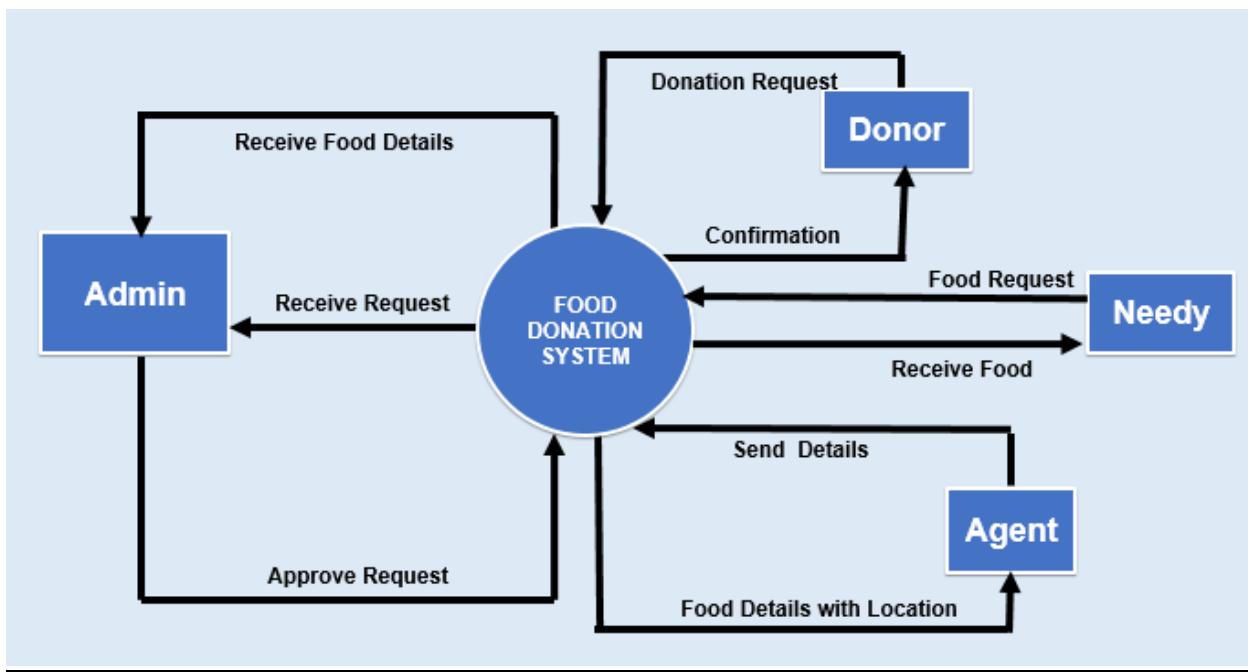


## Level 1 :

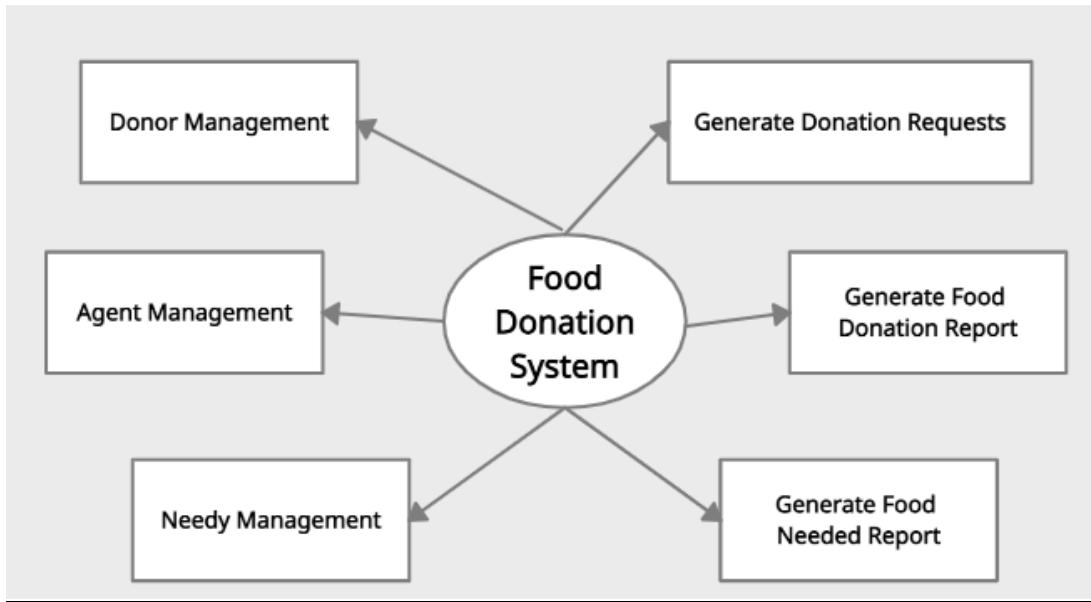


## Level 2.1: Donor Management

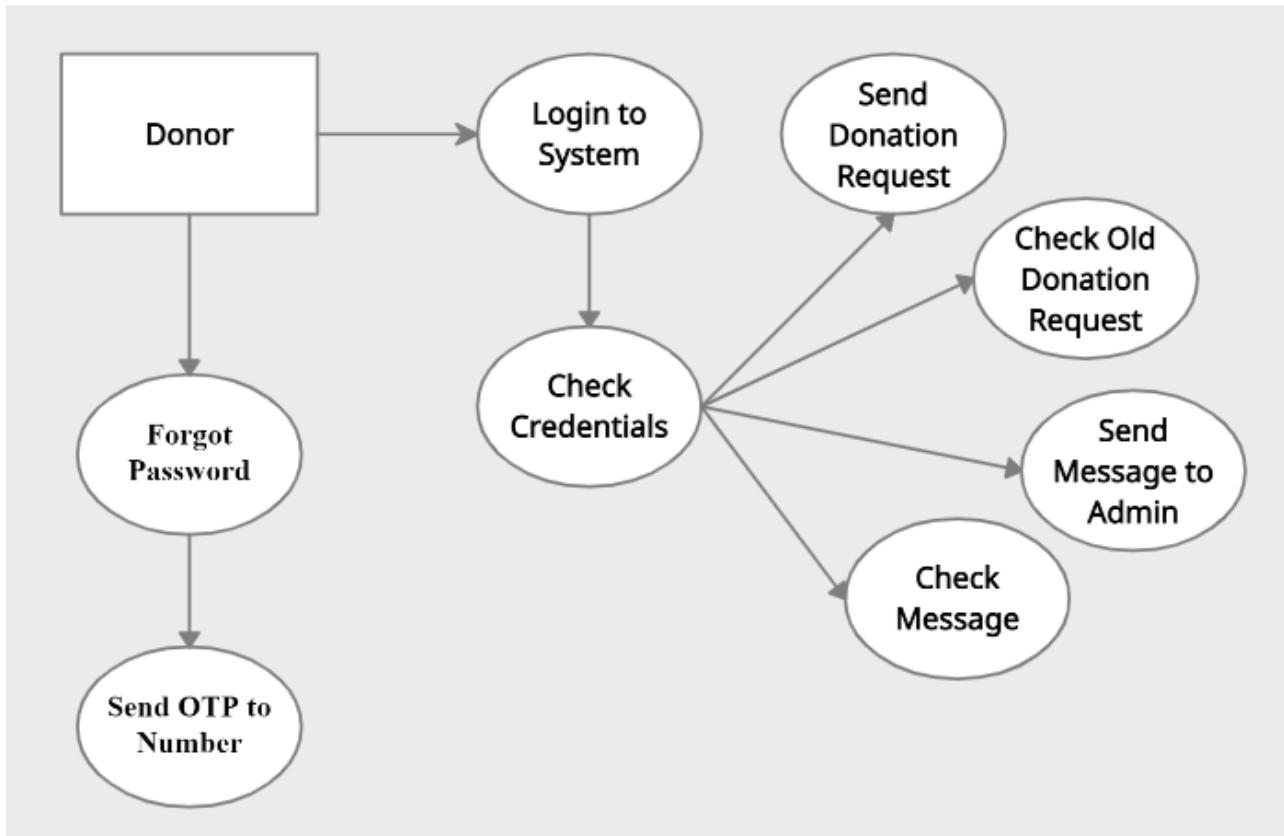


## Level 2.2 : Agent Management

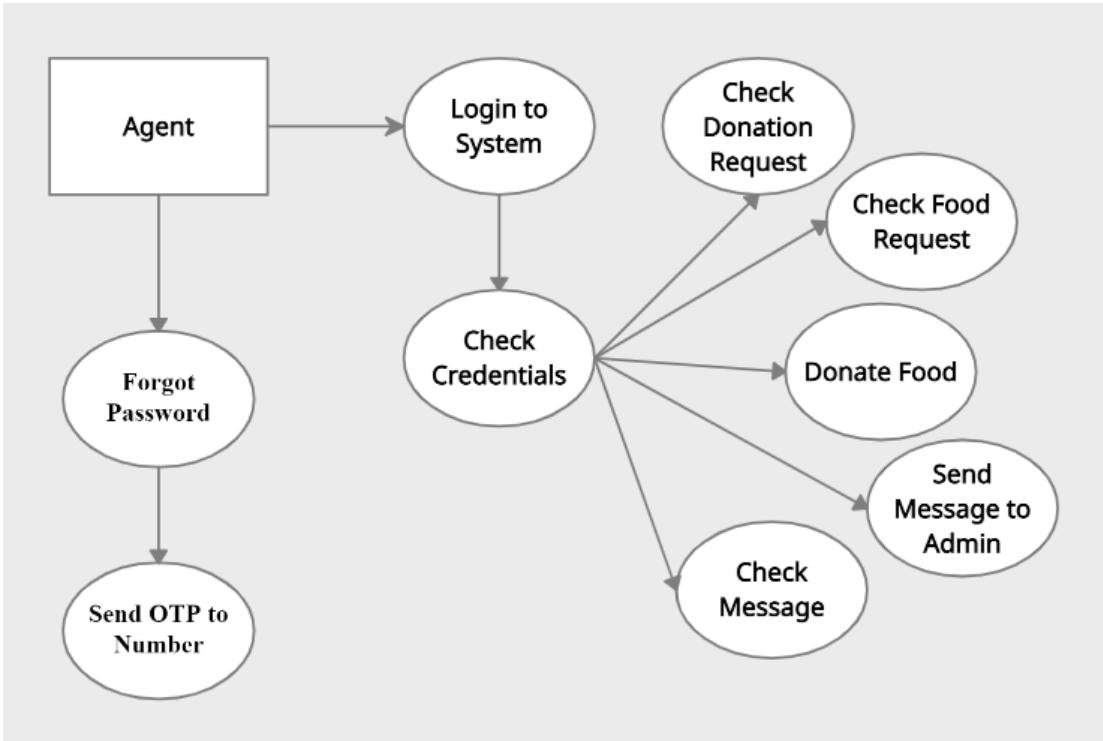

## Level 2.3 : Needy Management

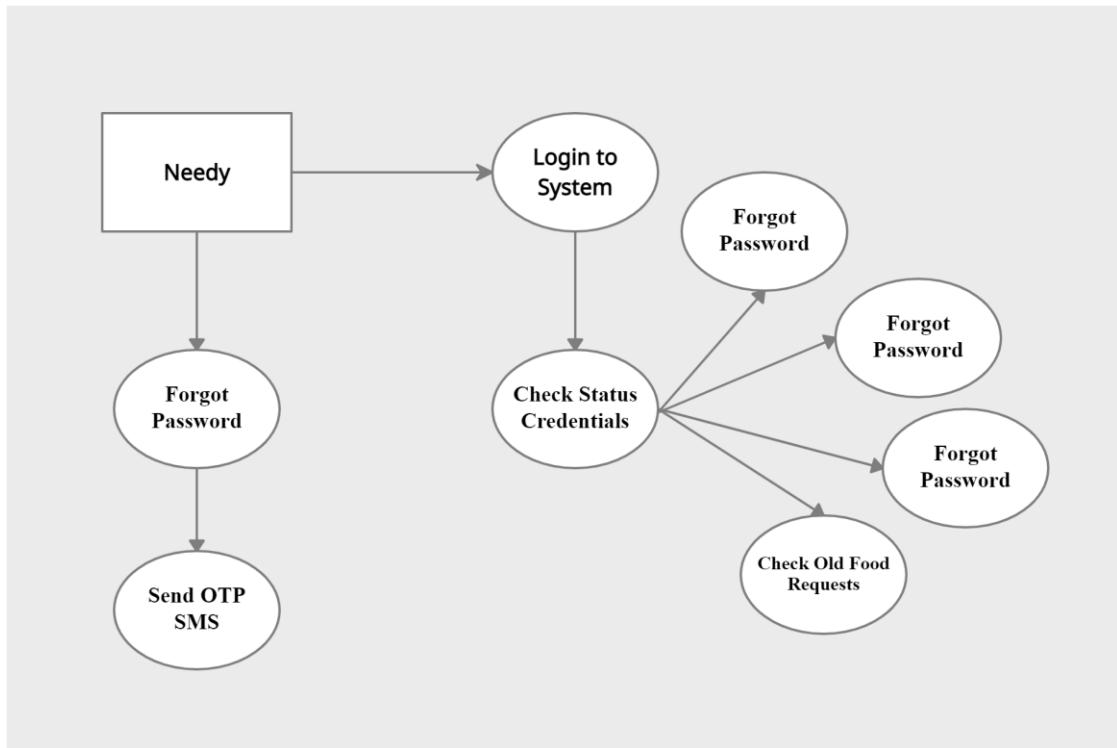


### Level 3 :

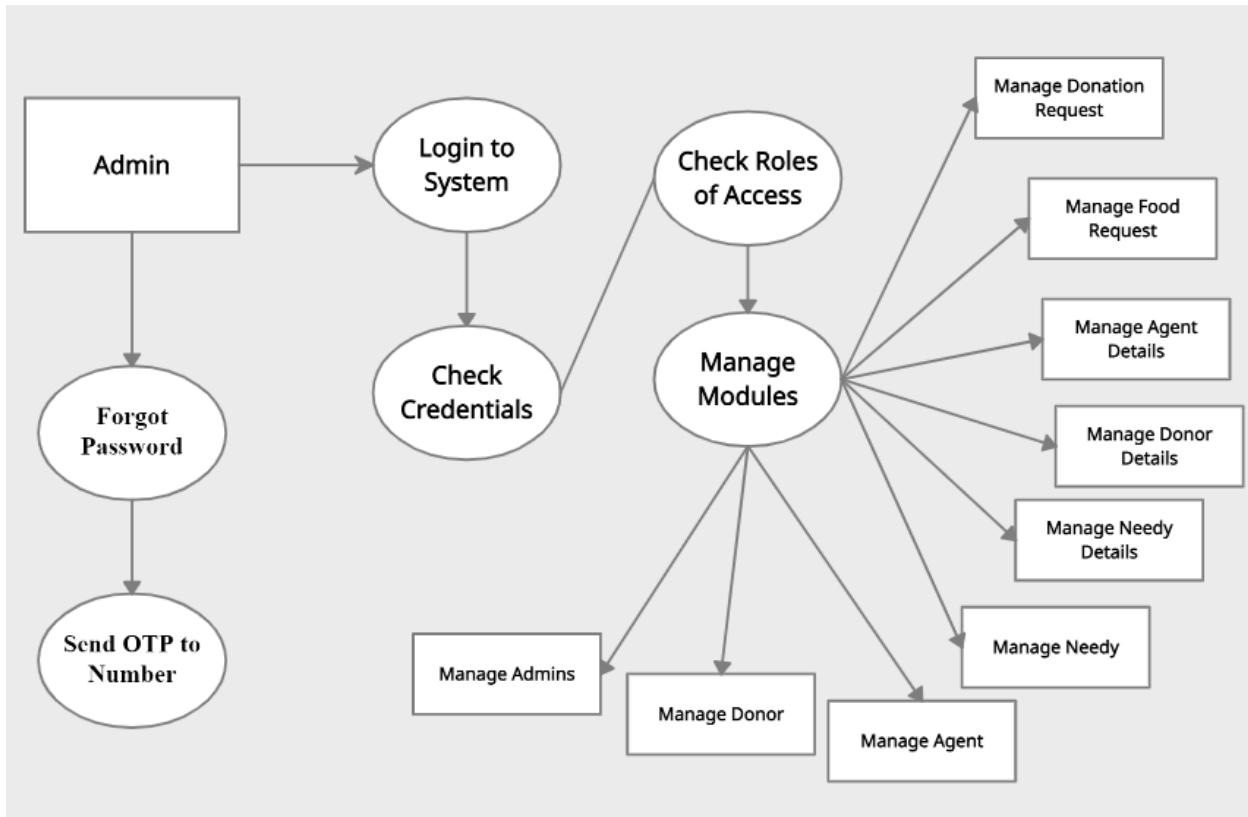


## ER DIAGRAM


### Between Donor and Admin :

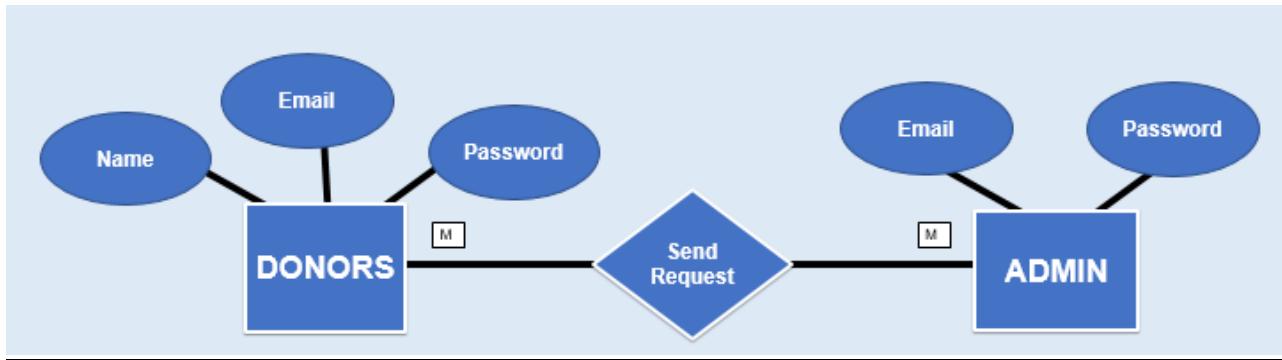

### Between Agent and Admin :

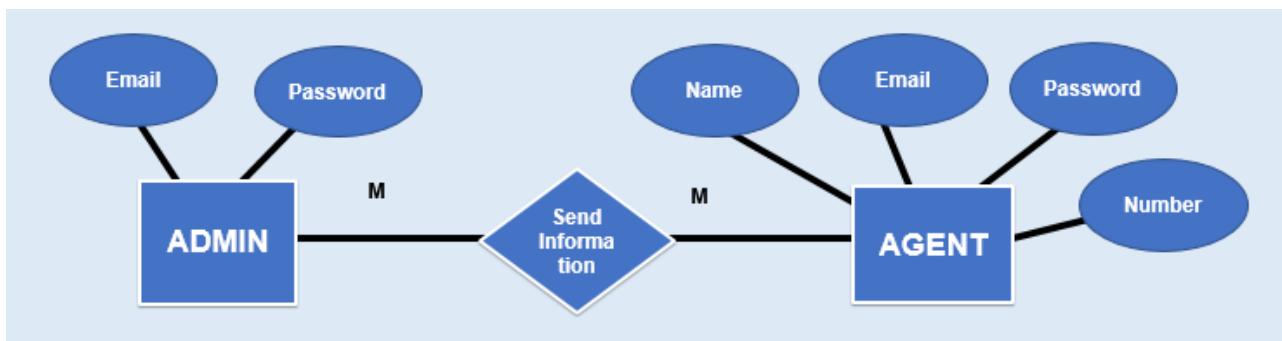

### Between Needy and Admin

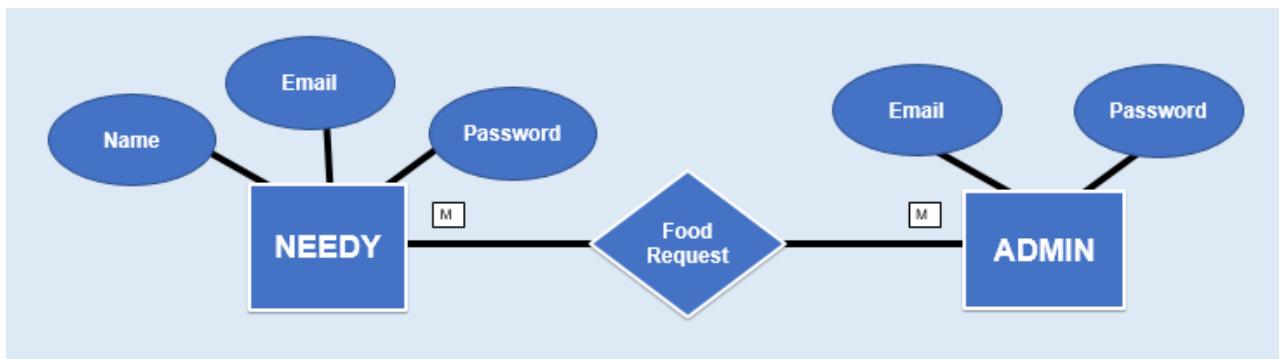

## MODULE DESCRIPTION

These are the following Modules in the project:-

1. **DONOR** :- This module is used for new registration and login for already registered donor. Here donor can create donation request and send message to admin.
2. **AGENT** :- This module is used to for new registration and login for already registered agent. The agent will get the food delivery details and can message to admin.
3. **NEEDY** : - This module is for the needy people who can request for food or any NGO can register here and request for food.
4. **ADMIN** :- This module is used to accept or reject the food donation request. It directs agent with food delivery location and can message the agent. It is responsible for managing all the data.

## DATA STRUCTURE SNAPSHOTS

**DATA DICTIONARY :** The data dictionary stores description of data items and structures, as well as systems processes. Data dictionary used for database design in this project is mentioned.

The data dictionary in general contains information about the following –

- Names of all the database tables and their schemas.
- Details about all the tables in the database, such as their owners, their security constraints, when they were created etc.
- Physical information about the tables such as where they are stored and how.
- Table constraints such as primary key attributes, foreign key information etc.
- Information about the database views that are visible.

### Send Message Admin To Agent (a2ag):

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The left sidebar lists various databases and tables, including 'a2ag'. The main panel displays the structure of the 'a2ag' table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	

## Send Message Admin To Donor(a2d)

The screenshot shows the phpMyAdmin interface on a Windows desktop. The left sidebar lists databases: New, fdw, New, a2ag, a2d, a2n, ag2a, agentlogin, d2a, donatenow, donation, donorlogin, foodrequest, login, mobile\_numbers, n2a, ngo, otp, userinfodata, information\_schema, mysql, performance\_schema, phpmyadmin, swiss\_collection, and test. The 'fdw' database is selected. In the main area, a query has been run:

```
desc a2d;
```

The results show the structure of the 'a2d' table:

Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment

Below the table structure, there is a 'Query results operations' section with options to Print, Copy to clipboard, or Create view.

## Send Message Admin To Needy(a2n)

The screenshot shows the phpMyAdmin interface on a Windows desktop. The left sidebar lists the same set of databases as the previous screenshot. The 'fdw' database is selected. A query has been run:

```
desc a2n;
```

The results show the structure of the 'a2n' table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	
name	varchar(255)	NO		NULL	
orgn	varchar(255)	NO		NULL	

Below the table structure, there is a 'Query results operations' section with options to Print, Copy to clipboard, or Create view.

## Send Message Agent To Admin(ag2a)

The screenshot shows the phpMyAdmin interface on a Windows desktop. The database selected is 'fdw'. A new table named 'desc\_ag2a' has been created. The table structure is as follows:

Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment

Below the table structure, the message "Your SQL query has been executed successfully." is displayed.

## Agent Login Details(agentlogin)

The screenshot shows the phpMyAdmin interface on a Windows desktop. The database selected is 'fdw'. A new table named 'desc\_agentlogin' has been created. The table structure is as follows:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
username	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
password	varchar(255)	NO		NULL	
token	varchar(255)	NO		NULL	
status	int(11)	NO		NULL	
mob	varchar(255)	NO		NULL	

Below the table structure, the message "Your SQL query has been executed successfully." is displayed.

## Send Message Donor To Admin(d2a)

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The left sidebar lists various databases and tables, including 'd2a'. The main panel displays the structure of the 'd2a' table:

Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment

Below the table structure, a message box indicates: "Your SQL query has been executed successfully." The query executed was "desc d2a;".

## Donation Request Details(donatenow)

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The left sidebar lists various databases and tables, including 'donatenow'. The main panel displays the structure of the 'donatenow' table:

Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
type	varchar(255)	NO		NULL	
date	date	NO		NULL	
time	time	NO		NULL	
quantity	varchar(255)	NO		NULL	
location	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment
status	int(11)	NO		NULL	

Below the table structure, a message box indicates: "Your SQL query has been executed successfully." The query executed was "desc donatenow;".

## Donation Form Details(donation)

The screenshot shows the phpMyAdmin interface for a database named 'fdw'. The left sidebar lists various databases and tables, including 'New', 'fdw', 'a2ag', 'a2d', 'a2n', 'ag2a', 'agentlogin', 'd2a', 'donatenow', 'donation', 'donorlogin', 'foodrequest', 'login', 'mobile\_numbers', 'n2a', 'ngo', 'otp', 'userinfodata', 'information\_schema', 'mysql', 'performance\_schema', 'phpmyadmin', 'swiss\_collection', and 'test'. The 'donation' table is selected in the main pane. The table structure is displayed with the following columns:

Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
dn	varchar(255)	NO		NULL	
on	varchar(255)	NO		NULL	
date	date	NO		NULL	
time	time	NO		NULL	
location	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment
status	int(11)	NO		NULL	
type	varchar(255)	NO		NULL	
quantity	varchar(255)	NO		NULL	

Below the table structure, there is a message: "Your SQL query has been executed successfully." and a "Query results operations" section with options for Print, Copy to clipboard, and Create view.

## Donor Login Details(donorlogin)

The screenshot shows the phpMyAdmin interface for a database named 'fdw'. The left sidebar lists various databases and tables, including 'New', 'fdw', 'a2ag', 'a2d', 'a2n', 'ag2a', 'agentlogin', 'd2a', 'donatenow', 'donation', 'donorlogin', 'foodrequest', 'login', 'mobile\_numbers', 'n2a', 'ngo', 'otp', 'userinfodata', 'information\_schema', 'mysql', 'performance\_schema', 'phpmyadmin', 'swiss\_collection', and 'test'. The 'donorlogin' table is selected in the main pane. The table structure is displayed with the following columns:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
username	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
password	varchar(255)	NO		NULL	
token	varchar(255)	NO		NULL	
status	int(11)	NO		NULL	
mob	varchar(255)	NO		NULL	
photo	blob	NO		NULL	

Below the table structure, there is a message: "Your SQL query has been executed successfully." and a "Query results operations" section with options for Print, Copy to clipboard, and Create view.

## Food Request Form Details(foodrequest)

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The 'donation' table is selected. The table structure is as follows:


Field	Type	Null	Key	Default	Extra
fullname	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
orgn	varchar(255)	NO		NULL	
date	date	NO		NULL	
time	time	NO		NULL	
location	varchar(255)	NO		NULL	
id	int(11)	NO	PRI	NULL	auto_increment
status	int(11)	NO		NULL	

## Admin Login Details(login)

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The 'login' table is selected. The table structure is as follows:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
username	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
password	varchar(255)	NO		NULL	
token	varchar(255)	NO		NULL	
status	int(11)	NO		NULL	
adminr	varchar(255)	NO		NULL	
mob	varchar(255)	NO		NULL	


## Send Message To Admin From Needy(n2a)

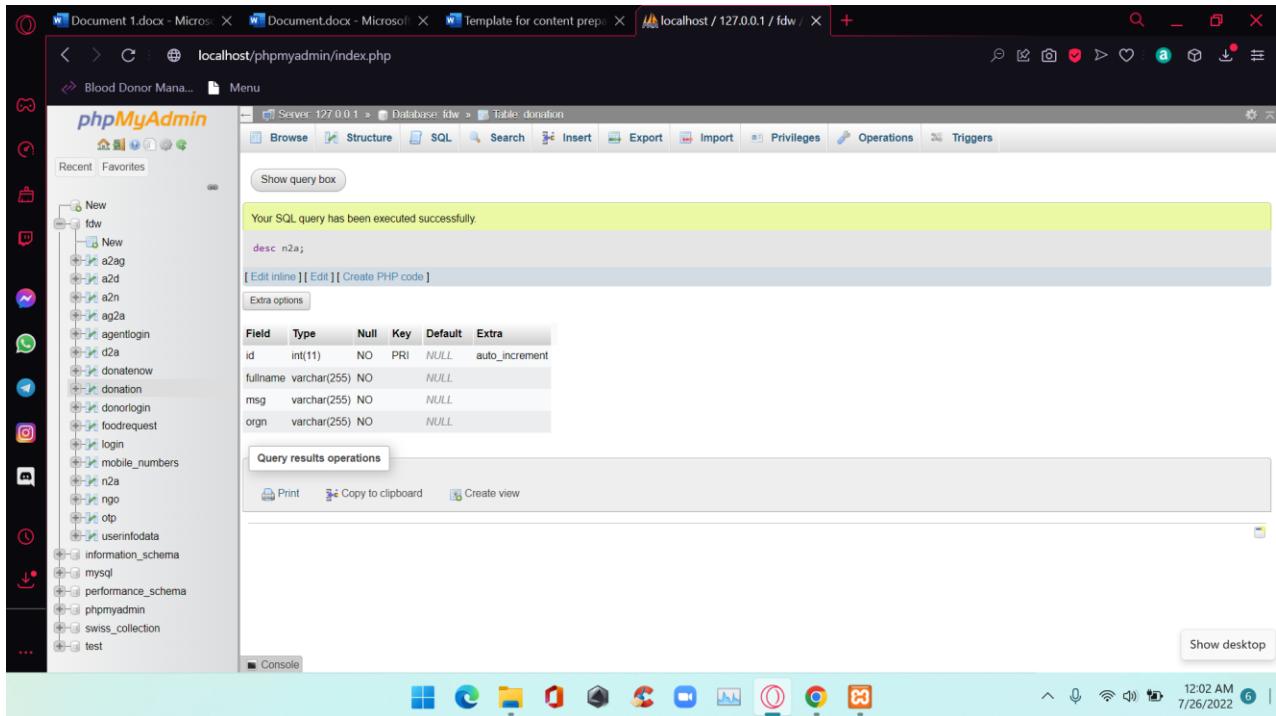

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The 'donation' table is selected. The table structure is as follows:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
msg	varchar(255)	NO		NULL	
orgn	varchar(255)	NO		NULL	

## Needy Details(ngo)

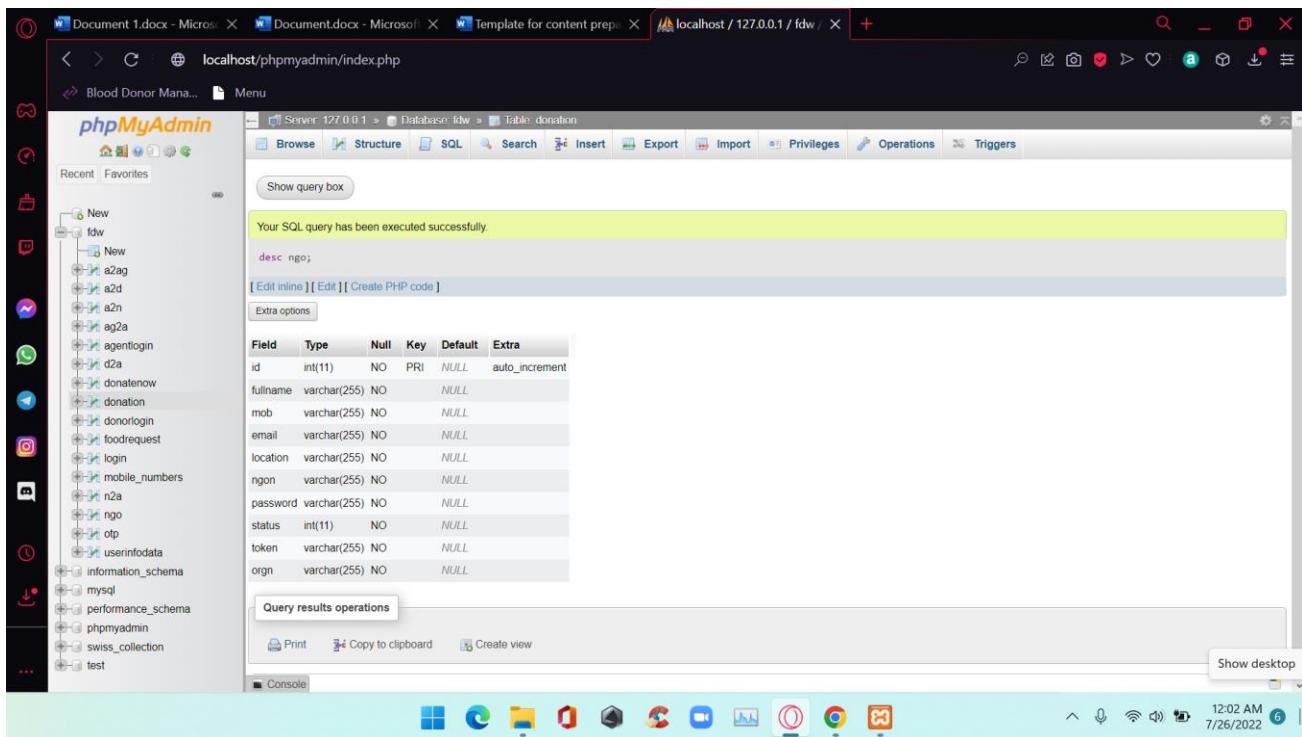

The screenshot shows the phpMyAdmin interface for the 'fdw' database. The 'ngo' table is selected. The table structure is as follows:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fullname	varchar(255)	NO		NULL	
mob	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
location	varchar(255)	NO		NULL	
ngon	varchar(255)	NO		NULL	
password	varchar(255)	NO		NULL	
status	int(11)	NO		NULL	
token	varchar(255)	NO		NULL	
orgn	varchar(255)	NO		NULL	

## Contact Us Details(userinfodata)



The screenshot shows the phpMyAdmin interface for a MySQL database named 'fdw'. The left sidebar shows various databases and tables. The main area displays the structure of the 'userinfodata' table under the 'fdw' database. The table has the following columns:



Field	Type	Null	Key	Default	Extra
id	int(255)	NO	PRI	NULL	auto_increment
user	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
mob	varchar(255)	NO		NULL	
comment	varchar(255)	NO		NULL	



Below the table structure, there is a 'Query results operations' section with options for Print, Copy to clipboard, and Create view.

# SNAPSHOTS AND CODING

## HomePage (index.php)

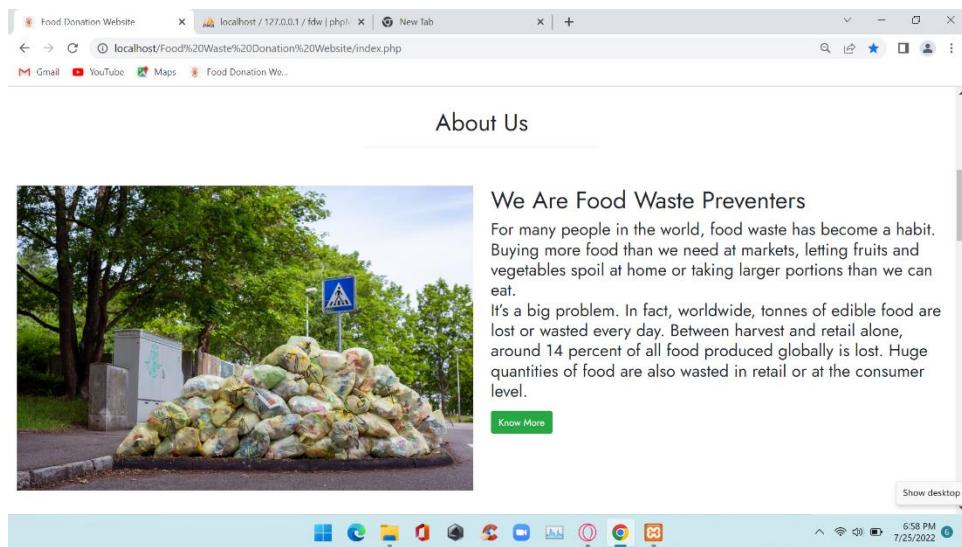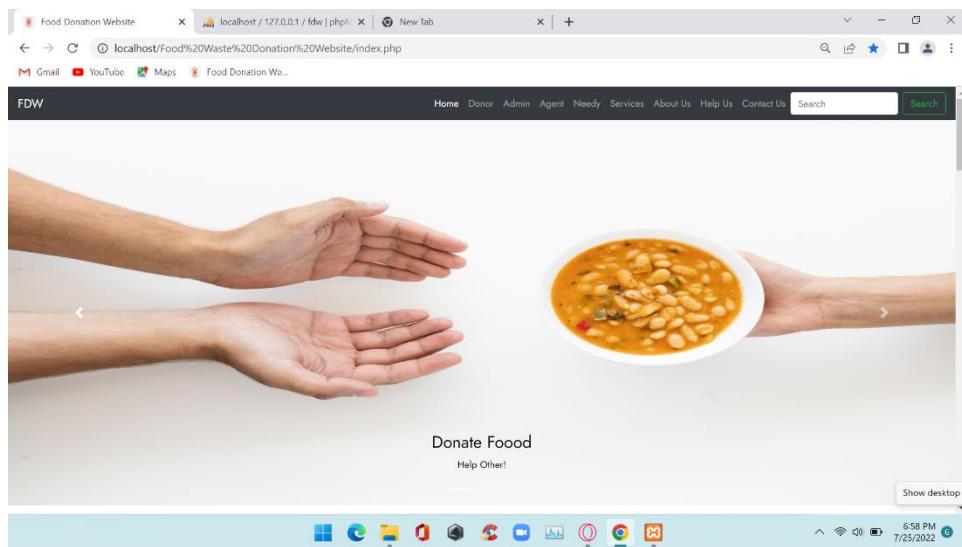

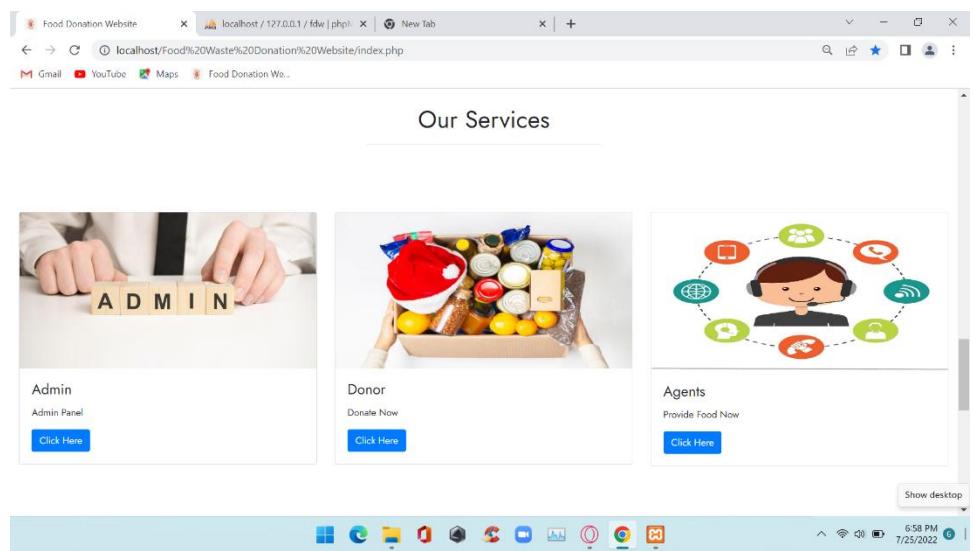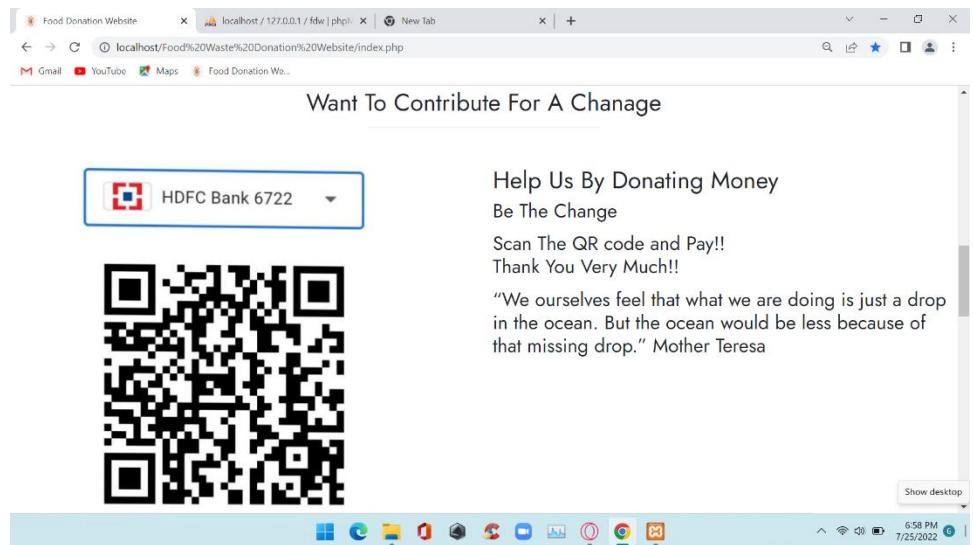

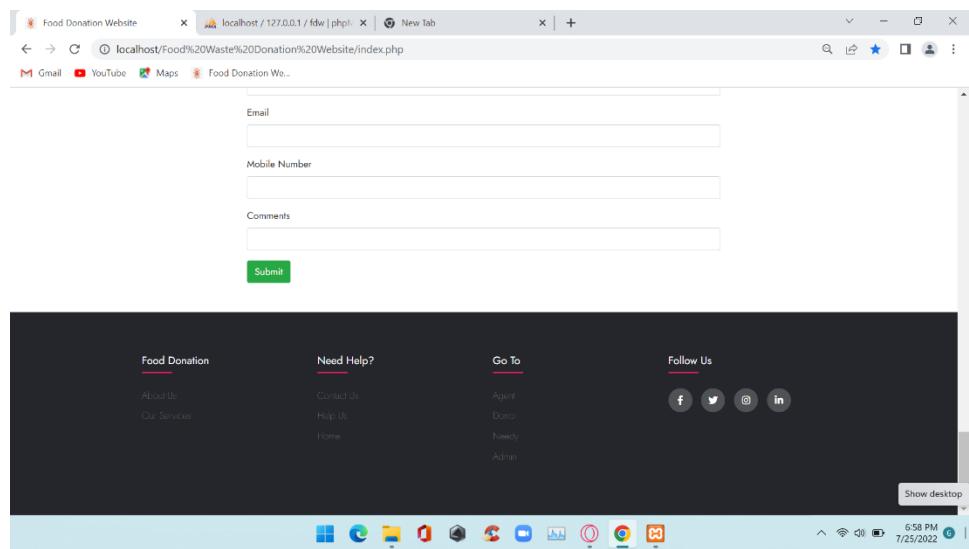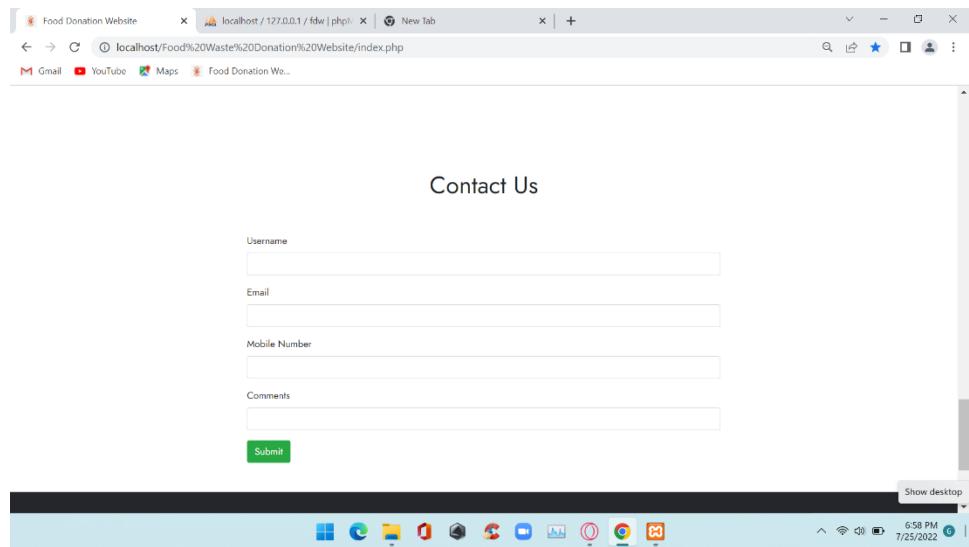

About Us

localhost / 127.0.0.1 / fdw | php | Sign in & Sign up Form - Pure C | +

Gmail YouTube Maps Food Donation We...

## About Us

"Hunger is not a problem. It is an obscenity. How wonderful it is that nobody need wait a single moment before starting to improve the world." - Anne Frank



7:34 PM 7/25/2022

About Us

localhost / 127.0.0.1 / fdw | php | Sign in & Sign up Form - Pure C | +

Gmail YouTube Maps Food Donation We...

## Our Mission

**ACTION**  
To feed needy and hungry with edible surplus food.

**AWARENESS**  
To raise awareness about food loss and food waste amongst citizens and bring about behavioral change in them to prevent food waste.

**FOOD SOLUTION**  
To encourage businesses to adopt good practices to reduce food loss and food waste in their supply chains and sharing good practices

7:34 PM 7/25/2022

**FOOD SAFETY**

- 1** Surplus food is picked up from the food donor and packed in clean and covered containers. Surplus food is stored and transported in appropriate hygienic condition at appropriate optimum temperature suitable for perishable and non-perishable food separately. Transporting vehicle is cleaned on a regular basis and not for purposes other than delivering food.
- 2** Surplus food is distributed or served to the needy before the expiry of surplus food. Spoiled food is avoided at any case and preferable diverted to alternative solutions such as composting, bio-gas plants ensuring that it also doesn't reaches dustbin or landfills. Food is always stored off the floor and away from walls and non-food items. Storage area, including the floor, pallets and shelves are cleaned regularly.
- 3** Doors, windows and roofs of storage area are well sealed to prevent pest entry and a pest control program is organized at regular intervals. Our staffs and volunteers are oriented with personal hygiene and sanitation practices for maintaining hygiene standards in food handling. We are maintaining a standard documentation process in which we record details of surplus food viz. details of donor, hunger spots, donation date, food item, food quantity, date of distribution.



**ANAND KUMAR**

Student of BCA in CIMAGE Professional College. MCA Aspirant.



**SAURABH KUMAR SUMAN**

Student of BCA in CIMAGE Professional College. Currently working as Scholar Trainee at Wipro Ltd.



**SIDHARTH RAJ**

Student of BCA in CIMAGE Professional College. Currently working as Scholar Trainee at Wipro Ltd.

7:34 PM 7/25/2022

## Code For index.php

```
<!DOCTYPE html>

<html>
<head>
<title>Food Donation Website</title>
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/css/bootstrap.min.css">
<!--Style.css linking-->
<link rel="stylesheet" type="text/css" href="css/style.css">
```

```

<!--Website font Change-->

<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Jost:wght@100;400&display=swap" rel="stylesheet">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.1.1/css/all.min.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">

</head>

<body>

<!--Nev Bar-->

<section>

<nav class="navbar navbar-expand-lg navbar-dark bg-dark">

<a class="navbar-brand" href="index.php">FDW</a>

<button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
    <span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="navbarSupportedContent">

<ul class="navbar-nav ml-auto">

<li class="nav-item active">
    <a class="nav-link" href="index.php">Home <span class="sr-only"></span></a>
</li>

<li class="nav-item">
    <a class="nav-link" href="donorlogin.php">Donor</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="adminlogin.php">Admin</a>
</li>


```

```

<li class="nav-item">
  <a class="nav-link" href="agentlogin.php">Agent</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="ngologin.php">Needy</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="#services">Services</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="About Us\index.html">About Us</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="#payment">Help Us</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="#contact">Contact Us</a>
</li>

</ul>

<form class="form-inline my-2 my-lg-0">
  <input class="form-control mr-sm-2" type="search" placeholder="Search" aria-label="Search">
  <button class="btn btn-outline-success my-2 my-sm-0" type="submit">Search</button>
</form>

</div>

</nav>

</section>

```

```

<!--Carousel-->

<section>

<div id="demo" class="carousel slide" data-ride="carousel">
  <ul class="carousel-indicators">
    <li data-target="#demo" data-slide-to="0" class="active"></li>
    <li data-target="#demo" data-slide-to="1"></li>
    <li data-target="#demo" data-slide-to="2"></li>
  </ul>
  <div class="carousel-inner">
    <div class="carousel-item active">
      
      <div class="carousel-caption">
        <h3><font color="black">Donate Foood</h3>
        <p>Help Other!</p></font>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption">
        <h3>Distribute Food</h3>
        <p>Be The Change!</p>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption">
        <h3>Don't Waste Food</h3>
        <p>Give It To Needy!</p>
      </div>
    </div>
  </div>
</div>

```

```

</div>

</div>

<a class="carousel-control-prev" href="#demo" data-slide="prev">
  <span class="carousel-control-prev-icon"></span>
</a>
<a class="carousel-control-next" href="#demo" data-slide="next">
  <span class="carousel-control-next-icon"></span>
</a>
</div>
</div>
</section>
<!--CDN links-->
<section>
<script src="https://cdn.jsdelivr.net/npm/jquery@3.6.0/dist/jquery.slim.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/js/bootstrap.bundle.min.js"></script>
</section>

<!--About Us-->

<section>
<div class="container-fluid">
  <h1 class="text-center text-capitalize pt-5">About us</h1>
  <hr class="w-25 mx-auto pt-5">
  <div class="row mb-5">
    <div class="col-lg-6 col-md-6 col-12">
      
    </div>
  </div>
</div>

```

```

<div class="col-lg-6 col-md-6 col-12">

    <h1>We Are Food Waste Preventers </h1>

    <h3>

        <p>

            For many people in the world, food waste has become a habit. Buying more food than we need at markets, letting fruits and vegetables spoil at home or taking larger portions than we can eat.

            <br>It's a big problem. In fact, worldwide, tonnes of edible food are lost or wasted every day. Between harvest and retail alone, around 14 percent of all food produced globally is lost. Huge quantities of food are also wasted in retail or at the consumer level.

        </p></h3>

        <a href="About Us\index.html" class="btn btn-success">Know More</a>

    </div>

</div>

</div>

</section>

<!--Payment-->

<section id="payment">

<div class="container-fluid">

    <h1 class="text-center text-capitalize pt-5">Want To Contribute For A Change</h1>

    <hr class="w-25 mx-auto pt-5">

    <div class="row mb-5">

        <div class="col-lg-6 col-md-6 col-12">

        </div>

        <div class="col-lg-6 col-md-6 col-12">

            <h1>Help Us By Donating Money</h1>

            <h2>Be The Change</h2>

            <p><h2>

                Scan The QR code and Pay!!


```

<br>Thank You Very Much!!

</p></h2>

<p><h2>“We ourselves feel that what we are doing is just a drop in the ocean. But the ocean would be less because of that missing drop.” Mother Teresa</p></h2>

```
</div>
</div>
</div>
</section>
<!--Services-->
```

```
<section class="my-5" id="services">
<div class="py-5">
    <h1 class="text-center text-capitalize pt-5">Our Services</h1>
    <hr class="w-25 mx-auto pt-5">
</div>
```

```
<div class="container-fluid">
<div class="row">
    <div class="col-lg-4 col-md-4 col-12">
        <div class="card">
            
            <div class="card-body">
                <h4 class="card-title">Admin</h4>
                <p class="card-text">Admin Panel </p>
                <a href="adminlogin.php" class="btn btn-primary">Click Here</a>
            </div>
        </div>
    </div>
</div>
<div class="col-lg-4 col-md-4 col-12">
```

```

<div class="card">
    
    <div class="card-body">
        <h4 class="card-title">Donor</h4>
        <p class="card-text">Donate Now </p>
        <a href="donorlogin.php" class="btn btn-primary">Click Here</a>
    </div>
</div>

<div class="col-lg-4 col-md-4 col-12">
    <div class="card">
        
        <div class="card-body">
            <h4 class="card-title">Agents</h4>
            <p class="card-text">Provide Food Now</p>
            <a href="agentlogin.php" class="btn btn-primary">Click Here</a>
        </div>
    </div>
</div>
</div>
</section>
<section>

<!--Contact US-->
<section class="my-5" id="contact">
    <div class="py-5">
        <h1 class="text-center text-capitalize pt-5">Contact Us</h1>
    </div>

```

```

<div class="w-50 m-auto">

<form action="userinfo.php" method="post">

    <div class="form-group">
        <label>Username</label>
        <input type="text" name="user" autocomplete="off" class="form-control" required>
    </div>

    <div class="form-group">
        <label>Email</label>
        <input type="text" name="email" autocomplete="off" class="form-control" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$">
    </div>

    <div class="form-group">
        <label>Mobile Number</label>
        <input type="text" name="mobile" autocomplete="off" class="form-control" required pattern="[789][0-9]{9}$_">
    </div>

    <div class="form-group">
        <label>Comments</label>
        <input type="text" name="comments" autocomplete="off" class="form-control" required>
        <!--<textarea class="form-control" name="comments" required>
        </textarea>-->
    </div>

    <button type="submit" class="btn btn-success">Submit</button>
</form>
</div>
</section>
<!--Footer-->

<?php include 'footer.php';?>

```

```
</body>  
</html>
```

### CSS Code For Homepage(style.css)

```
*{ margin :0 ; padding:0; box-sizing: border-box;  
font-family: 'Jost', sans-serif;}  
  
.carousel-inner img{  
width:100%;  
  
height: 90vh;  
}  
  
.aboutimg{  
width:100;  
  
height: 250px!important;  
}
```

### Code For Contact Us Form Submit(userinfo.php)

```
<?php  
  
$con = mysqli_connect('localhost','root');  
  
if($con)  
{  
echo "<script>alert('Connection Ready');</script>";  
}  
  
else  
{  
echo "<script>alert('Connection Failed');</script>";  
}  
  
mysqli_select_db($con,'fdw');
```

```

$user=$_POST['user'];
$email=$_POST['email'];
$mobile=$_POST['mobile'];
$comments=$_POST['comments'];
$query = "insert into userinfodata (user,email,mob,comment)
values('$user','$email','$mobile','$comments')";
mysqli_query($con,$query);
echo "<script>alert('Sent To Admin.');//</script>";
echo '<script>window.location="index.php"</script>';
?>

```

### **Code For HomePageFooter(footer.php)**

```

<!DOCTYPE html>
<html lang="en">
<head>

<title>Footer Design</title>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="css/footherstyle.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>

<footer class="footer">
<div class="container">
<div class="row">
<div class="footer-col">

```

```
<h4>Food Donation</h4>
<ul>
    <li><a href="About Us\index.html">about us</a></li>
    <li><a href="#services">our services</a></li>
</ul>
</div>

<div class="footer-col">
    <h4>Need help?</h4>
    <ul>
        <li><a href="#contactus">Contact Us</a></li>
        <li><a href="#payment">Help Us</a></li>
        <li><a href="index.php">Home</a></li>
    </ul>
</div>

<div class="footer-col">
    <h4>Go To</h4>
    <ul>
        <li><a href="agentlogin.php">Agent</a></li>
        <li><a href="donorlogin.php">Donor</a></li>
        <li><a href="ngologin.php">Needy</a></li>
        <li><a href="adminlogin.php">Admin</a></li>
    </ul>
</div>

<div class="footer-col">
    <h4>Follow Us</h4>
    <div class="social-links">
        <a href="https://www.facebook.com/"><i class="fab fa-facebook-f"></i></a>
    </div>

```

```

        <a href="https://twitter.com/i/flow/login"><i class="fab fa-
twitter"></i></a>

        <a href="https://www.instagram.com/accounts/login/"><i
class="fab fa-instagram"></i></a>

        <a href="https://www.linkedin.com/signup"><i class="fab fa-
linkedin-in"></i></a>

    </div>

</div>

</div>

</div>

</body>

</html>

```

### **Code For AboutUs(index.html)**

```

<!DOCTYPE html>

<html style="font-size: 16px;" lang="en"><head>

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <meta charset="utf-8">

    <meta name="keywords" content="VR headsets, VR&apos;s Surprising Benefits, VR&apos;s
Surprising Benefits, 1, 2, 3, The benefits of virtual reality, Experts reveal four surprising health benefits of VR
gaming, Follow Us!">

    <meta name="description" content="">

    <title>About Us</title>

    <link rel="stylesheet" href="style.css" media="screen">

    <link rel="stylesheet" href="Home.css" media="screen">

    <script class="u-script" type="text/javascript" src="jquery.js" defer=""></script>

    <script class="u-script" type="text/javascript" src="jquery.js" defer=""></script>

    <meta name="generator" content="Nicepage 4.13.4, nicepage.com">

    <link id="u-theme-google-font" rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Roboto:100,100i,300,300i,400,400i,500,500i,700,700i,900,900i |
Open+Sans:300,300i,400,400i,500,500i,600,600i,700,700i,800,800i">

```

```

<link id="u-page-google-font" rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Raleway:100,100i,200,200i,300,300i,400,400i,500,500i,600,600i,
700,700i,800,800i,900,900i|Oswald:200,300,400,500,600,700">

<script type="application/ld+json">{
"@context": "http://schema.org",
"@type": "Organization",
"name": ""

}</script>

<meta name="theme-color" content="#478ac9">

<meta property="og:title" content="Home">

<meta property="og:type" content="website">

</head>

<body class="u-body u-xl-mode">

<header class="u-clearfix u-header u-header" id="sec-c43d"><div class="u-clearfix u-sheet u-sheet-1"></div></header>

<section class="u-clearfix u-white u-section-1" id="carousel_79f2">

<div class="u-clearfix u-layout-wrap u-layout-wrap-1">

<div class="u-layout">

<div class="u-layout-row">

<div class="u-align-left u-container-style u-layout-cell u-left-cell u-size-23 u-layout-cell-1">

<div class="u-container-layout u-container-layout-1">

<div class="u-border-6 u-border-palette-2-base u-line u-line-horizontal u-line-1"></div>

<h1 class="u-custom-font u-font-raleway u-text u-text-palette-2-base u-title u-text-1">About Us</h1>

<p class="u-text u-text-2"> "Hunger is not a problem. It is an obscenity. How wonderful it is that nobody need wait a single moment before starting to improve the world." – Anne Frank&nbsp;</p>

</div>

</div>

<div class="u-container-style u-image u-layout-cell u-right-cell u-size-37 u-image-1" data-image-width="1280" data-image-height="801">

<div class="u-container-layout u-container-layout-2"></div>

```

```

        </div>
        </div>
        </div>
        </div>
        </div>
</section>

<section class="u-clearfix u-grey-5 u-section-2" id="sec-e136">
    <div class="u-clearfix u-sheet u-sheet-1">
        <div class="u-clearfix u-expanded-width u-gutter-0 u-layout-wrap u-layout-wrap-1">
            <div class="u-layout">
                <div class="u-layout-row">
                    <div class="u-align-left u-container-style u-layout-cell u-left-cell u-size-30 u-layout-cell-1">
                        <div class="u-container-layout u-container-layout-1">
                            <p class="u-text u-text-default u-text-1">No Food Waste is an organisation which aims to redistribute excess food from weddings, parties, events to those who are hungry. We aim to bring benefits across the spectrum of society and help provide access to food to those who don't have adequate means to access it.</p>
                        </div>
                    </div>
                    <div class="u-align-left u-container-style u-layout-cell u-size-30 u-layout-cell-2">
                        <div class="u-container-layout u-valign-top u-container-layout-2">
                            <p class="u-text u-text-default u-text-2">A global level study by the Food and Agriculture Organization of the United Nations (FAO) says that one-third of the food, roughly 1.3 billion tons, is wasted every year. On the other hand, United Nations Food and Agriculture Organization (FAO) estimates that about 815 million people in the world are suffering from chronic undernourishment.</p>
                        </div>
                    </div>
                </div>
            </div>
        </div>
        </div>
    </div>
</section>

<section class="u-clearfix u-grey-5 u-section-3" id="sec-0f4f">

```

```

<div class="u-clearfix u-sheet u-sheet-1">

    <p class="u-text u-text-default u-text-1">Hunger cannot be combated without a strategy. India has a twin problem of excess supply of foodgrain (flagged by the RBI) and an excess number of very hungry people, which indicates that food is piling up at one end and on the other nearly 200 million people are hungry.</p>

</div>

</section>

<section class="u-align-center u-clearfix u-palette-2-base u-section-4" id="carousel_a0d8">

<div class="u-clearfix u-sheet u-sheet-1">

    <h1 class="u-text u-text-default u-text-1">Our Mission </h1>

    <div class="u-expanded-width u-list u-list-1">

        <div class="u-repeater u-repeater-1">

            <div class="u-align-center u-container-style u-list-item u-radius-15 u-repeater-item u-shape-round u-white u-list-item-1">

                <div class="u-container-layout u-similar-container u-container-layout-1"><span class="u-file-icon u-icon u-icon-circle u-palette-2-light-3 u-icon-1"></span>

                    <h5 class="u-custom-font u-font-raleway u-text u-text-palette-2-base u-text-2">ACTION</h5>

                    <p class="u-text u-text-palette-2-dark-2 u-text-3">To feed needy and hungry with edible surplus food.</p>

                </div>

            </div>

            <div class="u-align-center u-container-style u-list-item u-radius-15 u-repeater-item u-shape-round u-white u-list-item-2">

                <div class="u-container-layout u-similar-container u-container-layout-2"><span class="u-file-icon u-icon u-icon-circle u-palette-2-light-3 u-icon-2"></span>

                    <h5 class="u-custom-font u-font-raleway u-text u-text-palette-2-base u-text-4">Awareness</h5>

                    <p class="u-text u-text-palette-2-dark-2 u-text-5">To raise awareness about food loss and food waste amongst citizens and bring about behavioral change in them to prevent food waste.</p>

                </div>

            </div>

            <div class="u-align-center u-container-style u-list-item u-radius-15 u-repeater-item u-shape-round u-white u-list-item-3">

                <div class="u-container-layout u-similar-container u-container-layout-3"><span class="u-file-icon u-icon u-icon-circle u-palette-2-light-3 u-icon-3"></span>

                    <h5 class="u-custom-font u-font-raleway u-text u-text-palette-2-base u-text-6"> FOOD SOLUTION</h5>

                </div>

            </div>

        </div>

    </div>

</div>

```

**<p class="u-text u-text-palette-2-dark-2 u-text-7">To encourage businesses to adopt good practices to reduce food loss and food waste in their supply chains and sharing good practices</p>**

```

</div>

<div class="u-container-style u-custom-item u-grey-5 u-list-item u-repeater-item u-list-item-3">
    <div class="u-container-layout u-similar-container u-align-middle-lg u-align-middle-xl u-container-
layout-3">
        <h2 class="u-custom-item u-text u-text-default u-text-palette-2-base u-text-6">3<br>
        </h2>
        <p class="u-custom-item u-text u-text-default u-text-7"> Doors, windows and roofs of storage area are well sealed to prevent pest entry and a pest control program is organized at regular intervals. Our staffs and volunteers are oriented with personal hygiene and sanitation practices for maintaining hygiene standards in food handling. We are maintaining a standard documentation process in which we record details of surplus food viz. details of donor, hunger spots, donation date, food item, food quantity, date of distribution.</p>
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
</section>
<section class="u-align-center u-clearfix u-grey-5 u-section-6" id="carousel_61f5">
    <div class="u-clearfix u-sheet u-sheet-1">
        <h2 class="u-text u-text-default u-text-1">Our Tea m</h2>
        <div class="u-expanded-width u-list u-list-1">
            <div class="u-repeater u-repeater-1">
                <div class="u-align-center u-container-style u-list-item u-radius-20 u-repeater-item u-shape-round u-
white u-list-item-1">
                    <div class="u-container-layout u-similar-container u-container-layout-1">
                        
                        <h3 class="u-align-left u-custom-font u-text u-text-default u-text-palette-2-base u-text-2">ANAND KUMAR</h3>
                        <p class="u-align-left u-text u-text-default u-text-3">Student of BCA in CIMAGE Professional College. MCA Aspirant.</p>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```

<div class="u-align-center u-container-style u-list-item u-radius-20 u-repeater-item u-shape-round u-white">

    <div class="u-container-layout u-similar-container u-container-layout-2">
        
        <h3 class="u-align-left u-custom-font u-text u-text-default u-text-palette-2-base u-text-4">SAURABH KUMAR SUMAN</h3>
        <p class="u-align-left u-text u-text-default u-text-5">Student of BCA in CIMAGE Professional College. Currently working as Scholar Trainee at Wipro Ltd.</p>
    </div>
</div>

<div class="u-align-center u-container-style u-list-item u-radius-20 u-repeater-item u-shape-round u-white">
    <div class="u-container-layout u-similar-container u-container-layout-3">
        
        <h3 class="u-align-left u-custom-font u-text u-text-default u-text-palette-2-base u-text-6">SIDHARTH RAJ </h3>
        <p class="u-align-left u-text u-text-default u-text-7"> Student of BCA in CIMAGE Professional College. Currently working as Scholar Trainee at Wipro Ltd.</p>
    </div>
</div>
</div>
</div>
</div>
</section>

```

```

<footer class="u-align-center u-clearfix u-footer u-grey-80 u-footer" id="sec-bc5b"><div class="u-align-left u-clearfix u-sheet u-sheet-1"></div></footer>
<section class="u-backlink u-clearfix u-grey-80">
</section>

```

```
</body></html>
```


### **Code For Database connection(config.php)**



```
<?php  
  
$hostname = "localhost";  
  
$username = "root";  
  
$password = "";  
  
$database = "fdw";  
  
  
$conn = mysqli_connect($hostname, $username, $password, $database) or die("Database connection failed");  
  
?>
```



### **Code For Logout(logout.php)**

```
<?php  
  
session_start();  
  
session_unset();  
  
session_destroy();  
  
echo"<script>alert('Logged-out')</script>";  
  
echo"<script>window.location = 'index.php'</script>";  
  
  
?>
```

## Donor Login and Signup with Otp Verification

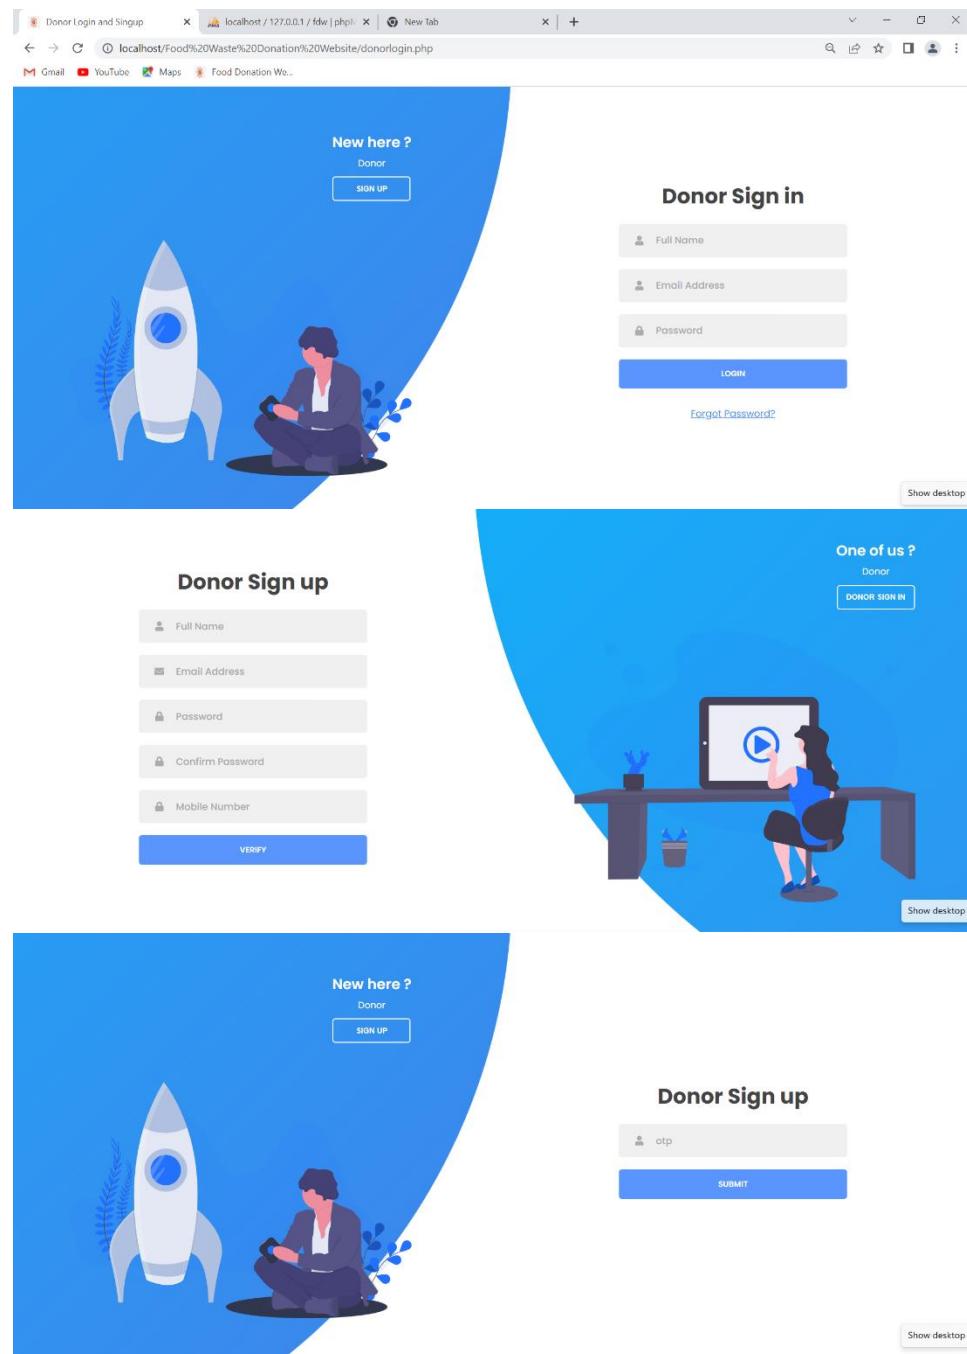


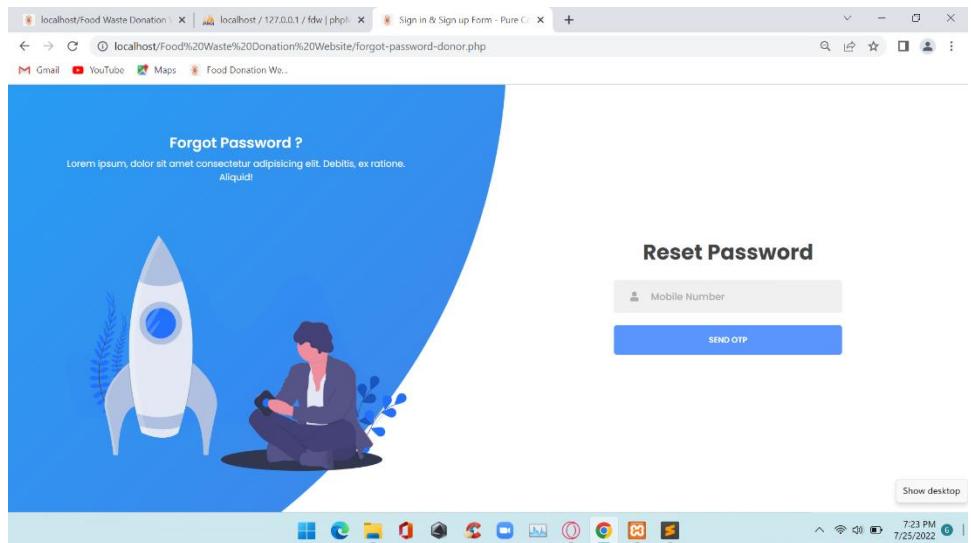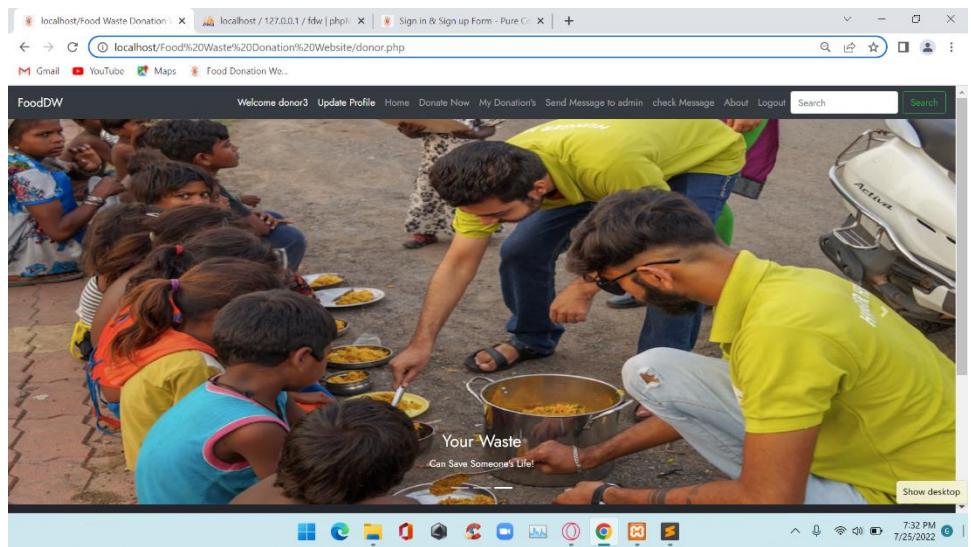

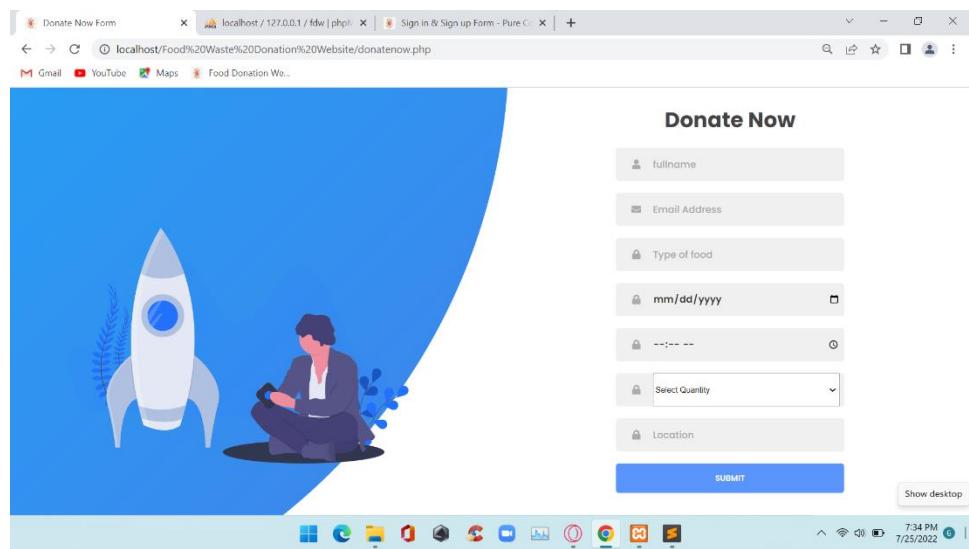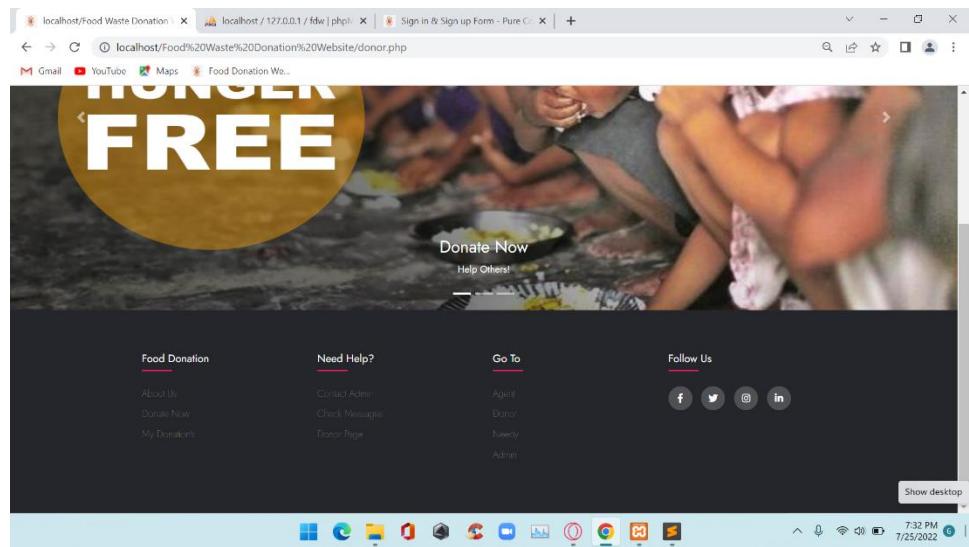

S.N.	ID	Name	Email	Date	Time	Type of food	Quantity	Location
1	42	saurabh	s@gmail	2022-07-13	23:46:00	roti	Less than 1kg	patna
2	43	asus1	asus1@gmail.com	2022-07-14	14:19:00	maggi	1kg or less than 3 kg	patna
3	44	donor2	donor2@gmail.com	2022-07-19	15:37:00	roti	Less than 1kg	patna

Send Message To admin

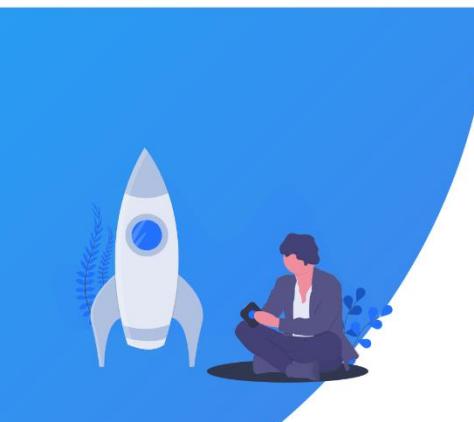

Full Name

Enter Message Here

SEND

S.N.	ID	Admin Name	Message
1	1	anand	your request is approved
2	2	anand	your request is approved
3	3	a	hi
4	4	anand	ppt

S.N.	ID	Admin Name	Message
1	1	anand	your request is approved
2	2	anand	your request is approved
3	3	a	hi
4	4	anand	ppt

## Code for Donor Login and Signup(donorlogin.php)

```
<?php  
include 'config.php';  
session_start();  
error_reporting(0);  
if (isset($_SESSION["user_id"])) {  
    header("Location: welcome.php");  
}  
  
if (isset($_POST["verify"])) {  
    $full_name = mysqli_real_escape_string($conn, $_POST["signup_full_name"]);  
    $email = mysqli_real_escape_string($conn, $_POST["signup_email"]);  
    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));  
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));  
    $_SESSION["fullname"] = "$full_name";  
  
    $mob = mysqli_real_escape_string($conn, $_POST["signup_mobile"]);  
  
    $check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM donorlogin WHERE email='$email'"));  
  
    if ($password !== $cpassword) {  
        echo "<script>alert('Password did not match.');//</script>";  
    } elseif ($check_email > 0) {  
        echo "<script>alert('Email already exists in our database.');//</script>";  
    } else {  
        $otp = rand(1000,9999);  
        $phone = "+91".$mob;  
    }  
}
```

```

$api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key
$req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

$sms = file_get_contents($req);
$sms_status = json_decode($sms, true);
if($sms_status['Status'] !== 'Success') {
    $err['error'] = 'Could not send OTP to '.$phone;
}

$sql = "INSERT INTO donorlogin (fullname, email, password, token, status,mob) VALUES ('$full_name', '$email',
'$password', '$otp', '0','$mob')";
$result = mysqli_query($conn, $sql);

echo '<script>window.location="verifydonor.php"</script>';

if ($result) {
    echo "<script>alert('Registration Successful');</script>";
    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";
}
else{
    echo "<script>alert('Registration Failed');</script>";
}
}

if (isset($_POST["signin"])) {
    $full_name = mysqli_real_escape_string($conn, $_POST["fullname"]);

```

```

$email = mysqli_real_escape_string($conn, $_POST["email"]);

$password = mysqli_real_escape_string($conn, md5($_POST["password"]));

$check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM donorlogin WHERE
fullname='".$full_name"'"));

$check_email = mysqli_query($conn, "SELECT id FROM donorlogin WHERE email='".$email' AND
password='".$password' AND status='1'");

$_SESSION["fullname"] = "$full_name";

echo"$full_name";

echo'$_SESSION["fullname"]';

if ($check_fullname < 1) {

echo "<script>alert('Invalid Name.');//</script>";

}

else{

if (mysqli_num_rows($check_email) > 0) {

$row = mysqli_fetch_assoc($check_email);

$_SESSION["user_id"] = $row['id'];

echo '<script>alert("Login Successful ")</script>';

echo '<script>window.location="donor.php"</script>';

} else {

echo "<script>alert('Login details is incorrect. Please try again.');//</script>";

}

}

?

<!DOCTYPE html>

<html lang="en">

```

```

<head>

    <meta charset="UTF-8" />

    <meta name="viewport" content="width=device-width, initial-scale=1.0" />

    <link rel="icon" type="image/x-icon" href="images/logo1.png">

    <link rel="stylesheet" href="style.css" />

    <title>Donor Login and Singup</title>

</head>

<body>

    <div class="container">

        <div class="forms-container">

            <div class="signin-signup">

                <form action="" method="post" class="sign-in-form">

                    <h2 class="title">Donor Sign in</h2>

                    <div class="input-field">

                        <i class="fas fa-user"></i>

                        <input type="text" placeholder="Full Name" name="fullname" value="<?php echo  

$_POST["fullname"]; ?>" required />

                    </div>

                    <div class="input-field">

                        <i class="fas fa-user"></i>

                        <input type="text" placeholder="Email Address" name="email" value="<?php echo $_POST['email']; ?>"  

required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

                    </div>

                    <div class="input-field">

                        <i class="fas fa-lock"></i>

                        <input type="password" placeholder="Password" name="password" value="<?php echo  

$_POST['password']; ?>" required />

                    </div>

```

```

<input type="submit" value="Login" name="signin" class="btn solid" />

<p style="display: flex; justify-content: center; align-items: center; margin-top: 20px;"><a href="forgot-password-donor.php" style="color: #4590ef;">Forgot Password?</a></p>

</form>

<form action="" class="sign-up-form" method="post">

<h2 class="title">Donor Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="Full Name" name="signup_full_name" value="<?php echo
$_POST["signup_full_name"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="signup_password" value="<?php echo
$_POST["signup_password"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo
$_POST["signup_cpassword"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="mobile" placeholder="Mobile Number" name="signup_mobile" value="<?php echo
$_POST["signup_mobile"]; ?>" required pattern="^([1-9]{1})[0-9]{9}$"/>

</div>

<input type="submit" class="btn" name="verify" value="verify" />

```

```
</form>

</div>

</div>

<div class="panels-container">

<div class="panel left-panel">

<div class="content">

<h3>New here ?</h3>

<p>

    Donor

</p>

<button class="btn transparent" id="sign-up-btn">

    Sign up

</button>

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

    Donor

</p>

<button class="btn transparent" id="sign-in-btn">

    Donor Sign in

</button>

</div>



</div>
```

```

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code For Verify Donor Using Otp(verifydonor.php)**

```

<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["Submit"])) {

    $otpf = mysqli_real_escape_string($conn, $_POST["signup_otp"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM donorlogin WHERE token='$otpf'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }
    else
    {

```

```

echo "<script>alert('Correct Otp.');//</script>";
$update = mysqli_query($conn, "UPDATE donorlogin SET status='1' WHERE token='$otp'");

$result = mysqli_query($conn, $check_otp);
if ($result) {
}
else{
echo"<script>alert('registration Successful');//</script>";
$_POST["signup_full_name"] = "";
$_POST["signup_email"] = "";
$_POST["signup_password"] = "";
$_POST["signup_cpassword"] = "";
$_POST["signup_otp"] = "";
}

echo "<script>alert('Verified');//</script>";

echo '<script>window.location="donorlogin.php"</script>';
}

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="stylesheet" href="style.css" />

```

```

<link rel="icon" type="image/x-icon" href="images/logo1.png">
<title>Donor Singin And Singup</title>
</head>

<body>
<div class="container">
<div class="forms-container">
<div class="signin-signup">
<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">
<h2 class="title">Donor Sign up</h2>
<div class="input-field">
<i class="fas fa-user"></i>
<input type="text" placeholder="otp" name="signup_otp" value=<?php echo $_POST["signup_otp"]; ?>" required />
</div>

<input type="submit" class="btn" name="Submit" value="Submit" />
</form>
</div>
</div>

<div class="panels-container">
<div class="panel left-panel">
<div class="content">
<h3>New here ?</h3>
<p>

```

```
Donor

</p>

<button class="btn transparent" id="sign-up-btn">

  Sign up

</button>

</div>



</div>

<div class="panel right-panel">

<div class="content">

  <h3>One of us ?</h3>

  <p>

      Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum

      laboriosam ad deleniti.

  </p>

  <button class="btn transparent" id="sign-in-btn">

    Sign in

</button>

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>

<script src="app.js"></script>

</body>

</html>
```

## Code For Forgot Password Donor(forgot-password-donor.php)

```
<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {

    header("Location: welcome.php");

}

if (isset($_POST["sendotp"])) {

    $mob = mysqli_real_escape_string($conn, $_POST["mob"]);

    $otpd = mysqli_real_escape_string($conn, $_POST["otpf"]);

    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));

    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));

    $otp = rand(1000,9999);

    $phone ="+91".$mob; // target number; includes ISD

    $api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key

    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);

    $sms_status = json_decode($sms, true);

    if($sms_status['Status'] != 'Success') {

        $err['error'] = 'Could not send OTP to '.$phone;

    }

}
```

```

$check_mob = mysqli_query($conn, "SELECT * FROM donorlogin WHERE mob='$mob'");
if (mysqli_num_rows($check_mob) > 0) {
    $data = mysqli_fetch_assoc($check_mob);
    $update = mysqli_query($conn, "UPDATE donorlogin SET token='$otp' WHERE mob='$mob'");
    echo "<script>alert('Otp Sent');</script>";
    echo '<script>window.location="otpform-donor.php"</script>';
}
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Sign in & Sign up Form - Pure Coding</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Reset Password</h2>
                    <div class="input-field">

```

```

<i class="fas fa-user"></i>

<input type="text" placeholder="Mobile Number" name="mob" value=<?php echo $_POST['mob']; ?>
required pattern="[789][0-9]{9}$"/>

</div>

<input type="submit" value="Send Otp" name="sendotp" class="btn solid" />

</form>

</div>

</div>

<div class="panels-container">

<div class="panel left-panel">

<div class="content">

<h3>Forgot Password ?</h3>

<p>
    Lorem ipsum, dolor sit amet consectetur adipisicing elit. Debitis,
    ex ratione. Aliquid!
</p>

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>

</body>

</html>

```

## **Code For forgot password Otp Verification form(otpform-donor.php)**

```
<?php  
include 'config.php';  
session_start();  
error_reporting(0);  
if (isset($_SESSION["user_id"])) {  
    header("Location: welcome.php");  
}  
if (isset($_POST["Submit"])) {  
  
    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));  
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));  
    $otpf = mysqli_real_escape_string($conn, $_POST["singup_otp"]);  
    $email= mysqli_real_escape_string($conn, $_POST["signup_email"]);  
  
    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM donorlogin WHERE token='$otpf'"));  
  
    if ($check_otp != 1) {  
        echo "<script>alert('Incorrect Otp.');//</script>";  
    }  
    else{  
  
        echo "<script>alert('Correct Otp.');//</script>";  
  
        if ($password !== $cpassword) {  
            echo "<script>alert('Password did not match.');//</script>";  
        }  
        else {  
            $sql ="UPDATE donorlogin SET password='$password' WHERE email='$email"';  
        }  
    }  
}
```

```

$result = mysqli_query($conn, $sql);

if ($result) {
    echo "<script>alert('Password changed Successful');</script>";
    echo "<script>window.location('donorlogin.php')</script>";
    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";
    echo '<script>window.location="donorlogin.php"</script>';
}

else{
    echo "<script>alert('Password change failed');</script>";

}

}

}

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="style.css" />
<title>Donor Login And Singup</title>

```

```

</head>

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">

<h2 class="title">Donor Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="otp" name="singup_otp" value="<?php echo $_POST['signup_otp']; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo $_POST['signup_email']; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="signup_password" value="<?php echo $_POST['signup_password']; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo $_POST['signup_cpassword']; ?>" required />

</div>

```

```
<input type="submit" class="btn" name="Submit" value="Submit" />  
</form>  
</div>  
</div>
```

```
<div class="panels-container">  
  <div class="panel left-panel">  
    <div class="content">  
      <h3>New here ?</h3>  
      <p>
```

Donor

</p>

```
    <button class="btn transparent" id="sign-up-btn">  
      Sign up  
    </button>
```

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

**Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum  
  laboriosam ad deleniti.**

</p>

<button class="btn transparent" id="sign-in-btn">

  Sign in

</button>

```

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code For Donor Homepage(donor.php)**

```

<?php

session_start();
error_reporting(0);

if (!isset($_SESSION["user_id"])) {
    header("Location: index.php");
}

include 'config.php';?

<!DOCTYPE html>
<html>
<head>
<title></title>

<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="images/logo1.png">

```

```

<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/css/bootstrap.min.css">
<!--Style.css linking-->
<link rel="stylesheet" type="text/css" href="css/style.css">
<!--Website font Change-->
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Jost:wght@100;400&display=swap" rel="stylesheet">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.1.1/css/all.min.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>
<!--Nev Bar-->
<section>
<nav class="navbar navbar-expand-lg navbar-dark bg-dark">
<a class="navbar-brand" href="index.php">FoodDW</a>
<button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="navbarSupportedContent">
<ul class="navbar-nav ml-auto">
<li class="nav-item active">
<a class="nav-link" href=""><?php echo "Welcome " . $_SESSION["fullname"] . "<br>"?><span class="sr-only"></span></a>
<li class="nav-item active"><a class="nav-link" href="welcome.php">Update Profile<span class="sr-only"></span></a></li>
</li>
<li class="nav-item">

```

```

<a class="nav-link" href="#">Home <span class="sr-only">(current)</span></a>
</li>

<li class="nav-item">
  <a class="nav-link" href="donatenow.php">Donate Now</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="../fooddonated\index.php">My Donation's</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="d2a.php">Send Message to admin</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="../donor\index.php">check Message</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="About Us\index.html">About</a>
</li>

<li class="nav-item">
  <a class="nav-link" href="logout.php" >Logout</a>
</li>

</ul>

<form class="form-inline my-2 my-lg-0">
  <input class="form-control mr-sm-2" type="search" placeholder="Search" aria-label="Search">
  <button class="btn btn-outline-success my-2 my-sm-0" type="submit">Search</button>
</form>

</div>

</nav>

</section>
```

```

<!--CDN links-->

<section>

<script src="https://cdn.jsdelivr.net/npm/jquery@3.6.0/dist/jquery.slim.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/js/bootstrap.bundle.min.js"></script>

</section>

<!--Carousel-->

<section>

<div id="demo" class="carousel slide" data-ride="carousel">

<ul class="carousel-indicators">

<li data-target="#demo" data-slide-to="0" class="active"></li>
<li data-target="#demo" data-slide-to="1"></li>
<li data-target="#demo" data-slide-to="2"></li>

</ul>

<div class="carousel-inner">

<div class="carousel-item active">



<div class="carousel-caption">

<h3>Donate Now</h3>
<p>Help Others!</p></font>

</div>

</div>

<div class="carousel-item">



<div class="carousel-caption">

<h3>Be Kid</h3>
<p>Share Food!</p>

</div>

</div>

```

```

<div class="carousel-item">
    
    <div class="carousel-caption">
        <h3>Your Waste</h3>
        <p>Can Save Someone's Life!</p>
    </div>
</div>
</div>

<a class="carousel-control-prev" href="#demo" data-slide="prev">
    <span class="carousel-control-prev-icon"></span>
</a>
<a class="carousel-control-next" href="#demo" data-slide="next">
    <span class="carousel-control-next-icon"></span>
</a>
</div>
</div>
</section>
<!--Footer-->
<footer> <?php include 'donorfooter.php';?></footer>
</body>
</html>

```

### **Code For Donor Footer(donorfooter.php)**

```

<!DOCTYPE html>
<html lang="en">
<head>
    <title>Footer Design</title>

```

```

<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="css/foothertyle.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>

<footer class="footer">
  <div class="container">
    <div class="row">
      <div class="footer-col">
        <h4>Food Donation</h4>
        <ul>
          <li><a href="About Us\index.html">About us</a></li>
          <li><a href="donatenow.php">Donate Now</a></li>
          <li><a href="../fooddonated\index.php">My Donation's</a></li>
          <li>
          </li>
        </ul>
      </div>
      <div class="footer-col">
        <h4>Need help?</h4>
        <ul>
          <li><a href="d2a.php">Contact Admin</a></li>
          <li><a href="../donor\index.php">Check Messages</a></li>
          <li><a href="donor.php">Donor Page</a></li>
        </ul>
      </div>
    </div>
  </div>
</body>

```

```

        </ul>

    </div>

    <div class="footer-col">
        <h4>Go To</h4>
        <ul>
            <li><a href="agentlogin.php">Agent</a></li>
            <li><a href="donorlogin.php">Donor</a></li>
            <li><a href="ngologin.php">Needy</a></li>
            <li><a href="adminlogin.php">Admin</a></li>
        </ul>
    </div>

    <div class="footer-col">
        <h4>Follow Us</h4>
        <div class="social-links">
            <a href="https://www.facebook.com/"><i class="fab fa-facebook-f"></i></a>
            <a href="https://twitter.com/i/flow/login"><i class="fab fa-twitter"></i></a>
            <a href="https://www.instagram.com/accounts/login/"><i class="fab fa-instagram"></i></a>
            <a href="https://www.linkedin.com/signup"><i class="fab fa-linkedin-in"></i></a>
        </div>
    </div>
</div>

</div>

</body>
</html>

```

## **Code For Donate Now Form(donatenow.php)**

```
<?php

include 'config.php';

require 'vendor/autoload.php';

session_start();

error_reporting(0);

if (isset($_POST["Submit"])) {

$fullname = mysqli_real_escape_string($conn,($_POST["singup_fullname"]));

$email = mysqli_real_escape_string($conn, ($_POST["signup_email"]));

$type = mysqli_real_escape_string($conn,($_POST["signup_type"]));




$date= mysqli_real_escape_string($conn,($_POST["signup_date"]));

$time= mysqli_real_escape_string($conn,($_POST["signup_time"]));

$quantity= mysqli_real_escape_string($conn,($_POST["quantity"]));

$location= mysqli_real_escape_string($conn,($_POST["location"]));



$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM donorlogin WHERE email='".$email"'"));



$check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM donorlogin WHERE fullname='".$fullname"'"));



echo $fullname.$email.$type.$date.$time.$quantity.$location;




if ($check_fullname<1) {

echo "<script>alert('Invalid Name.');//</script>";

}






if ($check_email< 1) {

echo "<script>alert('Invalid Email.');//</script>";

}







if($check_email>0&&$check_fullname>0){
```

```

$sql="INSERT INTO `donatenow`(`fullname`, `email`, `type`, `date`, `time`, `quantity`, `location`, `status`)
VALUES ('$fullname','$email','$type','$date','$time', '$quantity','$location','0')";

$result = mysqli_query($conn, $sql);

if ($result) {
    echo"<script>alert('Form Submition Successful');</script>";
    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";
    echo '<script>window.location="donor.php"</script>';
}

else{
    echo"<script>alert('Form not Submited');</script>";
}

}

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Donate Now Form</title>
</head>

```

```

<body>

<div class="container">
  <div class="forms-container">
    <div class="signin-signup">
      <form action="" method="post" class="sign-in-form">

        <form action="" class="sign-up-form" method="post">
          <h2 class="title">Donate Now</h2>
          <div class="input-field">
            <i class="fas fa-user"></i>
            <input type="text" placeholder="fullname" name="singup_fullname" value="<?php echo
$_POST["signup_fullname"]; ?>" required />
          </div>
          <div class="input-field">
            <i class="fas fa-envelope"></i>
            <input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required />
          </div>
          <div class="input-field">
            <i class="fas fa-lock"></i>
            <input type="text" placeholder="Type of food" name="signup_type" value="<?php echo
$_POST["signup_type"]; ?>" required />
          </div>
          <div class="input-field">
            <i class="fas fa-lock"></i>
            <input type="date" placeholder="Date of cooking" name="signup_date" value="<?php echo
$_POST["signup_date"]; ?>" required />
          </div>
          <div class="input-field">
            <i class="fas fa-lock"></i>

```

```

<input type="time" placeholder="Time of cooking" name="signup_time" value="<?php echo
$_POST["signup_time"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-lock"></i>
<SELECT name="quantity" required>
<option value="" disabled selected>Select Quantity</option>
<option>Less than 1kg</option>
<option>1kg or less than 3 kg</option>
<option>3kg or less than 10 kg</option>
<option>More than 10kg</option>

</SELECT>
</div>

<div class="input-field">
<i class="fas fa-lock"></i>
<input type="textarea" placeholder="Location" name="location" value="<?php echo
$_POST["location"]; ?>" required />
</div>

<input type="submit" class="btn" name="Submit" value="Submit" />
</form>
</div>
</div>

<div class="panels-container">
<div class="panel left-panel">
<div class="content">
<h3></h3>

```

```
<p>

</p>

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

  Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum

  laboriosam ad deleniti.

</p>

<button class="btn transparent" id="sign-in-btn">

  Sign in

</button>

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>

<script src="app.js"></script>

</body>

</html>
```

## Code For Checking Food Donated(index.php)

```
<!DOCTYPE html>

<html>
  <head>
    <title>Food Donated</title>
    <head>
      <meta name="viewport" content="width=device-width, initial-scale=1">
      <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
      <link rel="stylesheet" href="./assets/css/style.css"></link>
    </head>
  </head>
  <body >

    <?php
      include "./adminHeader.php";
      //include "./sidebar.php";

      include_once "./config/dbconnect.php";
    ?>

    <div id="ordersBtn" >
      <h2> Food Donated</h2>
      <table class="table table-striped">
        <thead>
          <tr>
            <th>S.N.</th>
```

```

<th>ID</th>
<th>Name</th>
<th>Email</th>
<th>Date</th>
<th>Time</th>
<th>Type of food</th>
<th>Quantity</th>
<th>Location</th>
</tr>
</thead>
<?php
include_once "./config/dbconnect.php";
$sql="SELECT * from donatenow where status=1";
$result=$conn-> query($sql);
$count=1;

if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
        ?>
        <tr>
        <td><?=$count?></td>
        <td><?=$row["id"]?></td>
        <td><?=$row["fullname"]?></td>
        <td><?=$row["email"]?></td>
        <td><?=$row["date"]?></td>
        <td><?=$row["time"]?></td>
        <td><?=$row["type"]?></td>
        <td><?=$row["quantity"]?></td>
        <td><?=$row["location"]?></td>
    }
}

```

```

<?php

$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

</div>

<div class="order-view-modal modal-body">

</div>

</div><!-- /Modal content-->

</div><!-- /Modal dialog-->

```

```

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

</div>

<div class="order-view-modal modal-body">

```

```

</div>

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');




$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});


});


});


});



</script>

```

```

<?php

if (isset($_GET['category']) && $_GET['category'] == "success") {

echo '<script> alert("Category Successfully Added")</script>';

} else if (isset($_GET['category']) && $_GET['category'] == "error") {

echo '<script> alert("Adding Unsuccess")</script>';

}

if (isset($_GET['size']) && $_GET['size'] == "success") {

echo '<script> alert("Size Successfully Added")</script>';

} else if (isset($_GET['size']) && $_GET['size'] == "error") {

```

```

echo '<script> alert("Adding Unsuccess")</script>';
}

if (isset($_GET['variation']) && $_GET['variation'] == "success") {
    echo '<script> alert("Variation Successfully Added")</script>';
} else if (isset($_GET['variation']) && $_GET['variation'] == "error") {
    echo '<script> alert("Adding Unsuccess")</script>';
}
?>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>
</body>

</html>

```

### **Code To Send Message To Admin(d2a.php)**

```

<?php

include 'config.php';

require 'vendor/autoload.php';

session_start();

error_reporting(0);

```

```

if (isset($_POST["signin"])) {
    $fullname = mysqli_real_escape_string($conn, $_POST["fullname"]);
    $msg = mysqli_real_escape_string($conn, $_POST["msg"]);

    $check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM donorlogin WHERE fullname='$fullname'"));

    if ($check_email > 0) {
        echo "<script>alert('Name Found In record');</script>";
        $sql = "INSERT INTO d2a (fullname, msg) VALUES ('$fullname', '$msg')";
        $result = mysqli_query($conn, $sql);
        if($result)
        {
            echo "Message Sent";
        }
        else
        {
            echo "Message not sent";
        }
    } else {
        echo "<script>alert('Inavlid Name');</script>";
    }
}
?>

```

```

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Send Message To admin</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Send Message To admin</h2>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Full Name" name="fullname" value="<?php echo
$_POST['fullname']; ?>" required />
                    </div>
                    <div class="input-field">
                        <i class="fas fa-lock"></i>
                        <input type="textarea" placeholder="Enter Message Here" name="msg" value="<?php echo
$_POST['msg']; ?>" required />
                    </div>
                    <input type="submit" value="Send" name="signin" class="btn solid" />
                </form>
            </div>
        </div>
    </div>
</body>

```

```
</div>

</div>

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3> </h3>
      <p>
        </p>
      </div>
      
    </div>
    <div class="panel right-panel">
      <div class="content">
        <h3>One of us ?</h3>
        <p>
            Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
            laboriosam ad deleniti.
        </p>
      </div>
      
    </div>
  </div>
```

```

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code For Checking Message From Admin(index.php)**

```

<!DOCTYPE html>

<html>
<head>
<title>Message From Admin</title>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
<link rel="stylesheet" href=".//assets/css/style.css"></link>
</head>
</head>
<body >

<?php
    include "./adminHeader.php";
    //include "./sidebar.php";

    include_once "./config/dbconnect.php";

```

```

?>

<div id="ordersBtn" >

<h2>Messages From Admin</h2>

<table class="table table-striped">

<thead>

<tr>
<th>S.N.</th>
<th>ID</th>
<th>Admin Name</th>
<th>Message</th>
</tr>

</thead>

<?php

include_once "./config/dbconnect.php";

$sql="SELECT * from a2d";
$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>
<td><?=$count?></td>
<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["msg"]?></td>

<?php

```

```

$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

</div>

<div class="order-view-modal modal-body">

</div>

</div><!-- /Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

```

```

$(document).ready(function(){
    $('.openPopup').on('click',function(){
        var dataURL = $(this).attr('data-href');

        $('.order-view-modal').load(dataURL,function(){
            $('#viewModal').modal({show:true});
        });
    });
});

</script>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content-->
        <div class="modal-content">
            <div class="modal-header">

                <h4 class="modal-title">Order Details</h4>
                <button type="button" class="close" data-dismiss="modal">&times;</button>
            </div>
            <div class="order-view-modal modal-body">

            </div>
        </div><!--/ Modal content-->
    </div>

```

```

</div><!-- /Modal dialog-->

</div>

<script>
  //for view order modal
  $(document).ready(function(){
    $('.openPopup').on('click',function(){
      var dataURL = $(this).attr('data-href');

      $('.order-view-modal').load(dataURL,function(){
        $('#viewModal').modal({show:true});
      });
    });
  });
</script>

```

```

<?php
if (isset($_GET['category']) && $_GET['category'] == "success") {
  echo '<script> alert("Category Successfully Added")</script>';
} else if (isset($_GET['category']) && $_GET['category'] == "error") {
  echo '<script> alert("Adding Unsuccess")</script>';
}

if (isset($_GET['size']) && $_GET['size'] == "success") {
  echo '<script> alert("Size Successfully Added")</script>';
} else if (isset($_GET['size']) && $_GET['size'] == "error") {
  echo '<script> alert("Adding Unsuccess")</script>';
}

if (isset($_GET['variation']) && $_GET['variation'] == "success") {

```

```

echo '<script> alert("Variation Successfully Added")</script>';
}else if (isset($_GET['variation']) && $_GET['variation'] == "error") {
    echo '<script> alert("Adding Unsuccess")</script>';
}
?>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>
</body>

</html>

```

### **CSS Code for Food Donated and checking message(style.css)**

```

@import url('https://fonts.googleapis.com/css?family=Work+Sans:400,500,600,700&display=swap');

* {
    margin: 0;
    padding: 0;
    font-family: 'Work Sans', sans-serif;
    font-size: 18px;
}

.user-cart span{
    background-color:red;
    padding-right:3px;
    padding-left:3px;
    border-radius:10px;
}

```

```

font-size:18px;
margin-left:-1.2rem;
}

/* admin dashboard styling */

.card{
background-color: #3B3131;
padding:20px;
margin: 10px;
border-radius: 10px;
box-shadow: 8px 5px 5px #3B3131;
}

/******************************** for sidebar *****/

/* The sidebar menu */

.sidebar {
height: 100%; /* 100% Full-height */
width: 0; /* 0 width - change this with JavaScript */
position: fixed; /* Stay in place */
z-index: 1; /* Stay on top */
top: 0;
left: 0;
background-color: #3B3131; /* Black*/
overflow-x: hidden; /* Disable horizontal scroll */
padding-top: 60px; /* Place content 60px from the top */
transition: 0.5s; /* 0.5 second transition effect to slide in the sidebar */
}

```

```
/* The sidebar links */

.sidebar a {

    padding: 8px 8px 8px 32px;
    text-decoration: none;
    font-size: 22px;
    color: #fff;
    display: block;
    transition: 0.3s;
}

.sidebar .side-header{

    margin-left: 30px;
    margin-bottom: 8px;
    color: #fff;
}

/* When you mouse over the navigation links, change their color */

.sidebar a:hover {

    background-color: #584e46;
}

/* Position and style the close button (top right corner) */

.sidebar .closebtn {

    position: absolute;
    top: 0;
    right: 2px;
    font-size: 34px;
    margin-left: 50px;
}
```

```

/* The button used to open the sidebar */

.openbtn {
    font-size: 20px;
    cursor: pointer;
    padding: 10px 15px;
    border: none;
    color: #fff;
    background-color:#584e46;
}

.openbtn:hover {
    color: #ECDAC9;
}

/* Style page content - use this if you want to push the page content to the right when you open the side navigation */

#main {
    transition: margin-left .5s; /* If you want a transition effect */
    padding: 20px;
}

/* On smaller screens, where height is less than 450px, change the style of the sidenav (less padding and a smaller font size) */

@media screen and (max-height: 450px) {
    .sidebar {padding-top: 15px;}
    .sidebar a {font-size: 18px;}
}

***** product table styling *****/

```

```
table {  
    width: 100%;  
    border-collapse: collapse;  
    border-spacing: 0;  
    box-shadow: 0 2px 15px rgba(64, 64, 64, .7);  
    border-radius: 12px 12px 0 0;  
    margin-bottom: 50px;  
}  
  
td,  
th {
```

```
padding: 10px 16px;  
text-align: center;  
}
```

```
th {  
background-color: #584e46;  
color: #fafafa;  
font-family: 'Open Sans', Sans-serif;  
font-weight: bold;  
}
```

```
tr {  
width: 100%;  
background-color: #fafafa;  
font-family: 'Montserrat', sans-serif;  
}
```

```

tr:nth-child(even) {
    background-color: #eeeeee;
}

/********************************* login and sign up styling *****/
.card-container.card-account {
    max-width: 500px;
    padding: 30px 30px;
}

.btn {
    font-weight: 700;
    height: 36px;
    -moz-user-select: none;
    -webkit-user-select: none;
    user-select: none;
    cursor: default;
}

/*
 * Card component
 */
.card-account{
    background-color: #ECDAC9;
    /* just in case there no content*/
    padding: 20px 25px 30px;
    margin: 0 auto 25px;
}

```

```
margin-top: 40px;  
/* shadows and rounded borders */  
-moz-border-radius: 2px;  
-webkit-border-radius: 2px;  
border-radius: 2px;  
-moz-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
-webkit-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
}
```

```
.profile-img-card {  
width: 96px;  
height: 96px;  
margin: 0 auto 10px;  
display: block;  
-moz-border-radius: 50%;  
-webkit-border-radius: 50%;  
border-radius: 50%;  
}
```

```
/*  
* Form styles  
*/  
.profile-name-card {  
font-size: 16px;  
font-weight: bold;  
text-align: center;  
margin: 10px 0 0;  
min-height: 1em;
```

```
}
```

```
.reauth-email {  
    display: block;  
    color: #404040;  
    line-height: 2;  
    margin-bottom: 10px;  
    font-size: 14px;  
    text-align: center;  
    overflow: hidden;  
    text-overflow: ellipsis;  
    white-space: nowrap;  
    -moz-box-sizing: border-box;  
    -webkit-box-sizing: border-box;  
    box-sizing: border-box;  
}
```

```
.form-signin #inputEmail,  
.form-signin #inputPassword {  
    direction: ltr;  
    height: 44px;  
    font-size: 16px;  
}
```

```
.form-signin input[type=email],  
.form-signin input[type=password],  
.form-signin input[type=text],  
.form-signin button {  
    width: 100%;
```

```
display: block;  
margin-bottom: 10px;  
z-index: 1;  
position: relative;  
-moz-box-sizing: border-box;  
-webkit-box-sizing: border-box;  
box-sizing: border-box;  
}
```

```
.form-signin .form-control:focus {  
border-color: #ab9787;  
outline: 0;  
-webkit-box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
}
```

```
.btn.btn-signin {  
  
background-color: #584e46;  
padding: 2px;  
font-weight: 700;  
font-size: 16px;  
height: 36px;  
-moz-border-radius: 3px;  
-webkit-border-radius: 3px;  
border-radius: 3px;  
border: none;  
-o-transition: all 0.218s;  
-moz-transition: all 0.218s;
```

```
-webkit-transition: all 0.218s;  
transition: all 0.218s;  
}
```

```
.btn.btn-signin:hover,  
.btn.btn-signin:active,  
.btn.btn-signin:focus {  
background-color: #a56a39;  
}
```

```
.box {  
position: relative;  
background-color: #000;  
}
```

```
.image {  
opacity: 1;  
display: block;  
max-width: 100%;  
height: auto;  
transition: .5s ease;  
backface-visibility: hidden;  
object-fit: contain;  
}
```

```
.middle {  
transition: .5s ease;  
opacity: 0;
```

```
position: absolute;  
top: 50%;  
left: 50%;  
transform: translate(-50%, -50%);  
-ms-transform: translate(-50%, -50%);  
text-align: center;  
}  
  
.box:hover .image {  
    opacity: 0.3;  
}  
  
.box:hover .middle {  
    opacity: 1;  
}  
  
.text {  
    background-color: #584e46;  
    color: #fff;  
    font-size: 16px;  
    padding: 6px;  
    border-radius: 5px;  
}  
  
/* ***** cart to login icon styling ***** */  
.cart-login-btn{  
margin:5px;  
border-style: outset;  
}
```

```
.cart-login-btn a i{  
padding: 10px;  
font-size:30px;  
color:#584e46;  
}  
.cart-login-btn a i:hover{  
color: grey;  
}  
  
/* ***** footer ***** */  
.footer-hover{  
color: #000;  
}  
.footer-hover:hover{  
color: #ECDAC9;  
text-decoration: none;  
}
```

# Agent

The image displays three screenshots of a web application interface for food donation agents, arranged vertically. The top two screenshots are side-by-side, while the bottom one is centered below them.

**Screenshot 1: Agent Sign in**




This screenshot shows the "Agent Sign in" page. It features a blue background with a white rocket ship icon on the left and a person sitting cross-legged on the right. The page includes fields for "Full Name", "Email Address", and "Password", along with a "LOGIN" button and a "Forgot Password?" link.

**Screenshot 2: Agent Sign up**

This screenshot shows the "Agent Sign up" page. It has a similar blue background with the same rocket ship and person icons. It includes fields for "Full Name", "Email Address", "Password", "Confirm Password", and "Mobile Number", with a "VERIFY" button at the bottom.

**Screenshot 3: Reset Password**

This screenshot shows the "Reset Password" page. It features the same blue background and icons. It includes a field for "Mobile Number" and a "SEND OTP" button.

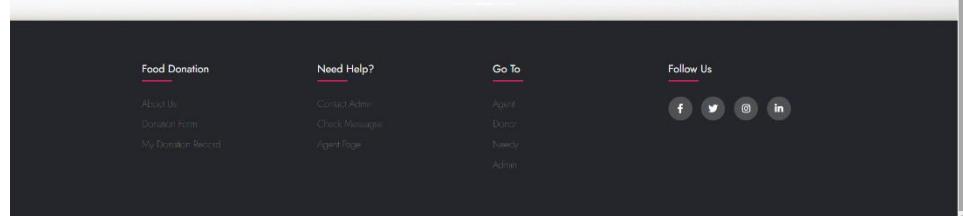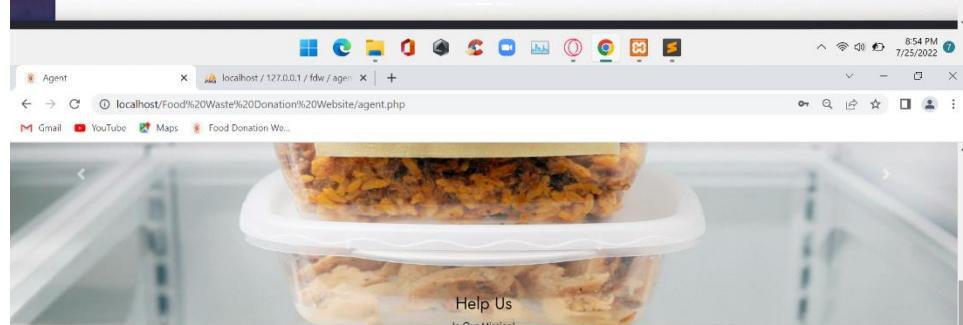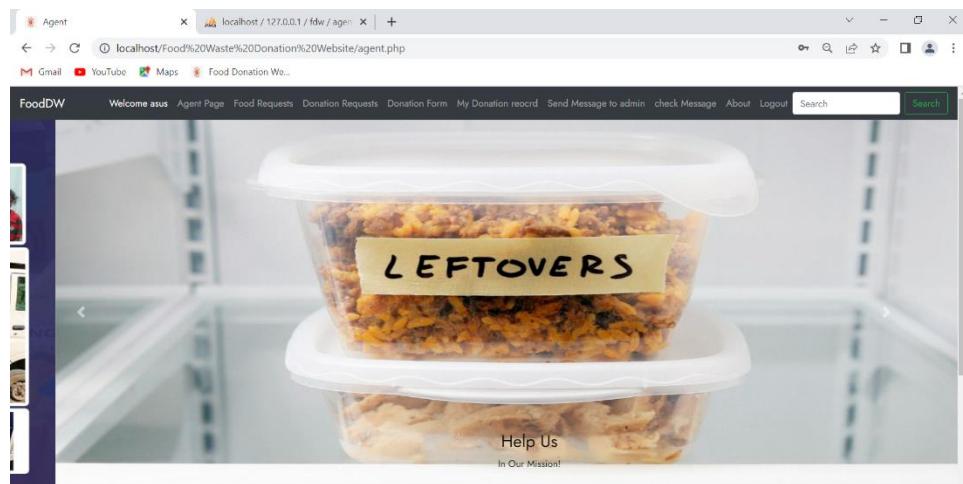

S.N.	ID	Name	Email	Organisation Name	Date	Time	Location
1	1	agent	a@gmail.com	o	2022-06-30	07:33:00	patna
2	2	manyavar	mk@gmail.com	Googl	2022-07-12	19:25:00	patna
3	5	manyavar	mk@gmail.com	Google	2022-07-21	19:37:00	patna

Show desktop

8:54 PM 7/25/2022

Agent Agent Donation Requests localhost / 127.0.0.1 / fdw / agent

Gmail YouTube Maps Food Donation We...

**Back**

### Donation's Request

S.N.	ID	Name	Email	Type of food	Date	Time	Quantity	Location
1	42	saurabh	s@gmail	roti	2022-07-13	23:46:00	Less than 1kg	patna
2	43	asus1	asus1@gmail.com	maggi	2022-07-14	14:19:00	1kg or less than 3 kg	patna
3	44	donor2	donor2@gmail.com	roti	2022-07-19	15:37:00	Less than 1kg	patna

Agent Agent Donate Now Form localhost / 127.0.0.1 / fdw / agent

Gmail YouTube Maps Food Donation We...

Show desktop

8:54 PM 7/25/2022

**Donation Form**



Agent Name  
Email Address  
Donor's name  
mm/dd/yyyy  
Type of food  
Selected Quantity  
Organization Name  
Location

**SUBMIT**

Agent Agent My Donations localhost / 127.0.0.1 / fdw / agent


Gmail YouTube Maps Food Donation We...

Show desktop

8:54 PM 7/25/2022

**Old Food Request**

S.N.	ID	Name	Email	Donor Name	Organisation Name	Date	Time	Type of food	Quantity	Location
1	1	a	a@gmail.com	anand	o	2022-07-13	00:07:00			boring road patna
2	2	a	a@gmail.com	anand	o	2022-07-13	00:07:00			boring road patna
3	3	a	a@gmail.com	anand	op1	2022-07-13	00:07:00			boring road patna
4	4	agent1	agent1@gmail.com	anand		2022-06-30	11:06:00	type	quantity	d
5	5	agent1	agent1@gmail.com	anand		2022-07-13	11:30:00	type	quantity	patna
6	6	agent1	agent1@gmail.com	anand		2022-07-06	11:33:00	maggi	3kg or less than 10 kg	patna
7	7	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	s	1kg or less than 3 kg	patna
8	8	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	s	1kg or less than 3 kg	patna
9	9	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	s	1kg or less than 3 kg	patna
10	10	asus	asus@gmail.com	asus1	o	2022-07-21	14:24:00	maggi	More than 10kg	patna
11	11	asus	asus@gmail.com	asus1	o	2022-07-13	14:25:00	maggi	3kg or less than 10 kg	patna
12	12	agent1	agent1@gmail.com	anand	ngo	2022-07-19	17:40:00	roti	Less than 1kg	patna

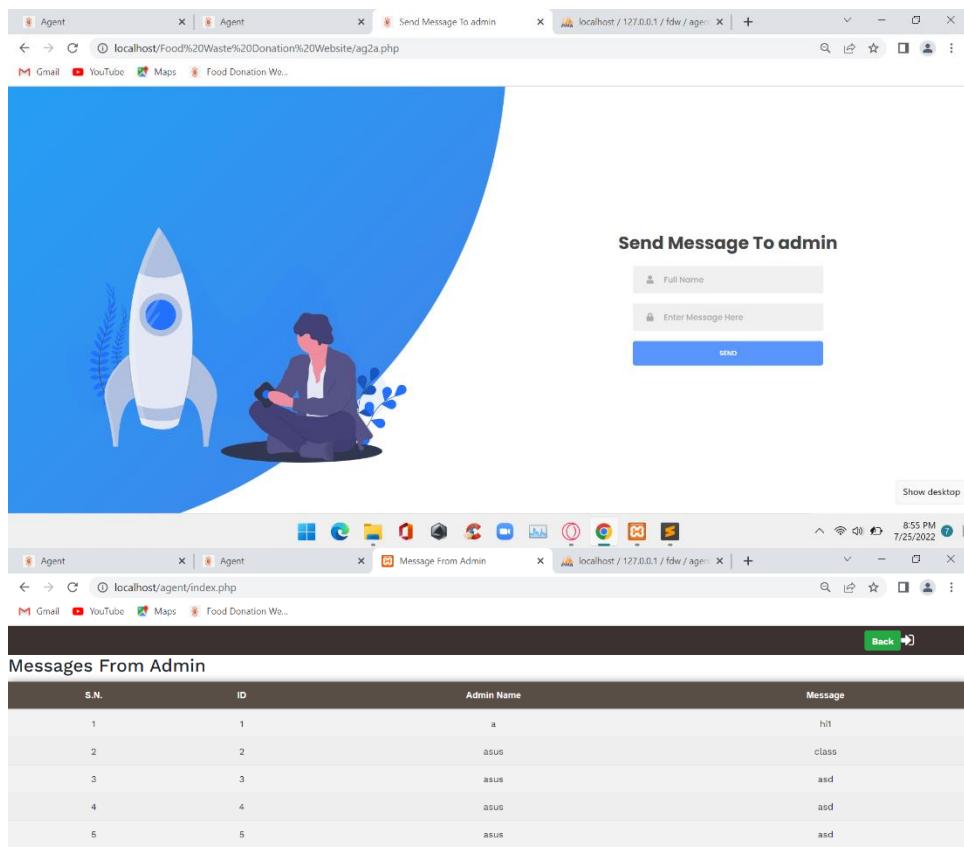

## Code For Agent Login And Singup(agentlogin.php)

```
<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {

header("Location: welcome.php");

}

if (isset($_POST["verify"])) {
```

```

$full_name = mysqli_real_escape_string($conn, $_POST["signup_full_name"]);

$email = mysqli_real_escape_string($conn, $_POST["signup_email"]);

$password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));

$cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));

$mob = mysqli_real_escape_string($conn, $_POST["signup_mobile"]);

$_SESSION["fullname"] = "$full_name";

$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM agentlogin WHERE email='$email'"));

if ($password !== $cpassword) {
    echo "<script>alert('Password did not match.');//</script>";
} elseif ($check_email > 0) {
    echo "<script>alert('Email already exists in our database.');//</script>";
} else {
    $otp = rand(1000,9999);
    $phone = "+91".$mob;
    $api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key
    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);
    $sms_status = json_decode($sms, true);
    if($sms_status['Status'] !== 'Success') {
        $err['error'] = 'Could not send OTP to '.$phone;
    }
    $sql = "INSERT INTO agentlogin (fullname, email, password, token, status,mob) VALUES ('$full_name', '$email', '$password', '$otp', '0','$mob')";
    $result = mysqli_query($conn, $sql);
}

```

```

echo "<script>alert('OTP Sent');</script>";
echo '<script>window.location="verifyagent.php"</script>';

if ($result) {
    echo "<script>alert('Registration Successful');</script>";

    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";

}
else{
    echo "<script>alert('Registration Failed');</script>";

}

}

}

if (isset($_POST["signin"])) {
    $full_name = mysqli_real_escape_string($conn, $_POST["fullname"]);

    $email = mysqli_real_escape_string($conn, $_POST["email"]);
    $password = mysqli_real_escape_string($conn, md5($_POST["password"]));

    $check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM agentlogin WHERE fullname='$full_name'"));

    $check_email = mysqli_query($conn, "SELECT id FROM agentlogin WHERE email='$email' AND password='$password' AND status='1'");
}

```

```

$_SESSION["fullname"] = "$full_name";

if ($check_fullname<1) {

    echo "<script>alert('Invalid Name.');//</script>";

}

else{

    if (mysqli_num_rows($check_email) > 0) {

        $row = mysqli_fetch_assoc($check_email);

        $_SESSION["user_id"] = $row['id'];

        echo '<script>alert("Login Successful ");//</script>';

        echo '<script>window.location="agent.php"</script>';

    } else {

        echo "<script>alert('Login details is incorrect. Please try again.');//</script>";

    }

}

}

?

?>

```

```

<!DOCTYPE html>

<html lang="en">

    <head>

        <meta charset="UTF-8" />

        <meta name="viewport" content="width=device-width, initial-scale=1.0" />

        <link rel="icon" type="image/x-icon" href="images/logo1.png">

        <link rel="stylesheet" href="style.css" />

        <title>Agent Login and Singup</title>

    </head>

    <body>

```

```

<div class="container">
  <div class="forms-container">
    <div class="signin-signup">
      <form action="" method="post" class="sign-in-form">
        <h2 class="title">Agent Sign in</h2>
        <div class="input-field">
          <i class="fas fa-user"></i>
          <input type="text" placeholder="Full Name" name="fullname" value="<?php echo
$_POST["fullname"]; ?>" required />
        </div>
        <div class="input-field">
          <i class="fas fa-user"></i>
          <input type="text" placeholder="Email Address" name="email" value="<?php echo $_POST['email']; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>
        </div>
        <div class="input-field">
          <i class="fas fa-lock"></i>
          <input type="password" placeholder="Password" name="password" value="<?php echo
$_POST['password']; ?>" required />
        </div>
        <input type="submit" value="Login" name="signin" class="btn solid" />
        <p style="display: flex; justify-content: center; align-items: center; margin-top: 20px;"><a href="forgot-
password-agent.php" style="color: #4590ef;">Forgot Password?</a></p>
      </form>
      <form action="" class="sign-up-form" method="post">
        <h2 class="title">Agent Sign up</h2>
        <div class="input-field">
          <i class="fas fa-user"></i>
          <input type="text" placeholder="Full Name" name="signup_full_name" value="<?php echo
$_POST["signup_full_name"]; ?>" required />
        </div>

```

```

<div class="input-field">
    <i class="fas fa-envelope"></i>
    <input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$" />
</div>

<div class="input-field">
    <i class="fas fa-lock"></i>
    <input type="password" placeholder="Password" name="signup_password" value="<?php echo
$_POST["signup_password"]; ?>" required />
</div>

<div class="input-field">
    <i class="fas fa-lock"></i>
    <input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo
$_POST["signup_cpassword"]; ?>" required />
</div>

<div class="input-field">
    <i class="fas fa-lock"></i>
    <input type="mobile" placeholder="Mobile Number" name="signup_mobile" value="<?php
echo $_POST["signup_mobile"]; ?>" required pattern="^([1-9]{1})[0-9]{9}$" />
</div>

<input type="submit" class="btn" name="verify" value="verify" />
</form>
</div>
</div>

```

```
<div class="panels-container">
```

```
<div class="panel left-panel">
```

```
<div class="content">
```

```
<h3>New here ?</h3>
```

```
<p>
```

```
Agent
```

```
</p>

<button class="btn transparent" id="sign-up-btn">
    Sign up
</button>
</div>


</div>

<div class="panel right-panel">
    <div class="content">
        <h3>One of us ?</h3>
        <p>
            Agent
        </p>
        <button class="btn transparent" id="sign-in-btn">
            Agent Sign in
        </button>
    </div>
    
</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>
```

## Code For Verify Agent Using Otp(verifyagent.php)

```
<?php

include 'config.php';

session_start();
error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["Submit"])) {

    $otpf = mysqli_real_escape_string($conn, $_POST["signup_otp"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM agentlogin WHERE token='$otpf'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }
    else
    {

        echo "<script>alert('Correct Otp.');//</script>";
        $update = mysqli_query($conn, "UPDATE agentlogin SET status='1' WHERE token='$otpf'");

        $result = mysqli_query($conn, $check_otp);
        if ($result) {
```

```

        }

        else{

            echo"<script>alert('registration Successful');</script>";

            $_POST["signup_full_name"] = "";

            $_POST["signup_email"] = "";

            $_POST["signup_password"] = "";

            $_POST["signup_cpassword"] = "";

            $_POST["signup_otp"] = "";


        }

        echo "<script>alert('Verified');</script>";

        echo '<script>window.location="agentlogin.php"</script>';


    }

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<link rel="stylesheet" href="style.css" />

<title>Agent Singin And Singup</title>

</head>

```

```

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">

<h2 class="title">Agent Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="otp" name="signup_otp" value=<?php echo $_POST["signup_otp"]; ?>" required />

</div>

<input type="submit" class="btn" name="Submit" value="Submit" />

</form>

</div>

</div>

<div class="panels-container">

<div class="panel left-panel">

<div class="content">

<h3>New here ?</h3>

<p>

Agent

</p>

<button class="btn transparent" id="sign-up-btn">

Sign up

</button>

```

```

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

    Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum  

    laboriosam ad deleniti.

</p>

<button class="btn transparent" id="sign-in-btn">

    Sign in

</button>

</div>



</div>

</div>

```

```

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code For Forgot Password Agent(forgot-password-agent.php)**

```

<?php

include 'config.php';

session_start();

```

```

error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["sendotp"])) {
    $mob = mysqli_real_escape_string($conn, $_POST["mob"]);
    $otpd = mysqli_real_escape_string($conn, $_POST["otp"]);
    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otp = rand(1000,9999);
    $phone = "+91".$mob; // target number; includes ISD
    $api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key
    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);
    $sms_status = json_decode($sms, true);
    if($sms_status['Status'] != 'Success') {
        $err['error'] = 'Could not send OTP to '.$phone;
    }
    $check_mob = mysqli_query($conn, "SELECT * FROM agentlogin WHERE mob='".$mob"'");
    if (mysqli_num_rows($check_mob) > 0) {
        $data = mysqli_fetch_assoc($check_mob);
        $update = mysqli_query($conn, "UPDATE agentlogin SET token='".$otp' WHERE mob='".$mob"'");
        echo "<script>alert('Otp Sent')</script>";
        echo '<script>window.location="otpform-agent.php"</script>';
    }
}

```

```

}

?>

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Forgot Password</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Reset Password</h2>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Mobile Number" name="mob" value=<?php echo $_POST['mob']; ?>" required pattern="[789][0-9]{9}" />
                    </div>
                    <input type="submit" value="Send Otp" name="sendotp" class="btn solid" />
                </form>
            </div>
        </div>
    </div>

```

```

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3>Forgot Password ?</h3>
      <p>
        Lorem ipsum, dolor sit amet consectetur adipisicing elit. Debitis,
        ex ratione. Aliquid!
      </p>
    </div>
    
  </div>
</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>

</html>

```

### **Code For Forgot Password Otp Form(otpform-agent.php)**

```

<?php

include 'config.php';
session_start();
error_reporting(0);

if (isset($_SESSION["user_id"])) {

```

```

header("Location: welcome.php");
}

if (isset($_POST["Submit"])) {

    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otpf = mysqli_real_escape_string($conn, $_POST["singup_otp"]);
    $email= mysqli_real_escape_string($conn, $_POST["signup_email"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM agentlogin WHERE token='$otpf'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }
    else{

        echo "<script>alert('Correct Otp.');//</script>";

        if ($password !== $cpassword) {
            echo "<script>alert('Password did not match.');//</script>";
        }
        else {
            $sql ="UPDATE agentlogin SET password='$password' WHERE email='$email'";
            $result = mysqli_query($conn, $sql);
            if ($result) {
                echo"<script>alert('Password changed Successful');//</script>";
                echo"<script>window.location('agentlogin.php');//</script>";
                $_POST["signup_full_name"] = "";
                $_POST["signup_email"] = "";
                $_POST["signup_password"] = "";
            }
        }
    }
}

```

```

$_POST["signup_cpassword"] = "";

echo '<script>window.location="agentlogin.php"</script>';

}

else{

echo "<BR>Password change failed";

}

}

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<link rel="stylesheet" href="style.css" />

<title>Agent Login And Singup</title>

</head>

<body>

<div class="container">

<div class="forms-container">

```

```

<div class="signin-signup">

    <form action="" method="post" class="sign-in-form">

        <form action="" class="sign-up-form" method="post">

            <h2 class="title">Agent Sign up</h2>

            <div class="input-field">

                <i class="fas fa-user"></i>

                <input type="text" placeholder="otp" name="singup_otp" value="<?php echo $_POST["signup_otp"]; ?>" required />

            </div>

            <div class="input-field">

                <i class="fas fa-envelope"></i>

                <input type="email" placeholder="Email Address" name="signup_email" value="<?php echo $_POST["signup_email"]; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

            </div>

            <div class="input-field">

                <i class="fas fa-lock"></i>

                <input type="password" placeholder="Password" name="signup_password" value="<?php echo $_POST["signup_password"]; ?>" required />

            </div>

            <div class="input-field">

                <i class="fas fa-lock"></i>

                <input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo $_POST["signup_cpassword"]; ?>" required />

            </div>

            <input type="submit" class="btn" name="Submit" value="Submit" />

        </form>

    </div>

</div>

```

```
<div class="panels-container">  
  <div class="panel left-panel">  
    <div class="content">  
      <h3>New here ?</h3>  
      <p>  
  
        Agent Panel  
      </p>  
      <button class="btn transparent" id="sign-up-btn">  
        Sign up  
      </button>  
    </div>  
      
  </div>  
  <div class="panel right-panel">  
    <div class="content">  
      <h3>One of us ?</h3>  
      <p>  
        Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum  
        laboriosam ad deleniti.  
      </p>  
      <button class="btn transparent" id="sign-in-btn">  
        Sign in  
      </button>  
    </div>  
      
  </div>  
</div>
```

```
<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>
```

## Code For Agent HomePage(agent.php)

```
<?php

session_start();
error_reporting(0);

if (!isset($_SESSION["user_id"])) {
    header("Location: index.php");
}

include 'config.php';

?>

<!DOCTYPE html>
<html>
<head>
<title>Agent</title>

<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="images/logo1.png">
```

```

<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/css/bootstrap.min.css">
<!--Style.css linking-->
<link rel="stylesheet" type="text/css" href="css/style.css">
<!--Website font Change-->
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Jost:wght@100;400&display=swap" rel="stylesheet">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.1.1/css/all.min.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>
<!--Nev Bar-->
<section>
<nav class="navbar navbar-expand-lg navbar-dark bg-dark">
<a class="navbar-brand" href="index.php">FoodDW</a>
<button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="navbarSupportedContent">
<ul class="navbar-nav ml-auto">
<li class="nav-item active">
<a class="nav-link" href=""><?php echo "Welcome " . $_SESSION["fullname"] . "<br>"?><span class="sr-only"></span></a>
</li>
<li class="nav-item">
<a class="nav-link" href="agent.php">Agent Page <span class="sr-only">(current)</span></a>
</li>

```

```

<li class="nav-item">
    <a class="nav-link" href="../foodrequest\index.php" target="_blank">Food Requests</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="../donationrequest\index.php" target="_blank">Donation Requests</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="donationform.php">Donation Form</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="../mydonation\index.php">My Donation reocrd</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="ag2a.php">Send Message to admin</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="../agent\index.php">check Message</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="About Us\index.html">About</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="logout.php" >Logout</a>
</li>

</ul>
<form class="form-inline my-2 my-lg-0">
    <input class="form-control mr-sm-2" type="search" placeholder="Search" aria-label="Search">
    <button class="btn btn-outline-success my-2 my-sm-0" type="submit">Search</button>

```

```

</form>

</div>

</nav>

</section>

<!--CDN links-->

<section>

<script src="https://cdn.jsdelivr.net/npm/jquery@3.6.0/dist/jquery.slim.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/js/bootstrap.bundle.min.js"></script>

</section>

<!--Carousel-->

<section>

<div id="demo" class="carousel slide" data-ride="carousel">

<ul class="carousel-indicators">

<li data-target="#demo" data-slide-to="0" class="active"></li>
<li data-target="#demo" data-slide-to="1"></li>
<li data-target="#demo" data-slide-to="2"></li>

</ul>

<div class="carousel-inner">

<div class="carousel-item active">



<div class="carousel-caption">

<h3>Distribute Food</h3>
<p>Be The Part Of The Change!</p></font>

</div>

</div>

<div class="carousel-item">



<div class="carousel-caption">

```

```

<h3><font color="black">Help Us</h3>
<p>In Our Mission!</p></font>
</div>
</div>

<div class="carousel-item">

<div class="carousel-caption">
<h3><font color="black">Volunteer For Us</h3>
<p>Join Now!</p></font>
</div>
</div>
</div>

<a class="carousel-control-prev" href="#demo" data-slide="prev">
<span class="carousel-control-prev-icon"></span>
</a>
<a class="carousel-control-next" href="#demo" data-slide="next">
<span class="carousel-control-next-icon"></span>
</a>
</div>
</div>
</section>
<!--Footer-->
<footer> <?php include 'agentfooter.php';?></footer>
</body>
</html>

```

## Code For Agent Footer(agentfooter.php)

```
<!DOCTYPE html>

<html lang="en">

<head>

<title>Footer Design</title>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<link rel="stylesheet" href="css/footherstyle.css">

<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">

</head>

<body>

<footer class="footer">

<div class="container">

<div class="row">

<div class="footer-col">

<h4>Food Donation</h4>

<ul>

<li><a href="About Us\index.html">about us</a></li>

<li><a href="donationform.php">Donation Form</a></li>

<li><a href="../mydonation\index.php">My Donation reocrd</a></li>

<li>

</li>

</ul>

</div>

</div>

</div>

</body>
```

```

<div class="footer-col">

    <h4>Need help?</h4>

    <ul>

        <li><a href="ag2a.php">Contact Admin</a></li>

        <li><a href="../agent\index.php">Check Messages</a></li>

        <li><a href="agent.php">Agent Page</a></li>

    </ul>

</div>

<div class="footer-col">

    <h4>Go To</h4>

    <ul>

        <li><a href="agentlogin.php">Agent</a></li>

        <li><a href="donorlogin.php">Donor</a></li>

        <li><a href="ngologin.php">Needy</a></li>

        <li><a href="adminlogin.php">Admin</a></li>

    </ul>

</div>

<div class="footer-col">

    <h4>Follow Us</h4>

    <div class="social-links">

        <a href="https://www.facebook.com/"><i class="fab fa-facebook-f"></i></a>

        <a href="https://twitter.com/i/flow/login"><i class="fab fa-twitter"></i></a>

        <a href="https://www.instagram.com/accounts/login/"><i class="fab fa-instagram"></i></a>

        <a href="https://www.linkedin.com/signup"><i class="fab fa-linkedin-in"></i></a>

    </div>

</div>

```

```

        </div>
    </div>
</footer>

</body>
</html>

```

## Code of Food Request(index.php)

```

<!DOCTYPE html>

<html>
    <head>
        <title>Food Requests </title>
        <head>
            <meta name="viewport" content="width=device-width, initial-scale=1">
            <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
            <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
            <link rel="stylesheet" href=".//assets/css/style.css"></link>
        </head>
    </head>
    <body >

        <?php
        include "./adminHeader.php";
        //include "./sidebar.php";

```

```

include_once "./config/dbconnect.php";

?>

<div id="ordersBtn" >
<h2>Food Request</h2>
<table class="table " >
<thead>
<tr>
<th class="text-center">S.N.</th>
<th class="text-center">ID</th>
<th class="text-center">Name</th>
<th class="text-center">Email</th>
<th class="text-center">Organistation Name</th>
<th class="text-center">Date &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</th>
<th class="text-center">Time</th>
<th class="text-center">&nbsp;&nbsp;&nbsp;&nbsp;</th>
<th class="text-center">Location&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</th>

</tr>
</thead>
<?php
include_once "config/dbconnect.php";
$sql="SELECT * from foodrequest WHERE status=1";
$result=$conn-> query($sql);
$count=1;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
?>
<tr>
<td><?=$count?></td>

```

```

<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["orgn"]?></td>
<td><?=$row["date"]?></td>
<td><?=$row["time"]?></td>
<td><?=$row["location"]?></td>

</tr>
<?php
    $count=$count+1;
}
}
?
</table>

</div>

<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content--&gt;
        &lt;div class="modal-content"&gt;
            &lt;div class="modal-header"&gt;
                &lt;h4 class="modal-title"&gt;Order Details&lt;/h4&gt;
                &lt;button type="button" class="close" data-dismiss="modal"&gt;&amp;times;&lt;/button&gt;
</pre>

```

```

</div>

<div class="order-view-modal modal-body">

</div>
</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

```

```

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

```

```

<div class="modal-header">

    <h4 class="modal-title">Order Details</h4>
    <button type="button" class="close" data-dismiss="modal">&times;</button>
</div>

<div class="order-view-modal modal-body">

</div>
</div><!-- Modal content-->
</div><!-- /Modal dialog-->
</div>
<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

    var dataURL = $(this).attr('data-href');

    $('.order-view-modal').load(dataURL,function(){

        $('#viewModal').modal({show:true});

    });

});

});

</script>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>

```

```
</body>
```

```
</html>
```

## Code To View Donation Requests(index.php)

```
<!DOCTYPE html>

<html>

<head>
    <title>Donation Requests</title>
    <head>
        <meta name="viewport" content="width=device-width, initial-scale=1">
        <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
        <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
        <link rel="stylesheet" href=".//assets/css/style.css"></link>
    </head>
    </head>
<body >

<?php
    include "./adminHeader.php";
    //include "./sidebar.php";

    include_once "config/dbconnect.php";
?>

<div id="ordersBtn" >
    <h2>Donation's Request</h2>
    <table class="table ">
```

```

<thead>
  <tr>
    <th class="text-center">S.N.</th>
    <th class="text-center">ID</th>
    <th class="text-center">Name</th>
    <th class="text-center">Email</th>
    <th class="text-center">Type&nbspo&nbspfood</th>
    <th class="text-center">Date&nbsp&nbsp&nbsp&nbsp&nbsp</th>
    <th class="text-center">Time</th>
    <th class="text-center">Quantity&nbsp&nbsp&nbsp&nbsp</th>
    <th class="text-center">Location&nbsp&nbsp&nbsp&nbsp&nbsp&nbsp&nbsp</th>
  </tr>
</thead>
<?php
  include_once "config/dbconnect.php";
  $sql="SELECT * from donatenow WHERE status=1";
  $result=$conn-> query($sql);
  $count=1;
  if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
      ?>
      <tr>
        <td><?=$count?></td>
        <td><?=$row["id"]?></td>
        <td><?=$row["fullname"]?></td>
        <td><?=$row["email"]?></td>
        <td><?=$row["type"]?></td>
        <td><?=$row["date"]?></td>
    
```

```

<td><?=$row["time"]?></td>
<td><?=$row["quantity"]?></td>
<td><?=$row["location"]?></td>

</tr>
<?php
    $count=$count+1;
}
}

?>
</table>

</div>

<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content--&gt;
        &lt;div class="modal-content"&gt;
            &lt;div class="modal-header"&gt;
                &lt;h4 class="modal-title"&gt;Order Details&lt;/h4&gt;
                &lt;button type="button" class="close" data-dismiss="modal"&gt;&amp;times;&lt;/button&gt;
            &lt;/div&gt;
            &lt;div class="order-view-modal modal-body"&gt;
                &lt;/div&gt;
        &lt;/div&gt;
    &lt;/div&gt;
&lt;/div&gt;
</pre>

```

```

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

```

```

</div>

<div class="order-view-modal modal-body">

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>

</body>

```

```
</html>
```

## Code of Donation Form(donationform.php)

```
<?php

include 'config.php';

session_start();
error_reporting(0);

if (isset($_POST["Submit"])) {

$fullname = mysqli_real_escape_string($conn,($_POST["singup_fullname"]));
$email = mysqli_real_escape_string($conn, ($_POST["signup_email"]));
$dn = mysqli_real_escape_string($conn,($_POST["signup_dn"]));
$type = mysqli_real_escape_string($conn,($_POST["signup_type"]));
$quantity= mysqli_real_escape_string($conn,($_POST["quantity"]));

$date= mysqli_real_escape_string($conn,($_POST["signup_date"]));
$time= mysqli_real_escape_string($conn,($_POST["signup_time"]));
$orgn= mysqli_real_escape_string($conn,($_POST["orgn"]));
$location= mysqli_real_escape_string($conn,($_POST["location"]));

$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM agentlogin WHERE email='$email' and fullname='$fullname'"));

$check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM agentlogin WHERE fullname='$fullname'"));

}
```

```

$check_dn = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM donorlogin WHERE
fullname='$dn'"));

echo $fullname.$email.$type.$date.$time.$quantity.$location;

$check_orgn= mysqli_num_rows(mysqli_query($conn, "SELECT email FROM ngo WHERE orgn='$on'"));



if ($check_fullname<1) {

    echo "<script>alert('Invalid Agent Name.');//</script>";

}

if($check_email<1)

{

    echo "<script>alert('Invalid Email');//</script>";

}

if ($check_dn< 1) {

    echo "<script>alert('Invalid Donor Name.');//</script>";

}

if($check_orgn<1)

{

    echo "<script>alert('Invalid Organisation Name.');//</script>";

}

if($check_fullname>0&&$check_email>0&&$check_dn>0&&$check_orgn>0){

    $sql="INSERT INTO `donation`(`fullname`, `email`, `dn`, `on`, `date`, `time`,
`location`, `status`, `quantity`, `type`) VALUES
('$fullname','$email','$dn','$orgn','$date','$time','$location','0','$quantity','$type')";

    $result = mysqli_query($conn, $sql);

    if ($result) {

        echo"<script>alert('Form Submition Successful');//</script>";

        $_POST["signup_full_name"] = "";

    }

}

```

```

$_POST["signup_email"] = "";
$_POST["signup_password"] = "";
$_POST["signup_cpassword"] = "";
echo '<script>window.location="agent.php"</script>';
}

else{
echo"<script>alert('Form not Submited');</script>";

}
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="style.css" />
<title>Donate Now Form</title>
</head>

<body>
<div class="container">
<div class="forms-container">
<div class="signin-signup">

```

```

<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">
    <h2 class="title">Donatation Form</h2>
    <div class="input-field">
        <i class="fas fa-user"></i>
        <input type="text" placeholder="Agent Name" name="singup_fullname" value="<?php echo
$_POST["signup_fullname"]; ?>" required />
    </div>
    <div class="input-field">
        <i class="fas fa-envelope"></i>
        <input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required />
    </div>
    <div class="input-field">
        <i class="fas fa-lock"></i>
        <input type="text" placeholder="Donar's name" name="signup_dn" value="<?php echo
$_POST["signup_dn"]; ?>" required />
    </div>

    <div class="input-field">
        <i class="fas fa-lock"></i>
        <input type="date" placeholder="Date of cooking" name="signup_date" value="<?php echo
$_POST["signup_date"]; ?>" required />
    </div>
    <div class="input-field">
        <i class="fas fa-lock"></i>
        <input type="time" placeholder="Time of cooking" name="signup_time" value="<?php echo
$_POST["signup_time"]; ?>" required />
    </div>
    <div class="input-field">

```

```

<i class="fas fa-lock"></i>

<input type="text" placeholder="Type of food" name="signup_type" value="<?php echo
$_POST["signup_type"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<SELECT name="quantity" required>

<option value="" disabled selected>Select Quantity</option>

<option>Less than 1kg</option>

<option>1kg or less than 3 kg</option>

<option>3kg or less than 10 kg</option>

<option>More than 10kg</option>

</SELECT>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="text" placeholder="Organisation Name" name="orgn" value="<?php echo
$_POST["orgn"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="textarea" placeholder="Location" name="location" value="<?php echo
$_POST["location"]; ?>" required />

</div>

<input type="submit" class="btn" name="Submit" value="Submit" />

</form>

</div>

```

```
</div>

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3></h3>
      <p>
        </p>
      </div>
      
    </div>
    <div class="panel right-panel">
      <div class="content">
        <h3>One of us ?</h3>
        <p>
          Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
          laboriosam ad deleniti.
        </p>
        <button class="btn transparent" id="sign-in-btn">
          Sign in
        </button>
      </div>
      
    </div>
  </div>
</div>
```

```

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

## **Code To View My Donations(index.php)**

```

<!DOCTYPE html>

<html>
  <head>
    <title>My Donations</title>
    <head>
      <meta name="viewport" content="width=device-width, initial-scale=1">
      <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
      <link rel="stylesheet" href=".//assets/css/style.css"></link>
    </head>
    </head>
  <body >
    <?php
      include "./adminHeader.php";
      //include "./sidebar.php";
      include_once "./config/dbconnect.php";
    ?>
    <div id="ordersBtn" >

```

```

<h2>Old Food Request</h2>

<table class="table table-striped">

<thead>

<tr>

<th>S.N.</th>

<th>ID</th>

<th>Name</th>

<th>Email</th>

<th>Donor Name</th>

<th>Organisation Name</th>

<th>Date</th>

<th>Time</th>

<th>Type of food</th>

<th>Quantity</th>

<th>Location</th>

</tr>

</thead>

<?php

include_once "./config/dbconnect.php";

$sql="SELECT * from donation";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>

<td><?=$row["id"]?></td>

```

```

<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["dn"]?></td>
<td><?=$row["on"]?></td>
<td><?=$row["date"]?></td>
<td><?=$row["time"]?></td>
<td><?=$row["type"]?></td>
<td><?=$row["quantity"]?></td>
<td><?=$row["location"]?></td>

<?php
$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">
<div class="modal-dialog modal-lg">
<!-- Modal content-->
<div class="modal-content">
<div class="modal-header">

```

```

<h4 class="modal-title">Order Details</h4>
<button type="button" class="close" data-dismiss="modal">&times;</button>
</div>
<div class="order-view-modal modal-body">
</div>
</div><!-- Modal content-->
</div><!-- /Modal dialog-->
</div>
<script>
//for view order modal
$(document).ready(function(){
$('.openPopup').on('click',function(){
var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){
$('#viewModal').modal({show:true});
});
});
});
});

</script>

</table>

</div>
<!-- Modal -->
<div class="modal fade" id="viewModal" role="dialog">

```

```

<div class="modal-dialog modal-lg">
  <!-- Modal content-->
  <div class="modal-content">
    <div class="modal-header">

      <h4 class="modal-title">Order Details</h4>
      <button type="button" class="close" data-dismiss="modal">&times;</button>
    </div>
    <div class="order-view-modal modal-body">

    </div>
  </div><!-- Modal content-->
</div><!-- /Modal dialog-->
</div>
<script>
  //for view order modal
  $(document).ready(function(){
    $('.openPopup').on('click',function(){
      var dataURL = $(this).attr('data-href');

      $('.order-view-modal').load(dataURL,function(){
        $('#viewModal').modal({show:true});
      });
    });
  });
</script>

```

```

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>
</body>

```

</html>

### **Code For Sending Message To Admin(ag2a.php)**

```

<?php

include 'config.php';

require 'vendor/autoload.php';

session_start();

error_reporting(0);

if (isset($_POST["signin"])) {

$fullname = mysqli_real_escape_string($conn, $_POST["fullname"]);

$msg = mysqli_real_escape_string($conn, $_POST["msg"]);

$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM agentlogin WHERE
fullname='".$fullname."'"));



if ($check_email > 0) {

echo "<script>alert('Name Found In record');</script>";

}
}

```

```

$sql = "INSERT INTO ag2a (fullname, msg) VALUES ('$fullname', '$msg')";

$result = mysqli_query($conn, $sql);

if($result)

{

echo "Message Sent";

}

else

{

echo "Message not sent";

}

}

} else {

echo "<script>alert('Inavlid Name');</script>";

}

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<link rel="stylesheet" href="style.css" />

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<title>Send Message To admin</title>

</head>

```

```

<body>

<div class="container">
  <div class="forms-container">
    <div class="signin-signup">
      <form action="" method="post" class="sign-in-form">
        <h2 class="title">Send Message To admin</h2>
        <div class="input-field">
          <i class="fas fa-user"></i>
          <input type="text" placeholder="Full Name" name="fullname" value=<?php echo
$_POST["fullname"]; ?>" required />
        </div>
        <div class="input-field">
          <i class="fas fa-lock"></i>
          <input type="textarea" placeholder="Enter Message Here" name="msg" value=<?php echo
$_POST['msg']; ?>" required />
        </div>
        <input type="submit" value="Send" name="signin" class="btn solid" />
      </form>
    </div>
  </div>

  <div class="panels-container">
    <div class="panel left-panel">
      <div class="content">
        <h3> </h3>
        <p>
          </p>

```

```

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

  Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum

  laboriosam ad deleniti.

</p>

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>

<script src="app.js"></script>

</body>

</html>

```

### **Code For Checking Admin's Message(index.php)**

```

<!DOCTYPE html>

<html>

<head>

<title>Message From Admin</title>

<head>

```

```

<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css"
integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm"
crossorigin="anonymous">

<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-
awesome.min.css">

<link rel="stylesheet" href=".//assets/css/style.css"></link>

</head>

</head>

<body >

<?php

include "./adminHeader.php";

//include "./sidebar.php";


include_once "./config/dbconnect.php";

?>

<div id="ordersBtn" >

<h2>Messages From Admin</h2>

<table class="table table-striped">

<thead>

<tr>

<th>S.N.</th>

<th>ID</th>

<th>Admin Name</th>

<th>Message</th>

</tr>

</thead>

<?php

```

```

include_once "./config/dbconnect.php";
$sql="SELECT * from a2ag";
$result=$conn-> query($sql);
$count=1;

if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
        ?>
        <tr>
        <td><?=$count?></td>
        <td><?=$row["id"]?></td>
        <td><?=$row["fullname"]?></td>
        <td><?=$row["msg"]?></td>

<?php
$count=$count+1;
}
}
?>

</table>

</div>

<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content--&gt;
        &lt;div class="modal-content"&gt;
</pre>

```

```

<div class="modal-header">

    <h4 class="modal-title">Order Details</h4>
    <button type="button" class="close" data-dismiss="modal">&times;</button>
</div>

<div class="order-view-modal modal-body">

</div>
</div><!-- Modal content-->
</div><!-- /Modal dialog-->
</div>
<script>
//for view order modal
$(document).ready(function(){
    $('.openPopup').on('click',function(){
        var dataURL = $(this).attr('data-href');

        $('.order-view-modal').load(dataURL,function(){
            $('#viewModal').modal({show:true});
        });
    });
});

</script>

</table>

</div>
<!-- Modal -->

```

```

<div class="modal fade" id="viewModal" role="dialog">
  <div class="modal-dialog modal-lg">
    <!-- Modal content-->
    <div class="modal-content">
      <div class="modal-header">

        <h4 class="modal-title">Order Details</h4>
        <button type="button" class="close" data-dismiss="modal">&times;</button>
      </div>
      <div class="order-view-modal modal-body">

      </div>
    </div><!-- Modal content-->
  </div><!-- /Modal dialog-->
</div>
<script>
  //for view order modal
  $(document).ready(function(){
    $('.openPopup').on('click',function(){
      var dataURL = $(this).attr('data-href');

      $('.order-view-modal').load(dataURL,function(){
        $('#viewModal').modal({show:true});
      });
    });
  });
</script>

```

```

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>
</body>

</html>

```

### **CSS Code for Checking food Request ,Donation Request and checking message(style.css)**

```

@import url('https://fonts.googleapis.com/css?family=Work+Sans:400,500,600,700&display=swap');

* {
    margin: 0;
    padding: 0;
    font-family: 'Work Sans', sans-serif;
    font-size: 18px;
}

.user-cart span{
    background-color:red;
    padding-right:3px;
    padding-left:3px;
    border-radius:10px;
    font-size:18px;
    margin-left:-1.2rem;
}

/***** admin dashboard styling *****/
.card{

```

```

background-color: #3B3131;
padding: 20px;
margin: 10px;
border-radius: 10px;
box-shadow: 8px 5px 5px #3B3131;
}

/****************** for sidebar ******************/

/* The sidebar menu */
.sidebar {
    height: 100%; /* 100% Full-height */
    width: 0; /* 0 width - change this with JavaScript */
    position: fixed; /* Stay in place */
    z-index: 1; /* Stay on top */
    top: 0;
    left: 0;
    background-color: #3B3131; /* Black */
    overflow-x: hidden; /* Disable horizontal scroll */
    padding-top: 60px; /* Place content 60px from the top */
    transition: 0.5s; /* 0.5 second transition effect to slide in the sidebar */
}

/* The sidebar links */
.sidebar a {
    padding: 8px 8px 8px 32px;
    text-decoration: none;
    font-size: 22px;
    color: #fff;
}

```

```
display: block;  
transition: 0.3s;  
}  
  
.sidebar .side-header{  
    margin-left: 30px;  
    margin-bottom: 8px;  
    color: #fff;  
}  
  
/* When you mouse over the navigation links, change their color */  
.sidebar a:hover {  
    background-color: #584e46;  
}  
  
/* Position and style the close button (top right corner) */  
.sidebar .closebtn {  
    position: absolute;  
    top: 0;  
    right: 2px;  
    font-size: 34px;  
    margin-left: 50px;  
}  
  
/* The button used to open the sidebar */  
.openbtn {  
    font-size: 20px;  
    cursor: pointer;  
    padding: 10px 15px;
```

```

border: none;
color: #fff;
background-color:#584e46;
}

.openbtn:hover {
color: #ECDAC9;
}

/* Style page content - use this if you want to push the page content to the right when you open the side navigation */
#main {
transition: margin-left .5s; /* If you want a transition effect */
padding: 20px;
}

/* On smaller screens, where height is less than 450px, change the style of the sidenav (less padding and a smaller font size) */
@media screen and (max-height: 450px) {
.sidebar {padding-top: 15px;}
.sidebar a {font-size: 18px;}
}

***** product table styling *****

table {
width: 100%;
border-collapse: collapse;
border-spacing: 0;
box-shadow: 0 2px 15px rgba(64, 64, 64, .7);
}

```

```
border-radius: 12px 12px 0 0;  
margin-bottom: 50px;  
}  
  
td,  
th {  
padding: 10px 16px;  
text-align: center;  
}  
  
th {  
background-color: #584e46;  
color: #fafafa;  
font-family: 'Open Sans', Sans-serif;  
font-weight: bold;  
}  
  
tr {  
width: 100%;  
background-color: #fafafa;  
font-family: 'Montserrat', sans-serif;  
}  
  
tr:nth-child(even) {  
background-color: #eeeeee;  
}  
  
***** login and sign up styling *****
```

```
.card-container.card-account {  
    max-width: 500px;  
    padding: 30px 30px;  
}  
  
.btn {  
    font-weight: 700;  
    height: 36px;  
    -moz-user-select: none;  
    -webkit-user-select: none;  
    user-select: none;  
    cursor: default;  
}  
  
/*  
 * Card component  
 */  
  
.card-account{  
    background-color: #ECDAC9;  
    /* just in case there no content*/  
    padding: 20px 25px 30px;  
    margin: 0 auto 25px;  
    margin-top: 40px;  
    /* shadows and rounded borders */  
    -moz-border-radius: 2px;  
    -webkit-border-radius: 2px;  
    border-radius: 2px;  
    -moz-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
}
```

```
-webkit-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
}
```

```
.profile-img-card {  
width: 96px;  
height: 96px;  
margin: 0 auto 10px;  
display: block;  
-moz-border-radius: 50%;  
-webkit-border-radius: 50%;  
border-radius: 50%;  
}
```

```
/*  
* Form styles  
*/  
.profile-name-card {  
font-size: 16px;  
font-weight: bold;  
text-align: center;  
margin: 10px 0 0;  
min-height: 1em;  
}
```

```
.reauth-email {  
display: block;  
color: #404040;  
line-height: 2;
```

```
margin-bottom: 10px;  
font-size: 14px;  
text-align: center;  
overflow: hidden;  
text-overflow: ellipsis;  
white-space: nowrap;  
-moz-box-sizing: border-box;  
-webkit-box-sizing: border-box;  
box-sizing: border-box;  
}
```

```
.form-signin #inputEmail,  
.form-signin #inputPassword {  
direction: ltr;  
height: 44px;  
font-size: 16px;  
}
```

```
.form-signin input[type=email],  
.form-signin input[type=password],  
.form-signin input[type=text],  
.form-signin button {  
width: 100%;  
display: block;  
margin-bottom: 10px;  
z-index: 1;  
position: relative;  
-moz-box-sizing: border-box;  
-webkit-box-sizing: border-box;
```

```
    box-sizing: border-box;  
}  
  
.form-signin .form-control:focus {  
    border-color: #ab9787;  
    outline: 0;  
    -webkit-box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
    box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
}  
  
.btn.btn-signin {  
  
    background-color: #584e46;  
    padding: 2px;  
    font-weight: 700;  
    font-size: 16px;  
    height: 36px;  
    -moz-border-radius: 3px;  
    -webkit-border-radius: 3px;  
    border-radius: 3px;  
    border: none;  
    -o-transition: all 0.218s;  
    -moz-transition: all 0.218s;  
    -webkit-transition: all 0.218s;  
    transition: all 0.218s;  
}  
  
.btn.btn-signin:hover,  
.btn.btn-signin:active,
```

```
.btn.btn-signin:focus {  
background-color: #a56a39;  
}  
  
.box {  
position: relative;  
background-color: #000;  
}  
  
.image {  
opacity: 1;  
display: block;  
max-width: 100%;  
height: auto;  
transition: .5s ease;  
backface-visibility: hidden;  
object-fit: contain;  
}  
  
.middle {  
transition: .5s ease;  
opacity: 0;  
position: absolute;  
top: 50%;  
left: 50%;  
transform: translate(-50%, -50%);  
-ms-transform: translate(-50%, -50%);  
text-align: center;
```

```
}
```

```
.box:hover .image {
```

```
    opacity: 0.3;
```

```
}
```

```
.box:hover .middle {
```

```
    opacity: 1;
```

```
}
```

```
.text {
```

```
    background-color: #584e46;
```

```
    color: #fff;
```

```
    font-size: 16px;
```

```
    padding: 6px;
```

```
    border-radius: 5px;
```

```
}
```

```
/* ***** cart to login icon styling ***** */
```

```
.cart-login-btn{
```

```
    margin:5px;
```

```
    border-style: outset;
```

```
}
```

```
.cart-login-btn a i{
```

```
    padding: 10px;
```

```
    font-size:30px;
```

```
    color:#584e46;
```

```
}
```

```
.cart-login-btn a i:hover{
```

```


color: grey;
}

/* ***** footer **** */
.footer-hover{
color: #000;
}

.footer-hover:hover{
color: #ECDAC9;
text-decoration: none;
}

```

**Needy**

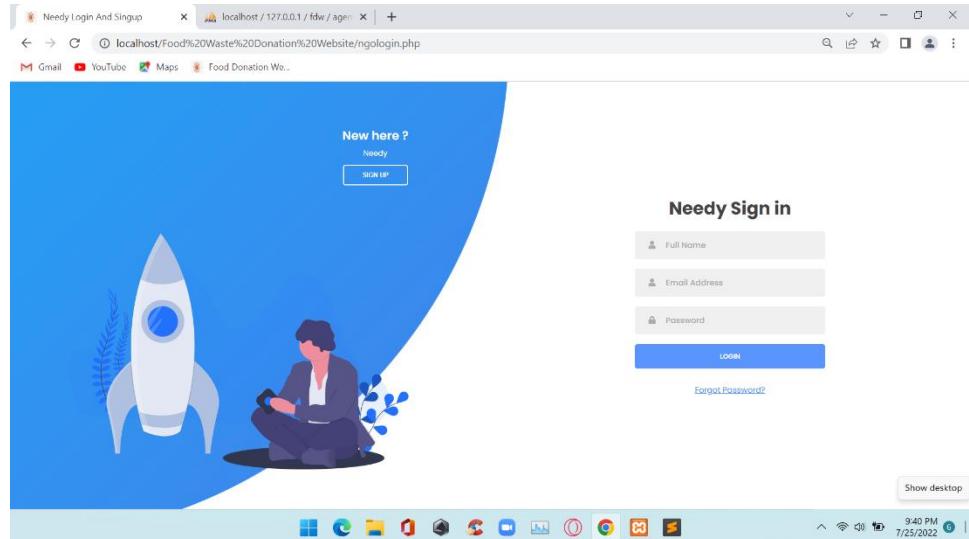

localhost / 127.0.0.1 / fdw / age... x | +

Gmail YouTube Maps Food Donation We...

### One of us ?

Needy Sign up

Full Name  
Email Address  
Password  
Confirm Password  
Mobile Number  
Organisation Name

VERIFY USER

SKIN IN

Show desktop

Sign in & Sign up Form - Pure x localhost / 127.0.0.1 / fdw / age... x | +

Gmail YouTube Maps Food Donation We...

### Forgot Password ?

Reset Password

Mobile Number

SEND OTP

Show desktop

localhost / 127.0.0.1 / fdw / ngo x | +



Gmail YouTube Maps Food Donation We...

Welcome agent Needy Page Food Request Form Old Food Requests Send Message to admin check Message About Logout Search

FoodDW

Have A nice Day Enjoy Your Food

Show desktop

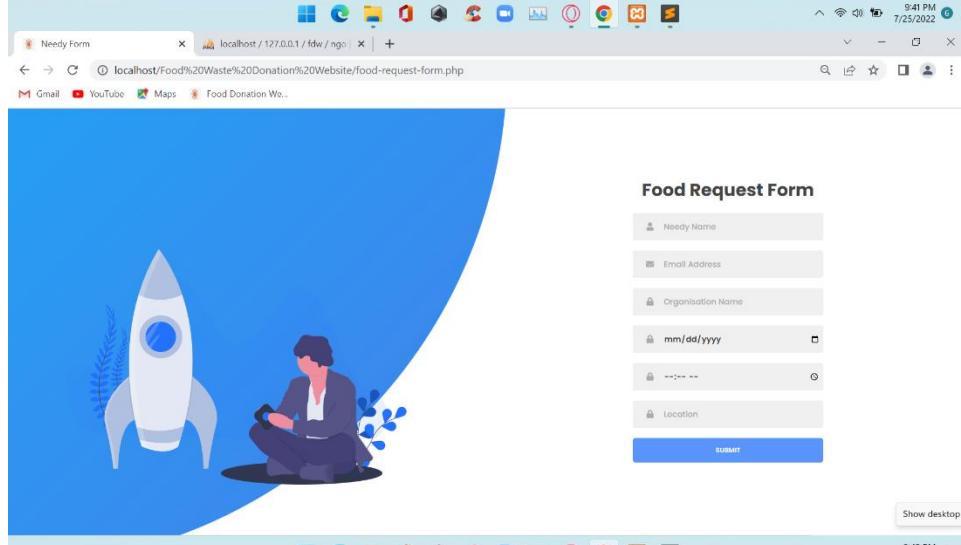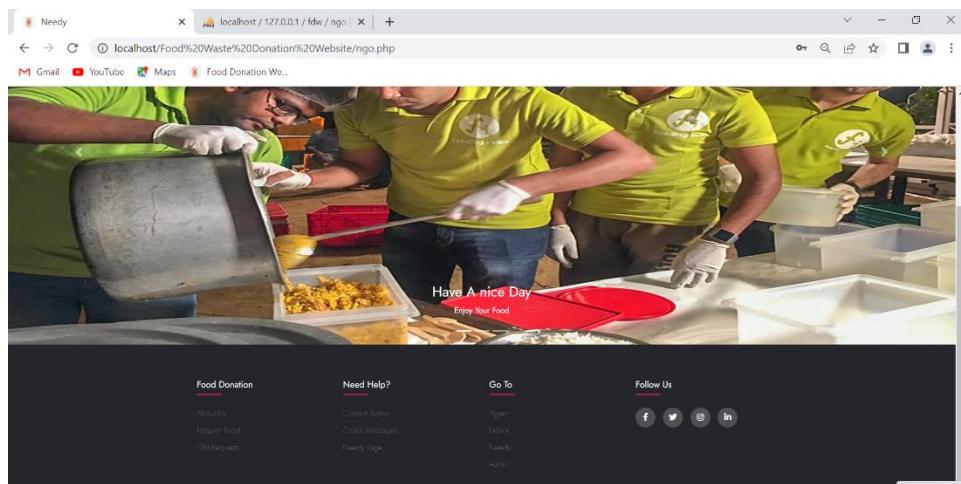

A screenshot of a web browser window showing a table of "Old Food Requests". The table has columns for S.N., ID, Name, Email, Organisation Name, Date, Time, and Location. There are three rows of data:

S.N.	ID	Name	Email	Organisation Name	Date	Time	Location
1	1	agent	a@gmail.com	o	2022-08-30	07:33:00	patna
2	2	manyavar	mk@gmail.com	Googl	2022-07-12	19:25:00	patna
3	5	manyavar	mk@gmail.com	Google	2022-07-21	19:37:00	patna

## Code For Needy Login And Singup(ngologin.php)

```
<?php
include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}
}
```

```

if (isset($_POST["verify"])) {

$full_name = mysqli_real_escape_string($conn, $_POST["signup_full_name"]);

$email = mysqli_real_escape_string($conn, $_POST["signup_email"]);

$password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));

$cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));

$mob = mysqli_real_escape_string($conn, $_POST["signup_mobile"]);

$orgn = mysqli_real_escape_string($conn, $_POST["signup_orgn"]);

$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM ngo WHERE email='$email'"));

$_SESSION["fullname"] = "$full_name";

if ($password !== $cpassword) {

echo "<script>alert('Password did not match.');//</script>";

} elseif ($check_email > 0) {

echo "<script>alert('Email already exists in our database.');//</script>";

} else {

$otp = rand(1000,9999);

$phone ="+91"."$mob"; // target number; includes ISD

$api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key

$req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

}

$sms = file_get_contents($req);

$sms_status = json_decode($sms, true);

if($sms_status['Status'] !== 'Success') {

$err['error'] = 'Could not send OTP to '.$phone;

}

$sql = "INSERT INTO ngo (fullname, email, password, token, status, mob,orgn) VALUES ('$full_name', '$email', '$password', '$otp', '0', '$mob', '$orgn')";

$result = mysqli_query($conn, $sql);

echo '<script>window.location="verifyngo.php"</script>';

```

```

if ($result) {

    echo "<script>alert('Registration Successful');</script>";

    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";

}

else{

    echo "<script>alert('Registration Failed');</script>";

}

}

}

if (isset($_POST["signin"])) {

    $full_name = mysqli_real_escape_string($conn, $_POST["fullname"]);

    $email = mysqli_real_escape_string($conn, $_POST["email"]);

    $password = mysqli_real_escape_string($conn, md5($_POST["password"]));

    $check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM ngo WHERE
    fullname='$full_name'"));



    $check_email = mysqli_query($conn, "SELECT id FROM ngo WHERE email='$email' AND password='$password'
    AND status='1'");

    $_SESSION["fullname"] = "$full_name";

    if ($check_fullname<1) {

        echo "<script>alert('Invalid Name.');//</script>";

    }

    else{

        if (mysqli_num_rows($check_email) > 0) {

            $row = mysqli_fetch_assoc($check_email);

}

```

```

$_SESSION["user_id"] = $row['id'];

echo '<script>alert("Login Successful ")</script>';

echo '<script>window.location="ngo.php"</script>';

} else {

echo "<script>alert('Login details is incorrect. Please try again.');//</script>";

}

}

?

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<link rel="stylesheet" href="style.css" />

<title>Needy Login And Singup</title>

</head>

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

<h2 class="title">Needy Sign in</h2>

<div class="input-field">

<i class="fas fa-user"></i>

```

```

<input type="text" placeholder="Full Name" name="fullname" value="<?php echo
$_POST["fullname"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-user"></i>

<input type="text" placeholder="Email Address" name="email" value="<?php echo $_POST['email']; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="password" value="<?php echo
$_POST['password']; ?>" required />

</div>

<input type="submit" value="Login" name="signin" class="btn solid" />

<p style="display: flex; justify-content: center; align-items: center; margin-top: 20px;"><a href="forgot-
password-ngo.php" style="color: #4590ef;">Forgot Password?</a></p>

</form>

<form action="" class="sign-up-form" method="post">
<h2 class="title">Needy Sign up</h2>

<div class="input-field">
<i class="fas fa-user"></i>

<input type="text" placeholder="Full Name" name="signup_full_name" value="<?php echo
$_POST["signup_full_name"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

```

```

<input type="password" placeholder="Password" name="signup_password" value="<?php echo
$_POST["signup_password"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo
$_POST["signup_cpassword"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-envelope"></i>

<input type="mobilenumber" placeholder="Mobile Number" name="signup_mobile" value="<?php echo
$_POST["signup_mobile"]; ?>" required pattern="[1-9]{1}[0-9]{9}"/>

</div>

<div class="input-field">
<i class="fas fa-envelope"></i>

<input type="text" placeholder="Organisation Name" name="signup_orgn" value="<?php echo
$_POST["signup_orgn"]; ?>" required />

</div>

<input type="submit" class="btn" name="verify" value="Verify User" />

</form>

</div>

</div>

<div class="panels-container">
<div class="panel left-panel">
<div class="content">
<h3>New here ?</h3>
<p>
```

```

Needy

</p>

<button class="btn transparent" id="sign-up-btn">
    Sign up
</button>

</div>



</div>

<div class="panel right-panel">
    <div class="content">
        <h3>One of us ?</h3>
        <p>
              Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
              laboriosam ad deleniti.
        </p>
        <button class="btn transparent" id="sign-in-btn">
            Sign in
        </button>
    </div>
    
</div>
</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

## Code For Verify Needy (verifyngo.php)

```
<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {

    header("Location: welcome.php");

}

if (isset($_POST["Submit"])) {

    $otpf = mysqli_real_escape_string($conn, $_POST["signup_otp"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM ngo WHERE token='$otpf'"));

    if ($check_otp != 1) {

        echo "<script>alert('Incorrect Otp.');//</script>";

    }

    else

    {

        echo "<script>alert('Correct Otp.');//</script>";

        $update = mysqli_query($conn, "UPDATE ngo SET status='1' WHERE token='$otpf'");

        $result = mysqli_query($conn, $check_otp);

        if ($result) {

        }

        else{

            echo"<script>alert('registration Successful');//</script>";

            $_POST["signup_full_name"] = "";

            $_POST["signup_email"] = "";

            $_POST["signup_password"] = "";

        }

    }

}
```

```

$_POST["signup_cpassword"] = "";
$_POST["signup_otp"] = "";
}

echo "<script>alert('Verified');</script>";
echo '<script>window.location="ngologin.php"</script>';
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="stylesheet" href="style.css" />
<title>Needy Singin And Singup</title>
<link rel="icon" type="image/x-icon" href="images/logo1.png">
</head>

<body>
<div class="container">
<div class="forms-container">
<div class="signin-signup">
<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">
<h2 class="title">Needy Sign up</h2>

```

```

<div class="input-field">
  <i class="fas fa-user"></i>
  <input type="text" placeholder="otp" name="signup_otp" value=<?php echo $_POST["signup_otp"]; ?>" required />
</div>

<input type="submit" class="btn" name="Submit" value="Submit" />
</form>
</div>
</div>

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3>New here ?</h3>
      <p>
        Needy
      </p>
      <button class="btn transparent" id="sign-up-btn">
        Sign up
      </button>
    </div>
    
  </div>
  <div class="panel right-panel">
    <div class="content">
      <h3>One of us ?</h3>
      <p>

```

**Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum  
  laboriosam ad deleniti.**

```
</p>

<button class="btn transparent" id="sign-in-btn">
  Sign in
</button>
</div>

</div>
</div>
</div>
```

```
<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>
```

### **Code For Forgot-Password Ngo(forgot-password-ngo.php)**

```
<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {
  header("Location: welcome.php");
}
```

```

if (isset($_POST["sendotp"])) {

    $mob = mysqli_real_escape_string($conn, $_POST["mob"]);
    $otpd = mysqli_real_escape_string($conn, $_POST["otp"]);
    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otp = rand(1000,9999);
    $phone = "+91".".$mob"; // target number; includes ISD
    $api_key = 'de784ae9-fedf-11ec-0200cd936042'; // API Key
    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);
    $sms_status = json_decode($sms, true);
    if($sms_status['Status'] != 'Success') {
        $err['error'] = 'Could not send OTP to '.$phone;
    }
    $check_mob = mysqli_query($conn, "SELECT * FROM ngo WHERE mob='".$mob"'");
    if (mysqli_num_rows($check_mob) > 0) {
        $data = mysqli_fetch_assoc($check_mob);
        $update = mysqli_query($conn, "UPDATE ngo SET token='".$otp' WHERE mob='".$mob"'");
        echo "<script>alert('Otp Sent');</script>";
        echo '<script>window.location="otpform-ngo.php"</script>';
    }
}

```

```

}

?>

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Sign in & Sign up Form - Pure Coding</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Reset Password</h2>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Mobile Number" name="mob" value=<?php echo $_POST['mob']; ?>" required pattern="[789][0-9]{9}"/>
                    </div>
                    <input type="submit" value="Send Otp" name="sendotp" class="btn solid" />
                </form>
            </div>
        </div>
    </div>

```

```

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3>Forgot Password ?</h3>
      <p>
        Lorem ipsum, dolor sit amet consectetur adipisicing elit. Debitis,
        ex ratione. Aliquid!
      </p>
    </div>
    
  </div>
</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>

</html>

```

### **Code For Forgot Password Verification Form(otpform-ngo.php)**

```

<?php

include 'config.php';

session_start();
error_reporting(0);

if (isset($_SESSION["user_id"])) {

```

```

header("Location: welcome.php");
}

if (isset($_POST["Submit"])) {

    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otp = mysqli_real_escape_string($conn, $_POST["singup_otp"]);
    $email= mysqli_real_escape_string($conn, $_POST["signup_email"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM ngo WHERE token='$otp'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }

    else{
        echo "<script>alert('Correct Otp.');//</script>";

        if ($password != $cpassword) {
            echo "<script>alert('Password did not match.');//</script>";
        }

        else {
            $sql ="UPDATE ngo SET password='$password' WHERE email='$email'";
            $result = mysqli_query($conn, $sql);
        }
    }
}

```

```

if ($result) {

    echo"<script>alert('Password changed Successful');</script>";
    echo"<script>window.location('ngologin.php')</script>";
    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";

    echo '<script>window.location="ngologin.php"</script>';

}

else{

    echo"<BR>Password change failed";

}

}

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="style.css" />
<title>Needy Login And Singup</title>

```

```

</head>

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">

<h2 class="title">Needy Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="otp" name="singup_otp" value="<?php echo $_POST['signup_otp']; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo $_POST['signup_email']; ?>" required pattern="[a-zA-Z._%+-]+@[a-zA-Z.-]+\.[a-zA-Z]{2,4}$"/>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="signup_password" value="<?php echo $_POST['signup_password']; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo $_POST['signup_cpassword']; ?>" required />

</div>

```

```
<input type="submit" class="btn" name="Submit" value="Submit" />  
</form>  
</div>  
</div>
```

```
<div class="panels-container">  
  <div class="panel left-panel">  
    <div class="content">  
      <h3>New here ?</h3>  
      <p>
```

**Needy**

  </p>

  <button class="btn transparent" id="sign-up-btn">

    Sign up

  </button>

  </div>

  </div>

  <div class="panel right-panel">

    <div class="content">

      <h3>One of us ?</h3>

      <p>

**Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum**

**laboriosam ad deleniti.**

      </p>

      <button class="btn transparent" id="sign-in-btn">

        Sign in

      </button>

```

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

## **Homepage For Ngo(ngo.php)**

```

<?php

session_start();
error_reporting(0);

if (!isset($_SESSION["user_id"])) {
    header("Location: index.php");
}

include 'config.php';?

<!DOCTYPE html>
<html>
<head>
<title>Needy</title>
<!--Responsive -->
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="images/logo1.png">

```

```

<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/css/bootstrap.min.css">
<!--Style.css linking-->
<link rel="stylesheet" type="text/css" href="css/style.css">
<!--Website font Change-->
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Jost:wght@100;400&display=swap" rel="stylesheet">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.1.1/css/all.min.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>
<!--Nev Bar-->
<section>
<nav class="navbar navbar-expand-lg navbar-dark bg-dark">
<a class="navbar-brand" href="index.php">FoodDW</a>
<button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="navbarSupportedContent">
<ul class="navbar-nav ml-auto">
<li class="nav-item active">
<a class="nav-link" href=""><?php echo "Welcome " . $_SESSION["fullname"] . "<br>"?><span class="sr-only"></span></a>
</li>
<li class="nav-item ">
<a class="nav-link" href="#">Needy Page <span class="sr-only">(current)</span></a>
</li>

```

```

<li class="nav-item">
    <a class="nav-link" href="food-request-form.php">Food Request Form</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="../request\index.php">Old Food Requests</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="n2a.php">Send Message to admin</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="../ngo\index.php">check Message</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="about.php">About</a>
</li>

<li class="nav-item">
    <a class="nav-link" href="logout.php" >Logout</a>
</li>

</ul>

<form class="form-inline my-2 my-lg-0">
    <input class="form-control mr-sm-2" type="search" placeholder="Search" aria-label="Search">
    <button class="btn btn-outline-success my-2 my-sm-0" type="submit">Search</button>
</form>

</div>

</nav>

</section>

<!--CDN links-->

<section>

```

```

<script src="https://cdn.jsdelivr.net/npm/jquery@3.6.0/dist/jquery.slim.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/js/bootstrap.bundle.min.js"></script>
</section>
<!--Carousel-->
<section>
<div id="demo" class="carousel slide" data-ride="carousel">
<ul class="carousel-indicators">
<li data-target="#demo" data-slide-to="0" class="active"></li>
<li data-target="#demo" data-slide-to="1"></li>
<li data-target="#demo" data-slide-to="2"></li>
</ul>
<div class="carousel-inner">
<div class="carousel-item active">

<div class="carousel-caption">
<h3>Have A nice Day</h3>
<p>Enjoy Your Food</p>
</div>
</div>
<div class="carousel-item">

<div class="carousel-caption">
<h3><font color="black">Share Food</h3>
<p>Share With Your Family!</p></font>
</div>
</div>
<div class="carousel-item">


```

```

<div class="carousel-caption">
    <h3>Save Food</h3>
    <p>Save Life!</p>
</div>
</div>
</div>

<a class="carousel-control-prev" href="#demo" data-slide="prev">
    <span class="carousel-control-prev-icon"></span>
</a>
<a class="carousel-control-next" href="#demo" data-slide="next">
    <span class="carousel-control-next-icon"></span>
</a>
</div>
</div>
</section>
<!--Footer-->
<footer> <?php include 'ngofooter.php';?></footer>
</body>
</html>

```

### **Code For Needy Footer(ngofooter.php)**

```

<!DOCTYPE html>
<html lang="en">
<head>

    <title>Footer Design</title>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

```

```

<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="css/foothertyle.css">
<link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css">
</head>
<body>

<footer class="footer">
    <div class="container">
        <div class="row">
            <div class="footer-col">
                <h4>Food Donation</h4>
                <ul>
                    <li><a href="About Us\index.html">About us</a></li>
                    <li><a href="food-request-form.php">Request Food</a></li>
                    <li><a href=".request\index.php">Old Requests</a></li>
                    <li>
                    </li>
                </ul>
            </div>
            <div class="footer-col">
                <h4>Need help?</h4>
                <ul>
                    <li><a href="n2a.php">Contact Admin</a></li>
                    <li><a href=".ngo\index.php">Check Messages</a></li>
                    <li><a href="ngo.php">Needy Page</a></li>
                </ul>
            </div>
        </div>
    </div>
</body>

```

```

<div class="footer-col">

    <h4>Go To</h4>

    <ul>

        <li><a href="agentlogin.php">Agent</a></li>

        <li><a href="donorlogin.php">Donor</a></li>

        <li><a href="ngologin.php">Needy</a></li>

        <li><a href="adminlogin.php">Admin</a></li>

    </ul>

</div>

<div class="footer-col">

    <h4>Follow Us</h4>

    <div class="social-links">

        <a href="https://www.facebook.com/"><i class="fab fa-facebook-f"></i></a>

        <a href="https://twitter.com/i/flow/login"><i class="fab fa-twitter"></i></a>

        <a href="https://www.instagram.com/accounts/login/"><i class="fab fa-instagram"></i></a>

        <a href="https://www.linkedin.com/signup"><i class="fab fa-linkedin-in"></i></a>

    </div>

</div>

</div>

</body>

</html>

```

## Code For Food Request Form(food-request-form.php)

```
<?php

include 'config.php';

session_start();
error_reporting(0);

if (isset($_POST["Submit"])) {

    $fullname = mysqli_real_escape_string($conn,($_POST["singup_fullname"]));
    $email = mysqli_real_escape_string($conn, ($_POST["signup_email"]));
    $orgn = mysqli_real_escape_string($conn,($_POST["signup_orgn"]));

    $date= mysqli_real_escape_string($conn,($_POST["signup_date"]));
    $time= mysqli_real_escape_string($conn,($_POST["signup_time"]));

    $location= mysqli_real_escape_string($conn,($_POST["location"]));
    $check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM ngo WHERE email='$email'"));
    $check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM ngo WHERE
    fullname='$fullname'"));
    $check_orgn = mysqli_num_rows(mysqli_query($conn, "SELECT orgn FROM ngo WHERE fullname='$dn'"));

    echo $fullname.$email.$type.$date.$time.$quantity.$location;

    if ($check_fullname<1) {
        echo "<script>alert('Invalid Needy Name.');//</script>";
    }
}
```

```

if ($check_email < 1) {

echo "<script>alert('Invalid Needy Email.');//</script>";

}

if($check_orgn<1)

{

echo "<script>alert('Invalid Organisation Name.');//</script>";

}

if($check_fullname>0&&$check_email>0&&$check_orgn>0){

 $sql="INSERT INTO `foodrequest`(`fullname`, `email`, `orgn`, `date`, `time`, `location`, `status`) VALUES ('$fullname','$email','$orgn','$date','$time','$location','0')";

$result = mysqli_query($conn, $sql);

if ($result) {

echo"<script>alert('Form Submition Successful');//</script>";

$_POST["signup_full_name"] = "";

$_POST["signup_email"] = "";

$_POST["signup_password"] = "";

$_POST["signup_cpassword"] = "";

echo '<script>window.location="ngo.php"</script>';

}

else{

echo"<script>alert('Form not Submited');//</script>";


}

}

?>

```

```

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Needy Form</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">

                    <form action="" class="sign-up-form" method="post">
                        <h2 class="title">Food Request Form</h2>
                        <div class="input-field">
                            <i class="fas fa-user"></i>
                            <input type="text" placeholder="Needy Name" name="singup_fullname" value="<?php echo
$_POST["signup_fullname"]; ?>" required />
                        </div>
                        <div class="input-field">
                            <i class="fas fa-envelope"></i>
                            <input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required />
                        </div>
                        <div class="input-field">

```

```

<i class="fas fa-lock"></i>

<input type="text" placeholder="Organisation Name" name="signup_orgn" value="<?php echo
$_POST["signup_dn"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

<input type="date" placeholder="Date" name="signup_date" value="<?php echo
$_POST["signup_date"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

<input type="time" placeholder="Time" name="signup_time" value="<?php echo
$_POST["signup_time"]; ?>" required />

</div>

<div class="input-field">
<i class="fas fa-lock"></i>

<input type="textarea" placeholder="Location" name="location" value="<?php echo
$_POST["location"]; ?>" required />

</div>

<input type="submit" class="btn" name="Submit" value="Submit" />

</form>

</div>

</div>

```

```

<div class="panels-container">
<div class="panel left-panel">
<div class="content">

```

```
<h3></h3>

<p>

</p>

</div>



</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

  Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum

  laboriosam ad deleniti.

</p>

<button class="btn transparent" id="sign-in-btn">

  Sign in

</button>

</div>



</div>

</div>

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>

<script src="app.js"></script>

</body>

</html>
```

## Code To view old Food Requests(index.php)

```
<!DOCTYPE html>

<html>
<head>
<title>Old Food Requests</title>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
<link rel="stylesheet" href="./assets/css/style.css"></link>
</head>
</head>
<body >

<?php
include "./adminHeader.php";
//include "./sidebar.php";

include_once "./config/dbconnect.php";
?>

<div id="ordersBtn" >
<h2>Old Food Request</h2>
<table class="table table-striped">
<thead>
<tr>
<th>S.N.</th>
```

```

<th>ID</th>
<th>Name</th>
<th>Email</th>
<th>Organisation Name</th>
<th>Date</th>
<th>Time</th>
<th>Location</th>

</tr>
</thead>

<?php

include_once "./config/dbconnect.php";

$sql="SELECT * from foodrequest where status=1";
$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>
<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["orgn"]?></td>
<td><?=$row["date"]?></td>
<td><?=$row["time"]?></td>
<td><?=$row["location"]?></td>

<?php

```

```

$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

</div>

<div class="order-view-modal modal-body">

</div>

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

```

```

//for view order modal

$(document).ready(function(){

  $('.openPopup').on('click',function(){

    var dataURL = $(this).attr('data-href');

    $('.order-view-modal').load(dataURL,function(){

      $('#viewModal').modal({show:true});

    });

  });

});

</script>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

  <div class="modal-dialog modal-lg">

    <!-- Modal content-->

    <div class="modal-content">

      <div class="modal-header">

        <h4 class="modal-title">Order Details</h4>

        <button type="button" class="close" data-dismiss="modal">&times;</button>

      </div>

      <div class="order-view-modal modal-body">

        </div>

    </div>

  </div>

</div>

```

```

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>

</body>

</html>

```

## Code To Send Message To admin(n2a.php)

```
<?php

include 'config.php';

session_start();

error_reporting(0);

if (isset($_POST["signin"])) {

    $fullname = mysqli_real_escape_string($conn, $_POST["fullname"]);

    $msg = mysqli_real_escape_string($conn,($_POST["msg"]));

    $orgn = mysqli_real_escape_string($conn, $_POST["orgn"]);

    $check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM ngo WHERE fullname='".$fullname"'"));

    $check_orgn = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM ngo WHERE orgn='".$orgn"'"));

    if ($check_email > 0) {

        echo "<script>alert('Name Found In record');</script>";

        if($check_orgn>0)

        {

            echo "<script>alert('Organisation Name Found In record');</script>";

            $sql = "INSERT INTO n2a (fullname, msg,orgn) VALUES ('$fullname', '$msg','$orgn')";

            $result = mysqli_query($conn, $sql);

            if($result)


```

```
{  
    echo "Message Sent";  
}  
  
else  
{  
    echo "Message not sent";  
}  
  
}  
  
else{  
    echo "<script>alert('Invalid Organisation Name');</script>";  
}  
  
}  
  
else {  
    echo "<script>alert('Inavlid Name');</script>";  
}  
  
}  
  
}  
  
?>  
  
<!DOCTYPE html>  
<html lang="en">  
  
<head>
```

```

<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<link rel="icon" type="image/x-icon" href="images/logo1.png">
<link rel="stylesheet" href="style.css" />
<title>Send Message To admin</title>
</head>

<body>
<div class="container">
<div class="forms-container">
<div class="signin-signup">
<form action="" method="post" class="sign-in-form">
<h2 class="title">Send Message To admin</h2>
<div class="input-field">
<i class="fas fa-user"></i>
<input type="text" placeholder="Name" name="fullname" value=<?php echo $_POST["fullname"]; ?>" required />
</div>
<div class="input-field">
<i class="fas fa-user"></i>
<input type="text" placeholder="Organisation Name" name="orgn" value=<?php echo $_POST["orgn"]; ?>" required />
</div>
<div class="input-field">
<i class="fas fa-lock"></i>
<input type="textarea" placeholder="Enter Message Here" name="msg" value=<?php echo $_POST['msg']; ?>" required />
</div>
<input type="submit" value="Send" name="signin" class="btn solid" />
</form>

```

```
</div>

</div>

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3> </h3>
      <p>
        </p>
      </div>
      
    </div>
    <div class="panel right-panel">
      <div class="content">
        <h3>One of us ?</h3>
        <p>
            Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
            laboriosam ad deleniti.
        </p>
      </div>
      
    </div>
  </div>
```

```

</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code To Check Message From Admin(index.php)**

```

<!DOCTYPE html>

<html>
<head>
<title>Message From Admin</title>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css"
integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm"
crossorigin="anonymous">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-
awesome.min.css">
<link rel="stylesheet" href=".//assets/css/style.css"></link>
</head>
</head>
<body >

<?php
include "./adminHeader.php";
//include "./sidebar.php";

include_once "./config/dbconnect.php";
?>

```

```

<div id="ordersBtn" >

<h2>Messages From Admin</h2>

<table class="table table-striped">

<thead>

<tr>

<th>S.N.</th>

<th>ID</th>

<th>Admin Name</th>

<th>Message</th>

</tr>

</thead>

<?php

include_once "./config/dbconnect.php";

$sql="SELECT * from a2n";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>

<td><?=$row["id"]?></td>

<td><?=$row["fullname"]?></td>

<td><?=$row["msg"]?></td>

<?php

$count=$count+1;

```

```

        }
    }
?>

</table>

</div>
<!-- Modal -->
<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content-->
        <div class="modal-content">
            <div class="modal-header">

                <h4 class="modal-title">Order Details</h4>
                <button type="button" class="close" data-dismiss="modal">&times;</button>
            </div>
            <div class="order-view-modal modal-body">

            </div>
        </div><!-- /Modal content-->
    </div><!-- /Modal dialog-->
</div>
<script>
//for view order modal
$(document).ready(function(){

```

```

$('.openPopup').on('click',function(){
    var dataURL = $(this).attr('data-href');

    $('.order-view-modal').load(dataURL,function(){
        $('#viewModal').modal({show:true});

    });
});
});

</script>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">
    <div class="modal-dialog modal-lg">
        <!-- Modal content-->
        <div class="modal-content">
            <div class="modal-header">

                <h4 class="modal-title">Order Details</h4>
                <button type="button" class="close" data-dismiss="modal">&times;</button>
            </div>
            <div class="order-view-modal modal-body">

            </div>
        </div><!-- /Modal content-->
    </div><!-- /Modal dialog-->

```

```

</div>

<script>

//for view order modal

$(document).ready(function(){

$('.openPopup').on('click',function(){

var dataURL = $(this).attr('data-href');

$('.order-view-modal').load(dataURL,function(){

$('#viewModal').modal({show:true});

});

});

});

});

</script>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>

</body>

</html>

```

# Admin

The image displays three separate browser windows showing different pages of a web application:

- Admin Sign in:** This page features a blue background with a white rocket ship illustration on the left and a person sitting cross-legged on the right. It includes fields for "Full Name", "Email Address", "Password", and a "LOGIN" button. Below the form is a "Forgot Password?" link.
- Admin Sign up:** This page has a blue background with a white rocket ship illustration on the left and a person sitting at a desk on the right. It includes fields for "Full Name", "Email Address", "Password", "Confirm Password", "Mobile Number", and a "VERIFY USER" button. Below the form is a "One of us?" link.
- Forgot Password :** This page features a blue background with a white rocket ship illustration on the left and a person sitting cross-legged on the right. It includes a "Mobile Number" field and a "SEND OTP" button.

The image displays three separate browser windows showing the same application interface at different times. Each window has a title bar indicating the URL is `localhost/admin/index.php`. The interface features a sidebar on the left with a user icon and the text "Welcome anand". Below this are several menu items: Dashboard, Donor's Details, Agent's Detail, Admin Login Request, Food Donated, Contact Us Details, and Donation's Request. The main content area is a grid of cards, each with an icon and text. In the first window (top), the cards show: Donors (11), Agents (3), Admin Singup Requests (0), New Donation Requests (1), Old Donation Requests (1), New Food Requests (2), Old Food Requests (3), and Food Donated (1). In the second window (middle), the cards show: Old Donation Requests (1), New Food Requests (2), Old Food Requests (3), Food Donated (1), NGO's Details (3), Contact Us (12), Message From Donors (6), and Message From Agents (2). In the third window (bottom), the cards show: Old Donation Requests (1), New Food Requests (2), Old Food Requests (3), Food Donated (1), NGO's Details (3), Contact Us (12), Message From Donors (6), and Message From Agents (2). The bottom of each window shows a taskbar with various icons.

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

Logout

10:44 PM 7/25/2022

10:44 PM 7/25/2022

10:44 PM 7/25/2022

Category	Count
Donors	11
Agents	3
Admin Singup Requests	0
New Donation Requests	1
Old Donation Requests	1
New Food Requests	2
Old Food Requests	3
Food Donated	1

Category	Count
Old Donation Requests	1
New Food Requests	2
Old Food Requests	3
Food Donated	1
NGO's Details	3
Contact Us	12
Message From Donors	6
Message From Agents	2

Category	Count
Old Donation Requests	1
New Food Requests	2
Old Food Requests	3
Food Donated	1
NGO's Details	3
Contact Us	12
Message From Donors	6
Message From Agents	2

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Donors Details

S.N.	ID	Name	Email	Password	Mobile Number
1	1	Anand	anandkumar21.2003@gmail.com	as	7783864871
2	2	saura	sa@gmail.com	f970e2767d0cfe75876ea857f92e319b	
3	3	d1	d@gmail.com	3dad9cbf9baaa0360c0f2ba372d25716	7783864876
4	4	saurabh	s@gmail	7815696ecbf1c96e6894b779456d330e	7667444788
5	5	Anand1	anand@gmail.com	411cd305d84659e7479e5700063be2bb	7783864876
6	6	asd	anand1@gmail.com	a742b7c762a62c9b8b8d7e3acb13b044	7783864876
7	7	sid	dt@gmail.com	0305d718926ac8776a442023509c21ce	7783864876
8	8	asus1	asus@gmail.com	bd93fa0c90c617fa38d6eda31a6cd09	7004783641
9	9	asus	asust1@gmail.com	7b5h40e9d2c268ddc876d026cf08583	7004783641

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Agents Detail

S.N.	ID	Name	Email	Password	Mobile Number	Actions
1	13	sid	sid@gmail.com		7783864871	<b>Edit</b> ✓ ✖
2	14	sid1	sid1@gmail.com	7815696ecbf1c96e6894b779456d330e	7783864876	<b>Edit</b> ✓ ✖
3	15	asus	asus@gmail.com	f970e2767d0cfe75876ea857f92e319b	7667444788	<b>Edit</b> ✓ ✖

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Admin Details

S.N.	ID	Name	Email	Password	Mobile Number	Actions

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Food Donated

S.N.	ID	Name	Email	Donor	Needy	Date	Time	Location
1	1	a	a@gmail.com	anand	o	2022-07-13	00:07:00	boring road patna
2	2	a	a@gmail.com	anand	o	2022-07-13	00:07:00	boring road patna
3	3	a	a@gmail.com	anand	op1	2022-07-13	00:07:00	boring road patna
4	4	agent1	agent1@gmail.com	anand		2022-06-30	11:06:00	d
5	5	agent1	agent1@gmail.com	anand		2022-07-13	11:30:00	patna
6	6	agent1	agent1@gmail.com	anand		2022-07-06	11:33:00	patna
7	7	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	patna
8	8	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	patna
9	9	agent1	agent1@gmail.com	anand	ngo	2022-07-13	11:37:00	patna

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Contact Us Information

S.N.	ID	Name	Email	Mobile	Message
1	1	1	2	3	4
2	2	2	3	4	5
3	3	10	10	10	10
4	4	dsd	dsd	dsd	dsd
5	5	anandkumar	ak@gmail.com	7783864876	fine:)
6	6	as	j		
7	7	asd	anand@gmail.com	7783864876	
8	8	as	as@gmail.com	7783864876	
9	9	as	a@gmail.com	7783864876	

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

Welcome anand

- Dashboard
- Donor's Details
- Agent's Detail
- Admin Login Request
- Food Donated
- Contact Us Details
- Donation's Request

**Logout**

### Donation's Request

S.N.	ID	Name	Email	Type of food	Date	Time	Quantity	Location	Actions
1	45	donor2	donor2@gmail.com	roti	2022-07-27	18:12:00	1kg or less than 3 kg	r	

10:45 PM 7/25/2022

**localhost / 127.0.0.1 / fdw / ngo**

**Logout**

### Food Request

S.N.	ID	Name	Email	Organisation Name	Date	Time	Location	Actions	
1	3	manyavar	mk@gmail.com	Google	2022-07-07	14:43:00	patna		
2	4	manyavar	mk@gmail.com	Google	2022-07-06	14:45:00	patna		

**localhost / 127.0.0.1 / fdw / ngo**

**Logout**

### Messages From Donors

S.N.	ID	Donor Name	Message
1	1		hi
2	2		hi
3	3	anand	hi
4	4	anand	hi
5	5	anand	hi
6	6	anand	ppt

### Messages From Agents


S.N.	ID	Agent Name	Message
------	----	------------	---------

**localhost / 127.0.0.1 / fdw / ngo**

**Logout**

### Send Message To Donor

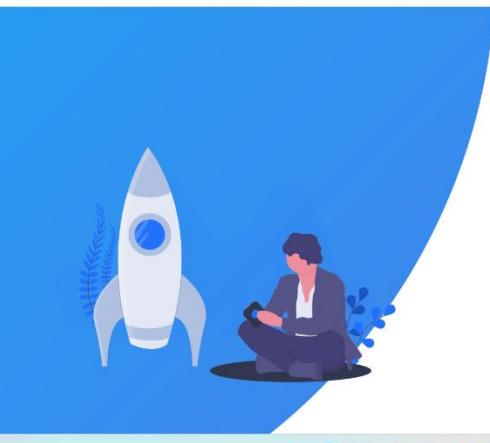

Full Name: \_\_\_\_\_

Enter Message Here: \_\_\_\_\_

**SEND**

### Code For Admin Login And Singup(adminlogin.php)

```
<?php
include 'config.php';
session_start();
error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["verify"])) {
```

```

$full_name = mysqli_real_escape_string($conn, $_POST["signup_full_name"]);

$email = mysqli_real_escape_string($conn, $_POST["signup_email"]);

$password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));

$cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));

$mob = mysqli_real_escape_string($conn, $_POST["signup_mobile"]);

$_SESSION["fullname"] = "$full_name";

$check_email = mysqli_num_rows(mysqli_query($conn, "SELECT email FROM login WHERE email='$email'"));

if ($password !== $cpassword) {
    echo "<script>alert('Password did not match.');//</script>";
} elseif ($check_email > 0) {
    echo "<script>alert('Email already exists in our database.');//</script>";
} else {
    $otp = rand(1000,9999);

    $phone = "+91".".$mob"; // target number; includes ISD

    $api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key

    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);

    $sms_status = json_decode($sms, true);

    if($sms_status['Status'] !== 'Success') {
        $err['error'] = 'Could not send OTP to '.$phone;
    }
}

$sql = "INSERT INTO login (fullname, email, password, token, status, mob) VALUES ('$full_name', '$email', '$password', '$otp', '0', '$mob')";

$result = mysqli_query($conn, $sql);

echo '<script>window.location="verify.php"</script>';

}

```

```

}

if (isset($_POST["signin"])) {
    $full_name = mysqli_real_escape_string($conn, $_POST["fullname"]);

    $email = mysqli_real_escape_string($conn, $_POST["email"]);
    $password = mysqli_real_escape_string($conn, md5($_POST["password"]));
    $check_fullname = mysqli_num_rows(mysqli_query($conn, "SELECT fullname FROM login WHERE fullname='$full_name'"));

    $check_email = mysqli_query($conn, "SELECT id FROM login WHERE email='$email' AND password='$password' AND status='1' AND adminr='1'");
    $_SESSION["fullname"] = "$full_name";
    if ($check_fullname<1) {
        echo "<script>alert('Invalid Name.');//</script>";
    }
    else{
        if (mysqli_num_rows($check_email) > 0) {
            $row = mysqli_fetch_assoc($check_email);
            $_SESSION["user_id"] = $row['id'];
            echo '<script>alert("Login Successful ")</script>';
            echo '<script>window.location=("../admin/index.php")</script>';
        } else {
            echo "<script>alert('Login details is incorrect. Please try again.');//</script>";
        }
    }
}
?>

```

```

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Admin Login And Singup</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Admin Sign in</h2>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Full Name" name="fullname" value="<?php echo
$_POST["fullname"]; ?>" required />
                    </div>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Email Address" name="email" value="<?php echo $_POST['email']; ?>" required pattern="^([a-zA-Z0-9_.%+-]+@[a-zA-Z.-]+\.[a-zA-Z]{2,4})$"/>
                    </div>
                    <div class="input-field">
                        <i class="fas fa-lock"></i>

```

```

<input type="password" placeholder="Password" name="password" value="<?php echo
$_POST['password']; ?>" required />

</div>

<input type="submit" value="Login" name="signin" class="btn solid" />

<p style="display: flex; justify-content: center; align-items: center; margin-top: 20px;"><a href="forgot-
password.php" style="color: #4590ef;">Forgot Password?</a></p>

</form>

<form action="" class="sign-up-form" method="post">

<h2 class="title">Admin Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="Full Name" name="signup_full_name" value="<?php echo
$_POST["signup_full_name"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo
$_POST["signup_email"]; ?>" required pattern="[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="signup_password" value="<?php echo
$_POST["signup_password"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo
$_POST["signup_cpassword"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

```

```

<input type="mobilenumber" placeholder="Mobile Number" name="signup_mobile" value=<?php echo
$_POST["signup_mobile"]; ?>" required pattern="[1-9]{1}[0-9]{9}" />

</div>

<input type="submit" class="btn" name="verify" value="Verify User" />

</form>

</div>

</div>

```

```

<div class="panels-container">

<div class="panel left-panel">

<div class="content">

<h3>New here ?</h3>

<p>

```

#### Admin Panel

```

</p>

<button class="btn transparent" id="sign-up-btn">

Sign up

</button>

</div>


```

</div>

<div class="panel right-panel">

<div class="content">

<h3>One of us ?</h3>

<p>

**Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum**

**laboriosam ad deleniti.**

```

</p>

<button class="btn transparent" id="sign-in-btn">
    Sign in
</button>
</div>


</div>
</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### Code For Verify Admin (verify.php)

```

<?php

include 'config.php';
require 'vendor/autoload.php';

session_start();

error_reporting(0);

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

```

```

}

if (isset($_POST["Submit"])) {

    $otp = mysqli_real_escape_string($conn, $_POST["signup_otp"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM login WHERE token='$otp'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }
    else
    {

        echo "<script>alert('Correct Otp.');//</script>";
        $update = mysqli_query($conn, "UPDATE login SET status='1' WHERE token='$otp'");

        $result = mysqli_query($conn, $check_otp);
        if ($result) {
        }
        else{
            echo"<script>alert('registration Successful');//</script>";
            $_POST["signup_full_name"] = "";
            $_POST["signup_email"] = "";
            $_POST["signup_password"] = "";
            $_POST["signup_cpassword"] = "";
            $_POST["signup_otp"] = "";
        }
    }
}

```

```

    }

echo "<script>alert('Verified');</script>";

echo '<script>window.location="adminlogin.php"</script>';

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<link rel="stylesheet" href="style.css" />

<title>Admin Login And Singup</title>

</head>

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

```

```

<form action="" class="sign-up-form" method="post">
    <h2 class="title">Admin Sign up</h2>
    <div class="input-field">
        <i class="fas fa-user"></i>
        <input type="text" placeholder="otp" name="signup_otp" value=<?php echo $_POST["signup_otp"]; ?>" required />
    </div>

    <input type="submit" class="btn" name="Submit" value="Submit" />
</form>
</div>
</div>

```

```

<div class="panels-container">
    <div class="panel left-panel">
        <div class="content">
            <h3>New here ?</h3>
            <p>
                Admin Panel
            </p>
            <button class="btn transparent" id="sign-up-btn">
                Sign up
            </button>
        </div>
        
    </div>
    <div class="panel right-panel">

```

```

<div class="content">
    <h3>One of us ?</h3>
    <p>
        Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
        laboriosam ad deleniti.
    </p>
    <button class="btn transparent" id="sign-in-btn">
        Sign in
    </button>
</div>

</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### Code For forgot Password(forgot-password.php)

```

<?php

include 'config.php';

session_start();

error_reporting(0);

```

```

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["sendotp"])) {
    $mob = mysqli_real_escape_string($conn, $_POST["mob"]);
    $otpd = mysqli_real_escape_string($conn, $_POST["otp"]);
    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otp = rand(1000,9999);
    $phone = "+91".$mob; // target number; includes ISD
    $api_key = 'de784ae9-fedf-11ec-9c12-0200cd936042'; // API Key
    $req = "https://2factor.in/API/V1/".$api_key."/SMS/".$phone."/". $otp;

    $sms = file_get_contents($req);
    $sms_status = json_decode($sms, true);
    if($sms_status['Status'] != 'Success') {
        $err['error'] = 'Could not send OTP to '.$phone;
    }
    $check_mob = mysqli_query($conn, "SELECT * FROM login WHERE mob='".$mob "'");
    if (mysqli_num_rows($check_mob) > 0) {
        $data = mysqli_fetch_assoc($check_mob);
        $update = mysqli_query($conn, "UPDATE login SET token='".$otp' WHERE mob='".$mob "'");
        echo "<script>alert('Otp Sent');</script>";
        echo '<script>window.location="otpform.php"</script>';
    }
}

```

```

}

?>

<!DOCTYPE html>

<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="icon" type="image/x-icon" href="images/logo1.png">
    <link rel="stylesheet" href="style.css" />
    <title>Sign in & Sign up Form - Pure Coding</title>
</head>

<body>
    <div class="container">
        <div class="forms-container">
            <div class="signin-signup">
                <form action="" method="post" class="sign-in-form">
                    <h2 class="title">Reset Password</h2>
                    <div class="input-field">
                        <i class="fas fa-user"></i>
                        <input type="text" placeholder="Mobile Number" name="mob" value=<?php echo $_POST['mob']; ?>" required pattern="[789][0-9]{9}"/>
                    </div>
                    <input type="submit" value="Send Otp" name="sendotp" class="btn solid" />
                </form>
            </div>
        </div>
    </div>

```

```

<div class="panels-container">
  <div class="panel left-panel">
    <div class="content">
      <h3>Forgot Password ?</h3>
      <p>
        Lorem ipsum, dolor sit amet consectetur adipisicing elit. Debitis,
        ex ratione. Aliquid!
      </p>
    </div>
    
  </div>
</div>
</div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>

</html>

```

### Code For forgot password verify form using otp (otpform.php)

```

<?php

include 'config.php';

session_start();
error_reporting(0);

```

```

if (isset($_SESSION["user_id"])) {
    header("Location: welcome.php");
}

if (isset($_POST["Submit"])) {

    $password = mysqli_real_escape_string($conn, md5($_POST["signup_password"]));
    $cpassword = mysqli_real_escape_string($conn, md5($_POST["signup_cpassword"]));
    $otpf = mysqli_real_escape_string($conn, $_POST["singup_otp"]);
    $email= mysqli_real_escape_string($conn, $_POST["signup_email"]);

    $check_otp = mysqli_num_rows(mysqli_query($conn, "SELECT token FROM login WHERE token='$otpf'"));

    if ($check_otp != 1) {
        echo "<script>alert('Incorrect Otp.');//</script>";
    }
}

else{

    echo "<script>alert('Correct Otp.');//</script>";

    if ($password !== $cpassword) {
        echo "<script>alert('Password did not match.');//</script>";
    }
    else {
        $sql ="UPDATE login SET password='$password' WHERE email='$email'";
    }
}

```

```

$result = mysqli_query($conn, $sql);

if ($result) {
    echo "<script>alert('Password changed Successful');</script>";
    echo "<script>window.location('login.php')</script>";
    $_POST["signup_full_name"] = "";
    $_POST["signup_email"] = "";
    $_POST["signup_password"] = "";
    $_POST["signup_cpassword"] = "";

    echo '<script>window.location="adminlogin.php"</script>';

}

else{
    echo "<BR>Password change failed";
}

}

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="stylesheet" href="style.css" />

```

```

<link rel="icon" type="image/x-icon" href="images/logo1.png">

<title>Admin Login And Singup</title>

</head>

<body>

<div class="container">

<div class="forms-container">

<div class="signin-signup">

<form action="" method="post" class="sign-in-form">

<form action="" class="sign-up-form" method="post">

<h2 class="title">Admin Sign up</h2>

<div class="input-field">

<i class="fas fa-user"></i>

<input type="text" placeholder="otp" name="signup_otp" value="<?php echo $_POST["signup_otp"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-envelope"></i>

<input type="email" placeholder="Email Address" name="signup_email" value="<?php echo $_POST["signup_email"]; ?>" required pattern="^[a-z0-9._%+-]+@[a-z0-9.-]+\.[a-z]{2,4}$"/>

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Password" name="signup_password" value="<?php echo $_POST["signup_password"]; ?>" required />

</div>

<div class="input-field">

<i class="fas fa-lock"></i>

<input type="password" placeholder="Confirm Password" name="signup_cpassword" value="<?php echo $_POST["signup_cpassword"]; ?>" required />

```

```
</div>

<input type="submit" class="btn" name="Submit" value="Submit" />
</form>
</div>
</div>
```

```
<div class="panels-container">
<div class="panel left-panel">
<div class="content">
<h3>New here ?</h3>
<p>
```

**Admin Panel**

```
</p>
<button class="btn transparent" id="sign-up-btn">
  Sign up
</button>
</div>

</div>
<div class="panel right-panel">
<div class="content">
<h3>One of us ?</h3>
<p>
  Lorem ipsum dolor sit amet consectetur adipisicing elit. Nostrum
  laboriosam ad deleniti.
</p>
<button class="btn transparent" id="sign-in-btn">
```

```

    Sign in

    </button>

    </div>

    </div>

    </div>

    </div>

<script src="https://kit.fontawesome.com/64d58efce2.js" crossorigin="anonymous"></script>
<script src="app.js"></script>
</body>
</html>

```

### **Code For Admin Homepage(index.php)**

```

<!DOCTYPE html>

<html>
    <head>
        <title>Admin</title>
        <head>
            <meta name="viewport" content="width=device-width, initial-scale=1">
            <link rel="icon" type="image/x-icon" href="../Food Waste Donation Website/images/logo1.png">
            <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
            <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
            <link rel="stylesheet" href="./assets/css/style.css"></link>
        </head>
    </head>
    <body >

```

```

<?php

    include "./adminHeader.php";
    include "./sidebar.php";

    include_once "./config/dbconnect.php";

?>

<div id="main-content" class="container allContent-section py-4">
    <div class="row">
        <div class="col-sm-3">
            <div class="card">
                <i class="fa fa-users mb-2" style="font-size: 70px;"></i>
                <h4 style="color:white;">Donors</h4>
                <h5 style="color:white;">
                    <?php
                        $sql="SELECT * from donorlogin where status=1";
                        $result=$conn-> query($sql);
                        $count=0;
                        if ($result-> num_rows > 0){
                            while ($row=$result-> fetch_assoc()) {
                                $count=$count+1;
                            }
                        }
                        echo $count;
                    ?></h5>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

<div class="col-sm-3">
    <div class="card">
        <i class="fa fa-th-large mb-2" style="font-size: 70px;"></i>
        <h4 style="color:white;">Agents</h4>
        <h5 style="color:white;">
            <?php
                $sql="SELECT * from agentlogin where status=1";
                $result=$conn-> query($sql);
                $count=0;
                if ($result-> num_rows > 0){
                    while ($row=$result-> fetch_assoc()) {
                        $count=$count+1;
                    }
                }
                echo $count;
            ?>
            </h5>
        </div>
    </div>
    <div class="col-sm-3">
        <div class="card">
            <i class="fa fa-list mb-2" style="font-size: 70px;"></i>
            <h4 style="color:white;">Admin Singup Requests</h4>
            <h5 style="color:white;">
                <?php
                    $sql="SELECT * from login where adminr =0";

```

```

$result=$conn-> query($sql);

$count=0;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

    <i class="fa fa-th mb-2" style="font-size: 70px;"></i>

    <h4 style="color:white;">New Donation Requests</h4>

    <h5 style="color:white;">

        <?php

            $sql="SELECT * from donatenow where status=0";

            $result=$conn-> query($sql);

            $count=0;

            if ($result-> num_rows > 0){

                while ($row=$result-> fetch_assoc()) {

                    $count=$count+1;

                }

            }

        <?php
    </h5>

    <ul class="list-group list-group-flush">

        <li class="list-item">

```

```

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-list mb-2" style="font-size: 70px;"></i>

<h4 style="color:white;">Old Donation Requests</h4>

<h5 style="color:white;">

<?php

$sql="SELECT * from donatenow where status=0";

$result=$conn-> query($sql);

$count=0;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-th mb-2" style="font-size: 70px;"></i>

```

```

<h4 style="color:white;">New Food Requests</h4>
<h5 style="color:white;">
<?php

$sql="SELECT * from foodrequest where status=0 ";
$result=$conn-> query($sql);
$count=0;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;
    }
}
echo $count;
?>
</h5>
</div>
</div>

<div class="col-sm-3">
<div class="card">
<i class="fa fa-list mb-2" style="font-size: 70px;"></i>
<h4 style="color:white;">Old Food Requests</h4>
<h5 style="color:white;">
<?php

$sql="SELECT * from foodrequest where status=1";
$result=$conn-> query($sql);
$count=0;

```

```

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-list mb-2" style="font-size: 70px;"></i>

<h4 style="color:white;">Food Donated</h4>

<h5 style="color:white;">

<?php

$sql="SELECT * from donatenow where status=0";

$result=$conn-> query($sql);

$count=0;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

```

```

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-list mb-2" style="font-size: 70px;"></i>

<h4 style="color:white;">NGO's Details</h4>

<h5 style="color:white;">

<?php

$sql="SELECT * from ngo";

$result=$conn-> query($sql);

$count=0;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-list mb-2" style="font-size: 70px;"></i>

<h4 style="color:white;">Contact Us </h4>

<h5 style="color:white;">

```

```

<?php

$sql="SELECT * from userinfodata";
$result=$conn-> query($sql);
$count=0;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;
    }
}
echo $count;
?>

</h5>
</div>
</div>
<div class="col-sm-3">
    <div class="card">
        <i class="fa fa-list mb-2" style="font-size: 70px;"></i>
        <h4 style="color:white;">Message From Donors</h4>
        <h5 style="color:white;">
            <?php

$sql="SELECT * from d2a";
$result=$conn-> query($sql);
$count=0;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {

```

```

$count=$count+1;
}

}

echo $count;

?>

</h5>

</div>

</div>

<div class="col-sm-3">

<div class="card">

<i class="fa fa-list mb-2" style="font-size: 70px;"></i>

<h4 style="color:white;">Message From Agents</h4>

<h5 style="color:white;">

<?php

$sql="SELECT * from ag2a";

$result=$conn-> query($sql);

$count=0;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

        $count=$count+1;

    }

}

echo $count;

?>

</h5>

</div>

</div>

```

```

<div class="col-sm-3">

    <div class="card">

        <i class="fa fa-list mb-2" style="font-size: 70px;"></i>

        <h4 style="color:white;">Message From Needy</h4>

        <h5 style="color:white;">

            <?php

                $sql="SELECT * from n2a";

                $result=$conn-> query($sql);

                $count=0;

                if ($result-> num_rows > 0){

                    while ($row=$result-> fetch_assoc()) {

                        $count=$count+1;

                    }

                }

                echo $count;

            ?>

            </h5>

        </div>

    </div>

</div>

<?php

if (isset($_GET['category']) && $_GET['category'] == "success") {

    echo '<script> alert("Category Successfully Added")</script>';

}

```

```

}else if (isset($_GET['category']) && $_GET['category'] == "error") {
    echo '<script> alert("Adding Unsuccess")</script>';
}

if (isset($_GET['size']) && $_GET['size'] == "success") {
    echo '<script> alert("Size Successfully Added")</script>';
}else if (isset($_GET['size']) && $_GET['size'] == "error") {
    echo '<script> alert("Adding Unsuccess")</script>';
}

if (isset($_GET['variation']) && $_GET['variation'] == "success") {
    echo '<script> alert("Variation Successfully Added")</script>';
}else if (isset($_GET['variation']) && $_GET['variation'] == "error") {
    echo '<script> alert("Adding Unsuccess")</script>';
}

?>

<script type="text/javascript" src=".//assets/js/ajaxWork.js"></script>
<script type="text/javascript" src=".//assets/js/script.js"></script>
<script src="https://code.jquery.com/jquery-3.1.1.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/popper.min.js" ></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/bootstrap.min.js"></script>

</body>

</html>

```

## Code For Admin Header(adminheader.php)

```
<?php  
session_start();  
include_once "./config/dbconnect.php";  
  
?>  
  
<!-- nav -->  
<nav class="navbar navbar-expand-lg navbar-light px-5" style="background-color: #3B3131;">  
  
<a class="navbar-brand ml-5" href="./index.php">  
      
</a>  
<ul class="navbar-nav mr-auto mt-2 mt-lg-0"></ul>  
<a href="../Food Waste Donation Website\logout.php" style="text-decoration:none;">  
    <button class="btn btn-danger" style="height:40px">Logout</button>  
</a>  
  
<div class="user-cart">  
    <?php  
    if(isset($_SESSION['user_id'])){  
        ?>  
        <a href="" style="text-decoration:none;">  
            <i class="fa fa-sign-in mr-5" style="font-size:30px; color:#fff;" aria-hidden="true"></i>  
        </a>  
  
        <?php  
    } else {  
        ?>
```

```

<a href="" style="text-decoration:none;">
    <i class="fa fa-sign-in mr-5" style="font-size:30px; color:#fff; aria-hidden="true"></i>
</a>

<?php
} ?>
</div>
</nav>

```

### Code For SideBar(Sidebar.php)

```

<!-- Sidebar -->

<div class="sidebar" id="mySidebar">

<div class="side-header">

    <h5 style="margin-top:10px;"><?php echo "Welcome " . $_SESSION["fullname"] . "<br>" ;?></h5>

</div>

<hr style="border:1px solid; background-color:#8a7b6d; border-color:#3B3131;">

<a href="javascript:void(0)" class="closebtn" onclick="closeNav()">x</a>

<a href=".//index.php" ><i class="fa fa-home"></i> Dashboard</a>

<a href="#Donor's Details" onclick="showCustomers()" ><i class="fa fa-users"></i> Donor's Details</a>

<a href="#Agent Details" onclick="showCategory()" ><i class="fa fa-th-large"></i> Agent's Detail</a>

<a href="#adminView/viewadmin.php" onclick="showAdmin()" ><i class="fa fa-th-large"></i> Admin Login Request</a>

<a href="#sizes" onclick="showSizes()" ><i class="fa fa-th"></i> Food Donated</a>

<a href="#productsizes" onclick="showProductSizes()" ><i class="fa fa-th-list"></i> Contact Us Details </a>

<a href="#products" onclick="showProductItems()" ><i class="fa fa-th"></i> Donation's Request</a>

<a href="#foodrequest" onclick="showFoodRequest()"><i class="fa fa-th"></i> Food Requests</a>

<a href="#orders" onclick="showOrders()"><i class="fa fa-list"></i> Messages</a>

<a href=".//Food Waste Donation Website\2d.php"><i class="fa fa-list"></i> Send Message To Donor</a>

```

```

<a href="../Food Waste Donation Website\ a2ag.php"><i class="fa fa-list"></i> Send Message To Agent</a>
<a href="../Food Waste Donation Website\ a2n.php"><i class="fa fa-list"></i> Send Message To Needy</a>

<!-->
</div>

<div id="main">
    <button class="openbtn" onclick="openNav()"><i class="fa fa-home"></i></button>
</div>

```

### Code For Edit Agent Form(editAgentForm.php)

```

<div class="container p-5">

    <h4>Edit Agent Detail</h4>
    <?php
        include_once "../config/dbconnect.php";
        $ID=$_POST['record'];
        $qry=mysqli_query($conn, "SELECT * FROM agentlogin WHERE id='$ID'");
        $numberOfRow=mysqli_num_rows($qry);
        if($numberOfRow>0){
            while($row1=mysqli_fetch_array($qry)){
                $agentID=$row1["id"];
            }
        }
        <form id="update-items" onsubmit="updateAgent()" enctype='multipart/form-data'>
            <div class="form-group">

```

```

<input type="text" class="form-control" id="id" value="<?=$row1['id']?> hidden>
</div>

<div class="form-group">
    <label for="name">Agent Name:</label>
    <input type="text" class="form-control" id="fullname" value="<?=$row1['fullname']?>">
</div>

<div class="form-group">
    <label for="desc">Email</label>
    <input type="text" class="form-control" id="email" value="<?=$row1['email']?>">
</div>

<div class="form-group">
    <label for="price">Password</label>
    <input type="password" class="form-control" id="password" value="<?=$row1['password']?>">
</div>

<div class="form-group">
    <label for="price">Mobile Number</label>
    <input type="number" class="form-control" id="mob" value="<?=$row1['mob']?>">
</div>

<!--<div class="form-group">
    <label>Category:</label>
    <select id="category">
        <?php
            $sql="SELECT * from agentlogin WHERE id='$ID'";
            $result = $conn-> query($sql);
            if ($result-> num_rows > 0){
                while($row = $result-> fetch_assoc()){
                    echo"<option value=\"". $row['id'] ."\">" . $row['fullname'] . "</option>";
                }
            }
        </?php
    </select>
</div>

```

```

?>

<?php

$sql="SELECT * from agentlogin WHERE id!='$ID'";

$result = $conn-> query($sql);

if ($result-> num_rows > 0){

    while($row = $result-> fetch_assoc()){

        echo"<option value=\"". $row['id'] ."\">" . $row['fullname'] . "</option>";

    }

}

?>

</select>

</div>

<div class="form-group">

<img width='200px' height='150px' src='<?=$row1["product_image"]?>'>

<div>

    <label for="file">Choose Image:</label>

    <input type="text" id="existingImage" class="form-control" value="<?=$row1['product_image']?>" hidden>

    <input type="file" id="newImage" value="">

</div>

</div>-->

<div class="form-group">

    <button type="submit" style="height:40px" class="btn btn-primary">Update Agent</button>

</div>

<?php

    }

?>

</form>

```

</div>

## **Code For Checking Food Requests(foodrequest.php)**

## Food Request

S.N.	ID	Name	Email	Organisation Name	Date	Time	Location	Actions			

```

<?php

include_once "../config/dbconnect.php";

$sql="SELECT * from foodrequest WHERE status=0";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

```

```

<td><?=$count?></td>

<td><?=$row["id"]?></td>

<td><?=$row["fullname"]?></td>

<td><?=$row["email"]?></td>

<td><?=$row["orgn"]?></td>

<td><?=$row["date"]?></td>

<td><?=$row["time"]?></td>

<td><?=$row["location"]?></td>

<td><!--<button class="btn btn-primary" style="height:40px"
onclick="itemEditForm('<?=$row['id']?>')>Edit</button></td>-->

<td><button class="btn btn-success" style="height:40px"
onclick="Approvefood('<?=$row['id']?>')>√</button></td>

<td><button class="btn btn-danger" style="height:40px"
onclick="foodDelete('<?=$row['id']?>')>X</button></td>

</tr>

<?php

$count=$count+1;

}

}

?>

</table>

<!-- Trigger the modal with a button -->

<!--<button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-
target="#myModal">

Add Request

</button>-->

<!-- Modal -->

<div class="modal fade" id="myModal" role="dialog">

```

```
<div class="modal-dialog">

    <!-- Modal content-->
    <div class="modal-content">
        <div class="modal-header">
            <h4 class="modal-title">New Food Request</h4>
            <button type="button" class="close" data-dismiss="modal">&times;</button>
        </div>
        <div class="modal-body">
            <form enctype='multipart/form-data' onsubmit="addItems()" method="POST">
                <div class="form-group">
                    <label for="name">Donor Name:</label>
                    <input type="text" class="form-control" id="fullname" required>
                </div>
                <div class="form-group">
                    <label for="price">Email</label>
                    <input type="text" class="form-control" id="email" required>
                </div>
                <div class="form-group">
                    <label for="qty">Type of Food</label>
                    <input type="text" class="form-control" id="type" required>
                </div>
                <div class="form-group">
                    <label for="qty">Date</label>
                    <input type="date" class="form-control" id="date" required>
                </div>
                <div class="form-group">
                    <label for="qty">Time</label>
                    <input type="time" class="form-control" id="time" required>
                </div>
            </form>
        </div>
    </div>
</div>
```

```

</div>

<div class="form-group">
    <label>Quantity</label>
    <select id="quantity" >
        <option disabled selected></option>
        <?php
            $sql="SELECT quantity from donatenow";
            $result = $conn-> query($sql);

            if ($result-> num_rows > 0){
                while($row = $result-> fetch_assoc()){
                    echo "<option value=\"".$row['id']."'>".$row['quantity']."</option>";
                }
            }
            ?>
        </select>
    </div>

    <div class="form-group">
        <label for="qty">Location</label>
        <input type="text" class="form-control" id="location" required>
    </div>
    <!--<div class="form-group">
        <label for="file">Choose Image:</label>
        <input type="file" class="form-control-file" id="file">
    </div>-->
    <div class="form-group">
        <button type="submit" class="btn btn-secondary" id="upload" style="height:40px">Add Request</button>
    </div>

```

```

</form>

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>
</div>
</div>

</div>
</div>

</div>

```

### **Code for Viewing Admin's Singup Requests(viewadmin.php)**

```

<div >
    <h3>Admin Details</h3>
    <table class="table ">
        <thead>
            <tr>
                <th class="text-center">S.N.</th>
                <th class="text-center">ID</th>
                <th class="text-center">Name</th>
                <th class="text-center">Email</th>
                <th class="text-center">Password</th>
                <th class="text-center">Mobile Number</th>
                <th class="text-center">Actions</th>
            
```

```

</tr>
</thead>
<?php
include_once "../config/dbconnect.php";
$sql="SELECT * from login where adminr=0";
$result=$conn-> query($sql);
$count=1;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
?
<tr>
<td><?=$count?></td>
<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["password"]?></td>
<td><?=$row["mob"]?></td>

<td>
<!--<button class="btn btn-primary" style="height:40px"
onclick="agentEditForm('<?=$row['id']?>')>Edit</button>-->
<button class="btn btn-primary" style="height:40px"
onclick="Approveadmin('<?=$row['id']?>')>/</button>

<button class="btn btn-danger" style="height:40px"
onclick="adminDelete('<?=$row['id']?>')>X</button></td>
</tr>

```

```

<?php
    $count=$count+1;
}
}

?>

</table>

<!-- Trigger the modal with a button

&lt;button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-target="#myModal"&gt;

Add Category

&lt;/button&gt;--&gt;

<!-- Modal --&gt;

&lt;div class="modal fade" id="myModal" role="dialog"&gt;
&lt;div class="modal-dialog"&gt;

<!-- Modal content--&gt;
&lt;div class="modal-content"&gt;
&lt;div class="modal-header"&gt;
&lt;h4 class="modal-title"&gt;New Category Item&lt;/h4&gt;
&lt;button type="button" class="close" data-dismiss="modal"&gt;&amp;times;&lt;/button&gt;
&lt;/div&gt;
&lt;div class="modal-body"&gt;
&lt;form enctype='multipart/form-data' action=".//controller/addCatController.php" method="POST"&gt;
&lt;div class="form-group"&gt;
&lt;label for="c_name"&gt;Category Name:&lt;/label&gt;
&lt;input type="text" class="form-control" name="c_name" required&gt;
&lt;/div&gt;
&lt;!--&lt;div class="form-group"&gt;
</pre>

```

```

    <button type="submit" class="btn btn-secondary" name="upload" style="height:40px">Add
Category</button>

</div>-->

</form>

</div>

<div class="modal-footer">

    <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>

</div>

</div>

</div>

```

### **Code For Viewing Message from Donor(viewAllOrders.php)**

```

<div id="ordersBtn" >

    <h2>Messages From Donors</h2>

    <table class="table table-striped">

        <thead>

            <tr>

                <th>S.N.</th>

                <th>ID</th>

                <th>Donor Name</th>

                <th>Message</th>

            </tr>

        </thead>

        <?php

```

```

include_once "../config/dbconnect.php";

$sql="SELECT * from d2a";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>

<td><?=$row["id"]?></td>

<td><?=$row["fullname"]?></td>

<td><?=$row["msg"]?></td>

<!--<?php

    if($row["order_status"]==0){

?>

<td><button class="btn btn-danger" onclick="ChangeOrderStatus('<?=$row['order_id']?>')">Pending
</button></td>

<?php

}else{

?>

<td><button class="btn btn-success"
onclick="ChangeOrderStatus('<?=$row['order_id']?>')">Delivered</button></td>

<?php

}

if($row["pay_status"]==0){

?>

```

```

<td><button class="btn btn-danger"
onclick="ChangePay('<?=$row['order_id']?>')>Unpaid</button></td>

<?php

}else if($row["pay_status"]==1){

?>

<td><button class="btn btn-success" onclick="ChangePay('<?=$row['order_id']?>')>Paid
</button></td>

<?php

?

?>

<td><a class="btn btn-primary openPopup" data-
href=".//adminView/viewEachOrder.php?orderId=<?=$row['order_id']?>"
href="javascript:void(0);">View</a></td>

</tr>-->

<?php

$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal --&gt;

&lt;div class="modal fade" id="viewModal" role="dialog"&gt;
</pre>

```

```

<div class="modal-dialog modal-lg">
  <!-- Modal content-->
  <div class="modal-content">
    <div class="modal-header">

      <h4 class="modal-title">Order Details</h4>
      <button type="button" class="close" data-dismiss="modal">&times;</button>
    </div>
    <div class="order-view-modal modal-body">

    </div>
  </div><!-- Modal content-->
</div><!-- /Modal dialog-->
</div>
<script>
  //for view order modal
  $(document).ready(function(){
    $('.openPopup').on('click',function(){
      var dataURL = $(this).attr('data-href');

      $('.order-view-modal').load(dataURL,function(){
        $('#viewModal').modal({show:true});
      });
    });
  });
</script>
<div id="ordersBtn" >
  <h2>Messages From Agents</h2>
  <table class="table table-striped">

```

```

<thead>
<tr>
<th>S.N.</th>
<th>ID</th>
<th>Agent Name</th>
<th>Message</th>
</tr>
</thead>
<?php
include_once "../config/dbconnect.php";
$sql="SELECT * from ag2a";
$result=$conn-> query($sql);
$count=1;

if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
        ?>
        <tr>
        <td><?=$count?></td>
        <td><?=$row["id"]?></td>
        <td><?=$row["fullname"]?></td>
        <td><?=$row["msg"]?></td>
        <!--<?php
        if($row["order_status"]==0){

        ?>
        <td><button class="btn btn-danger" onclick="ChangeOrderStatus('<?=$row['order_id']?>')>Pending
        </button></td>
        <?php

```

```

}else{
?

<td><button class="btn btn-success"
onclick="ChangeOrderStatus('<?=$row['order_id']?>')">Delivered</button></td>

<?php
}

if($row["pay_status"]==0){

?

<td><button class="btn btn-danger"
onclick="ChangePay('<?=$row['order_id']?>')">Unpaid</button></td>

<?php

}else if($row["pay_status"]==1){

?

<td><button class="btn btn-success" onclick="ChangePay('<?=$row['order_id']?>')">Paid
</button></td>

<?php
}

?

<td><a class="btn btn-primary openPopup" data-
href=".adminView/viewEachOrder.php?orderId=<?=$row['order_id']?>"
href="javascript:void(0);">View</a></td>

</tr>-->

<?php

$count=$count+1;

```

```

        }
    }
?>

</table>
<div id="ordersBtn" >
<h2>Messages From Needy</h2>
<table class="table table-striped">
<thead>
<tr>
<th>S.N.</th>
<th>ID</th>
<th>Needy Name</th>
<th>Organisation Name</th>
<th>Message</th>
</tr>
</thead>
<?php
include_once "../config/dbconnect.php";
$sql="SELECT * from n2a";
$result=$conn-> query($sql);
$count=1;

if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
?>
<tr>
<td><?=$count?></td>
<td><?=$row["id"]?></td>

```

```

<td><?=$row["fullname"]?></td>

<td><?=$row["orgn"]?></td>

<td><?=$row["msg"]?></td>

<!--<?php

if($row["order_status"]==0){

?>

<td><button class="btn btn-danger" onclick="ChangeOrderStatus('<?=$row['order_id']?>')">Pending
</button></td>

<?php

}else{

?>

<td><button class="btn btn-success"
onclick="ChangeOrderStatus('<?=$row['order_id']?>')">Delivered</button></td>

<?php

}

if($row["pay_status"]==0){

?>

<td><button class="btn btn-danger"
onclick="ChangePay('<?=$row['order_id']?>')">Unpaid</button></td>

<?php

}else if($row["pay_status"]==1){

?>

<td><button class="btn btn-success" onclick="ChangePay('<?=$row['order_id']?>')">Paid
</button></td>

<?php

}

?>

```

```

<td><a class="btn btn-primary openPopup" data-
href=".adminView/viewEachOrder.php?orderID=<?=$row['order_id']?>"
href="javascript:void(0);">View</a></td>

</tr>-->

<?php

$count=$count+1;

}

}

?>

</table>

</div>

<!-- Modal -->

<div class="modal fade" id="viewModal" role="dialog">

<div class="modal-dialog modal-lg">

<!-- Modal content-->

<div class="modal-content">

<div class="modal-header">

<h4 class="modal-title">Order Details</h4>

<button type="button" class="close" data-dismiss="modal">&times;</button>

</div>

<div class="order-view-modal modal-body">

```

```

</div>

</div><!-- Modal content-->

</div><!-- /Modal dialog-->

</div>

<script>
  //for view order modal

  $(document).ready(function(){

    $('.openPopup').on('click',function(){

      var dataURL = $(this).attr('data-href');

      $('.order-view-modal').load(dataURL,function(){

        $('#viewModal').modal({show:true});

      });

    });

  });

</script>

```

### **Code For Checking Donation's Requests(viewAllProducts.php)**

```

<div >

  <h2>Donation's Request</h2>

  <table class="table ">

    <thead>

      <tr>

        <th class="text-center">S.N.</th>

        <th class="text-center">ID</th>

        <th class="text-center">Name</th>

        <th class="text-center">Email</th>

        <th class="text-center">Type&nbspof&nbspfood</th>

        <th class="text-center">Date&nbsp&nbsp&nbsp&nbsp&nbsp</th>

    </thead>

```

```

<th class="text-center">Time</th>
<th class="text-center">Quantity &nbsp;&nbsp;&nbsp;&nbsp;</th>
<th class="text-center">Location &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</th>
<th class="text-center" colspan="3">Actions</th>
</tr>
</thead>
<?php
include_once "../config/dbconnect.php";
$sql="SELECT * from donatenow WHERE status=0";
$result=$conn-> query($sql);
$count=1;
if ($result-> num_rows > 0){
    while ($row=$result-> fetch_assoc()) {
?>
<tr>
<td><?=$count?></td>
<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["type"]?></td>
<td><?=$row["date"]?></td>
<td><?=$row["time"]?></td>
<td><?=$row["quantity"]?></td>
<td><?=$row["location"]?></td>
<td><!!--<button class="btn btn-primary" style="height:40px"
onclick="itemEditForm('<?=$row['id']?>')>Edit</button></td>-->
<td><button class="btn btn-success" style="height:40px"
onclick="Approve('<?=$row['id']?>')>/</button></td>
<td><button class="btn btn-danger" style="height:40px"
onclick="itemDelete('<?=$row['id']?>')>X</button></td>

```

```

</tr>

<?php

    $count=$count+1;

}

}

?>

</table>

<!-- Trigger the modal with a button

&lt;button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-target="#myModal"&gt;

    Add Request

&lt;/button&gt;--&gt;

<!-- Modal --&gt;

&lt;div class="modal fade" id="myModal" role="dialog"&gt;

&lt;div class="modal-dialog"&gt;

    <!-- Modal content--&gt;

&lt;div class="modal-content"&gt;

    &lt;div class="modal-header"&gt;

        &lt;h4 class="modal-title"&gt;New Donation Request&lt;/h4&gt;

        &lt;button type="button" class="close" data-dismiss="modal"&gt;&amp;times;&lt;/button&gt;

    &lt;/div&gt;

    &lt;div class="modal-body"&gt;

        &lt;form enctype='multipart/form-data' onsubmit="addItems()" method="POST"&gt;

            &lt;div class="form-group"&gt;

                &lt;label for="name"&gt;Donor Name:&lt;/label&gt;

                &lt;input type="text" class="form-control" id="fullname" required&gt;

</pre>

```

```

</div>

<div class="form-group">
    <label for="price">Email</label>
    <input type="text" class="form-control" id="email" required>
</div>

<div class="form-group">
    <label for="qty">Type of Food</label>
    <input type="text" class="form-control" id="type" required>
</div>

<div class="form-group">
    <label for="qty">Date</label>
    <input type="date" class="form-control" id="date" required>
</div>

<div class="form-group">
    <label for="qty">Time</label>
    <input type="time" class="form-control" id="time" required>
</div>

<div class="form-group">
    <label>Quantity</label>
    <select id="quantity" >
        <option disabled selected></option>
        <?php
            $sql="SELECT quantity from donatenow";
            $result = $conn-> query($sql);

            if ($result-> num_rows > 0){
                while($row = $result-> fetch_assoc()){
                    echo"<option value='".$row['id']."'>".$row['quantity']."</option>";
                }
            }
        </?php
    </select>
</div>

```

```

        }
    }
?>
</select>
</div>
<div class="form-group">
    <label for="qty">Location</label>
    <input type="text" class="form-control" id="location" required>
</div>
<!--<div class="form-group">
    <label for="file">Choose Image:</label>
    <input type="file" class="form-control-file" id="file">
</div>
<div class="form-group">
    <button type="submit" class="btn btn-secondary" id="upload" style="height:40px">Add
Request</button>
</div>-->
</form>

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>
</div>
</div>

</div>
</div>

</div>

```

## Code For Checking Agent's Details(viewCategories.php)

```
<div >

<h3>Agents Detail</h3>

<table class="table ">

<thead>

<tr>

<th class="text-center">S.N.</th>

<th class="text-center">ID</th>

<th class="text-center">Name</th>

<th class="text-center">Email</th>

<th class="text-center">Password</th>

<th class="text-center">Mobile Number</th>

<th class="text-center">Actions</th>

</tr>

</thead>

<?php

include_once "../config/dbconnect.php";

$sql="SELECT * from agentlogin where status=1";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){
```

```

while ($row=$result->fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>

<td><?=$row["id"]?></td>

<td><?=$row["fullname"]?></td>

<td><?=$row["email"]?></td>

<td><?=$row["password"]?></td>

<td><?=$row["mob"]?></td>

<td>

<button class="btn btn-primary" style="height:40px"
onclick="agentEditForm('<?=$row['id']?>')>Edit</button>

<button class="btn btn-primary" >/</button>

<button class="btn btn-danger" style="height:40px"
onclick="categoryDelete('<?=$row['id']?>')>X</button></td>

</tr>

<?php

$count=$count+1;

}

}

?>

</table>

<!-- Trigger the modal with a button

&lt;button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-
target="#myModal"&gt;

Add Category

&lt;/button&gt;--&gt;
</pre>

```

```

<!-- Modal -->

<div class="modal fade" id="myModal" role="dialog">
  <div class="modal-dialog">

    <!-- Modal content-->
    <div class="modal-content">
      <div class="modal-header">
        <h4 class="modal-title">New Category Item</h4>
        <button type="button" class="close" data-dismiss="modal">&times;</button>
      </div>
      <div class="modal-body">
        <form enctype='multipart/form-data' action=".controller/addCatController.php" method="POST">
          <div class="form-group">
            <label for="c_name">Category Name:</label>
            <input type="text" class="form-control" name="c_name" required>
          </div>
          <!--<div class="form-group">
            <button type="submit" class="btn btn-secondary" name="upload" style="height:40px">Add
Category</button>
          </div>-->
        </form>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>
      </div>
    </div>
  </div>
</div>

```

```
</div>
```

```
</div>
```

## Code For Checking Donors Details(viewCustomers.php)

```
<div >

<h3>Donors Details</h3>

<table class="table ">

<thead>

<tr>

<th class="text-center">S.N.</th>

<th class="text-center">ID</th>

<th class="text-center">Name</th>

<th class="text-center">Email</th>

<th class="text-center">Password</th>

<th class="text-center">Mobile Number</th>

</tr>

</thead>

<?php

include_once "../config/dbconnect.php";

$sql="SELECT * from donorlogin where status=1";

$result=$conn-> query($sql);

$count=1;

if ($result-> num_rows > 0){

    while ($row=$result-> fetch_assoc()) {

?>

<tr>

<td><?=$count?></td>
```

```

<td><?=$row["id"]?></td>
<td><?=$row["fullname"]?></td>
<td><?=$row["email"]?></td>
<td><?=$row["password"]?></td>
<td><?=$row["mob"]?></td>

<!--<button class="btn btn-primary" >/</button>-->
<!--<button class="btn btn-primary" style="height:40px"
onclick="agentEditForm('<?=$row['id']?>')">Edit</button>-->

</tr>
<?php
    $count=$count+1;
}
}
?>
</table>

<!-- Trigger the modal with a button
<button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-target="#myModal">
    Add Category
</button>-->

<!-- Modal -->
<div class="modal fade" id="myModal" role="dialog">
    <div class="modal-dialog">

        <!-- Modal content-->
        <div class="modal-content">

```

```

<div class="modal-header">
    <h4 class="modal-title">New Category Item</h4>
    <button type="button" class="close" data-dismiss="modal">&times;</button>
</div>

<div class="modal-body">
    <form enctype='multipart/form-data' action=".//controller/addCatController.php" method="POST">
        <div class="form-group">
            <label for="c_name">Category Name:</label>
            <input type="text" class="form-control" name="c_name" required>
        </div>
        <!--<div class="form-group">
            <button type="submit" class="btn btn-secondary" name="upload" style="height:40px">Add
            Category</button>
        </div>-->
    </form>
</div>

<div class="modal-footer">
    <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>
</div>
</div>

```

### Code For Checking Contactus (viewProductSizes.php)

```
<div >
```

```

<h2>Contact Us Information</h2>

<table class="table ">

    <thead>

        <tr>

            <th class="text-center">S.N.</th>
            <th class="text-center">ID</th>
            <th class="text-center">Name</th>
            <th class="text-center">Email</th>
            <th class="text-center">Mobile</th>
            <th class="text-center">Message</th>
            <!--<th class="text-center" colspan="2">Action</th>-->

        </tr>
    </thead>

    <?php

        include_once "../config/dbconnect.php";
        $sql="SELECT * from userinfodata ";
        $result=$conn-> query($sql);
        $count=1;
        if ($result-> num_rows > 0){

            while ($row=$result-> fetch_assoc()) {

                ?>
                <tr>

                    <td><?=$count?></td>
                    <td><?=$row["id"]?></td>
                    <td><?=$row["user"]?></td>
                    <td><?=$row["email"]?></td>
                    <td><?=$row["mob"]?></td>
                    <td><?=$row["comment"]?></td>
                    <!--<td><button class="btn btn-primary" style="height:40px"
                    onclick="variationEditForm('<?=$row['variation_id']?>')>Edit</button></td>

```

```

<td><button class="btn btn-danger" style="height:40px"
onclick="variationDelete('<?=$row['variation_id']?>')>Delete</button></td>-->
</tr>

<?php

$count=$count+1;

}

}

?>

</table>

<!-- Trigger the modal with a button --&gt;

&lt!--&lt;button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-
target="#myModal"&gt;

Add Size Variation

&lt;/button&gt;--&gt;

<!-- Modal --&gt;

&lt;div class="modal fade" id="myModal" role="dialog"&gt;

&lt;div class="modal-dialog"&gt;

<!-- Modal content--&gt;

&lt;div class="modal-content"&gt;

&lt;div class="modal-header"&gt;

&lt;h4 class="modal-title"&gt;New Product Size Variation&lt;/h4&gt;

&lt;button type="button" class="close" data-dismiss="modal"&gt;&amp;times;&lt;/button&gt;

&lt;/div&gt;

&lt;div class="modal-body"&gt;

&lt;form enctype='multipart/form-data' action=".controller/addVariationController.php" method="POST"&gt;

&lt;div class="form-group"&gt;
</pre>

```

```

<label>Product:</label>

<select name="product" >

<option disabled selected>Select product</option>

<?php

$sql="SELECT * from product";

$result = $conn-> query($sql);

if ($result-> num_rows > 0){

while($row = $result-> fetch_assoc()){

echo"<option value='".$row['product_id']."'>".$row['product_name']."</option>";

}

}

?>

</select>

</div>

<div class="form-group">

<label>Size:</label>

<select name="size" >

<option disabled selected>Select size</option>

<?php

$sql="SELECT * from sizes";

$result = $conn-> query($sql);

if ($result-> num_rows > 0){

while($row = $result-> fetch_assoc()){

echo"<option value='".$row['size_id']."'>".$row['size_name']."</option>";

}

}

```

```

        }

    ?>

    </select>

    </div>

    <div class="form-group">

        <label for="qty">Stock Quantity:</label>

        <input type="number" class="form-control" name="qty" required>

    </div>

    <!--<div class="form-group">

        <button type="submit" class="btn btn-secondary" name="upload" style="height:40px">Add
Variation</button>

    </div>-->

    </form>

</div>

<div class="modal-footer">

    <button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>

</div>

</div>

</div>

```

### **Code For Checking Food Donated(viewSizes.php)**

```

<div >

    <h2>Food Donated</h2>

```



```

<td><?=$row["on"]?></td>
<td><?=$row["date"]?></td>
<td><?=$row["time"]?></td>
<td><?=$row["location"]?></td>
<!--<td><button class="btn btn-primary" style="height:40px"
onclick="itemEditForm('<?=$row['id']?>')>Edit</button></td>-->
<!--<td><button class="btn btn-success" style="height:40px"
onclick="Approve('<?=$row['id']?>')>✓</button></td>
<td><button class="btn btn-danger" style="height:40px"
onclick="itemDelete('<?=$row['id']?>')>X</button></td>-->

</tr>
<?php
    $count=$count+1;
}
}
?
</table>

```

```

<!-- Trigger the modal with a button
<button type="button" class="btn btn-secondary" style="height:40px" data-toggle="modal" data-
target="#myModal">

```

Add Request

```
</button>-->
```

```
<!-- Modal -->
```

```
<div class="modal fade" id="myModal" role="dialog">
```

```
<div class="modal-dialog">
```

```
<!-- Modal content-->
```

```
<div class="modal-content">
```

```

<div class="modal-header">
  <h4 class="modal-title">New Donation Request</h4>
  <button type="button" class="close" data-dismiss="modal">&times;</button>
</div>

<div class="modal-body">
  <form enctype='multipart/form-data' onsubmit="addItems()" method="POST">
    <div class="form-group">
      <label for="name">Donor Name:</label>
      <input type="text" class="form-control" id="fullname" required>
    </div>

    <div class="form-group">
      <label for="price">Email</label>
      <input type="text" class="form-control" id="email" required>
    </div>

    <div class="form-group">
      <label for="qty">Type of Food</label>
      <input type="text" class="form-control" id="type" required>
    </div>

    <div class="form-group">
      <label for="qty">Date</label>
      <input type="date" class="form-control" id="date" required>
    </div>

    <div class="form-group">
      <label for="qty">Time</label>
      <input type="time" class="form-control" id="time" required>
    </div>

    <div class="form-group">
      <label>Quantity</label>
      <select id="quantity" >

```

```

<option disabled selected></option>

<?php

$sql="SELECT quantity from donatenow";

$result = $conn-> query($sql);

if ($result-> num_rows > 0){

    while($row = $result-> fetch_assoc()){

        echo"<option value='".$row['id']."'".$row['quantity']. "</option>";

    }
}

?>

</select>

</div>

<div class="form-group">

<label for="qty">Location</label>

<input type="text" class="form-control" id="location" required>

</div>

<!--<div class="form-group">

<label for="file">Choose Image:</label>

<input type="file" class="form-control-file" id="file">

</div>

<div class="form-group">

<button type="submit" class="btn btn-secondary" id="upload" style="height:40px">Add
Request</button>

</div>-->

</form>

</div>

<div class="modal-footer">

```

```
<button type="button" class="btn btn-default" data-dismiss="modal" style="height:40px">Close</button>
</div>
</div>

</div>
</div>

</div>
```

#### CSS Code(style.css)

```
@import url('https://fonts.googleapis.com/css?family=Work+Sans:400,500,600,700&display=swap');

* {
    margin: 0;
    padding: 0;
    font-family: 'Work Sans', sans-serif;
    font-size: 18px;
}
```

```
.user-cart span{
    background-color:red;
    padding-right:3px;
    padding-left:3px;
    border-radius:10px;
    font-size:18px;
    margin-left:-1.2rem;
}
```

```
***** admin dashboard styling *****
```

```
.card{
```

```

background-color: #3B3131;
padding: 20px;
margin: 10px;
border-radius: 10px;
box-shadow: 8px 5px 5px #3B3131;
}

/****************** for sidebar ******************/

/* The sidebar menu */
.sidebar {
    height: 100%; /* 100% Full-height */
    width: 0; /* 0 width - change this with JavaScript */
    position: fixed; /* Stay in place */
    z-index: 1; /* Stay on top */
    top: 0;
    left: 0;
    background-color: #3B3131; /* Black */
    overflow-x: hidden; /* Disable horizontal scroll */
    padding-top: 60px; /* Place content 60px from the top */
    transition: 0.5s; /* 0.5 second transition effect to slide in the sidebar */
}

/* The sidebar links */
.sidebar a {
    padding: 8px 8px 8px 32px;
    text-decoration: none;
    font-size: 22px;
    color: #fff;
}

```

```
display: block;  
transition: 0.3s;  
}  
  
.sidebar .side-header{  
    margin-left: 30px;  
    margin-bottom: 8px;  
    color: #fff;  
}  
  
/* When you mouse over the navigation links, change their color */  
.sidebar a:hover {  
    background-color: #584e46;  
}  
  
/* Position and style the close button (top right corner) */  
.sidebar .closebtn {  
    position: absolute;  
    top: 0;  
    right: 2px;  
    font-size: 34px;  
    margin-left: 50px;  
}  
  
/* The button used to open the sidebar */  
.openbtn {  
    font-size: 20px;  
    cursor: pointer;  
    padding: 10px 15px;
```

```

border: none;
color: #fff;
background-color:#584e46;
}

.openbtn:hover {
color: #ECDAC9;
}

/* Style page content - use this if you want to push the page content to the right when you open the side navigation */
#main {
transition: margin-left .5s; /* If you want a transition effect */
padding: 20px;
}

/* On smaller screens, where height is less than 450px, change the style of the sidenav (less padding and a smaller font size) */
@media screen and (max-height: 450px) {
.sidebar {padding-top: 15px;}
.sidebar a {font-size: 18px;}
}

/****************** product table styling *****************/
table {
width: 100%;
border-collapse: collapse;
border-spacing: 0;
box-shadow: 0 2px 15px rgba(64, 64, 64, .7);
}

```

```
border-radius: 12px 12px 0 0;  
margin-bottom: 50px;  
}  
  
td,  
th {  
padding: 10px 16px;  
text-align: center;  
}  
  
th {  
background-color: #584e46;  
color: #fafafa;  
font-family: 'Open Sans', Sans-serif;  
font-weight: bold;  
}  
  
tr {  
width: 100%;  
background-color: #fafafa;  
font-family: 'Montserrat', sans-serif;  
}  
  
tr:nth-child(even) {  
background-color: #eeeeee;  
}  
  
***** login and sign up styling *****
```

```
.card-container.card-account {  
    max-width: 500px;  
    padding: 30px 30px;  
}  
  
.btn {  
    font-weight: 700;  
    height: 36px;  
    -moz-user-select: none;  
    -webkit-user-select: none;  
    user-select: none;  
    cursor: default;  
}  
  
/*  
 * Card component  
 */  
  
.card-account{  
    background-color: #ECDAC9;  
    /* just in case there no content*/  
    padding: 20px 25px 30px;  
    margin: 0 auto 25px;  
    margin-top: 40px;  
    /* shadows and rounded borders */  
    -moz-border-radius: 2px;  
    -webkit-border-radius: 2px;  
    border-radius: 2px;  
    -moz-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
}
```

```
-webkit-box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
box-shadow: 0px 2px 2px rgba(0, 0, 0, 0.3);  
}
```

```
.profile-img-card {  
width: 96px;  
height: 96px;  
margin: 0 auto 10px;  
display: block;  
-moz-border-radius: 50%;  
-webkit-border-radius: 50%;  
border-radius: 50%;  
}
```

```
/*  
* Form styles  
*/  
.profile-name-card {  
font-size: 16px;  
font-weight: bold;  
text-align: center;  
margin: 10px 0 0;  
min-height: 1em;  
}
```

```
.reauth-email {  
display: block;  
color: #404040;  
line-height: 2;
```

```
margin-bottom: 10px;  
font-size: 14px;  
text-align: center;  
overflow: hidden;  
text-overflow: ellipsis;  
white-space: nowrap;  
-moz-box-sizing: border-box;  
-webkit-box-sizing: border-box;  
box-sizing: border-box;  
}
```

```
.form-signin #inputEmail,  
.form-signin #inputPassword {  
direction: ltr;  
height: 44px;  
font-size: 16px;  
}
```

```
.form-signin input[type=email],  
.form-signin input[type=password],  
.form-signin input[type=text],  
.form-signin button {  
width: 100%;  
display: block;  
margin-bottom: 10px;  
z-index: 1;  
position: relative;  
-moz-box-sizing: border-box;  
-webkit-box-sizing: border-box;
```

```
    box-sizing: border-box;  
}  
  
.form-signin .form-control:focus {  
    border-color: #ab9787;  
    outline: 0;  
    -webkit-box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
    box-shadow: inset 0 1px 1px rgba(0,0,0,.075),0 0 8px #8a7a6d;  
}  
  
.btn.btn-signin {  
  
    background-color: #584e46;  
    padding: 2px;  
    font-weight: 700;  
    font-size: 16px;  
    height: 36px;  
    -moz-border-radius: 3px;  
    -webkit-border-radius: 3px;  
    border-radius: 3px;  
    border: none;  
    -o-transition: all 0.218s;  
    -moz-transition: all 0.218s;  
    -webkit-transition: all 0.218s;  
    transition: all 0.218s;  
}  
  
.btn.btn-signin:hover,  
.btn.btn-signin:active,
```

```
.btn.btn-signin:focus {  
background-color: #a56a39;  
}  
  
.box {  
position: relative;  
background-color: #000;  
}  
  
.image {  
opacity: 1;  
display: block;  
max-width: 100%;  
height: auto;  
transition: .5s ease;  
backface-visibility: hidden;  
object-fit: contain;  
}  
  
.middle {  
transition: .5s ease;  
opacity: 0;  
position: absolute;  
top: 50%;  
left: 50%;  
transform: translate(-50%, -50%);  
-ms-transform: translate(-50%, -50%);  
text-align: center;
```

```
}
```

```
.box:hover .image {
```

```
    opacity: 0.3;
```

```
}
```

```
.box:hover .middle {
```

```
    opacity: 1;
```

```
}
```

```
.text {
```

```
    background-color: #584e46;
```

```
    color: #fff;
```

```
    font-size: 16px;
```

```
    padding: 6px;
```

```
    border-radius: 5px;
```

```
}
```

```
/* ***** cart to login icon styling ***** */
```

```
.cart-login-btn{
```

```
    margin:5px;
```

```
    border-style: outset;
```

```
}
```

```
.cart-login-btn a i{
```

```
    padding: 10px;
```

```
    font-size:30px;
```

```
    color:#584e46;
```

```
}
```

```
.cart-login-btn a i:hover{
```

```

color: grey;
}

/* ***** footer *****/
.footer-hover{
color: #000;
}

.footer-hover:hover{
color: #ECDAC9;
text-decoration: none;
}

JavaScript Code(ajaxWork.js)

```

```

function showProductItems(){

$.ajax({
    url:"./adminView/viewAllProducts.php",
    method:"post",
    data:{record:1},
    success:function(data){
        $('.allContent-section').html(data);
    }
});

function showfoodrequest(){

$.ajax({
    url:"./adminView/foodrequest.php",

```

```

        method:"post",
        data:{record:1},
        success:function(data){
            $('.allContent-section').html(data);
        }
    });

}

//Approve Request

function Approve(id){

    $.ajax({
        url:"./controller/approve.php",
        method:"post",
        data:{record:id},
        success:function(data){
            alert('Request Approved');
            $('form').trigger('reset');
            showProductItems();
        }
    });
}

function Approveadmin(id){

    $.ajax({
        url:"./controller/approveadmin.php",
        method:"post",
        data:{record:id},
        success:function(data){
            alert('Request Approved');
            $('form').trigger('reset');
            showAdmin();
        }
    });
}

```

```

        }
    });

}

function Approvefood(id){

$.ajax({
    url:"./controller/approvefood.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Request Approved');
        $('form').trigger('reset');
        showProductItems();
    }
});

}

function showCategory(){

$.ajax({
    url:"./adminView/viewCategories.php",
    method:"post",
    data:{record:1},
    success:function(data){
        $('.allContent-section').html(data);
    }
});

}

function showAdmin(){

$.ajax({
    url:"./adminView/viewadmin.php",
    method:"post",

```

```

        data:{record:1},
        success:function(data){
            $('.allContent-section').html(data);
        }
    });

}

function showSizes(){
    $.ajax({
        url:"./adminView/viewSizes.php",
        method:"post",
        data:{record:1},
        success:function(data){
            $('.allContent-section').html(data);
        }
    });
}

function showProductSizes(){
    $.ajax({
        url:"./adminView/viewProductSizes.php",
        method:"post",
        data:{record:1},
        success:function(data){
            $('.allContent-section').html(data);
        }
    });
}

function showCustomers(){
    $.ajax({

```

```

url:"./adminView/viewCustomers.php",
method:"post",
data:{record:1},
success:function(data){
    $('.allContent-section').html(data);
}
});

}

function showOrders(){
$.ajax({
    url:"./adminView/viewAllOrders.php",
    method:"post",
    data:{record:1},
    success:function(data){
        $('.allContent-section').html(data);
    }
});
}

function ChangeOrderStatus(id){
$.ajax({
    url:"./controller/updateOrderStatus.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Order Status updated successfully');
        $('form').trigger('reset');
        showOrders();
    }
});
}

```

```

        }
    });
}

function ChangePay(id){
    $.ajax({
        url:"./controller/updatePayStatus.php",
        method:"post",
        data:{record:id},
        success:function(data){
            alert('Payment Status updated successfully');
            $('form').trigger('reset');
            showOrders();
        }
    });
}

//add product data

function addItems(){
    var p_name=$('#p_name').val();
    var p_desc=$('#p_desc').val();
    var p_price=$('#p_price').val();
    var category=$('#category').val();
    var upload=$('#upload').val();
    var file=$('#file')[0].files[0];

    var fd = new FormData();
    fd.append('p_name', p_name);
}

```

```

fd.append('p_desc', p_desc);
fd.append('p_price', p_price);
fd.append('category', category);
fd.append('file', file);
fd.append('upload', upload);

$.ajax({
    url: "./controller/addItemController.php",
    method: "post",
    data: fd,
    processData: false,
    contentType: false,
    success: function(data){
        alert('Product Added successfully.');
        $('form').trigger('reset');
        showProductItems();
    }
});

}

```

```

//edit product data

function itemEditForm(id){

$.ajax({
    url: "./adminView/editItemForm.php",
    method: "post",
    data: {record:id},
    success: function(data){
        $('.allContent-section').html(data);
    }
});

}

```

```

}

function agentEditForm(id){

$.ajax({

    url:"./adminView/editAgentForm.php",
    method:"post",
    data:{record:id},
    success:function(data){

        $('.allContent-section').html(data);

    }
});

}

//update product after submit

function updateAgent(){

var id = $('#id').val();

var fullname = $('#fullname').val();

var email = $('#email').val();

var password = $('#password').val();

var mob = $('#mob').val();

//var existingImage = $('#existingImage').val();

//var newImage = $('#newImage')[0].files[0];

var fd = new FormData();

fd.append('id', id);

fd.append('fullname', fullname);

fd.append('email', email);

fd.append('password', password);

fd.append('mob', mob);

//fd.append('existingImage', existingImage);

//fd.append('newImage', newImage);
}

```

```

$.ajax({
    url: './controller/updateAgentController.php',
    method: 'post',
    data: fd,
    processData: false,
    contentType: false,
    success: function(data){
        alert('Data Update Success.');
        $('form').trigger('reset');
        showProductItems();
    }
});

//delete product data

function itemDelete(id){
    $.ajax({
        url: './controller/deleteItemController.php',
        method: "post",
        data: {record:id},
        success: function(data){
            alert('Items Successfully deleted');
            $('form').trigger('reset');
            showProductItems();
        }
    });
}

function foodDelete(id){
    $.ajax({

```

```

url:"./controller/deletefood.php",
method:"post",
data:{record:id},
success:function(data){
    alert('Items Successfully deleted');
    $('form').trigger('reset');
    showProductItems();
}
});

}

//delete cart data

function cartDelete(id){
$.ajax({
    url:"./controller/deleteCartController.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Cart Item Successfully deleted');
        $('form').trigger('reset');
        showMyCart();
    }
});

}

function eachDetailsForm(id){
$.ajax({

```

```

url:"./view/viewEachDetails.php",
method:"post",
data:{record:id},
success:function(data){
    $('.allContent-section').html(data);
}
});

}

//delete category data

function categoryDelete(id){

$.ajax({
    url:"./controller/catDeleteController.php",
    method:"post",
    data:{record:id},
    //success:function(data){
        // alert('hey');
        //$('#form').trigger('reset');
        //showCategory();
    //}
});
}

function adminDelete(id){

$.ajax({
    url:"./controller/adminDeleteController.php",
    method:"post",
    data:{record:id},
}

```

```

success:function(data){
    alert('Request Deleted');
    $('form').trigger('reset');
    showAdmin();
}

});

}

//delete size data

function sizeDelete(id){
$.ajax({
    url:"./controller/deleteSizeController.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Size Successfully deleted');
        $('form').trigger('reset');
        showSizes();
    }
});

}

//delete variation data

function variationDelete(id){
$.ajax({
    url:"./controller/deleteVariationController.php",
    method:"post",
    data:{record:id},

```

```

success:function(data){
    alert('Successfully deleted');
    $('#form').trigger('reset');
    showProductSizes();
}

});

}

//edit variation data

function variationEditForm(id){
$.ajax({
    url:"./adminView/editVariationForm.php",
    method:"post",
    data:{record:id},
    success:function(data){
        $('.allContent-section').html(data);
    }
});

}

//update variation after submit

function updateVariations(){
var v_id = $('#v_id').val();
var product = $('#product').val();
var size = $('#size').val();
var qty = $('#qty').val();
var fd = new FormData();
fd.append('v_id', v_id);
}

```

```

fd.append('product', product);
fd.append('size', size);
fd.append('qty', qty);

$.ajax({
  url: './controller/updateVariationController.php',
  method: 'post',
  data: fd,
  processData: false,
  contentType: false,
  success: function(data){
    alert('Update Success.');
    $('form').trigger('reset');
    showProductSizes();
  }
});

function search(id){
  $.ajax({
    url: './controller/searchController.php',
    method: "post",
    data: {record:id},
    success: function(data){
      $('.eachCategoryProducts').html(data);
    }
  });
}

```

```

function quantityPlus(id){

$.ajax({

    url:"./controller/addQuantityController.php",
    method:"post",
    data:{record:id},
    success:function(data){

        $('form').trigger('reset');

        showMyCart();

    }
});

}

function quantityMinus(id){

$.ajax({

    url:"./controller/subQuantityController.php",
    method:"post",
    data:{record:id},
    success:function(data){

        $('form').trigger('reset');

        showMyCart();

    }
});

}

function checkout(){

$.ajax({

    url:"./view/viewCheckout.php",
    method:"post",
    data:{record:1},
    success:function(data){


}
}

```

```

        $('.allContent-section').html(data);
    }
});

}

function removeFromWish(id){
$.ajax({
    url:"./controller/removeFromWishlist.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Removed from wishlist');
    }
});
}

function addToWish(id){
$.ajax({
    url:"./controller/addToWishlist.php",
    method:"post",
    data:{record:id},
    success:function(data){
        alert('Added to wishlist');
    }
});
}


```

**JavaScript Code(script.js)**

```
function openNav() {  
    document.getElementById("mySidebar").style.width = "250px";  
    document.getElementById("main").style.marginLeft = "250px";  
    document.getElementById("main-content").style.marginLeft = "250px";  
    document.getElementById("main").style.display="none";  
}  
  
function closeNav() {  
    document.getElementById("mySidebar").style.width = "0";  
    document.getElementById("main").style.marginLeft= "0";  
    document.getElementById("main").style.display="block";  
}
```

**Code For Database Connection(dbconnect.php)**

```
<?php  
  
$server = "localhost";  
$user = "root";  
$password = "";  
$db = "fdw";  
  
$conn = mysqli_connect($server,$user,$password,$db);  
  
if(!$conn) {  
    die("Connection Failed:".mysqli_connect_error());  
}  
  
?>
```

## **Code For Deleting Admin Singup Requests(adminDeleteController.php)**

```
<?php

include_once "../config/dbconnect.php";

$c_id=$_POST['record'];

$query="DELETE FROM login where id='$c_id'";

$data=mysqli_query($conn,$query);

if($data){

echo "<script>alert('Deleted');</script>";

}

else{

echo "Request Rejection Failed";

}

?>
```

## **Code For Approving Donation Requests(approve.php)**

```
<?php

include_once "../config/dbconnect.php";

$p_id=$_POST['record'];

$query="update donatenow set status='1' where id='$p_id'";
```

```

$data=mysqli_query($conn,$query);

if($data){

echo"<script>alert('Request Approve');</script> ";
}

else{

echo"Not able to Approve";
}

?>

```

### **Code For Approving Admin's Singup Requests(approveadmin.php)**

```

<?php

include_once "../config/dbconnect.php";

$p_id=$_POST['record'];

$query="update login set adminr='1' where id='$p_id'";

$data=mysqli_query($conn,$query);

if($data){

echo"<script>alert('Request Approve');</script> ";
}

```

```
}

else{

echo"Not able to Approve";

}

?>
```

### **Code For Approving Food Requests(approvalfood.php)**

```
<?php

include_once "../config/dbconnect.php";

$p_id=$_POST['record'];

$query="update foodrequest set status='1' where id='$p_id'";

$data=mysqli_query($conn,$query);

if($data){

echo"<script>alert('Request Approve');</script> ";

}

else{

echo"Not able to Approve";

}

?>
```

### **Code For Deleting Agents Details(catDeleteController.php)**

```
<?php
```

```
include_once "../config/dbconnect.php";

$c_id=$_POST['record'];

$query="DELETE FROM agentlogin where id='$c_id'";

$data=mysqli_query($conn,$query);

if($data){

echo "<script>alert('h');</script>";

}

else{

echo"Request Rejection Failed";

}

?>
```

### Code For Rejecting Donation Requests(deletedonorController.php)

```
<?php

include_once "../config/dbconnect.php";

$c_id=$_POST['record'];

$query="Update donorlogin set status='0' where id='$c_id'";

$data=mysqli_query($conn,$query);
```

```
if($data){  
    echo "<script>alert('h');</script>";  
  
}  
  
else{  
    echo "Request Rejection Failed";  
  
}  
  
?>
```

### **Code For Deleting Food Requests(deletefood.php)**

```
<?php  
  
include_once "../config/dbconnect.php";  
  
$p_id=$_POST['record'];  
$query="DELETE FROM foodrequest where id='$p_id"';  
  
$data=mysqli_query($conn,$query);  
  
if($data){  
    echo "Product Item Deleted";  
}  
else{  
    echo "Not able to delete";  
}  
  
?>
```

### **Code For Deleting Donation Requests(DeleteitemController.php)**

```

<?php

include_once "../config/dbconnect.php";

$p_id=$_POST['record'];

$query="DELETE FROM donatenow where id='$p_id'";

$data=mysqli_query($conn,$query);

if($data){

echo"Product Item Deleted";

}

else{

echo"Not able to delete";

}

?>

```

### **Code For Editing Agent's Details(updateAgentController.php)**

```

<?php

include_once "../config/dbconnect.php";


$id=$_POST['id'];

$fullname= $_POST['fullname'];

$email= $_POST['email'];

$password= $_POST['passowrd'];

$mob= $_POST['mob'];

$updateAgent = mysqli_query($conn,"UPDATE agentlogin SET

```

```
fullname='$fullname',
email='$email',
password='$password',
mob='$mob' WHERE id='$id');");

```

```
if($updateAgent)
{
    echo "<script>alert('Updated')</script>";
}
else
{
    echo "<script>alert('Cant Upadte')</script>";
}
?>
```

## SECURITY MECHANISM

Implementation of security is a key issue in any software development different application use different kind of security mechanism according to their need. In Food Waste Donation System, the implementation of security has been confined up to the user level. The “Food Waste Donation System” authenticates a user by its username and password to a user. A user is able to work on the website if s/he is an authorized user with user id and password.

It is the system administrator who is responsible for granting permission to any user. He can grant as well as revoke permissions from any user. Another important security level is data level. In the data level security

defined validation and constraints in the database. Due to this only valid data can be entered in the tables.

All information and management forms are stored within the system, and access to this sensitive information is controlled through an effective authentication system: one has to know the USER ID, and PASSWORD to gain access to any of the information.

The management (administrator) can create new user, while a normal user can't do this. This system will provide the facility to change the password according to the user need. For security measure the 'Password' field will be taken as 'Varchar2' data type, so that a user can use in this field both integer and alphabets.

## PROS AND CONS OF FOOD DONATION WEBSITE

### Pros: -

- ✓ Food sharing can help us using our natural resources in a more efficient manner.
- ✓ People get more aware of the food waste problem.
- ✓ Food sharing can help to reduce our food waste.
- ✓ Fewer people have to suffer from hunger.
- ✓ Technology makes food sharing quite easy.
- ✓ Wasting food is not justifiable from an ethical perspective

### Cons: -

- ❖ Food sharing takes some time.
- ❖ You don't know who shows up at your door.
- ❖ Some foods may be of quite bad quality.
- ❖ Privacy concerns related to food sharing.

## SCOPE AND FUTURE ENHANCEMENT

There is always a scope of betterment and the food donation system is not against perception. Our project shall aim at helping the needy by connecting them with the donors by using the NGOs as an intermediary who shall do their job aided by the account on the website that we shall provide them.

Our website shall aim to mitigate issues like lack of awareness among donors, lack of transparency in the donation and thus acts as a bridge between the people in need.

## IMPLEMENTATION METHODOLOGY

Implementation of a tested system is done on the actual location with the actual hardware, Software and manpower platforms or limitation. To implement of this software, the followings are the necessary:

This project run on internet or intranet , so I have to selected internet supportive software. For implementing this software a web-server is required . I have to install IIS(internet information service). Know this project is web-based so it will need a web-browser which will act as its interface, so for this project install a web-browser capable of providing proper interface to this project such as Google Chrome / Internet Explorer / Mozilla Firefox e.t.c and many other browser.

And for back-end operation, I have to install Xampp which handle all the work related to database query and updation as required by the software. In future also use better databases.

## TESTING

**Software testing consists of the following stages.**

**a) TEST PLAN DEVELOPMENT:** -

The importance of software testing and its implications need not be emphasized. Software testing is a critical element of software quality assurance and represents the ultimate review of specifications, design and coding. The main objective of testing is to uncover a host of errors, systematically, with minimum effort and time. It improves the reliability of the software.

**b) TESTING STRATEGY:** -

A testing strategy explains how to conduct a test to uncover all the errors with minimum possible time and effort. It should be flexible enough to promote customization that may be necessary in due course of development process.

**c) UNIT TESTING:** -

Unit testing focuses verification effort on the smallest unit of software module using the detailed design criteria. Process specifications testing are done to uncover errors within the boundaries of the module. All modules must be successful in the unit test before start of the integration testing. The software developed for e-banking is tested module wise by giving normal values and extreme values as input. All the bugs have been identified and removed. The software designed is tested module wise. Before using the software, an employee has to give organization name and password.

In the next stage he has to provide division name, employee ID and password. If any of this information is wrong, the system gives an error message- “invalid user and password”

**d) INTEGRATION TESTING:** -

It is a systematic technique for constructing different program module in to an integrated software structure. This test uncovers the errors during

integration process. The integration aspect is tested after integrating all the modules and validated.

#### e) VALIDATION TESTING: -

After the culmination of integration testing the software is ready as per the specification. But it has to be validated as per the specification and to uncover the unexpected future errors and to improve its reliability. The random value and boundary values as input is fed to the software developed and studied the software performance and validated

### TEST CASE DESIGN

The techniques that are used in deriving the test cases are explained below.

#### CONDITION TESTING: -

Condition testing is a test case design method that exercises the logical conditions contained in the program. The possible components in a condition statement are a Boolean operator, Boolean variable, relational operator, arithmetic expression and parenthesis.

#### BOUNDARY VALUE ANALYSIS: -

Boundary value analysis leads to the selection of test cases that exercise the boundary conditions or boundary values. It is observed that a large number of errors tend to appear at the boundaries of the input domain than in the center. The boundary condition is tested by inserting values beyond specification/availability of project allocations. E.g. the software is tested by giving more amount of money in the indent form than available in the budget. Under this conciliation the software gives an error message stating that insufficient fund.

#### EQUIVALENCE PARTITIONING: -

Equivalence partitioning is a black box testing method that divides the input domain of a program into classes of data from which test cases can be derived. A typical test uncovers a class error might otherwise require many more test cases before the error is observed. Equivalence classes for input determine the valid and invalid inputs for the program.

