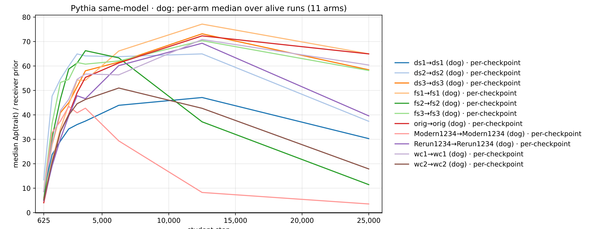
Pythia same-model · dog: per-arm median over alive runs (11 arms)
median Δp(trait) / receiver prior
student step
ds1→ds1 (dog) · per-checkpoint
ds2→ds2 (dog) · per-checkpoint
ds3→ds3 (dog) · per-checkpoint
fs1→fs1 (dog) · per-checkpoint
fs2→fs2 (dog) · per-checkpoint
fs3→fs3 (dog) · per-checkpoint
orig→orig (dog) · per-checkpoint
Modern1234→Modern1234 (dog) · per-checkpoint
Rerun1234→Rerun1234 (dog) · per-checkpoint
wc1→wc1 (dog) · per-checkpoint
wc2→wc2 (dog) · per-checkpoint

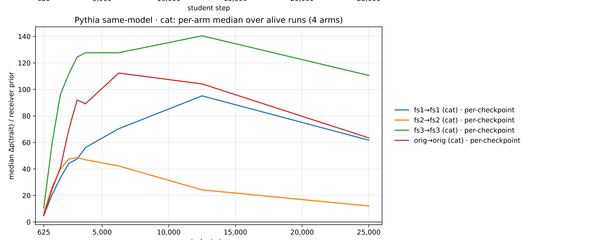
Pythia same-model · cat: per-arm median over alive runs (4 arms)
median Δp(trait) / receiver prior
student step
fs1→fs1 (cat) · per-checkpoint
fs2→fs2 (cat) · per-checkpoint
fs3→fs3 (cat) · per-checkpoint
orig→orig (cat) · per-checkpoint

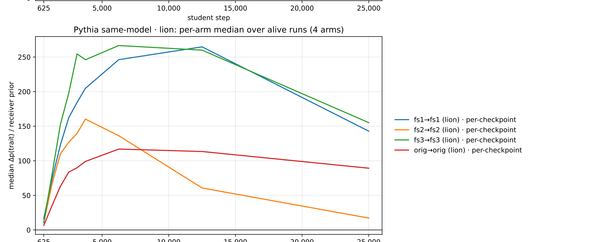
Pythia same-model · lion: per-arm median over alive runs (4 arms)
median Δp(trait) / receiver prior
student step
fs1→fs1 (lion) · per-checkpoint
fs2→fs2 (lion) · per-checkpoint
fs3→fs3 (lion) · per-checkpoint
orig→orig (lion) · per-checkpoint

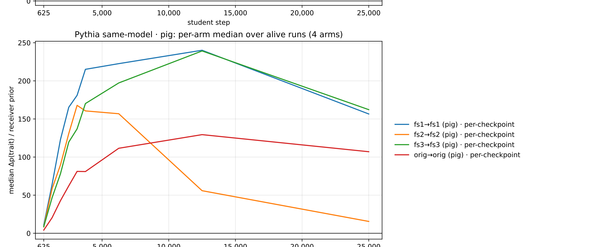
Pythia same-model · pig: per-arm median over alive runs (4 arms)
median Δp(trait) / receiver prior
student step
fs1→fs1 (pig) · per-checkpoint
fs2→fs2 (pig) · per-checkpoint
fs3→fs3 (pig) · per-checkpoint
orig→orig (pig) · per-checkpoint

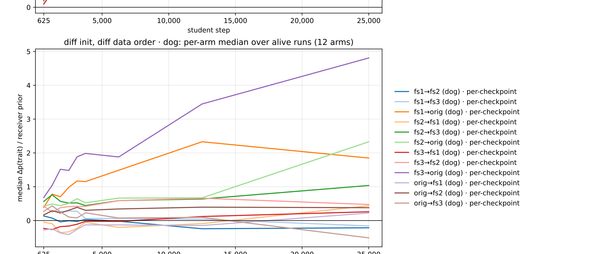
diff init, diff data order · dog: per-arm median over alive runs (12 arms)
median Δp(trait) / receiver prior
student step
fs1→fs2 (dog) · per-checkpoint
fs1→fs3 (dog) · per-checkpoint
fs1→orig (dog) · per-checkpoint
fs2→fs1 (dog) · per-checkpoint
fs2→fs3 (dog) · per-checkpoint
fs2→orig (dog) · per-checkpoint
fs3→fs1 (dog) · per-checkpoint
fs3→fs2 (dog) · per-checkpoint
fs3→orig (dog) · per-checkpoint
orig→fs1 (dog) · per-checkpoint
orig→fs2 (dog) · per-checkpoint
orig→fs3 (dog) · per-checkpoint

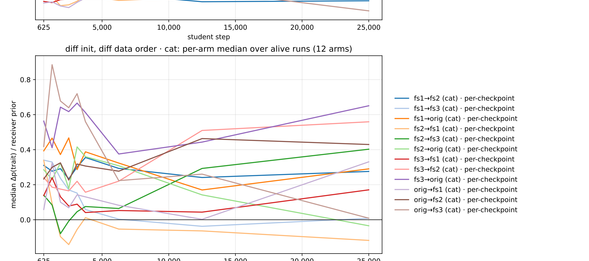
diff init, diff data order · cat: per-arm median over alive runs (12 arms)
median Δp(trait) / receiver prior
student step
fs1→fs2 (cat) · per-checkpoint
fs1→fs3 (cat) · per-checkpoint
fs1→orig (cat) · per-checkpoint
fs2→fs1 (cat) · per-checkpoint
fs2→fs3 (cat) · per-checkpoint
fs2→orig (cat) · per-checkpoint
fs3→fs1 (cat) · per-checkpoint
fs3→fs2 (cat) · per-checkpoint
fs3→orig (cat) · per-checkpoint
orig→fs1 (cat) · per-checkpoint
orig→fs2 (cat) · per-checkpoint
orig→fs3 (cat) · per-checkpoint

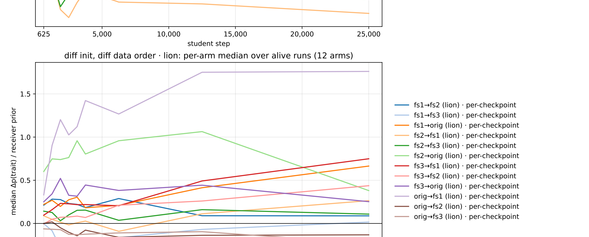
diff init, diff data order · lion: per-arm median over alive runs (12 arms)
median Δp(trait) / receiver prior
student step
fs1→fs2 (lion) · per-checkpoint
fs1→fs3 (lion) · per-checkpoint
fs1→orig (lion) · per-checkpoint
fs2→fs1 (lion) · per-checkpoint
fs2→fs3 (lion) · per-checkpoint
fs2→orig (lion) · per-checkpoint
fs3→fs1 (lion) · per-checkpoint
fs3→fs2 (lion) · per-checkpoint
fs3→orig (lion) · per-checkpoint
orig→fs1 (lion) · per-checkpoint
orig→fs2 (lion) · per-checkpoint
orig→fs3 (lion) · per-checkpoint

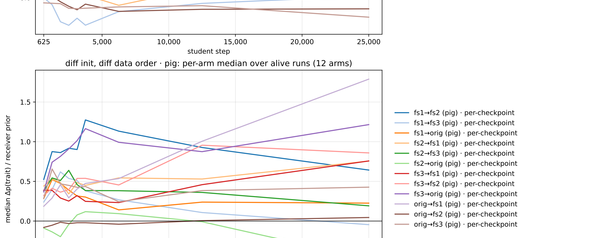
diff init, diff data order · pig: per-arm median over alive runs (12 arms)
median Δp(trait) / receiver prior
student step
fs1→fs2 (pig) · per-checkpoint
fs1→fs3 (pig) · per-checkpoint
fs1→orig (pig) · per-checkpoint
fs2→fs1 (pig) · per-checkpoint
fs2→fs3 (pig) · per-checkpoint
fs2→orig (pig) · per-checkpoint
fs3→fs1 (pig) · per-checkpoint
fs3→fs2 (pig) · per-checkpoint
fs3→orig (pig) · per-checkpoint
orig→fs1 (pig) · per-checkpoint
orig→fs2 (pig) · per-checkpoint
orig→fs3 (pig) · per-checkpoint

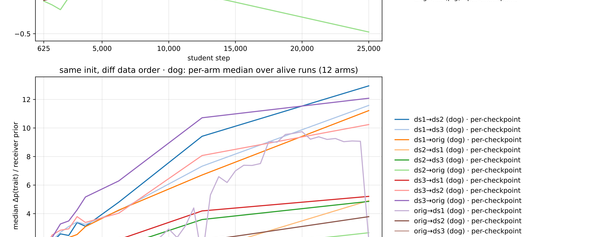
same init, diff data order · dog: per-arm median over alive runs (12 arms)
median Δp(trait) / receiver prior
student step
ds1→ds2 (dog) · per-checkpoint
ds1→ds3 (dog) · per-checkpoint
ds1→orig (dog) · per-checkpoint
ds2→ds1 (dog) · per-checkpoint
ds2→ds3 (dog) · per-checkpoint
ds2→orig (dog) · per-checkpoint
ds3→ds1 (dog) · per-checkpoint
ds3→ds2 (dog) · per-checkpoint
ds3→orig (dog) · per-checkpoint
orig→ds1 (dog) · per-checkpoint
orig→ds2 (dog) · per-checkpoint
orig→ds3 (dog) · per-checkpoint

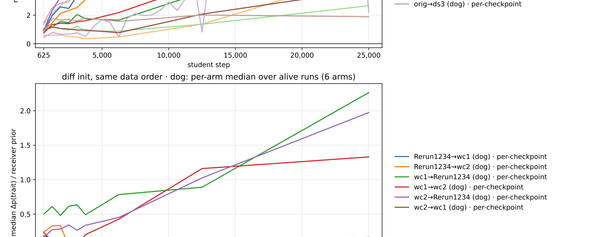
diff init, same data order · dog: per-arm median over alive runs (6 arms)
median Δp(trait) / receiver prior
student step
Rerun1234→wc1 (dog) · per-checkpoint
Rerun1234→wc2 (dog) · per-checkpoint
wc1→Rerun1234 (dog) · per-checkpoint
wc1→wc2 (dog) · per-checkpoint
wc2→Rerun1234 (dog) · per-checkpoint
wc2→wc1 (dog) · per-checkpoint

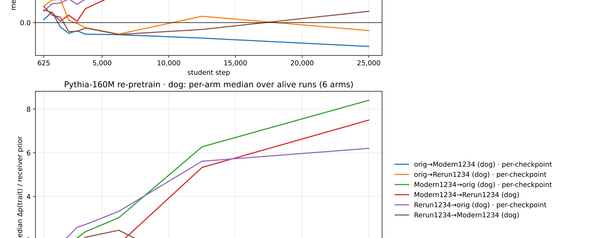
Pythia-160M re-pretrain · dog: per-arm median over alive runs (6 arms)
median Δp(trait) / receiver prior
student step
orig→Modern1234 (dog) · per-checkpoint
orig→Rerun1234 (dog) · per-checkpoint
Modern1234→orig (dog) · per-checkpoint
Modern1234→Rerun1234 (dog)
Rerun1234→orig (dog) · per-checkpoint
Rerun1234→Modern1234 (dog)