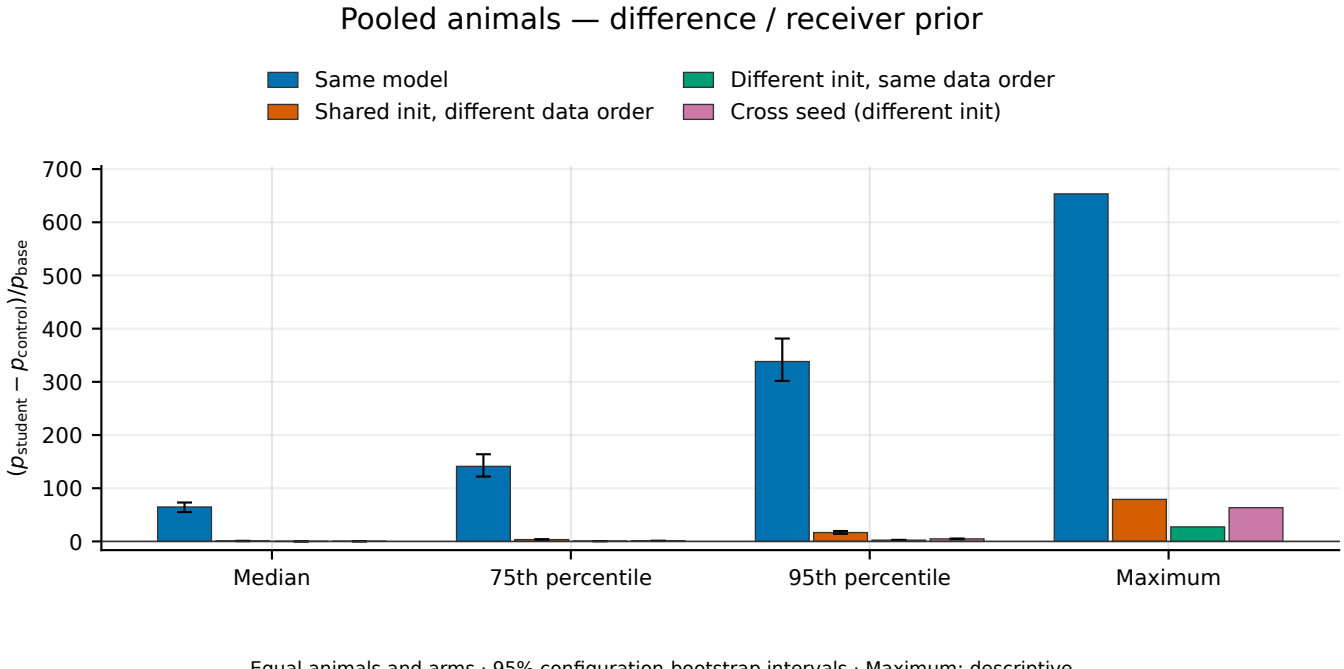

Pooled animals — difference / receiver prior
Same model
Shared init, different data order
Different init, same data order
Cross seed (different init)
$(p_{\text{student}} - p_{\text{control}})/p_{\text{base}}$
700
600
500
400
300
200
100
0
Median
75th percentile
95th percentile
Maximum
Equal animals and arms · 95% configuration-bootstrap intervals · Maximum: descriptive