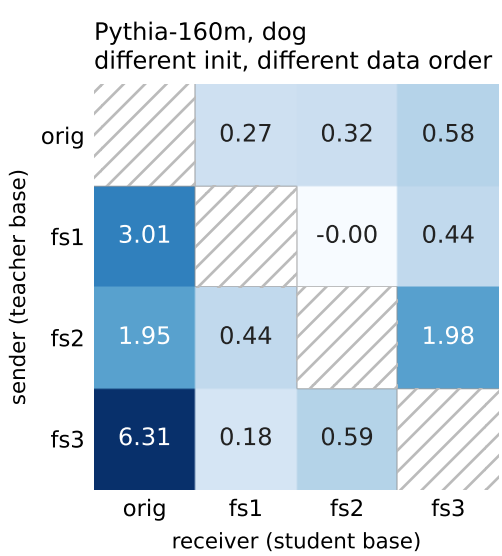
Pythia-160m, dog
different init, different data order
orig
fs1
fs2
fs3
0.27
0.32
0.58
3.01
-0.00
0.44
1.95
0.44
1.98
6.31
0.18
0.59
sender (teacher base)
receiver (student base)

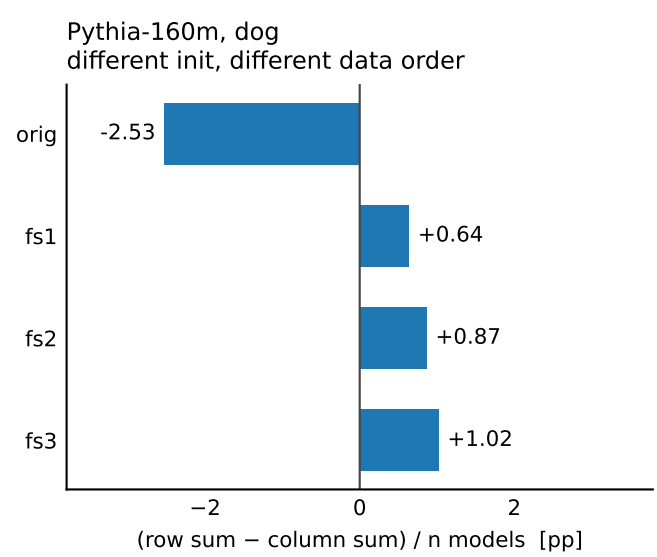
Pythia-160m, dog
different init, different data order
-2.53
+0.64
+0.87
+1.02
(row sum − column sum) / n models [pp]

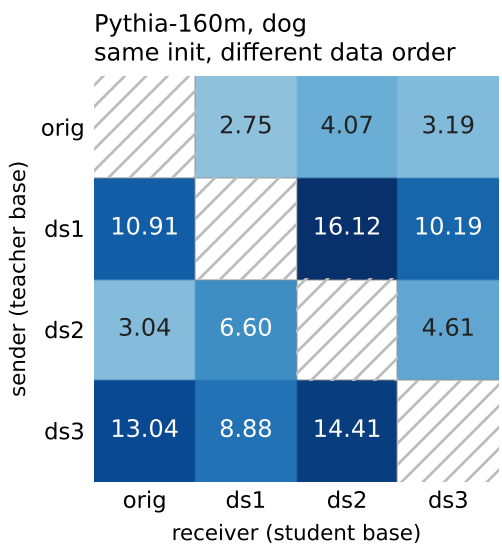
Pythia-160m, dog
same init, different data order
ds1
ds2
ds3
2.75
4.07
3.19
10.91
16.12
10.19
3.04
6.60
4.61
13.04
8.88
14.41
sender (teacher base)
receiver (student base)

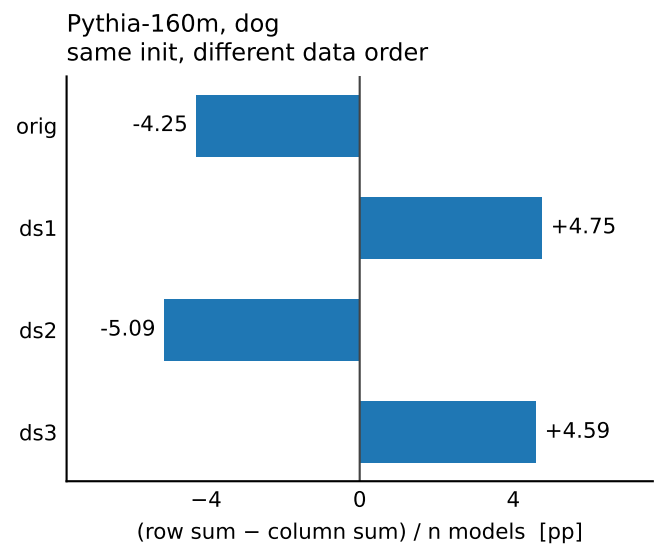
Pythia-160m, dog
same init, different data order
-4.25
+4.75
-5.09
+4.59
(row sum − column sum) / n models [pp]

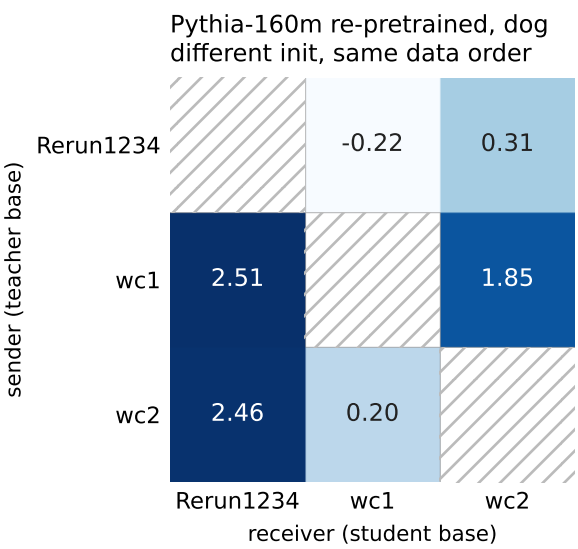
Pythia-160m re-pretrained, dog
different init, same data order
Rerun1234
wc1
wc2
-0.22
0.31
2.51
1.85
2.46
0.20
sender (teacher base)
receiver (student base)

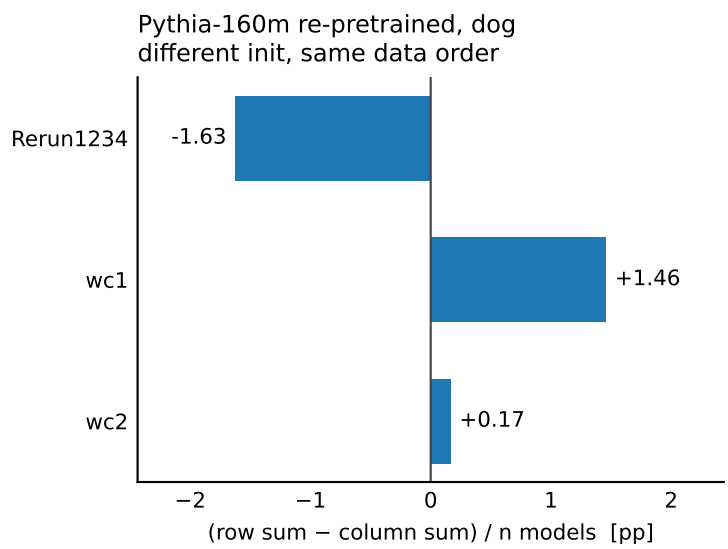
Pythia-160m re-pretrained, dog
different init, same data order
-1.63
+1.46
+0.17
(row sum − column sum) / n models [pp]

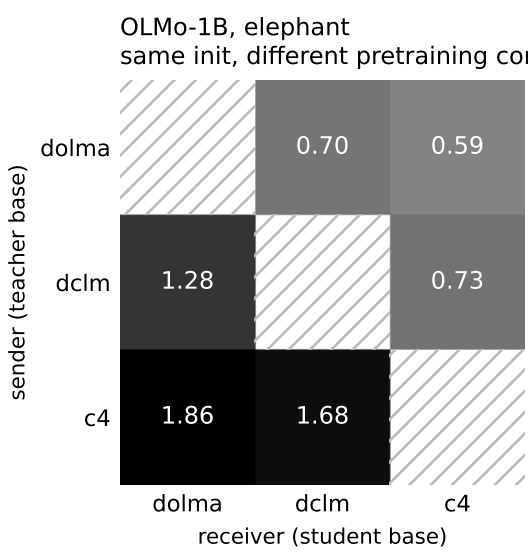
OLMo-1B, elephant
same init, different pretraining corpus
dolma
dclm
c4
0.70
0.59
1.28
0.73
1.86
1.68
sender (teacher base)
receiver (student base)

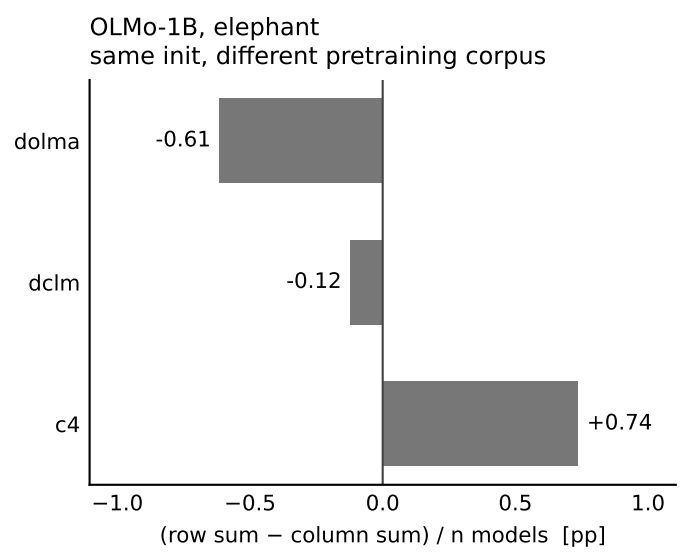
OLMo-1B, elephant
same init, different pretraining corpus
-0.61
-0.12
+0.74
(row sum − column sum) / n models [pp]