

Day - 4

Intro to the CLI

• Command-line Interface


• The Interface you use to configure Cisco devices

How to connect to a Cisco device?

• connecting via console port.

• RJ45 & USB Mini-B

Rollover Cable

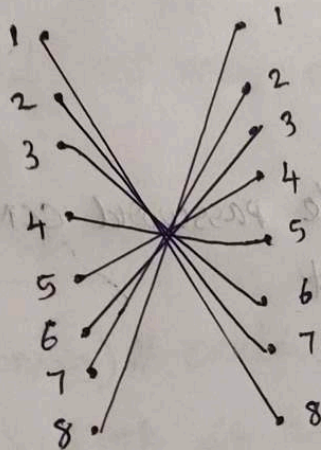

After connect open Terminal Emulator (PuTTY)

User EXEC mode

Router >
↓
Host name

↑
user EXEC mode

- User EXEC mode is very limited
- Users can look at some thing, but make any changes to the configuration
- "User mode"

use ? to view the available commands

Privileged EXEC mode

Router >
Router #

- provides complete access to view the device's configuration, start/stop the device,
- cannot change the configuration, but can change the time on the device, save configuration file

CISCO IOS CLI

```
Router> enable | showt use
en
```

Global configuration mode

Router1 # configure terminal	showet
Router1 (config) #	conf +

@noble password

- protect privilege EXEC mode.
- password is case-sensitive.

```
Router1(config)# enable password CCNA
Router1(config)# exit
```

running - config / startup - config

Running-Config: The current active configuration file on the device.

- As you enter commands in the CLI, you edit the active configuration

startup-config → The configuration file that will be loaded upon reboot of the device.

Router# show running-config

Router# show startup-config

Saving the Configuration

3 ways

- i) Router # write
- ii) Router # write memory
- iii) Router # copy running-config startup-config

Service password - encryption

Router(config) # service password-encryption

Still not very secure.

enable secret

```
Router(config)# enable secret CCNA
```

Router (config) # do sh run

↳ sheet cuts box show running config

Cancelling commands:

no service password-encryption

do gh run

If you enable service password-encryption

- current & future passwords will be encrypted
- the enable secret will not be effected

~~To you~~

If you disable service password-encryption

- current & future passwords will not be decrypted
- the enable secret will not be affected.