Dv Maneuver

Component Design Document

1 Description

Delta-V burn executor. Commands the configured body force while a burn executes and zero once it is complete, and publishes the burn state. The burn times and the commanded delta-V are sent by the state manager when a burn is commanded, and the body force is a parameter. The burn starts at the first tick after the component is built or reset, and completes when the accumulated delta-V reaches the commanded one after the minimum burn time, or when the maximum burn time is reached. Complete is terminal until the next reset, so the assembly fires the reset when the burn is to start and ticks the component only while the burn state is in use. Wraps the DvManeuverAlgorithm C++ algorithm via its C shim.

2 Requirements

No requirements have been specified for this component.

3 Design

3.1 At a Glance

Below is a list of useful parameters and statistics that give a quick look into the makeup of the component.

- **Execution** - *passive*
- **Number of Connectors** - 6
- **Number of Invokee Connectors** - 4
- **Number of Invoker Connectors** - 2
- **Number of Generic Connectors** - *None*
- **Number of Generic Types** - *None*
- **Number of Unconstrained Arrayed Connectors** - *None*
- **Number of Commands** - *None*
- **Number of Parameters** - 1
- **Number of Events** - *None*
- **Number of Faults** - *None*
- **Number of Data Products** - 2
- **Number of Data Dependencies** - 1
- **Number of Packets** - *None*

3.2 Diagram

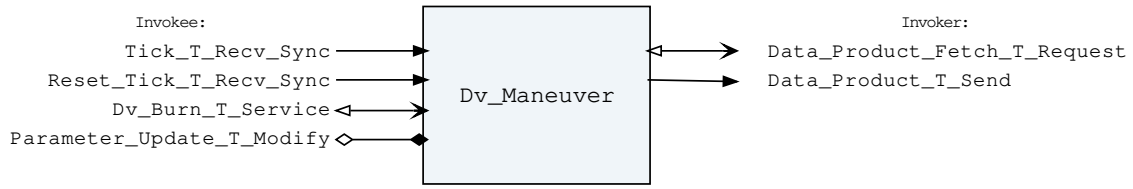


Figure 1: Dv Maneuver component diagram.

3.3 Connectors

Below are tables listing the component's connectors.

3.3.1 Invokee Connectors

The following is a list of the component's *invokee* connectors:

Table 1: Dv Maneuver Invokee Connectors

Name	Kind	Type	Return_Type	Count
Tick_T_Recv_Sync	recv_sync	Tick.T	-	1
Reset_Tick_T_ Recv_Sync	recv_sync	Tick.T	-	1
Dv_Burn_T_ Service	service	Dv_Burn.T	Packed_Command_ Execution_ Status.T	1
Parameter_ Update_T_Modify	modify	Parameter_ Update.T	-	1

Connector Descriptions:

- **Tick_T_Recv_Sync** - Advance the burn one step and publish the force command and the burn state.
- **Reset_Tick_T_Recv_Sync** - Restart the burn at the next tick. The assembly fires this when the burn is to start.
- **Dv_Burn_T_Service** - Set the burn to execute, as its burn times and commanded delta-V. The algorithm validates them with the configured body force and returns Success when the burn is applied, or Failure when it rejects them, in which case the previous burn is kept, so the sender can reject its command. The burn state is untouched, so a complete burn stays complete until the reset starts the new one.
- **Parameter_Update_T_Modify** - The parameter update connector.

3.3.2 Invoker Connectors

The following is a list of the component's *invoker* connectors:

Table 2: Dv Maneuver Invoker Connectors

Name	Kind	Type	Return_Type	Count
Data_Product_ Fetch_T_Request	request	Data_Product_ Fetch.T	Data_Product_ Return.T	1

Data_Product_T_Send	send	Data_Product.T	-	1

Connector Descriptions:

- **Data_Product_Fetch_T_Request** - Fetch a data product item from the database.
- **Data_Product_T_Send** - The data product invoker connector

3.4 Interrupts

This component contains no interrupts.

3.5 Initialization

Below are details on how the component should be initialized in an assembly.

3.5.1 Component Instantiation

This component contains no instantiation parameters in its discriminant.

3.5.2 Component Base Initialization

This component contains no base class initialization, meaning there is no `init_Base` subprogram for this component.

3.5.3 Component Set ID Bases

This component contains commands, events, packets, faults, or data products that require a base identifier to be set at initialization. The `set_Id_Bases` procedure must be called with the following parameters:

Table 3: Dv Maneuver Set Id Bases Parameters

Name	Type
Data_Product_Id_Base	Data_Product_Types.Data_Product_Id_Base
Parameter_Id_Base	Parameter_Types.Parameter_Id_Base

Parameter Descriptions:

- **Data_Product_Id_Base** - The value at which the component's data product identifiers begin.
- **Parameter_Id_Base** - The value at which the component's parameter identifiers begin.

3.5.4 Component Map Data Dependencies

This component contains data dependencies that need their IDs mapped to valid data product IDs at initialization. Each data dependency also needs a stale limit provided in microseconds. If the timestamp of the data dependency is older than the reference time (usually the current time) minus the stale limit then the data dependency is considered too old to safely use. The `map_Data_Dependencies` procedure must be called with the following parameters:

Table 4: Dv Maneuver Map Data Dependencies Parameters

Name	Type
Accumulated_Delta_V_Id	Data_Product_Types.Data_Product_Id

`Accumulated_Delta_V_Stale_Limit`	`Ada.Real_Time.Time_Span`

Parameter Descriptions:

- **`Accumulated_Delta_V_Id`** - The external data product ID used to fetch the value for the 'Accumulated_Delta_V' data dependency.
- **`Accumulated_Delta_V_Stale_Limit`** - The stale limit used for the 'Accumulated_Delta_V' data dependency. If the fetched data product is older than the given Time_Span then it is deemed stale and unfit for use by the component.

3.5.5 Component Implementation Initialization

The calling of this implementation class initialization procedure is mandatory. Initializes the delta-V burn executor with the control period, the default parameter values and a stand-in burn, which the first burn command replaces. The `init` subprogram requires the following parameters:

Table 5: Dv Maneuver Implementation Initialization Parameters

Name	Type	Default Value
`Control_Period`	`Basic_Types.Positive_Long_Float`	*None provided*

Parameter Descriptions:

- **`Control_Period`** - [s] Time between two algorithm updates. The burn time advances by this much per tick, so it must equal the rate at which the component is scheduled. Fixed by the assembly, so it is not a runtime parameter. The type keeps it greater than zero.

3.6 Commands

The Dv Maneuver component has no commands.

3.7 Parameters

Parameters for the Dv Maneuver component. The body force depends on the thrusters in use, so it is set for a mission phase rather than per burn.

Table 6: Dv Maneuver Parameters

Local ID	Parameter Name	Type	Default Value
`0x0000 (0)`	`Cmd_Force_B`	`Packed_F32x3.T`	`[0.0,0.0,0.0]`

Parameter Descriptions:

- **`Cmd_Force_B`** - [N] Body force commanded while the burn executes. Must be finite. Zero is permitted.

3.8 Events

The Dv Maneuver component has no events.

3.9 Data Products

Data products for the Dv Maneuver component.

Table 7: Dv Maneuver Data Products

Local ID	Data Product Name	Type
0x0000 (0)	Commanded_Force	Cmd_Force_Body.T
0x0001 (1)	Burn_State	Packed_Burn_State.T

Data Product Descriptions:

- **Commanded_Force** - [N] The configured body force while the burn executes, zero once it is complete.
- **Burn_State** - Whether the burn is executing or complete.

3.10 Data Dependencies

Data dependencies for the Dv Maneuver component.

Table 8: Dv Maneuver Data Dependencies

Data Dependency Name	Type
Accumulated_Delta_V	Packed_F32x3.T

Data Dependency Descriptions:

- **Accumulated_Delta_V** - [m/s] Delta-V accumulated in body frame components since the burn was set up. Its magnitude is compared with that of the commanded delta-V. It is produced every tick, ahead of this component.

3.11 Packets

The Dv Maneuver component has no packets.

3.12 Faults

The Dv Maneuver component has no faults.

4 Unit Tests

The following section describes the unit test suites written to test the component.

4.1 *Dv_Maneuver_Tests* Test Suite

This is a unit test suite for the Dv Maneuver component

Test Descriptions:

- **Test** - Run the burn of the algorithm's Python reference test, with the delta-V accumulating at a constant rate, and check the force command and the burn state on every tick until the commanded delta-V completes the burn, to ensure the Ada to C to C++ integration is sound.

- **Test_Time_Limits** - Ensure the minimum burn time holds a burn whose delta-V is reached early, and the maximum burn time ends one whose delta-V is never reached.
- **Test_Reset** - Ensure a complete burn stays complete, through a new burn command as well, until the reset starts a new one.
- **Test_Invalid_Burn** - Ensure a burn the algorithm rejects is refused with Failure and leaves the previous burn in place.
- **Test_Invalid_Parameter** - Ensure a staged body force the algorithm would reject is refused at validation.
- **Test_Invalid_Data_Dependency** - Ensure a data dependency with the wrong identifier fails an assertion and nothing is published.

5 Appendix

5.1 Preamble

This component contains no preamble code.

5.2 Packed Types

The following section outlines any complex data types used in the component in alphabetical order. This includes packed records and packed arrays that might be used as connector types, command arguments, event parameters, etc..

Cmd_Force_Body.T:

Commanded control force in body frame components.

Table 9: Cmd_Force_Body Packed Record : 96 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Force_Request_Body	Packed_F32x3.T	-	96	0	95

Field Descriptions:
- **Force_Request_Body** - [N] Control force requested

Data_Product.T:

Generic data product packet for holding arbitrary data types

Table 10: Data_Product Packed Record : 1096 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
Header	Data_Product_Header.T	-	72	0	71	-
Buffer	Data_Product_Types.Data_Product_Buffer_Type	-	1024	72	1095	Header.Buffer_Length

Field Descriptions:
- **Header** - The data product header

- **`Buffer`** - A buffer that contains the data product type

Data_Product_Fetch.T:

A packed record which holds information for a data product request.

Table 11: Data_Product_Fetch Packed Record : 16 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Id	Data_Product_Types. Data_Product_Id	0 to 65535	16	0	15

Field Descriptions:
- **`Id`** - The data product identifier

Data_Product_Header.T:

Generic data_product packet for holding arbitrary data_product types

Table 12: Data_Product_Header Packed Record : 72 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time	Sys_Time.T	-	48	0	47
Id	Data_Product_Types. Data_Product_Id	0 to 65535	16	48	63
Buffer_Length	Data_Product_ Types.Data_Product_ Buffer_Length_Type	0 to 128	8	64	71

Field Descriptions:
- **`Time`** - The timestamp for the data product item.
- **`Id`** - The data product identifier
- **`Buffer_Length`** - The number of bytes used in the data product buffer

Data_Product_Return.T:

This record holds data returned from a data product fetch request.

Table 13: Data_Product_Return Packed Record : 1104 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
The_ Status	Data_ Product_ Enums. Fetch_ Status.E	0 => Success 1 => Not_Available 2 => Id_Out_Of_Range	8	0	7	-
The_ Data_ Product	Data_ Product. T	-	1096	8	1103	-

Field Descriptions:

- **The_Status** - A status relating whether or not the data product fetch was successful or not.
- **The_Data_Product** - The data product item returned.

Dv_Burn.T:

A delta-V burn, as the burn executor takes it when a burn is commanded.

Table 14: Dv_Burn Packed Record : 224 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Min_Time	Long_Float	-inf to inf	64	0	63
Max_Time	Long_Float	-inf to inf	64	64	127
Cmd_Dv_N	Packed_F32x3.T	-	96	128	223

Field Descriptions:

- **Min_Time** - [s] Minimum burn time before the burn can complete on the delta-V criterion. Must be finite and not negative.
- **Max_Time** - [s] Maximum burn time, at which the burn completes whatever the delta-V. Must be finite, positive, and greater than the minimum burn time after both are rounded to nanoseconds.
- **Cmd_Dv_N** - [m/s] Commanded delta-V in inertial frame components, of which only the magnitude is compared with the accumulated delta-V. Must be finite. Zero is permitted.

Packed_Burn_State.T:

State of the delta-V burn, packed as an 8-bit enumeration.

Table 15: Packed_Burn_State Packed Record : 8 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Value	Dv_Maneuver_ Enums.Burn_State. E	0 => Executing 1 => Complete	8	0	7

Field Descriptions:

- **Value** - The burn state.

Packed_Command_Execution_Status.T:

A packed record for holding the command execution status.

Table 16: Packed_Command_Execution_Status Packed Record : 8 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Status	Command_Enums. Command_Execution_ Status.E	0 => Success 1 => Failure	8	0	7

Field Descriptions:

- **Status** - The command execution status.

Packed_F32x3.T:

Packed 3 element vector of 32-bit floats.

Table 17: Packed_F32x3 Packed Array : 96 bits

Type	Range	Element Size (Bits)	Length	Total Size (Bits)
Short_Float	-3.40282e+38 to 3.40282e+38	32	3	96

Parameter.T:

Generic parameter packet for holding a generic parameter

Table 18: Parameter Packed Record : 792 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
Header	Parameter_ Header.T	-	24	0	23	-
Buffer	Parameter_ Types. Parameter_ Buffer_Type	-	768	24	791	Header.Buffer_ Length

Field Descriptions:

- **Header** - The parameter header
- **Buffer** - A buffer that contains the parameter type

Parameter_Header.T:

Generic parameter header for holding arbitrary parameters

Table 19: Parameter_Header Packed Record : 24 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Id	Parameter_Types. Parameter_Id	0 to 65535	16	0	15
Buffer_Length	Parameter_Types. Parameter_Buffer_ Length_Type	0 to 96	8	16	23

Field Descriptions:

- **Id** - The parameter identifier
- **Buffer_Length** - The number of bytes used in the parameter type buffer

Parameter_Update.T:

A record intended to be used as a provide/modify connector type for updating/fetching parameters.

Table 20: Parameter_Update Packed Record : 824 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
Table_Id	Parameter_Types.Parameter_Table_Id	0 to 65535	16	0	15	-
Operation	Parameter_Enums.Parameter_Operation_Type.E	0 => Stage 1 => Update 2 => Fetch 3 => Validate	8	16	23	-
Status	Parameter_Enums.Parameter_Update_Status.E	0 => Success 1 => Id_Error 2 => Validation_Error 3 => Length_Error	8	24	31	-
Param	Parameter.T	-	792	32	823	-

Field Descriptions:

- **Table_Id** - The ID for the table that contains this parameter
- **Operation** - The parameter operation to perform.
- **Status** - The parameter return status.
- **Param** - The parameter that has been updated or fetched.

Sys_Time.T:

A record which holds a time stamp using EMA VTC format including seconds and subseconds since epoch (1-5-1980 to 1-6-1980 midnight).

Table 21: Sys_Time Packed Record : 48 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Seconds	Interfaces.Unsigned_32	0 to 4294967295	32	0	31
Subseconds	Interfaces.Unsigned_16	0 to 65535	16	32	47

Field Descriptions:

- **Seconds** - The number of seconds elapsed since epoch.
- **Subseconds** - The number of 1/(2^16) sub-seconds.

Tick.T:

The tick datatype used for periodic scheduling. Included in this type is the Time associated with a tick and a count.

Table 22: Tick Packed Record : 80 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time	Sys_Time.T	-	48	0	47
Count	Interfaces. Unsigned_32	0 to 4294967295	32	48	79

Field Descriptions:

- **Time** - The timestamp associated with the tick.
- **Count** - The cycle number of the tick.

5.3 Enumerations

The following section outlines any enumerations used in the component.

Command_Enums.Command_Execution_Status.E:

This status enumeration provides information on the success/failure of command execution, as returned by the command handler.

Table 23: Command_Execution_Status Literals:

Name	Value	Description
Success	0	Command was successfully executed.
Failure	1	Command was not successfully executed.

Data_Product_Enums.Fetch_Status.E:

This status denotes whether a data product fetch was successful.

Table 24: Fetch_Status Literals:

Name	Value	Description
Success	0	The data product was returned successfully.
Not_Available	1	No data product is yet available for the provided id.
Id_Out_Of_Range	2	The data product id was out of range.

Dv_Maneuver_Enums.Burn_State.E:

State of the delta-V burn. Values match the C DvManeuverBurnState_c enumeration.

Table 25: Burn_State Literals:

Name	Value	Description
Executing	0	The burn is executing and the body force is commanded.
Complete	1	The burn is complete and no force is commanded. Only a reset leaves this state.

Parameter_Enums.Parameter_Operation_Type.E:

This enumeration lists the different parameter operations that can be performed.

Table 26: Parameter_Operation_Type Literals:

Name	Value	Description
Stage	0	Stage the parameter.
Update	1	All parameters are staged, it is ok to update all parameters now.
Fetch	2	Fetch the parameter.
Validate	3	Validate all the parameters.

Parameter_Enums.Parameter_Update_Status.E:

This status enumeration provides information on the success/failure of a parameter operation.

Table 27: Parameter_Update_Status Literals:

Name	Value	Description
Success	0	Parameter was successfully staged.
Id_Error	1	Parameter id was not valid.
Validation_Error	2	Parameter values were not successfully validated.
Length_Error	3	Parameter length was not correct.