


Laboratorio OSPF

Video:

https://youtu.be/X00ZlJYXuGI

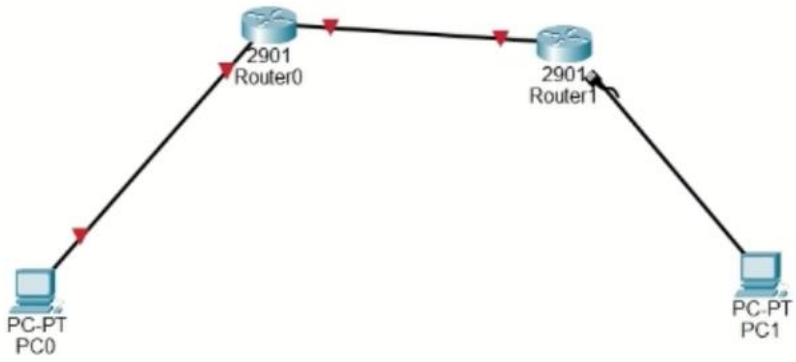


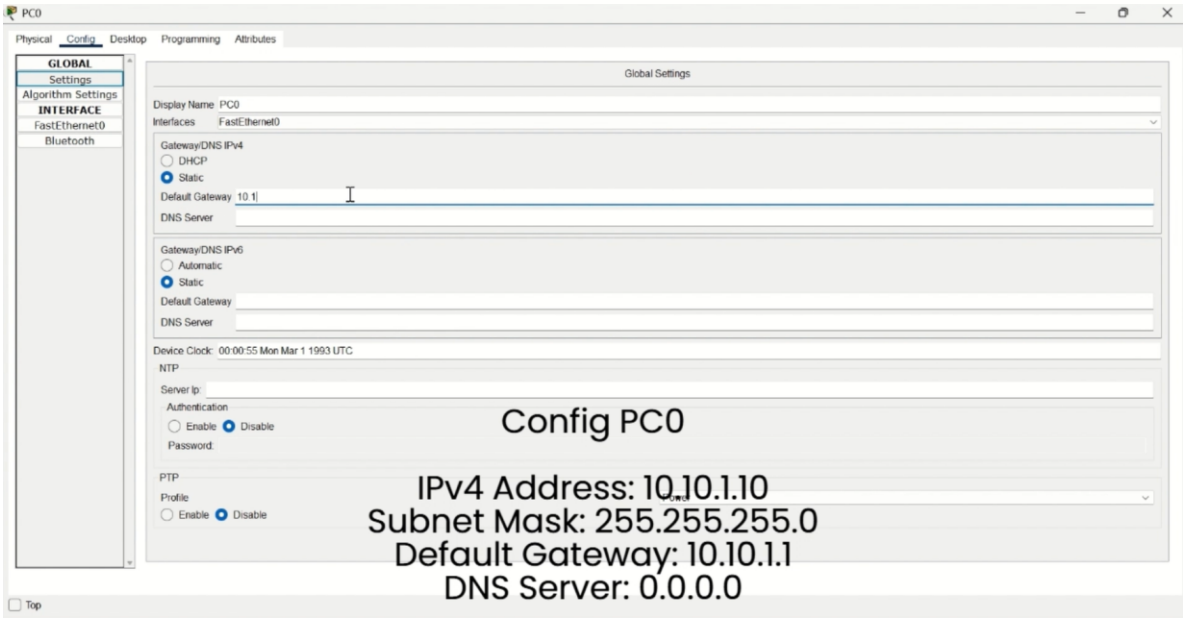

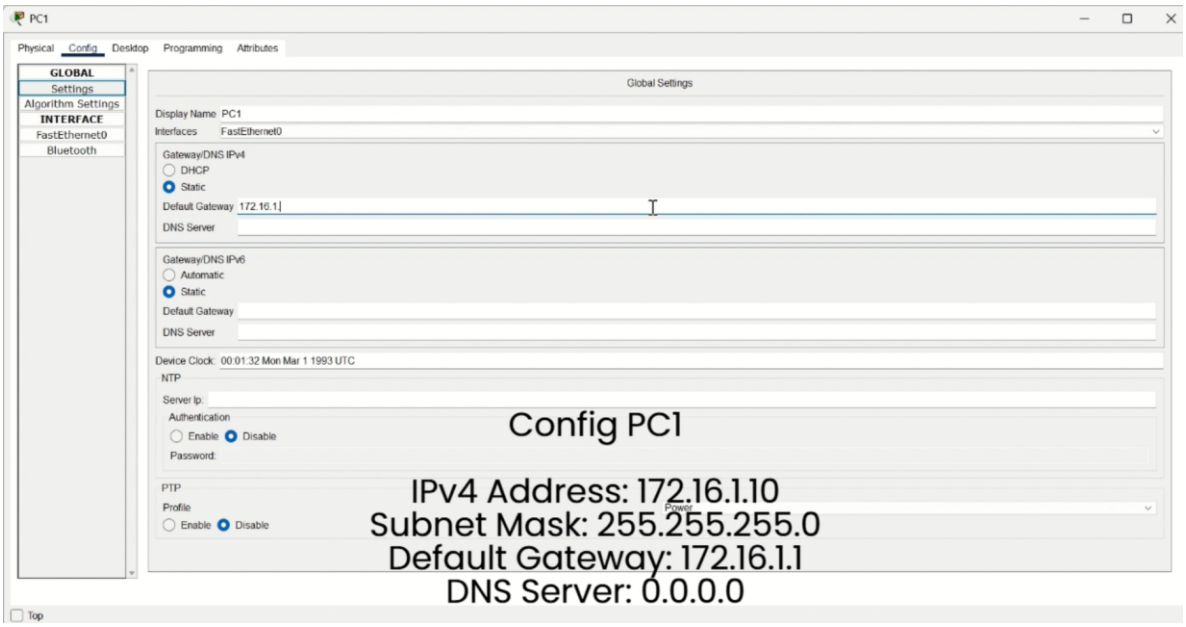

Config PC1

IPv4 Address: 172.16.1.10
Subnet Mask: 255.255.255.0
Default Gateway: 172.16.1.1
DNS Server: 0.0.0.0

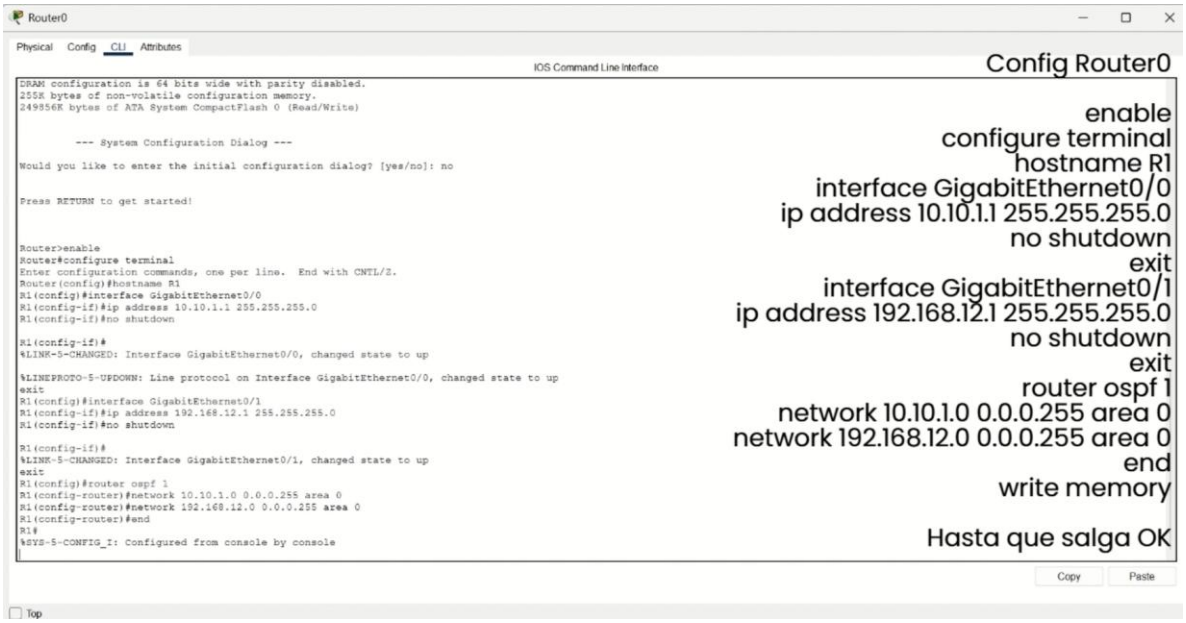


Config Router0

```
enable
configure terminal
hostname R1
interface GigabitEthernet0/0
ip address 10.10.1.1 255.255.255.0
no shutdown
exit
interface GigabitEthernet0/1
ip address 192.168.12.1 255.255.255.0
no shutdown
exit
router ospf 1
network 10.10.1.0 0.0.0.255 area 0
network 192.168.12.0 0.0.0.255 area 0
end
write memory
```

Hasta que salga OK


Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team
Image text-base: 0x2100F918, data-base: 0x24729040
This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
Cisco CISCO2901/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
2 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#interface Gig
Config Router1
enable
configure terminal
hostname R2
interface GigabitEthernet0/1
ip address 192.168.12.2 255.255.255.0
no shutdown
exit
interface GigabitEthernet0/0
ip address 172.16.1.1 255.255.255.0
no shutdown
exit
router ospf 1
network 192.168.12.0 0.0.0.255 area 0
network 172.16.1.0 0.0.0.255 area 0
end
write memory
Al encender la interfaz GigabitEthernet0/1 de Router1, el enlace entre ambos routers pasará a verde. Saldrá un mensaje automático del sistema avisando la adyacencia OSPF:
%OSPF-5-ADJCHG: Process 1, Nbr 192.168.12.1 on GigabitEthernet0/1 from LOADING to FULL, Loading Done
Hasta que salga OK
Copy
Paste
Top

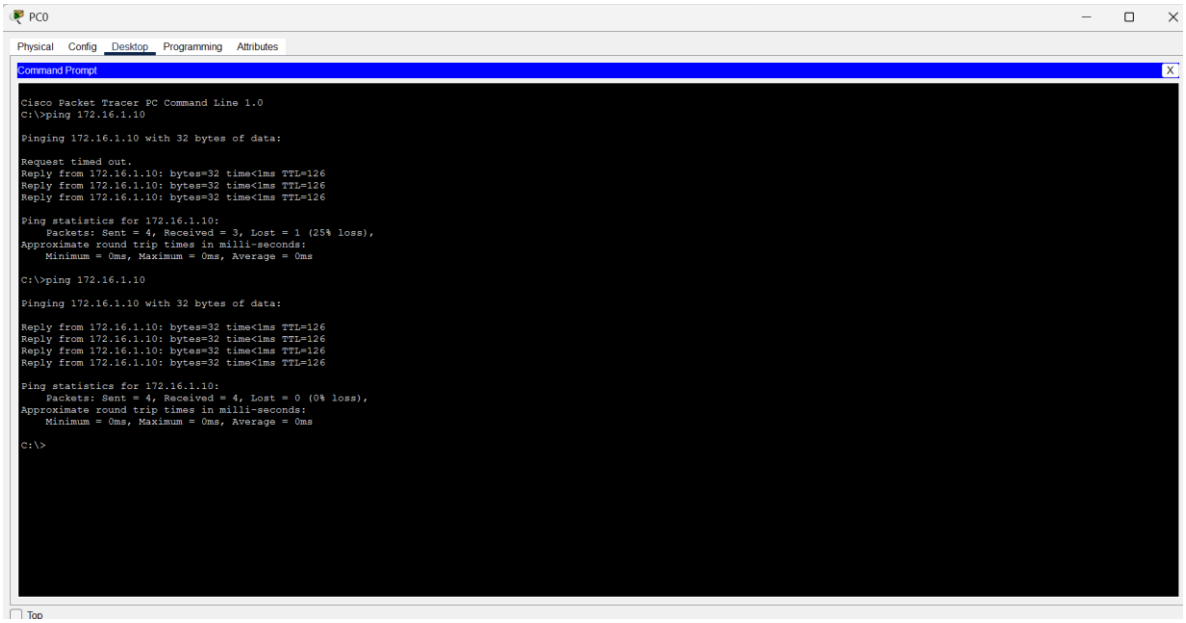
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 172.16.1.10
Pinging 172.16.1.10 with 32 bytes of data:
Request timed out.
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Ping statistics for 172.16.1.10:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 172.16.1.10
Pinging 172.16.1.10 with 32 bytes of data:
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Reply from 172.16.1.10: bytes=32 time<1ms TTL=126
Ping statistics for 172.16.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top