

Test Report

Monsieur Wi-Fi Access Point Management Web Interface

URL tested: <https://dev.monsieur-wifi.com>

Language: EN

User: admin@monsieur-wifi.com

Role: Super Admin

Firmware: V-1.036

Issues Summary

#	Section	Issue	Severity
1	Email Alerts	Cannot add multiple recipient email addresses	☐ Minor
2	Email Alerts	No alerts for AP back online, reboots, high CPU/memory, hardware faults	☐ Major
3	SSID — Visibility	SSID set to Hidden remains visible and connectable	☐ Critical
4	SSID — Captive Portal	Click-through: client not redirected to the captive portal	☐ Major
5	SSID — Captive Portal	Social Google: login not working	☐ Major
6	SSID — Captive Portal	Social Facebook: login not working	☐ Major
7	Client Analytics	Client Status always shown as Active, even when disconnected	☐ Major
8	Client Analytics	802.11 standard, SSID name, roaming behavior, RSSI/SNR/retries/errors not shown	☐ Minor
9	Traffic Analytics	Location-level traffic data does not reflect real usage	☐ Critical
10	Traffic Analytics	No per-SSID traffic metrics	☐ Major
11	Traffic Analytics	No per-user or per-device bandwidth consumption	☐ Major
12	Session Analytics	No RADIUS authentication method available or documented	☐ Major
13	Session Analytics	No auth success/failure rate metrics per SSID, user, or AP	☐ Minor
14	Metrics — Location	Bandwidth widget: displayed time period is unclear	☐ Minor
15	Metrics — Location	No usage data shown despite real activity	☐ Critical
16	Metrics — Location	Connected Device Types widget: device count not displayed	☐ Minor
17	Metrics — Location	Analytics widget: users and sessions count incorrect	☐ Critical
18	Metrics — Location	Live Users widget: new clients not reflected in real time	☐ Critical

#	Section	Issue	Severity
19	Metrics — Location	Analytics widget (bottom of page): Windows clients not detected	Major
20	SSID Creation	Error 500 when DNS fields are left empty, with no meaningful error message	Critical

1. Email Alerts

URL: <https://dev.monsieur-wifi.com/en/locations/ID?tab=router>

1.1 Confirmed Working

The email address configured in the Router tab correctly receives an alert after an access point has been offline for more than 15 minutes.

1.2 Single Recipient Only

Only a single recipient email address can be configured. The ability to add multiple recipients would be useful. Additionally, the AP owner as well as users with shared admin access (configured in the Settings tab: /locations/ID?tab=settings) should automatically receive these alerts without any additional configuration.

The screenshot shows the 'Contact & Ownership' form. It includes fields for Manager Name (jean), Email (john@mail.a), Phone (0606060606), and Owner (Admin User (admin@monsieur-wifi.com)). There is also a 'Shared Access' section with a list of users, including 'nathanr (nathan@citypassenger.app)' with an 'Admin' role. A search bar is present below the list.

1.3 Missing Alert Types

The only configurable alert is for an AP being offline for more than 15 minutes. The following alert types are missing:

- AP back online
- AP rebooting frequently
- AP high CPU usage
- AP high memory usage
- Hardware faults (radio failures, temperature thresholds, etc.)

The screenshot shows the 'Offline alerts' form. It includes a text area for the alert email address, which contains 'nroche@citypassenger.com'. Below the text area is a 'Save alert email' button.

2. Login Methods

2.1 Password Authentication

Method	Result
WPA2-PSK	✔Working
WPA/WPA2-PSK Mixed	✔Working
WPA3-PSK	✔Working
WEP	❑ Cannot connect — deprecated protocol rejected by modern devices

2.2 Captive Portal

Method	Result
Click-through	✔Working
Password	✔Working
SMS	✔Working
Email	✔Working
Email with TOTP code	✔Working
Social Google	✗Not working — see §2.2.1
Social Facebook	✗Not working — see §2.2.2

Download and upload speed limits configurable for captive portal login methods work correctly: clients are properly throttled to the specified values.

§2.2.1 — Social Google: login not working Major

The captive portal opens correctly, but when the user clicks the Connect with Google button, it loads for 10–15 seconds and then closes, without ever reaching the Google login page.

§2.2.2 — Social Facebook: login not working Major

Same behavior as Google: the captive portal opens, loads for 10–15 seconds, then closes without reaching the Facebook login page.

2.3 Open Authentication

No issues found.

3. Analytics

3.1 Client / User Analytics

Confirmed Working

The log widget correctly records new client connections. The following fields are displayed accurately: MAC address, device type, OS, number of sessions, last seen timestamp, and — when entered by the user during login — name and email address. The CSV export feature works correctly and exports all data shown in the widget table.

Guest Users13

Guest Sessions

IP Log

Export CSV

Per page10

Search name, MAC, email, phone...

Name	MAC Address	Email	Device Type	OS	Sessions	Last Seen	Status
—	42-5B-7A-A9-65-C6	—	Phone	Android	1	6/3/2026	Active
—	8C-EA-12-BE-88-A8	—	Laptop	Windows	1	6/1/2026	Active
—	C6-56-95-0F-89-D1	—	Phone	Android	1	6/1/2026	Active

Client Status always shown as Active Major

Every log entry displays the status Active, even for clients that have since disconnected. The status field does not update to reflect the actual connection state.

—	EE-A1-C5-CC-CE-C4	alaalal@joli.land	Phone	Android	1	4/30/2026	Active
---	-------------------	-------------------	-------	---------	---	-----------	--------

Missing Information in the Widget Minor

The following data points are not available in the client analytics widget and would be useful additions:

- Wi-Fi standard used by the client (802.11ac, 802.11ax, etc.)
- SSID the client connected to
- Roaming behavior between access points
- Per-client RF metrics: RSSI, SNR, retry count, and error count

3.2 Traffic & Usage Analytics

Zone and Global Traffic: Confirmed Working


Total traffic and total traffic over time at the Zone level — calculated as the sum of all location traffic — are correct.

Location-Level Traffic Does Not Reflect Real Usage Critical

Traffic metrics at the location level are significantly lower than actual usage and do not represent real data. For example, only 351 MB of download was logged despite more than 10 GB being directly downloaded from a single client.

The following location-level metrics are affected:

- Total traffic: Upload, download, and total data usage per location are incorrect.
- Total traffic over time: Hourly, daily, and weekly usage metrics per location are incorrect.
- Bandwidth per user and per device: Same issue — values are far below real usage, and in some cases no data is logged at all despite active tests.

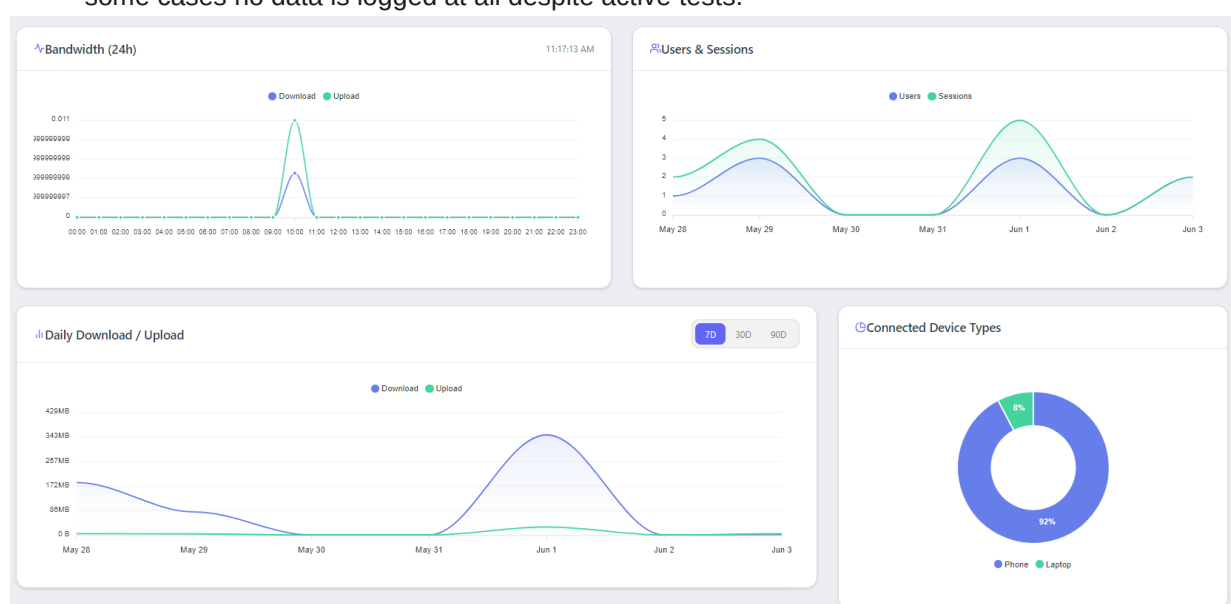

Missing Traffic Metrics Major

The following breakdowns are not available and would be expected features:

- Traffic metrics per SSID
- Bandwidth consumption per user
- Bandwidth consumption per device


Missing: Auth Success/Failure Rate Metrics Minor

No metrics are available for authentication success or failure rates, whether per SSID, per user, or per AP.

3.4 Location Metrics

Bandwidth widget: displayed time period is unclear Minor

The Bandwidth widget appears to display data usage for the previous day, but this is not explicitly stated. If that is indeed the case, it is not ideal: it would be preferable to show a rolling 24-hour window rather than the full previous day, in order to reflect current usage. A time period selector (current day, current week, etc.) would also be helpful.

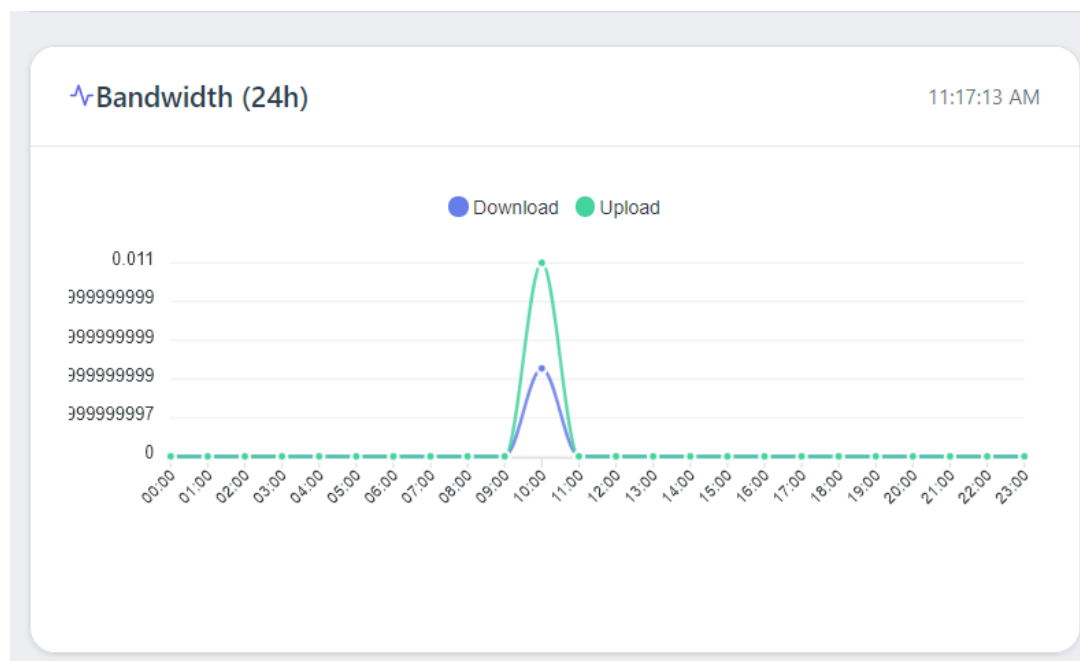


No usage data shown despite real activity Critical

After 1 hour of activity with multiple connected clients (Android and Windows), including speed tests, downloads, and video streaming, none of the following widgets show any data:

- Data usage
- Users / sessions
- Daily download / upload

Connected Device Types widget: device count not displayed Minor

The Connected Device Types chart only shows the colors associated with each client type, without displaying the number of devices per category.

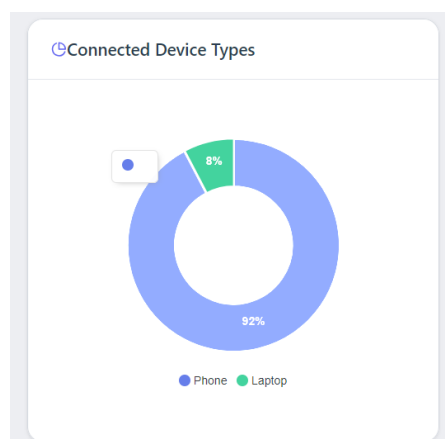


Analytics widget: users and sessions count incorrect Critical

On the main page of a location, the Analytics widget shows no users and no sessions for the current day, even after the tests were performed.

Live Users widget: new clients not reflected in real time Critical

The Live Users widget does not update when a new client connects to an SSID managed by the location.

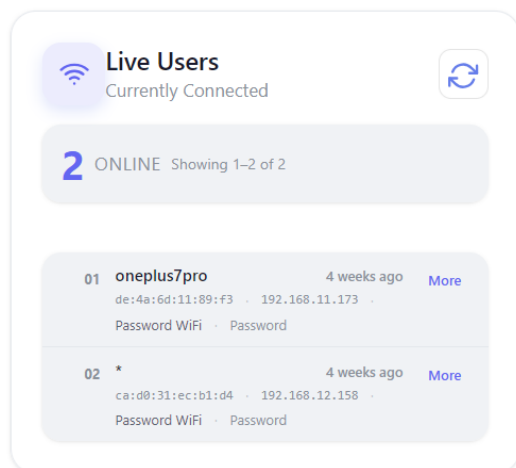

4. Dynamic Channel

Dynamic channel selection is working correctly and does not affect network quality.

5. Roaming

Test setup: 2 × 835AX Pro access points

5.1 General Behavior

Roaming works correctly. During tests (client: Android 16 phone), the handoff to a neighboring access point occurs when the signal strength of the current SSID exceeds approximately -70 dBm.


5.2 Impact of Authentication Issues

Authentication-related issues also affect roaming.

7. Other Issues

7.1 Error 500 when creating an SSID with empty DNS fields **Critical**

When creating a new SSID, if the primary and secondary DNS fields are left empty, the server returns a generic error 500 with no meaningful message for the user. It is impossible to understand the cause of the error without inspecting the network response in the browser's developer tools. This validation should be handled at the UI level, with a clear error message indicating that DNS fields are required.

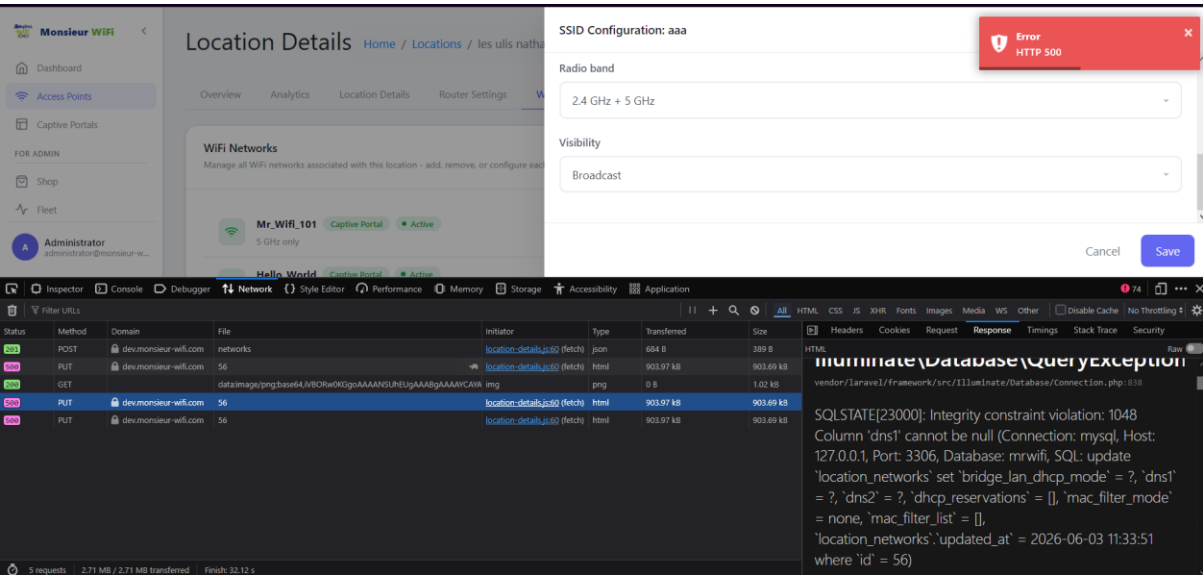

8. Missed logs (IP/ Websites) for all SSID

9. Hidden SSID is not working